



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>

REFRIGERATION
COLD STORAGE AND
ICE-MAKING

A. J. WALLIS-TAYLER



ery

02).

Used by all the leading **COLD STORAGE COMPANIES,**
SHIP OWNERS, and **BREWERS** throughout the World.

CATALOGUE AND ESTIMATES ON APPLICATION.


THE **HASLAM** Foundry & Engineering Co.,
Limited.

INCORPORATED WITH

PONTIFEX & WOOD, LTD.,

UNION FOUNDRY :
DERBY.


34, New Bridge Street,
LONDON, E.C.



Refrigerating and Ice-Making Machinery.

J. & E. HALL'S
Patent
**Dry Air Carbonic (CO₂)
System.**

Awarded by the Royal Agricultural Society of England their **SPECIAL PRIZE** for a small Refrigerating Machine suitable for Dairies (June, 1901); also **SILVER MEDAL** (the Highest Award) at the British Dairy Farmers' Association's Dairy Show, Agricultural Hall (October, 1901).

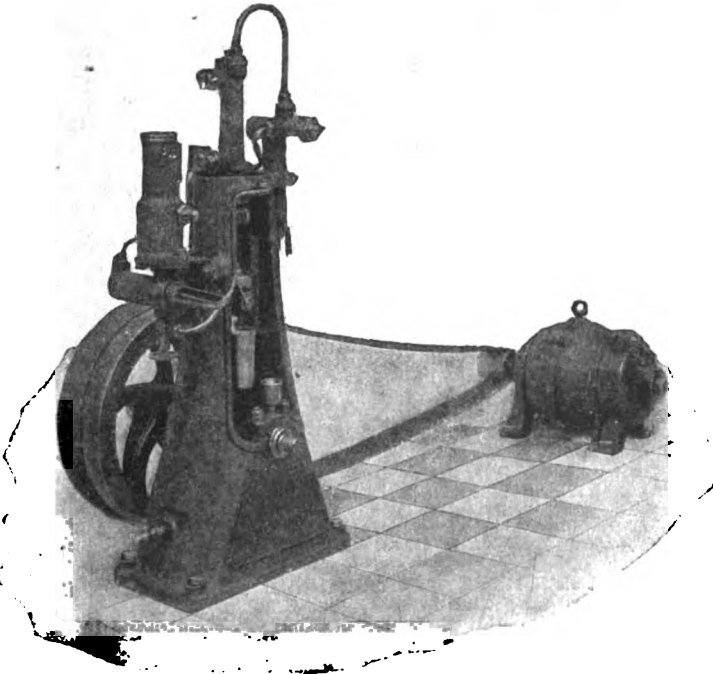

Can be driven by an Electric Motor as illustrated above, or any other motive power requiring only $2\frac{1}{2}$ effective H.P.

These machines are extremely simple; use a material having **no noxious or poisonous fumes**. Being fitted with a safety valve, no neglect or ignorance can cause an accident.

Hundreds of Machines supplied for Abattoirs, Cold Storage Companies, Bacon Curers, Ice Factories, Dairies, Butchers, Etc.

J. & E. HALL, Ltd. } **DARTFORD IRONWORKS, KENT;**
and 22, St. Swithin's Lane, LONDON, E.C.
[See next page.]


Refrigerating and Ice-Making Machinery.

J. & E. HALL'S

Patent

Dry Air Carbonic (CO₂) System.

850 MACHINES fitted on **BOARD SHIP ALONE**, and **HUNDREDS** of **MACHINES SUPPLIED** for use on Land for all purposes in connection with **REFRIGERATION** and **ICE-MAKING**.

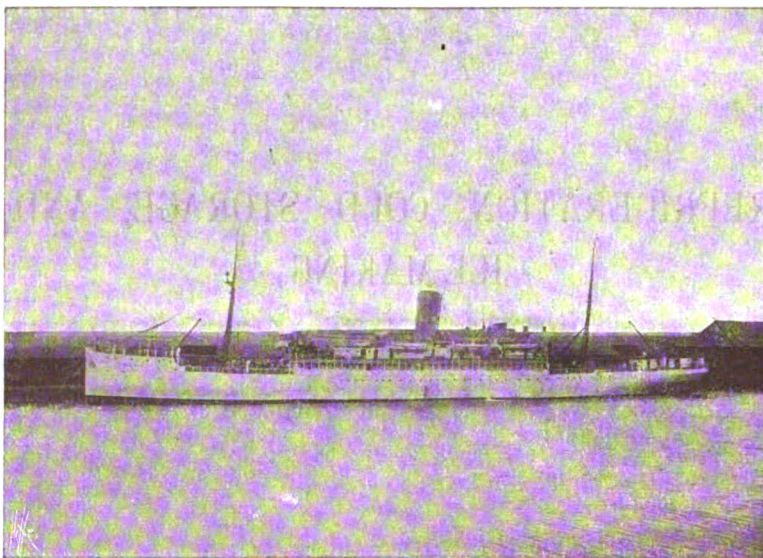

The Imperial Direct West India Mail Steamer "Port Royal" and three other ships of the same line specially fitted by J. & E. Hall, Ltd., with Refrigerating Machinery for importing 3,000,000 bananas in each ship.

J. & E. HALL'S REFRIGERATING MACHINES supplied to—

H. M. Admiralty	26 Installations	Union-Castle Mail S.S. Co. ...	45 Installations
Japanese Admiralty	11 "	Hamburg-American Steam	
Russian Admiralty	6 "	Packet Co.	33 "
American Admiralty	3 "	Elder, Dempster & Co. ...	32 "
French Admiralty	"	White Star Line	28 "
Chilian Admiralty	"	Peninsular & Oriental Steam	
Houlder Bros. & Co.	11 "	Navigation Co.	26 "
Thos. Wilson, Sons, & Co. ...	10 "	Royal Mail Steam Packet Co.	23 "
United S.S. Co. of Copenhagen	10 "	Chargeurs Reunis Co. ...	19 "
Nippon Yusen Kaisha	10 "	Tyser & Co.	12 "

And many others.

These machines are extremely simple. Use a material having no noxious and poisonous fumes, and by official sanction of the Board of Trade are placed in the Main Engine Room on board ship, where they come under the attention of the engineer on watch.

FRUIT COLD STORAGE A SPECIALITY.

J. & E. HALL, Ltd. } **DARTFORD IRONWORKS, KENT;**
and 22, St. Swithin's Lane, LONDON, E.C.


[See previous page.]

REFRIGERATION, COLD STORAGE, AND ICE-MAKING

REFRIGERATION COLD STORAGE AND ICE-MAKING

The D. Van Nostrand Company

intend this book to be sold to the Public
at the advertised price, and supply it to
the Trade on terms which will not allow
of discount.



LONDON
CROSBY LOCKWOOD AND SON

NEW YORK
D. VAN NOSTRAND COMPANY
23 MURRAY AND 27 WARREN STREETS

1902



REFRIGERATION COLD STORAGE AND ICE-MAKING

*A PRACTICAL TREATISE
ON THE ART AND SCIENCE OF REFRIGERATION*


BY

A. J. WALLIS-TAYLER, C.E.

ASSOC. M. INST. C.E.

AUTHOR OF "REFRIGERATING AND ICE-MAKING MACHINERY," "SUGAR MACHINERY," "TEA
MACHINERY," "BEARINGS AND LUBRICATION," "AERIAL OR WIRE ROPE TRAMWAYS,"
"MOTOR CARS OR POWER CARRIAGES FOR COMMON ROADS," "THE SANITARY
ARRANGEMENT OF DWELLING HOUSES," ETC.

With Three Hundred and Sixty-one Illustrations



LONDON
CROSBY LOCKWOOD AND SON

NEW YORK
D. VAN NOSTRAND COMPANY
23 MURRAY AND 27 WARREN STREETS

1902

TP49.2
W32

HALLIDIE

onle

PREFACE.

THAT Refrigeration is a subject of great and daily increasing interest is now universally acknowledged. The field of usefulness of the art, moreover, is gradually widening, and the near future will doubtless see even more rapid developments than those which have taken place in the past.

When the Author produced, in 1895, his smaller work entitled "Refrigerating and Ice-Making Machinery," the literature dealing specifically with the subject was of a very limited and chiefly of a scattered description, but at the present time there are a number of books published—mostly, however, of American origin. The periodical literature also—which in 1895 was confined entirely to the United States—has likewise been largely augmented, notably by the publication in this country of several monthly journals treating specifically of Refrigeration, and also by several such magazines produced in Germany. France, strange to say, as yet boasts only one such periodical.

The success attained by "Refrigerating and Ice-Making Machinery"—now in its Third Edition—has encouraged the Author to produce the present larger volume, which it is hoped may be found to meet the needs of a class of readers requiring a more complete treatise than has up to the present time been published in this country.

In the preparation of the present work the Author has been indebted for much useful information to the columns of the technical press, especially so to that excellent and instructive American journal "Ice and Refrigeration," which has now had a well-deserved successful

career extending over a number of years. He has also availed himself of the information contained in several valuable papers read before scientific societies both in this country and abroad, as well as that derived from other sources, due acknowledgment whereof he has endeavoured to make in each case in the body of the book.

He takes this opportunity of expressing his sincere thanks and obligations to Mr. G. J. Wells, W.Sc., A.M.I.C.E., for his valuable assistance in revising the chapter devoted to the theory of Refrigeration, a task for which his scientific attainments render him specially qualified.

In conclusion, the Author has to gratefully acknowledge the courtesy of the Manufacturers of machinery and appliances who have afforded him particulars of their various specialities.

A. J. WAILLIS-TAYLER.

99, BELSIZE ROAD, LONDON, N.W.

March, 1902.

CONTENTS.



	PAGE
CHAPTER I.	
<i>INTRODUCTION.</i>	
Origin of Artificial Refrigeration.—History and Progress of the Trade in Fresh Provisions	1—5
CHAPTER II.	
<i>THE THEORY AND PRACTICE OF REFRIGERATION.</i>	
Relation to first two Laws of Thermodynamics.—Definitions of Heat.—Specific Heat.—Latent Heat.—Mechanical equivalent of Heat.—Calculations made with respect to Heat.—Temperature.—Laws of Gases.—Construction of Chart applicable to any value of n .—Work demanded of a Refrigerating Machine.—Greatest theoretical efficiency of a Refrigerating Machine	6—18
CHAPTER III.	
<i>THE LIQUEFACTION PROCESS.</i>	
Use of by the Ancients.—Various Machines operating on the.—General Laws governing production of cold by.—Principal Freezing Mixtures	19—23
CHAPTER IV.	
<i>THE VACUUM PROCESS.</i>	
Principles of.—First Machine working on.—More recent types of Machines working on	24—32
CHAPTER V.	
<i>THE COMPRESSION PROCESS OR SYSTEM.</i>	
Early History of.—Principles of.—Cycle of Operations obligatory in.—Improvements in.—Ether Machines.—Sulphurous Acid Machines.—Carbonic Acid Machines	33—47

CHAPTER VI.

THE COMPRESSION PROCESS (continued).

- Ammonia Machines.—Properties of Ammonia.—Cycle of Operations.—
Wet and Dry Compression Principle.—Construction of Gas Com-
pressors.—Various Examples of Modern Machines 48—106

CHAPTER VII.

THE COMPRESSION PROCESS (continued).

- Properties of Ether.—Modern Ether Machines.—Properties of Methyl-
Chloride.—Methyl-Chloride Machines.—Properties of Sulphurous
Acid.—Sulphurous Acid Machines.—Properties of Carbonic Acid.—
Carbonic Acid Machines 107—136

CHAPTER VIII.

*CONDENSERS AND WATER-COOLING AND SAVING
APPARATUS.*

- Submerged Condensers.—Amount of Condenser Surface required.—
Amount of Cooling Water required.—Atmospheric or Open-Air
Evaporative Surface Condensers.—Amount of Condenser Surface
required.—Amount of Cooling Water required.—Supplementary Con-
densers or Forecoolers.—Double-pipe Condensers.—Hendrick's Con-
denser.—Water-Cooling and Saving Apparatus.—Water Towers . . . 137—153

CHAPTER IX.

*THE ABSORPTION AND BINARY ABSORPTION
PROCESS OR SYSTEM.*

- The Principle of the Absorption Process.—Early Machines.—Later Pat-
terns of Machines.—The Binary Absorption Process or Machines
using a Compound or dual Liquid 154—188

CHAPTER X.

THE COLD-AIR SYSTEM.

- Principles of.—Early Machines.—Modern Patterns of Machines.—The
Allen Dense-Air Ice Machine.—Maximum Theoretical Efficiency of
Cold-Air Machines.—Comparative Tests of Cold-Air Machines. . . . 189—220

CHAPTER XI.

COCKS, VALVES, AND PIPE-JOINTS AND UNIONS.

- Expansion or Regulating Cocks and Valves.—Stop-Cocks and Valves.—
Suction and Discharge Valves.—Pipe-Joints and Unions.—Means for
Increasing the Cooling Surfaces of Pipes 221—242

CONTENTS.

ix

CHAPTER XII.

PAGE

REFRIGERATION AND COLD STORAGE.

Refrigeration by means of the Cold-Air Machine.—Refrigeration by means of Compression or Absorption Machines.—The Brine Circulation System.—The Direct Expansion System.—The Cold-Air Blast System.—Piping for Cold Stores 243—256

CHAPTER XIII.

REFRIGERATION AND COLD STORAGE (*continued*).

The Construction and Arrangement of Cold Stores and of Cold Storage Rooms or Chambers.—Ventilation.—Air Circulation.—Insulation.—Railway Vans 257—338

CHAPTER XIV.

REFRIGERATION AND COLD STORAGE (*continued*).

Hoisting and Conveying Machinery 339—344

CHAPTER XV.

REFRIGERATION AND COLD STORAGE (*continued*).

Proper Methods of Storing, and Temperatures for the Cold Storage of, various articles.—Meats and Fish.—Butter.—Cheese.—Milk.—Eggs.—Fruits.—Vegetables.—Table of Temperatures for Cold Storage of various articles 345—357

CHAPTER XVI.

MARINE REFRIGERATION.

Carbonic Acid Machines.—Ammonia Machines.—Cold-Air Machines.—Arrangement of Cargo Holds and Stores.—Icemaking on board Ship.—Barges 358—377

CHAPTER XVII.

MANUFACTURING, INDUSTRIAL, AND CONSTRUCTIONAL APPLICATIONS.

Chocolate Manufacture.—Breweries.—Paraffin Works.—Artificial Butter Manufactories.—Dairies.—Dynamite Factories.—Manufactories of Photographic Accessories.—Wine Growers' and Wine Merchants' Establishments.—Distilleries.—Sugar Factories and Refineries.—Chemical Works.—India-Rubber Works.—Glue Works.—Tea Factories.—Various other Manufacturing and Industrial Applications.—Tunnelling.—Sinking Shafts.—Laying Foundations, etc. 378—414

CHAPTER XVIII.

ICE-MAKING.

Various Methods of Ice-Making.—The Can System.—The Wall or Plate System.—The Stationary Cell System.—Miscellaneous Arrangements for making Clear or Crystal Ice by Agitation.—Holden System of Ice-Making.—Water Deaerating or Distilling Apparatus.—Vacuum System of Ice-Making.—Imitation of Natural System.—Ice Factories.—Ice Elevating and Conveying Machinery.—Ice-Making, General.—Brine.—Storing Ice.—Ice Crushing or Breaking Machinery	415—464
--	---------

CHAPTER XIX.

THE MANAGEMENT AND TESTING OF REFRIGERATING MACHINERY.

Management.—Ammonia Compression Machines.—Oil Separators or Collectors.—Accumulations of deposit in the Condenser.—Breaking Joints.—Lubricating qualities of Ammonia.—Compressor piston-rod packings.—To charge and work a Carbonic Acid Machine.—Freezing or choking up of Compression System.—Lubrication of Refrigerating Machinery.—Testing.—Interpretation of Compressor Diagrams.—Leaks in Ammonia Apparatus.—Leaks in Carbonic Acid Machines.—Management of Cold-Air Machines.—Determination of Moisture in Air.—Psychrometers.—Hygrometers.—Electrical Tell-tales and Long-distance Thermometers.—Thermographs	465—498
--	---------

CHAPTER XX.

COST OF WORKING.

Main Items of Expense.—Absorption Machines.—Compression Machines.—Vacuum Machines.—Cold-Air Machines.—Cost of Ice-Making	499—507
--	---------

CHAPTER XXI.

THE PRODUCTION OF VERY LOW TEMPERATURES.

Early Investigators and Experimenters.—The Cascade System.—The Regenerative Method.—Properties of Liquid Air.—Physical Constants of Liquefied Gases	508—521
---	---------

APPENDIX.

I.— <i>USEFUL TABLES AND MEMORANDA</i>	522—560
II.— <i>BIBLIOGRAPHY OF REFRIGERATION</i>	561, 562

LIST OF ILLUSTRATIONS.

FIG.	PAGE
1. Diagram showing method of constructing curve $P V^n = C$. . .	11
2. Diagram showing method of constructing curve $P V^n = C$. . .	12
3. Diagram showing method of constructing chart	13
4. Carré's Sulphuric Acid Vacuum Freezing Machine	25
5. Lange's Exhaust Pump for Vacuum Freezing Machine	28
6. Harrison's Rotating Exhaust Pump or Cylinder	29
7. Perkins' Early Type of Compression Machine	34
8. Diagram illustrating the operation of a Refrigerating Machine on the Compression Principle	36
9. Harrison's Ether Compression Machine	37
10. Tellier's Apparatus for the Distillation of Methylic Ether	40
11. Tellier's Methylic Ether Compression Machine	40
12. Expansion Valve or Distributor of Tellier's Methylic Ether Machine	41
13. Original Type of Windhausen Compressor with liquid piston for treating the gas in two stages	45
14. Suction Valve of Windhausen Compressor for treating gas in two stages	46
15. Outlet or Discharge Valve of Windhausen Compressor for treating gas in two stages	46
16. Diagram illustrating Loss due to Clearance Space in Compressor Cylinder	54
17. Double-Acting Vertical Type De La Vergne Ammonia Compressor, Vertical Section through Compression Cylinder	58
18. Double-Acting Vertical Type De La Vergne Ammonia Compressor, Side Elevation of complete machine	59
19. Diagrammatical View showing Complete Installation of a Refriger- ating Plant on the De La Vergne Ammonia Compression System	60
20. Diagram taken from Single-Acting De La Vergne Ammonia Compressor without Sealing, Lubricating, and Cooling Fluid	62
21. Diagram taken from Single-Acting De La Vergne Ammonia Compressor with Sealing, Lubricating, and Cooling Fluid	63
22. Diagram taken from Double-Acting De La Vergne Ammonia Compressor with Sealing, Lubricating, and Cooling Fluid	64

FIG.		PAGE
23.	Small Single-Acting Vertical Type Frick Ammonia Compressor. Vertical Central Section through Cylinder	66
24.	Large Single-Acting Vertical Type Frick Ammonia Compressor. Vertical Central Section through Cylinder	67
25.	Large Single-Acting Vertical Type Frick Ammonia Compressor. Sectional Elevation of complete machine	68
26-31.	Diagrams taken from Frick Compressor	69
32.	Enock's Patent Safety Compressor. Vertical Section	70A
32A.	Enock Safety Crossheads and Springs <i>Plate facing page</i>	70
32B.	Enock Patent Compressor. Enclosed Type, with Coupled Vertical Steam Engine <i>Plate facing page</i>	70B
32C.	Open Type of Ammonia Compressor, fitted with Enock's Patent Safety Crosshead <i>Plate facing page</i>	70B
33.	Linde Horizontal Type of Compound Ammonia Compressor. Plan View	72
34.	American Pattern Linde Horizontal Type of Ammonia Compressor. Part Sectional View	74
35.	Two-Cylinder Single-Acting Fixary Compressor	75
36.	Ammonia Compressor, Pulsometer Engineering Company, Limited	78
37.	Small Single-Acting Kilbourn Inclosed Type Ammonia Com- pressor and Condenser	79
38.	Double-Acting Horizontal Type Triumph Ammonia Compressor. Sectional View	81
39.	Double-Acting Horizontal Type Triumph Ammonia Compressor and Tandem Compound Condensing Engine. Plan View	82
40.	Double-Acting Puplett Ammonia Compression Machine	84
41.	Horizontal Type Compound Haslam Ammonia Compression Machine. Plan and Side Elevation	85
42.	Horizontal Type Compound Haslam Ammonia Compressor. Ver- tical Central Section	86
43.	Belt-Driven Horizontal Type Haslam Double-Acting Ammonia Compressor. Latest Pattern	87
44.	Pair of Large Double-Acting Horizontal Type Haslam Double- Acting Ammonia Compressors and Triple Expansion Vertical Steam-Engine	88
45.	Single-Acting Vertical Type Ammonia Compressor, York Manu- facturing Company. Sectional Elevation of complete machine	90
46.	Horizontal Type of Belt-Driven Tuxen and Hammerich Ammonia Compressor	91
47.	Vertical Type of Steam-Driven Buffalo Ammonia Compressor. Vertical Central Section through Cylinder	93
48.	Vertical Type of Steam-Driven Hercules Ammonia Compressor. Vertical Central Section through Cylinder	98
49.	Double-Acting Horizontal Barber Steam-Driven Ammonia Com- pressor	99
50.	Double-Acting Horizontal Type Barber Electrically-Driven Ammonia Compressor	101
51.	Small Single-Acting Horizontal Type Barber Steam-Driven Ammonia Compressor	102

LIST OF ILLUSTRATIONS.

.xiii

FIG.	PAGE
52. Double-Acting Horizontal Type Vulcan Ammonia Compressor. Central Section through Cylinder	103
53. Small Single-Acting Vertical Inclosed Type Vulcan Ammonia Compressor. Elevation partly in Vertical Section	104
54. Small Single-Acting Vertical Inclosed Type Vulcan Ammonia Compressor. Transverse Section	105
55. Belt-Driven Horizontal Type West Ether Compression Machine	109
56. Single-Acting Inclosed Type Douane Methyl Chloride Compressor. Vertical Central Section	111
57. Belt-Driven Double-Acting Vertical Type Quiri Sulphurous Acid Compression Machine	112
58. Belt-Driven Double-Acting Horizontal Type Quiri Sulphurous Acid Compressor	113
59. Belt-Driven Horizontal Inclosed Type Douglas-Conroy Sulphurous Acid Compression Machine. Elevation partly in Vertical Section	115
60. Belt-Driven Horizontal Inclosed Type Douglas-Conroy Sulphurous Acid Compression Machine. Plan of Compressor	116
61. Belt-Driven Horizontal Inclosed Type Douglas-Conroy Sulphurous Acid Compression Machine. Section on line A B, Fig. 60	117
62. Belt-Driven Horizontal Inclosed Type Douglas-Conroy Sulphurous Acid Machine. Section on line C D, Fig. 60	118
63. Belt-Driven Vertical Type Hall Carbonic Acid Compression Machine	120
64. Belt-Driven Vertical Type Hall Carbonic Acid Compression Machine. Sectional View	121
65. Belt-Driven Vertical Type Hall Carbonic Acid Compression Machine. Vertical Central Section through Cylinder	122
66. Belt-Driven Vertical Type Hall Carbonic Acid Compression Machine. Cross Section through Cylinder	123
67. Belt-Driven Vertical Type Hall Carbonic Acid Compression Machine. Vertical Section through Spiral Packing Ring	124
68. Belt-Driven Vertical Type Hall Carbonic Acid Compression Machine. Vertical Central Section through Suction Passage	124
69. Belt-Driven Vertical Type Hall Carbonic Acid Compression Machine. Vertical Central Section through Safety Valve	125
70. Horizontal Type of Steam-Driven Hall Carbonic Acid Compressor	126
71. Horizontal Type of Duplex Steam-Driven Hall Carbonic Acid Compressor	127
72. Vertical Type Steam-Driven West Carbonic Acid Compression Machine	128
73. Vertical Type West Carbonic Acid Compression Machine. Vertical Central Section through Compressor Cylinder	129
74. Vertical Type West Carbonic Acid Compression Machine. Vertical Central Section through Valve. Enlarged Scale	130
75. Vertical Type Belt-Driven Kroeschell Carbonic Acid Compression Machine	131
76. Horizontal Type Belt-Driven Kroeschell Carbonic Acid Compressor	134
76.* Schou's Patent Refrigerator or Evaporator	135

FIG.		PAGE
77.	Chew's Patent Condenser, Submerged Type. Vertical Central Section	139
78.	Diagram showing simple method of distributing water in Atmospheric Condenser	143
79.	Diagram showing objections to common plan of distributing water in Atmospheric Condensers	144
80.	Diagram showing method of avoiding Spattering in distributing water in Atmospheric Condenser	145
81.	Arrangement for removing Liquefied Agent from Atmospheric Condensers	145
82.	Haslam's Open-air Evaporative Surface Condenser	147
83.	Triumph Atmospheric or Open-air Evaporative Surface Condenser	148
84.	Rau's Atmospheric or Open-air Evaporative Surface Condenser.	149
85, 86.	Westerlin-Campbell Double-pipe Condenser. Side and End Elevations	150
87.	Puplett's Water Saving and Cooling Apparatus	151
88.	Triumph Water Cooling Tower. Elevation	152
89.	Carre's Continuous Acting Ammonia Absorption Machine	156
90.	Pontifex-Wood Improved Continuous Acting Ammonia Absorption Machine	169
91, 92.	Pontifex-Wood Improved Ammonia Pump. Elevation and Vertical Central Section	170
93, 94.	Hill's Ammonia Absorption Machine with Supplementary or Auxiliary Absorber. Diagrams showing Front and End Views	175
95.	Hill's Ammonia Absorption Machine with Supplementary or Auxiliary Absorber. Diagrammatical View of complete Machine	177
96.	Tyler and Ellis' (Cracknall's Patent) Ammonia Absorption Machine. Front View	178
97.	Tyler and Ellis' (Cracknall's Patent) Ammonia Absorption Machine. Side Elevation	179
98.	Tyler and Ellis' (Cracknall's Patent) Ammonia Absorption Machine. Vertical Longitudinal Central Section	180
99.	Lyon's Patent Ammonia Absorption Machine. Plan	181
100.	Lyon's Patent Ammonia Absorption Machine. Front Elevation	182
101.	Lyon's Patent Ammonia Absorption Machine. Vertical Longitudinal Section	183
102.	Diagram illustrating Coleman's Electrically Heated Absorption Machine	184
103.	Diagram illustrating Leading Type of American Ammonia Absorption Machine	186
104.	Original Pattern Windhausen Cold-Air Machine. Plan View	195
105.	Original Pattern Windhausen Cold-Air Machine. Side Elevation	196
106.	Modified form of Windhausen Cold-Air Machine. Vertical Central Section	198
107.	Improved Type Giffard (1877) Cold-Air Machine. Sectional Side Elevation	201
108.	Haslam Cold-Air Machine. Horizontal Pattern	203
109.	Haslam Cold-Air Machine. Diagonal Pattern	205

LIST OF ILLUSTRATIONS.

XV

FIG.	PAGE
110. Haslam Cold-Air Machine. Vertical Pattern	207
111. Lightfoot Double-Acting Cold-Air Machine, Horizontal Pattern. Vertical Central Section	210
112. Lightfoot Single-Acting Cold-Air Machine. Sectional Elevation .	211
113. Cole's Patent Cold-Air Machine with Auxiliary Cooling Arrange- ment. Sectional Elevation	212
114. Cole's Patent Cold-Air Machine with Air-Drying Arrangement. Small Size	213
115. Cole's Patent Cold-Air Machine with Air-Drying Arrangement. Large Size <i>Plate facing page</i>	212
116, 117. Cole's Patent Cold-Air Machine with Air-Drying Arrangement. Side Elevation partly in Section and Transverse Section . .	214
117A. Indicator Diagram from Double-acting Expander of Cole's Patent Dry Cold-Air Machine	214A
117B. Indicator Diagram from Single-Acting Expander of Cole's Patent Dry Cold-Air Machine	214A
118. Allen Dense-Air, Ice Machine. Diagrammatical View	215
119. Taper Spindle Expansion or Regulating Valve. View partly in Vertical Section	221
120. Taper Spindle Expansion or Regulating Valve. Vertical Central Section	222
121. Triumph Angle Expansion or Regulating Valve. Vertical Central Section	223
122. Triumph Globe Expansion or Regulating Valve. Vertical Central Section	223
123. Frick Angle Expansion or Regulating Valve. Vertical Central Section	224
124. De La Vergne Expansion or Regulating Cock. Plan	225
125. De La Vergne Expansion or Regulating Cock. Vertical Central Section	225
126. De La Vergne Expansion or Regulating Cock. View of Plug partly in Section	225
127. Triumph Safety Combination Expansion Valve and Stop-Cock. Vertical Central Section	226
128. De La Vergne 2½-inch Stop Cock. Vertical Central Section . .	227
129. De La Vergne 1-inch Stop Cock. Vertical Central Section . .	228
130. Frick Shut-off or Stop Valve. Vertical Central Section	229
131, 132. Frick Stop Valves. Perspective Views	229
133. Discharge Valve, Hercules Compressor. Vertical Central Section .	230
134. Suction Valve, Hercules Compressor. Vertical Central Section .	230
135. Triumph Suction Valve. Vertical Central Section	231
136. Triumph Pattern Suction Valve for Frick Compressor. Vertical Central Section	232
137. Triumph Pattern Suction Valve for Frick Compressor. Vertical Central Section	232
138. Triumph Pattern Suction Valve for De La Vergne Compressor. Vertical Central Section	232
139. Triumph Pattern Suction Valve for De La Vergne Compressor. Vertical Central Section	232

FIG.		PAGE
140.	Triumph Pattern Valve for Calahan Compressor. Vertical Central Section	233
141.	De La Vergne Pipe Joint. Perspective View	234
142.	De La Vergne Pipe Joint. Vertical Central Section	235
143.	Kilbourn Joint for connecting pipes to plates. Vertical Central Section	236
144.	Kilbourn Joint for connecting different lengths of pipe. Vertical Central Section	237
145.	Flange Coupling or Union for lead Gasket. Vertical Central Section	238
146, 147.	Frick Coupling or Union for large pipes. Vertical Central Section and End View	238
148.	Frick Coupling or Union for small pipes. Vertical Central Section	239
149.	Flange Coupling or Union for sheet packing. Elevation partly in Vertical Central Section	239
150.	De La Vergne Soldered Pipe Joint, Bend or Elbow. Vertical Central Section	239
151.	Return Socket Bend. Vertical Central Section	240
152.	Flange Bend or Elbow. Vertical Central Section	240
153, 154.	Frick Evaporating Coil Bend. Side view partly in Section and End View	240
155, 156.	Flange Return Bend. End View and Side View	241
157.	Return Bend or Head formed in halves. Side Elevation	241
158.	Return Bend or Head formed in halves. Vertical Central Section	241
159, 160.	Discs or Gills for increasing the Surface of Refrigerating Pipes. View showing Gill fixed on pipe, and View showing one-half of Gill removed	248
161.	Diagram showing Variation in Capacity, etc., of Refrigerating Machine	250
162.	Arrangement of Cooling Pipes in Refrigerating Chamber. Transverse Section	261
163.	Arrangement of Cooling Pipes in Ceiling Loft. Transverse Section	262
164.	Hill's Arrangement for refrigerating cold rooms or chambers. Diagrammatical View	262
165.	Hill's arrangement for refrigerating cold rooms or chambers. Elevation of Chamber partly in Vertical Section	263
166.	Haslam's Patent Brine Cooling Battery, for cooling air to be circulated through cold storage rooms. Plan View	266
167.	Douglas' Patent Apparatus for cooling air for use in cold storage rooms or chambers. Vertical Central Section	268
168.	Cooper's Apparatus for washing, cooling and drying air for use in cold storage rooms or chambers. Diagrammatical View	269
169.	Arrangement of Cooling Pipes in beef chill rooms fitted with the De La Vergne Patent Pipe System. Transverse Section	270
170.	Beef Chill Room in cold store fitted with Haslam Patent Brine Cooling Battery. Transverse Section	271
171.	Hog Chill Room fitted with the De La Vergne Patent Pipe System. Transverse Section	272

LIST OF ILLUSTRATIONS.

xvii

	PAGE
172. Arrangement of Chill Room and Curing Cellar in bacon factory. Transverse Section	274
173. Small Cold Store for Butchers, etc., cooled by Cold Air Machine. Plan View	275
174. Small Cold Store for Butchers, etc., cooled by Ammonia Compression Machine. Sectional Elevation	277
175. Small Cold Storage Room for hotel or private residence. Vertical Section	278
176. Arrangement of Cold Storage Rooms and Ice-Making Plant in hotel. Perspective View	279
177, 178. Revolving Air-lock Door for cold storage rooms in hotels, &c. Sectional Elevation and Horizontal Section	280
179. Diagram showing gravity air circulation in cold storage room or chamber with ceiling piping	283
180. Diagram showing gravity air circulation in cold storage room or chamber with side wall piping.	283
181. Diagram showing gravity air circulation in cold storage room or chamber with screened wall piping	284
182. Diagram showing gravity air circulation in cold storage room or chamber with screened wall piping and ceiling extension	284
183. Diagram showing gravity air circulation in cold storage room or chamber with Gay's arrangement of piping	285
184. Diagram showing gravity air circulation in cold storage room or chamber with St. Clair pipe loft system	285
185. Diagram showing mechanical or forced air circulation with air forced into the room at each end and drawn out at the centre	289
186. Diagram showing mechanical or forced air circulation with false ceiling for distributing cold air from the coil room	289
187. Diagram showing mechanical or forced air circulation with air admitted at sides of ceiling and drawn out at the centre thereof	290
188. Diagram showing mechanical or forced air circulation with air admitted at one side of ceiling and drawn out of the other side	291
189. Diagram showing mechanical or forced air circulation with air admitted at each side of floor and drawn out at centre of ceiling	292
190. Diagram showing mechanical or forced air circulation with air admitted at one side of floor and drawn out at other side of ceiling	293
191. Diagram showing mechanical or forced air circulation with air admitted at two ducts on each side on wall, and drawn out through perforated false ceiling	294
192. Diagram showing mechanical or forced air circulation with air admitted at one broad duct on each side wall and drawn out through perforated ceiling	295
193. Diagram showing mechanical or forced air circulation with air admitted through perforated floor and drawn out through perforated ceiling	296

b

FIG.		PAGE
194.	Door for Cold Store with Taylor's patent Fittings	324
195, 196.	Frick Co. methods of insulating cold stores. Vertical and Horizontal Sections	325
197-204.	Frick Co. methods of wall, floor, ceiling, partition, door, and window insulation	326
205.	Frick Co. method of tank insulation. Vertical Section	327
206-215.	Barber Manufacturing Company methods of wall, floor, ceiling, and tank insulation	329
216-223.	Triumph Ice Machine Company methods of wall, floor, ceiling and tank insulation	331
224-234.	Triumph Ice Machine Company methods of wall and floor insulation	332
235.	Refrigerator Van or wagon, Great Southern and Western Railway, Ireland. Side Elevation	333
236.	Refrigerator Van or wagon, Great Southern and Western Railway, Ireland. End Elevation partly in Section	334
237.	Refrigerator Van or wagon, Great Southern and Western Railway, Ireland. Sectional Plan	335
238.	Refrigerator Car or wagon, Illinois Central Railway, U.S. Side Elevation partly in Section	336
239.	Refrigerator Car or wagon, Illinois Central Railway, U.S., Sectional Plan	337
240-245.	Child's Patent Automatic electrically driven Beef Hoist	340
246.	Child's Patent Automatic electrically driven Beef Hoist. View showing quarters of beef in position <i>Plate to face page</i>	340
247.	Multon Hoist in London cold store	342
248.	External Carcass Hoist at Nelson's Cold Storage Wharf, London, at rest <i>Plate to face page</i>	342
249.	External Carcass Hoist at Nelson's Cold Storage Wharf, London, at work <i>Plate to face page</i>	344
250.	Lawton's Apparatus for preserving Fruit. Diagrammatical view	351
251.	Hall's Horizontal Duplex Marine Type of Steam-driven Carbonic Acid Compression Machine <i>Plate to face page</i>	360
252.	Hall's Vertical Marine Type of Steam-driven Carbonic Acid Compression Machine	361
252*.	Hall's Small Marine Type of Steam-driven Carbonic Acid Compression Machine. Vertical Central Section	362
253.	De La Vergne Vertical Single-acting Marine Type of Ammonia Compression Machine	363
254.	Puplett Horizontal Marine Type of Steam-driven Ammonia Compression Machine	364
255.	Puplett Horizontal Marine Type of Belt-driven Ammonia Compression Machine	364
256.	Haslam Vertical self-contained Marine Type of Steam-driven Ammonia Compression Machine <i>Plate to face page</i>	364
257.	Haslam Horizontal Marine Type of Steam-driven Compound Ammonia Compressor <i>Plate to face page</i>	364
258, 259.	Kilbourn Horizontal self-contained Marine Type Steam-driven Double-acting Ammonia Compressor. Plan and Elevation partly in Section	365

LIST OF ILLUSTRATIONS.

xix

FIG.	PAGE
260. Kilbourn Horizontal Double-acting Marine Type of Belt-driven Ammonia Compressor	366
261, 262. Marine Type of Ammonia Condenser. Plan and Elevation partly in Section	367
263. Insulation of cargo holds on board s.s. <i>Campania</i> and <i>Lucania</i> . Transverse Section	368
264. Plan of Refrigerating Machine Room on Cunard Steamers	369
265. Insulation of Provision Stores on board s.s. <i>Campania</i> and <i>Lucania</i> . Transverse Section through ceiling	370
266. Insulation of Provision Stores on board s.s. <i>Campania</i> and <i>Lucania</i> . Longitudinal Section through ceiling.	370
267. Hall Vertical Marine Type of Steam-driven Cold-air Machine.	372
268. Haslam Vertical Marine Type of Steam-driven Cold-air Machine	373
269. Haslam Vertical Marine Type of Steam-driven Cold-air Machine and Ice-Making Apparatus	374
270. Arrangement of Cold Storage Chamber on board large passenger steamer. Sectional Plan	375
271. Ice-Making or Congealing Tanks or Boxes for use on shipboard. Plan, Side, End Elevation and detail view	376
272. "Baudelot" Cooler with direct expansion for cooling hot beer wort	382
273. "Baudelot" Cooler with brine circulation for cooling beer wort	383
274. Arrangement for cooling fermenting and yeast rooms in brewery on the brine circulation system	384
275. Arrangement for cooling fermenting room on direct expansion principle on the De La Vergne system	385
276. Frick Co. Method of cooling fermenting room in brewery. Transverse Section	387
277, 278. Arrangement for suspending flat pipe coils from ceiling on the iron floor beams. Side Elevation and Transverse Section	387
279. Pipe Arrangement for vault in brewery. Transverse Section	388
280, 281. Frick Co. Automatic Attenuator System and Cooling Arrangement. Side Elevation and Plan	389
282. Arrangement for cooling water for attenuating purposes in breweries with Ammonia Absorption Machine	391
283. Triumph Ice Machine Co. Small Brewery with Refrigerating Machinery working on the direct expansion principle. Sectional Elevation	392
284. Arrangement for the extraction of solid paraffin from shale oil. Sectional Elevation	394
285. Refrigerating Arrangement in an artificial butter factory. Sectional Elevation	397
286. Pontifex-Wood Brine Refrigerator	398
287. Installation of Ammonia Compression Machine in a dairy	400
288. Sandbach combined Cream Cooler and Heater. Plan	401
289. Sandbach combined Cream Cooler and Heater. Elevation	401
290. Capillary Cream Cooler. Elevation	402
291. Gobert Congelation Method of Sinking Shafts. Vertical Section	409
292. Gobert Congelation Method of Sinking Shafts. Plan	410

FIG.	PAGE
293-295. Gobert Congelation Method of Sinking Shafts. Details of construction	412
296. Pyramid Ice-making Box or Tank. Vertical Section	418
297. Box or Tank for making Ice on the Can System	419
298. "Eclipse" Can Ice-Making Tank or Box. Longitudinal Section	420
299. Propeller for circulating or agitating brine in Ice-Making Tank or Box. Side Elevation	422
300. Frick Pattern Brine Strainer. Vertical Central Section	422
301. Box or Tank for Making Ice on the Plate or Wall System	423
302. Pontifex-Wood Cell Ice-Making Tank or Box	427
303. Hill's Method of Making Clear or Crystal Ice. Plan of box or tank	428
304. Method of Making Clear or Crystal Ice. Transverse Section on line x, x, Fig. 303	429
305. Modified Arrangement of Hill's Method of Making Clear or Crystal Ice. Horizontal Section	430
306. Modified Arrangement of Hill's Method of Making Clear or Crystal Ice. Transverse Section on line x ¹ , x ¹ , Fig. 305	431
307. Oscillating Ice-Making Tank or Box. Side Elevation	431
308. Arrangement for agitation of water in Ice Cans by means of partially submerged double-ported Plunger Pump. Sectional Elevation	432
309. Arrangement for agitation of water in fixed Ice Cans by means of a Plunger or Piston Pump. Vertical Longitudinal Section	433
310. Arrangement for agitation of water in removable Ice Cans or Moulds by means of Plunger Pumps. Transverse Section	433
311. Arrangement for agitation of water to be frozen in Ice-Making Tank or Box by long horizontal agitator. Transverse Section	433
312. Arrangement for agitation of water to be frozen in Ice-Making Tank or Box by means of Vertical Plunger Pump. Transverse Section	434
313. Arrangement for the agitation of water to be frozen in Ice-Making Tank or Box by means of Horizontal Plunger Pump. Transverse Section	434
314. Triumph Ice Machine Co. Oil Separator and Condensed Water Cooler. Plan	436
315. Triumph Ice Machine Co. Oil Separator and Condensed Water Cooler. Vertical Section	436
316. Frick Co. Apparatus for making distilled water from exhaust steam. Diagrammatical view	437
317. Diagram illustrating operation of triple-effect Evaporating Apparatus	437
318. Complete single-effect Distilling Apparatus on the Yaryan System	440
319. Complete sextuple-effect Distilling Apparatus on the Yaryan System	442
320. Ice Tank or box room on the Can System. Sectional Elevation	446
321. Ice Tank or box room of Ice Factory on Plate or Wall System, showing mechanism for raising slabs or blocks of ice	447
322-324. Frick Co. Plan for Ice Factory of six tons capacity. Plan, Sectional Side Elevation, and Transverse Section	448
325-327. Frick Co. Plan for Ice Factory of thirty to thirty-five tons capacity. Sectional Side and End Elevation, and Plan	449

LIST OF ILLUSTRATIONS.

xxi

FIG.		PAGE
328-330.	Frick Co. Plan for Ice Factory of one hundred tons capacity. Plan and Sectional Side and End Elevations	450
331, 332.	Arrangement of model Ice Factory by the Triumph Ice Machine Company. Plan and Sectional Elevation	451
333, 334.	Vulcan Iron Works Arrangement for a five-ton Ice Factory on the Can System. Plan and Sectional Elevation	452
335.	Ice Factory on the "Eclipse" Can System, constructed by the Frick Company. Sectional Elevation	453
336.	Frick Ice Can Hoist for use with small Ice-making plants	454
337.	Travelling Crane and Geared Hand-power Ice Can Hoist	455
338.	Electric Crane for handling ice cans in large factories	455
339.	Automatic Ice Dump	456
340.	Vulcan Iron Works Track System	456
341.	Brine Mixing Tank. Vertical Longitudinal Central Section	460
342.	15-ton per hour power Ice-Crushing Machine	463
343.	Voorhee's Oil Separator or Collector. Vertical Central Section	473
344.	Proposed form of Oil Separator, Collector, or Interceptor. Vertical Central Section	474
345.	Triumph Ice Machine Company Ammonia Receiver and Oil Trap. Vertical Central Section and detail views	476
346.	Stuffing Box and Packing for Ammonia Machines. Longitudinal Section	479
347.	Mercury Well for horizontal pipe. Vertical Section	485
348, 349.	Mercury Well for vertical pipe. Vertical and Horizontal Sections	485
350.	Diagram from Compressor in good order	489
351.	Diagram from Compressor indicating an excessive amount of clearance	489
352.	Diagram from Compressor indicating binding of pressure valve	489
353.	Diagram from Compressor indicating too great a resistance in pressure and suction pipes	489
354.	Diagram from Compressor indicating binding of suction valve	490
355.	Diagram from Compressor indicating leaking of compressor valve	490
356.	Diagram from Compressor indicating defective packing of piston	490
357.	Diagram illustrating the Cascade or Successive Cycle System of producing very low temperatures	509
358.	Diagram illustrating Tripler's Apparatus for the production of very low temperatures by the Regenerative method	514
359, 360.	Hampson's Apparatus for the production of very low temperatures by the Regenerative method. Vertical and Horizontal Section	516
361.	Linde's Apparatus for the production of very low temperatures by the Regenerative process. Sectional Elevation	517



REFRIGERATION, COLD STORAGE, AND ICE-MAKING.

CHAPTER I.

INTRODUCTION.

Origin of Artificial Refrigeration.—History and Progress of the Trade in Fresh Provisions.

ALTHOUGH refrigeration and the production of ice by artificial means is said to have been known to, and practised by, the Ancients, it is only in comparatively recent times that improved systems and apparatus have enabled operations to be carried out profitably on a commercial scale, and have rendered possible the numerous manufacturing and industrial applications now made.

In addition to the employment of mechanical refrigeration for the manufacture of ice, more durable, and—by reason of the known purity of the water congealed—more palatable and sanitary than the natural product; to its extensive use for the freezing and chilling of freshly killed meat in abattoirs; and to its application to the cooling of stores or chambers for the preservation of meat, fowl, fish, fruit, vegetables, and other provisions of a perishable nature: mechanical refrigeration is now commonly employed in a number of different manufacturing processes, brief descriptions of the most important of which applications will be found in a chapter devoted to this subject.

The trade in fresh provisions is one that during the last few years has made enormous strides, and at the present time vast quantities of

frozen carcasses, and of fish, fruit, vegetables, and milk are being imported into this country.

Space does not, unfortunately, admit of entering into any lengthy account of the history of this trade, which is one of great interest, or of giving lengthy statistics relative to the constantly increasing amounts of these imports; the full figures can, however, readily be got from a variety of sources by anyone interested therein, and, moreover, they hardly come within the province of a book purporting to be devoted to a description of the various machines and appliances adapted for refrigeration and ice-making. The following however are a few of the leading facts and figures:—

Meat frozen by a Harrison ether machine was shipped from Melbourne on the 23rd July, 1873, arriving here on the 18th October, but turned out a failure. In 1875 and 1876 frozen meat was brought over from America. The first cargo of frozen meat was successfully brought to this country from Australia in the year 1880, in the *Strathleven*, which is said to have been fitted with a Bell-Coleman cold-air machine, and this was quickly followed by another consignment in the *Protos*, refrigerated by means of a cold-air machine of the Lightfoot pattern. On October 5th of the same year the steamship *Orient* arrived at London with a cargo of frozen meat, she being also fitted with refrigerating apparatus on the cold-air principle, in this instance one of Haslam's patent dry-air refrigerators being employed, which worked without interruption during the entire voyage of six weeks' duration. On the 26th September, in the succeeding year, the clipper ship *Mataura*, also fitted with a Haslam patent cold-air machine, arrived with a cargo of frozen meat from New Zealand.

Such were the commencements of the trade in refrigerated meat, and it has so rapidly advanced that, in mutton and lamb from a few (400) hundred carcasses in 1880, it had risen to 6,869,419 carcasses in 1899. In 1900, however, the imports fell short of those of the previous year by 435,598 carcasses, the total being 6,433,821, the first time since the commencement of the trade that there had failed to be a considerable increase in the aggregate, as will be seen from the following table compiled from statistics published by Messrs. Weddel and Co. :—

INTRODUCTION.

3

YEARLY IMPORTS OF FROZEN MUTTON AND LAMB FROM COMMENCEMENT OF THE TRADE TO 31ST DECEMBER, 1900.

Year.	Australia.	New Zealand.	Falkland Islands.	River Plate.	Totals.
1880	400	—	—	—	400
1881	17,275	—	—	—	17,255
1882	57,256	8,839	—	—	66,095
1883	63,733	120,893	—	17,163	201,791
1884	111,745	412,349	—	108,823	632,917
1885	95,051	492,269	—	190,571	777,891
1886	66,960	655,888	30,000	434,699	1,187,547
1887	88,811	766,417	45,552	641,866	1,542,646
1888	112,214	939,231	—	924,003	1,975,448
1889	86,547	1,068,286	—	1,009,936	2,164,769
1890	207,984	1,533,393	10,168	1,195,531	2,948,076
1891	334,684	1,824,105	18,897	811,135	3,058,823
1892	504,738	1,539,605	17,818	1,247,861	3,310,022
1893	636,917	1,857,598	16,425	1,373,723	3,884,663
1894	939,360	1,958,259	11,675	1,414,815	4,324,109
1895	1,005,503	2,412,331	19,438	1,615,795	5,053,367
1896	1,643,243	2,211,895	24,074	1,768,206	5,647,418
1897	1,407,417	2,703,845	26,275	2,095,196	6,232,733
1898	1,248,653	2,784,101	—	2,397,437	6,430,091
1899	1,204,601	3,250,100	20,000	2,394,718	6,869,419
1900	943,924	3,157,060	—	2,332,837	6,433,821

The total weight of frozen beef received into the United Kingdom in 1900 was 56,831 tons, as compared with 44,200 in 1899, and there has been a steady increase in the amounts of Australian, New Zealand, and River Plate frozen beef, United States and Canadian chilled beef, and Continental fresh killed beef imported into this country for the last ten years, as will be seen by the following table drawn up by Messrs. Weddel and Co. :—

	1891	1892	1893	1894	1895	1896	1897	1898	1899	1900
	Cwts.	Cwts.	Cwts.	Cwts.	Cwts.	Cwts.	Cwts.	Cwts.	Cwts.	Cwts.
Queensland ...	40,850	54,000	206,783	286,806	358,814	449,911	497,080	483,032	513,225	365,899
New South Wales and Victoria	765	2,568	4,200	15,090	126,567	45,024	63,749	48,619	95,991	29,292
New Zealand	107,433	62,065	14,706	2,617	16,317	28,803	73,426	92,756	130,427	329,467
River Plate ...	14,485	8,309	35,383	5,279	23,446	50,095	84,667	108,288	150,368	411,962
United States	1,747,578	1,951,887	1,489,949	1,775,528	1,649,473	2,074,644	2,242,063	2,301,956	2,756,796	2,867,238
Canada ...	287	154	84	40	8,121	9,189	5,774	21,543	90,238	45,084
Continent, &c.	9,113	654	56,947	18,705	7,829	2,034	43,618	44,427	61,577	79,368
Totals ...	1,920,511	2,079,637	1,808,052	2,104,065	2,190,567	2,659,700	3,010,377	3,100,221	3,802,622	4,128,310

The trade in frozen rabbits has also attained to considerable dimensions, and in the year 1900 36,823 crates, containing 917,142 rabbits, were sent to this country from South Australia.

In 1886 the steamship *Nonpareil* (Scrutton, Sons and Co.), which had been fitted for the purpose with a Haslam dry-air refrigerator, brought to this country the first cargo of West Indian fruit; and early in 1888 a cargo of apples was shipped from Melbourne in the *Oceana*, in chambers also cooled by a Haslam machine, both cargoes arriving in good condition. Subsequently many of the ships belonging to the Peninsular and Oriental Steamship Company, and others, were fitted up for this trade, and quite recently four fine steamers, with which Messrs. Elder, Dempster, and Co. have inaugurated the Imperial West India Direct Mail Service, have been specially adapted for the transport of large quantities of bananas from Jamaica, a task which has been successfully performed. The method adopted is to circulate through the insulated holds of the vessel air which has been purified and cooled in the course of its passage over a specially constructed cooler, through which cold brine is circulated by means of pumps, and every precaution is taken to maintain an equable temperature of 40 to 45 degrees Fahrenheit during the voyage.

Besides this there is now quite a large trade in Australian and Canadian apples, about 230,000 cases being shipped in 1900 from Tasmania alone, and one in soft fruits, such as pears, peaches, and grapes, is in a fair way to become also established.

In 1893 a considerable import trade in milk had already arisen; one firm alone, in 1894, regularly sold 500 gallons of foreign milk daily, and thousands of gallons of foreign cream were likewise imported into this country within the same period, to be used for butter-making. The bulk of this milk is shipped to London from Gothenburg by steamer, having been frozen chiefly by refrigerating machines on the ammonia compression principle, and costing, it is stated, 25 per cent. less than English milk.

Large quantities of butter are brought over from Denmark and the Baltic, Messrs. Thos. Wilson, Sons, and Co. alone having seven steamships fitted up with refrigerating machinery for the butter trade, and one firm of refrigerating engineers (Messrs. J. and E. Hall, Limited), have fitted up thirty steamers with refrigerating installations for the same trade. The amount of butter imported into the United Kingdom from Victoria, in 1900, was 26,185,679 lbs., that from New South Wales 8,727,600 lbs., and large quantities of butter and cheese are likewise brought over from Canada.

All these provisions can now be brought to this country in excellent condition, the chief dangers of deterioration being from hurried and consequently careless stowing, from bumps and bruises caused by rough and unskilled handling, and from exposure to higher temperatures during transit from the vessel to the cold stores on land, and subsequent distribution by road or rail to the retailers.

There are at the present time upwards of 130 cold stores and ice factories in the United Kingdom. The total number of firms now engaged either as makers of refrigerating machinery, manufacturers of ammonia, carbonic anhydride and other refrigerating mediums, proprietors of cold stores, importers or manufacturers of ice, etc., is upwards of 1,300. On the Continent there are about 4,400 firms directly interested in refrigeration, and in America some 5,600, whilst spread over China, Japan, Java, India, Ceylon, the Malay Peninsula, the Philippine Islands, Siam, East, West, and South Africa, Australia, New Zealand, Egypt, and Algèria are about 1,500 more. Making a grand total of 12,800. There are besides many butchers, fishmongers, hotel proprietors, and others, who have small cold stores cooled by refrigerating machinery and by ice.

The number of vessels fitted up with refrigerating installations, and specially designed for the frozen meat trade is now 137, estimated to have a carrying capacity of 7,184,290 56-lb. carcasses.

CHAPTER II.

THE THEORY AND PRACTICE OF MECHANICAL REFRIGERATION.

Relation to first two Laws of Thermo-dynamics.—Definition of Heat.—Specific Heat.—Latent Heat.—Mechanical Equivalent of Heat.—Calculations made with respect to Heat.—Temperature.—Laws of Gases.—Construction of Chart applicable to any value of n .—Work demanded of a Refrigerating Machine.—Greatest Theoretical Efficiency of a Refrigerating Machine.

THE theory and practice of mechanical refrigeration are based upon the two first laws of thermo-dynamics—that is to say, first that mechanical energy is convertible into heat, and *vice versa*, and, second, that an external agent is necessary to enable heat to pass from a cold to a heated body.

The above fact very naturally leads us to inquire what heat really is, and here we are confronted with a question by no means easy to answer correctly. According to the well-known and generally accepted definition of text books, the answer to the question is that heat is a mode of motion. A more satisfactory statement as to the nature of heat, however, is that it is a form of molecular energy. This theory is the result of a series of observations made by Benjamin Thompson, better known, perhaps, as Count Rumford, in the year 1798, and also by Sir Humphrey Davy, in the year 1799, the definition having been finally arrived at, and accepted by, the former eminent scientist in 1812. It is an unfortunate circumstance, but nevertheless a true one, that even the most gifted amongst scientific men, in endeavouring to penetrate the secrets of nature, are, after all is said and done, but groping blindly in the dark, and the fallacy of but too many of our scientific definitions is a truth patent to all who give the subject any serious consideration. This is a fact fully recognised by most eminent teachers; but notwithstanding this, the erroneous definitions are allowed to stand unchallenged for want, doubtless, of more accurate ones.

In the case of heat, the before-mentioned experiments had apparently shown that heat was not a substance, as had been thought by previous authorities, and therefore it was accepted without dispute, in order to secure a plausible definition, as being a mode of motion. In a very interesting paper by Doctor Ernst Mach, Professor of

Physics in the University of Prague, which appeared in the *Monist* of October, 1894, the absurdity of many of the universally accepted theories is clearly demonstrated, and with reference to thermo-dynamics, he remarks that, as it has been shown that heat is not a substance, the usually accepted theory is that it is a mode of motion. This, however, Dr. Mach proves not to be true. In an able article upon the fallacy of scientific definitions published in the *Engineer* of October 12th, 1894, the writer, after referring to the fact that the exact nature of heat is as yet absolutely unknown, truly observes that heat really behaves sometimes like a substance and sometimes not.

Modern physicists assume heat to be not a material but a state. All bodies are built up of very large numbers of extremely minute particles, known as molecules, which have a mutual attraction the one for the other, which attraction is more or less great in solid matter, lesser in liquid matter, and actually resolves itself into a repulsion in gaseous matter. These molecules are supposed to be in a state of perpetual movement or vibration, except in the case of bodies which are absolutely cold, and the temperature of a body is governed by the rate of this vibration, the more rapid the vibration the higher the temperature. Every molecule possesses a certain definite weight, and owing to its motion must have a certain amount of kinetic energy, so that according to this heat is really a kind of energy, and not a substance. Both heat and mechanical energy are mutually convertible, and besides, for each unit of heat expended or produced, a definite amount of mechanical work must be produced or expended.

Lord Armstrong said: "According to the new theory, heat is an internal motion of molecules, capable of being communicated from the molecules of one body to those of another; the result of this imparted motion being either an increase of temperature or the performance of work. Clausius states that heat cannot be communicated from a cold body to a hotter one without compensation. According to Tyndall heat is not matter, but an accident or condition of matter, namely, a motion of its ultimate particles. Maxwell says that heat, considered with respect to its power of warming things, and changing their state, is a quantity strictly capable of measurement, and not subject to any variation in quality or kind. Balfour Stewart says that when air is compressed, the rise of temperature is scarcely at all due to the mere diminution of the distance between the particles, but almost entirely to the mechanical effect which must be spent on the air before the condensation can be produced."

It may here be remarked that the word heat is very commonly em-

ployed in a very loose manner, and the fact that two quite distinct meanings may attach themselves to it is either forgotten or ignored, viz., "temperature" and "quantity of heat," which, whilst closely connected with one another, are nevertheless entirely different. For example, we may have two vessels of largely varying dimensions containing water at exactly the same temperature, whilst the quantity of heat in the larger vessel may be double, treble, or more, of that in the other or smaller one.

Specific heat is defined as being that amount of heat necessary to raise the temperature of a body of a unit weight 1° . The unit of measure is that quantity of heat that is necessary in order to raise the unit weight of water through 1° , at its temperature of maximum density 39.4° Fahr. If equal weights of different bodies are raised the same number of degrees of temperature, each one takes up a different amount of heat, moreover the specific heat of the same substance differs in accordance with its state, *i.e.*, whether it be solid, liquid, or gaseous, and under varying conditions of temperature and pressure, increasing invariably with an increase of temperature or pressure. The specific heat of water is exceeded by but few bodies, and the variation thereof at different temperatures is so small as to be unworthy of notice. The specific heat of water is therefore taken as the standard of comparison, and is represented by unity. It is, however, a quantity increasing with the temperature; for example at the temperature of maximum density 39° Fahr. to 40° Fahr., it is exactly unity, at 104° Fahr. it is 1.0012, and at 212° Fahr. it is 1.005.

Latent heat, the existence of which was first discovered by Dr. Black in 1762, is the heat that is absorbed by bodies when passing from one state to another. Latent heat has been thus clearly and concisely defined by Balfour Stewart, in his "Treatise on Heat":—"Latent heat is the heat which is absorbed by bodies in passing from one state to another, but it does not manifest itself by producing an increase of temperature, and is on this account called latent heat. . . . A pound of water at 212° , mixed with a pound of water at 32° , gives 2 lbs. of water at 122° , the mean of the two components; if, however, a pound of ice at 32° be mixed with a pound of water at 212° , we have 2 lbs. of water at 51° only. . . . The difference being equal to that required to raise 2 lbs. of water through a range of 71° . . . representing the heat required to liquefy 1 lb. of ice."

Joule's mechanical equivalent of heat equals 772 ft.-lbs. That is to say that heat demands for its production, and produces by its dis-

appearance, 772 ft.-lbs. for each unit of heat. The experiments by which Joule determined the above equivalent were conducted by means of a falling weight, which actuated an agitator or paddle-wheel placed in water, the friction caused by a weight of 1 lb. falling through a distance of 772 ft., or of a weight of 772 lbs. falling through a distance of 1 ft., being found sufficient to heat 1 lb. of water 1° Fahr.

The method of conducting the experiment consisted in first winding up the weight until it was at the top of a scale, the temperature of the fluid (water, oil, mercury, etc.) being then noted, and the weight allowed to fall through a certain distance and the temperature again noted. If then W be the weight in lbs., and H the height through which the weight has fallen in feet, $W \times H$ will be the number of foot-pounds of work that have been performed by the falling weight. And if $w \times s$ be the weight of the fluid multiplied by its specific heat, t_1 be the initial temperature of the fluid, and t_2 be its final temperature, $w \times s (t_2 - t_1)$ will be the number of heat units imparted to the fluid by the fall of the weight. Taking J (usually known as Joule's equivalent) to denote the number of foot-pounds required to produce one heat unit, or the mechanical equivalent of heat, we have therefore:

$$J = \frac{W H}{w \times s (t_2 - t_1)}$$

This is what is generally called the first law of thermo-dynamics, viz., heat and mechanical energy are mutually convertible, and heat requires for its production or produces by its disappearance, mechanical energy in the proportion of 772 ft.-lbs. for 1 unit of heat.

This value has been used universally for many years, being even now that most commonly employed. Recent investigators, however, have conclusively shown that the above is too small, and various values varying up to 778 ft.-lbs. are used.

Calculations made with respect to heat entail the use of the terms absolute pressure and temperature.

The first of these, or absolute pressure, is pounds per square inch above a vacuum. Hence, as the zero on a steam pressure gauge represents atmospheric pressure it will be necessary to add 14.7 lbs. to any particular gauge pressure to convert it into absolute pressure.

Temperature is a term which implies that degree of sensible heat which a body possesses when compared with another body. The zero upon the Fahrenheit thermometrical scale is an arbitrary zero or starting point, adopted because the real zero was unknown; recent experiments place it at -459.13° Fahr. On both the Centigrade and

Reaumur Scales the two fixed points are the temperatures of melting ice, and boiling water under a pressure due to that of the standard atmosphere. A degree is obtained by dividing the interval between these points into 180 in the case of the Fahrenheit, 100 in the case of the Centigrade, and 80 in the case of the Reaumur, equal divisions on the three scales, the bore of the tube being assumed to be uniform and the expansion of the glass neglected. Thus the absolute temperature of a body is that of absolute zero added to the ordinary thermometrical temperature thereof. For instance, if the latter be 32° Fahr. then the absolute temperature would be 491.13° Fahr., or 459.13 were it zero Fahr. on the thermometer.

The laws of gases may be concisely stated as follows :

$$P V = R T:$$

Where P = pressure

V = volume

R = constant (depending upon the gas)

T = absolute temperature

= $(T + 459.13^{\circ})$ on Fahrenheit scale.

The equation may be put as follows :

$$\frac{P V}{T} = \text{constant.}$$

If temperature remains constant then

$$P V = a \text{ constant.}$$

And in this form is the algebraical representation of Boyle's or Mariotte's law, usually expressed in words thus: If the temperature remain constant then the volume of any given quantity of gas will be in the inverse ratio to the pressure which it sustains.

The volume remaining constant then

$$\frac{V}{T} = a \text{ constant.}$$

Which is the symbolic expression of Charles' and Gay Lussac's laws (laws of expansion). Charles' law may be orated thus: Under constant pressure all gases expand alike.

$$P V^n = \text{constant.}$$

In cases where the change of volume takes place at constant tem-

* Figures given by Professor Clerk Maxwell in his "Theory of Heat." 460 is the amount generally taken.

perature, then it is said to be isothermal expansion and $n = 1$. The curve connecting pressure and volume is an hyperbola, and consequently it is occasionally called hyperbolic expansion.

If the working medium or agent expand without receiving or giving up any heat from or to external bodies, it is said to expand adiabatically, the curve of expansion is adiabatic and $n =$ ratio of specific heat at constant pressure to the specific heat at constant volume, which for air $= 1.408$, or




Fig. 1.—Diagram showing method of construction of curve $P V^n = \text{constant}$.

$$P V^{1.408} = \text{constant}.$$

This particular ratio is usually denoted by γ , or

$$P V^{\gamma} = \text{constant}.$$

To construct the curve $P V^n = \text{constant}$.

When $n = 1$ then for a given series of values of V it is easy to calculate the corresponding values of P , but for any other value of n , it is necessary to use logarithms, thus:

$$\log. P + n \log. V = \log. C; \quad (1)$$

Put $\log. P = y$; $\log. V = x$, and $\log. C = k$, then equation (1) may be written:

$$y + nx = k,$$

which is the equation to a straight line.

In Fig. 1 take the point R in the straight line AB , then $CR = OD = x_1$, and $RD = OC = y_1$; then from the figure we have—

$$\frac{OA}{OB} = \frac{AC}{CR} = \frac{OA - CO}{CR} = \frac{OARD}{CR} = \frac{OA}{CR} - \frac{RD}{CR};$$

$$\therefore RD + \frac{OA}{OB} \cdot CR = OA$$

$$\text{or, } y_1 + nx_1 = k;$$

and similarly for any other point (xy) in the line it may be shown that—

$$y + nx = k.$$

Also let the angle $A B O = D$, then $n = \tan D = \frac{A O}{O B}$




Fig. 2.—Diagram showing method of constructing curve $P V^n = \text{constant}$.

In Fig. 2 let $A' R' B'$ be the curve $P V^n = C$, then if $C R = \log. C' R'$ and $D R = \log. D' R'$, then all points such as R will lie on a straight line $A B$, and $A O = \log. C$, whilst

$$\frac{A O}{B O} = n.$$

Upon these principles Professor D. A. Low has devised the following general method applicable to any value of n , which avoids the continual use of a table of logarithms.

For this purpose a chart is constructed (see Fig. 3), which may be considered divided up into four parts by the lines $X_1 X$, and $Y_1 Y$. Volumes are measured along $O X$, pressures along $O Y$ as usual, so that the top right-hand corner is the curve $P V^n = \text{constant}$. $\log. P$ is measured along $O X_1$, and $\log. V$ along $O Y_1$. A curve is drawn in the top left-hand corner such that any point Q in it, satisfies the conditions $Q S = P$, and $Q T = \log. P$. Similarly in the right-hand lower corner is a second curve in which any point K_1 must satisfy the conditions $K L = V_1$ and $K M = \log. V$. These curves will be used for constructional purposes and should be carefully drawn.

Let A (Fig. 3) be a point in the curve $P V^n = C$, and also that n has the value 1.4, the pressure at A being 140 lbs., and the value 10 units. Then project a vertical line downwards to meet the $V \log. V$ curve at a , and a line horizontally to meet the $P \log. P$ curve at a' . From a' let fall a perpendicular to meet a horizontal line through a , at a'' . Join the point 1.4 on scale of $\log. P$ to 1.0 on scale of $\log. V$ and through a'' draw a line parallel to this line. Next select some point, say b'' , and project vertically and horizontally, obtaining the points b' and b'' , again projecting horizontally and vertically, and their intersection B is a point on the curve required; repeat this process for as many points as may be required. All this process requires is the use of a tee square and set square; and in practice if the two curves are constructed once for all and the construction performed upon a piece of tracing paper, the original can be then preserved uninjured. The converse problem can be solved, viz., if a curve $U V$ be given to find the nearest value of n in the equation $P V^n = C$. In this case take a number of points, 1, 2, 3,

&c., and draw the *straight* line $u'' v''$ through them, and through the point 1.0 (in log. V) draw a parallel line to $u'' v''$, to intersect log. P scale (O X₁), then the reading in this example 0.8 nearly. So that the equation to the curve U V is $P V^{0.8} = 1313$.

The work demanded of a machine of any kind whatsoever intended for effecting mechanical refrigeration is to reduce the temperature of any given matter to the desired point as compared with the surrounding

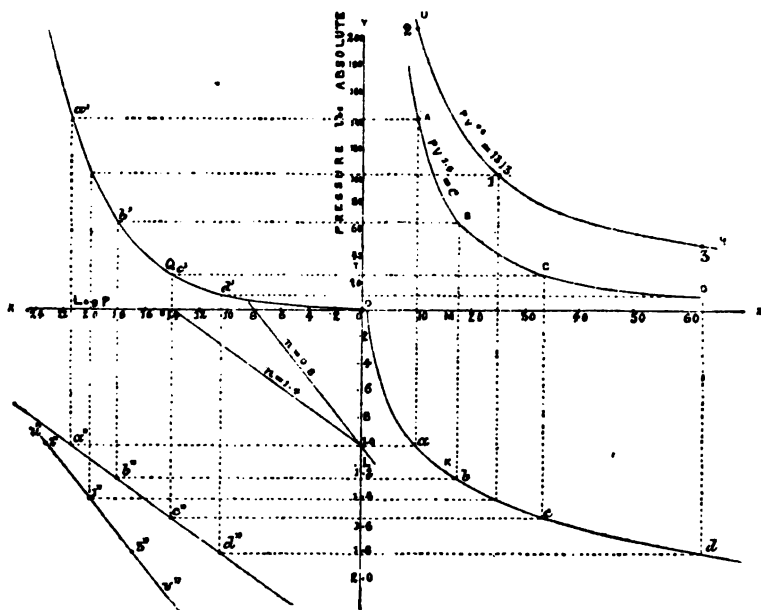


Fig. 3.—Construction of Chart applicable to any value of n .

matter, and to maintain it subsequently at or near this point, for naturally, were two bodies having different temperatures placed either in actual contact or in sufficiently close proximity to one another, their temperatures must infallibly become equalized sooner or later, if no means be employed to permanently keep up the difference. It may here be noted that the theoretical cycle of a perfect refrigerating machine is precisely the opposite to that of a perfect heat engine. In the first, heat goes in at a low temperature and passes out at a more elevated temperature, to render which action possible certain work has

to be effected upon it. In the second, heat derived from some external source at an elevated temperature, is given out at a lower temperature, a greater or lesser amount of mechanical work being produced by it during its fall.

When a gas is compressed the temperature rises. When a gas is allowed to expand, the work it performs is done at the expense of its store of heat. If, therefore, some gas, say air, be compressed its temperature will increase, and some of its heat will be able to flow into any surrounding bodies at a lower temperature, and in cold air machinery air is compressed, and then cooled by passing through water at a lower temperature, which reduces the temperature to about its original amount before compression. Now if this air be allowed to expand again until its original pressure is regained, the work so done will be performed at the expense of its reduced stock of heat, so that the air will have lost a large portion of its heat in the process, which will result in a great reduction of temperature, thereby giving rise to that negative condition known as cold.

It may be here mentioned that the phrase commonly used, "heat is generated by compression," is somewhat misleading, because the amount of heat in the Universe is a fixed quantity, and the intrinsic energy possessed by any gas is under given conditions a quantity that can be accurately calculated. Thus if a pound of air at a temperature of 70 degrees Fahrenheit, and at normal atmospheric pressure be taken as an example, the total quantity of energy it possesses is at once known. If this air be placed in a compressor and its volume be reduced to say one half of its original volume, and if this be done so rapidly that there is no time for heat to escape at the end of the compression, that is to say adiabatically or instantaneous compression without transmission of heat, then its energy will have been increased by the amount of work done upon it. Its statical pressure will be increased, and its temperature will also have risen, by reason of its changed state or condition internally, and the theta-phi diagram for the two conditions would show this more clearly than any other known method. Now if the temperature be reduced to its former amount, that is to say to 70 degrees Fahrenheit, its volume will contract, so that a small additional quantity of air will have to be forced in in order that the pressure may remain unchanged as the temperature is reduced. It will be seen that there will be now, consequently upon the above, rather more than a pound of air to deal with at the higher pressure, and this is what actually occurs in practice, but is a point which is easily overlooked. Now if this air be allowed to expand in a

cylinder, it will give up more of its heat in order to overcome the resistance, and in this way it will lose or part with more heat. The amount of work done is shown by the indicator card, and can be estimated. The mechanical work done by the air in this expansion is exactly the same as that done upon it during its compression, but there is in addition the further loss of energy, due to the internal work done in the air during the expansion, so that what has been done to the air during the entire process has been to extract some of its original store of heat, thus reducing its temperature; and the cold air is now ready to restore its deficiency at the expense of the surrounding hotter bodies.

The greatest theoretical efficiency of a refrigerating machine is expressible by the equation :

$$\frac{X}{X'} = \frac{Y}{Z-Y};$$

X denoting the heat units which are abstracted.

X' denoting the total of heat units representing work effected.

Y denoting the absolute lower temperature.

Z denoting the absolute higher temperature.

In all refrigerating machines, other matters being equal, a limited range of temperature gives the largest amount of efficiency, and the more extended the range of temperature the less will be the degree of efficiency developed; the efficiency, moreover, advances proportionately to a rise in the lowest limit of the range of temperature.

Shortly, the work demanded of a refrigerating machine is to extract heat from a cold body, say from the air in an enclosed space, such as a refrigerating chamber, and by the expenditure of mechanical energy to sufficiently raise the temperature of this heat to admit of its being carried away by a suitable external agent, the latter being most usually water, which is not only the cheapest one available, but also has a greater capacity for heat, weight for weight, than any other known substance, and is taken as the standard of comparison, its specific heat being taken as unity.

It has been already stated that heat cannot be communicated from a cold body to one at a higher temperature without compensation taking place, and as the heating of cold bodies is not refrigeration, an explanation of the nature, extent, and necessity of this compensation is called for.

Let us suppose that it is desired to cool some agent or medium, say air for an example, at a temperature of 60° Fahr., a liquid at a

temperature of zero Fahr. being available which has, say, the same specific heat as water. On mixing 100 cubic feet of this air with ten pounds of the liquid, it will be found, as soon as the temperatures have become equalised, that the air has been cooled 50° , and the liquid heated 10° , practically no expenditure of power being required to effect the mixing.

On the other hand, supposing that it is desired to cool air at a temperature of 60° Fahr., and that water at 80° Fahr. is available for the purpose of absorbing the heat, then in this case as the substance to be cooled is the colder body, some means must be found of reversing the relative temperatures of the two substances. According to Boyle's or Mariotte's law, the temperature remaining the same, the volume of any given quantity of gas will be in the inverse ratio to the pressure which it sustains. By compressing the 100 cubic feet of air to $\frac{1}{10}$ ths of its volume, the terminal temperature will be found to be 140° Fahr., and if this air be mixed whilst under pressure with 10 lbs. of water at a temperature of 80° Fahr., it will be found, as soon as the temperatures become equalized, that both the air and the water are at a temperature of 90° . By allowing this air to expand to normal pressure, its final temperature will be found to be 10° Fahr., or reduced to a similar temperature as in the first case. In the above example, the compression, cooling, and expansion are assumed to be all effected in the same cylinder, and without transference of heat to or from the exterior.

It will be seen that, in both of the above cases, 100 cubic feet of air has been reduced in temperature by 50° Fahr. The heat removed or abstracted was in the first instance communicated to a liquid at a low temperature, no compensation taking place, whilst in the second case the heat removed or abstracted was taken up by water at an initial temperature considerably above that of the said air, which action necessitated the temperature of the latter being raised by compression, thereby consuming a certain amount of power in doing so, which consumption of power in the above case, allowing for friction, may be taken as 27,500 ft.-lbs.

We have already seen that the mechanical equivalent of heat is 778 ft.-lbs. per British thermal unit (B.T.U. or heat unit, viz., the quantity of heat required to raise one pound of pure water one degree Fahrenheit, or, more exactly, from $39^{\circ}1'$ to $40^{\circ}1'$), therefore :

$$\frac{27500}{778} = 35.3 \text{ B. T. U.}$$

This, however, as above mentioned, is on the assumption that compression, cooling, and expansion, all take place in the same cylinder and without loss or accession of heat to the exterior, an impossible arrangement in practice, and if the air be compressed in one cylinder and passed into other cylinders against pressure for cooling and expansion, as it would be in an actual working arrangement, another 122,000 ft.-lbs. would be consumed for the discharge of the air against pressure, whilst there would be a recovery of 80,000 ft.-lbs. due to the expansion of the compressed air behind a piston, and we have therefore, 27,500 ft.-lbs. + 122,000 ft.-lbs. = 149,500 ft.-lbs. — 80,000 ft.-lbs. = 69,500 ft.-lbs. as the expenditure of power required to cool 100 cubic feet of air 50° with cooling or condensing water at a temperature of 80° Fahrenheit.

The principles involved in the process are very simple, as will be readily seen from the above. The main point is that the temperature of the substance or agent to be cooled must be raised above that at which the water available for condensing purposes happens to be, the exact amount of this additional temperature must be regulated by the temperature at which it is required that the medium or agent should be on leaving the expansion cylinder. Another absolute necessity is the provision of a suitable cooling medium, such as water, which will take up the heat given off from the medium or agent to be cooled, which cooling or condensing water can be run to waste, or cooled for further use for the same purpose.

Finally it must be borne in mind that all substances contain, more or less, heat; and that as heat cannot be created, nor yet can it be destroyed, a body can only be reduced in temperature by the transference of more or less of its heat to another body.

The abstraction of heat, therefore, from one body and its transfer to another, called the refrigerating or cooling agent, is naturally the main function of refrigerating and ice-making apparatus, and in order to insure continuity of action, the said refrigerating agent—the temperature of which must necessarily be lower than that of the substance upon which it is desired to act—must be either periodically renewed, or suitable means must be provided for the removal therefrom of the heat extracted or abstracted from the latter. That is to say, a continuously working machine comprises a heat-abstracting apparatus, and suitable means for automatically renewing at the requisite intervals the cooling agent or medium, or for the removal from the latter of the heat extracted from the body it is desired to cool, so as to enable it to be used over and over again in a continuous cycle.

In short a refrigerating machine, in a few words, may be described as a heat pump.

The various inventions for refrigerating and ice-making that are now in use, can be conveniently classified for the present purpose under the following five principal heads, viz. :—

First, those wherein the more or less rapid dissolution or liquefaction of a solid is utilised to abstract heat. This is, strictly speaking, more a chemical process.

Second, those wherein the abstraction of heat is effected by the evaporation of a portion of the liquid to be cooled, the process being assisted by an air-pump. This is known as the vacuum system.

Third, those wherein the abstraction of heat is effected by the evaporation of a separate refrigerating agent of a more or less volatile nature, which agent is subsequently restored to its original physical condition by mechanical compression and cooling. This is called the compression system.

Fourth, those wherein the abstraction of heat is effected by the evaporation of a separate refrigerating agent of more or less volatile nature under the direct action of heat, which agent again enters into solution with a liquid. This is termed the absorption system.

Fifth, those wherein air or other gas is first compressed, then cooled, and afterwards permitted to expand whilst doing work, or practically by first applying heat, so as to ultimately produce cold. These are usually designated as cold-air machines.

CHAPTER III.

THE LIQUEFACTION PROCESS.

Use of by the Ancients.—Various Machines Operating on the.—General Laws Governing Production of Cold by.—Principal Freezing Mixtures.

LIQUEFACTION, or the utilisation of the more or less rapid dissolution of a solid to abstract heat, is one of the most ancient methods employed for artificial cooling. The reduction of temperature of water and other liquids by the melting of saltpetre is said to have been known in India at a very remote period, and it is on record that one Blasius Villafrañca, a physician of Rome, utilised it for this purpose as early as 1550. The Romans are said to have cooled wine by immersing the bottle containing the latter in a second vessel filled with cold water into which saltpetre was gradually thrown, whilst at the same time the said bottle was rotated rapidly. Freezing water by the use of a mixture of snow or powdered ice and saltpetre was mentioned by Latinus Tancredus, of Naples, in 1607, and wine by means of snow and common salt by Santorio in 1626. This was also, in all probability, the method employed by the Esthonian tribe for producing artificial cold, and freezing the dead, and liquids, as mentioned by Orosius about A.D. 400.

To this class belong the numerous ordinary and well-known machines and apparatus employed for icing creams, lemonades, etc., which usually consist of a tub constructed of wood into which a vessel containing the substance to be cooled or frozen is placed, and is surrounded by a frigorific agent, such as a mixture of pounded ice or snow and chloride of sodium; or a combination of certain chemicals may be substituted for the former.

This method is also used on a more extensive scale for ice-making and cooling, but although ice can be produced on a commercial scale with improved apparatus, it is still more expensive than strictly mechanical methods. The best among the many forms of apparatus for making ice on this principle are probably those of Toselli and Siemens.

In Toselli's machine the frigorific agent consists of a mixture of ammonium nitrate and water, which produces a reduction of temperature of about 40° Fahr. The apparatus requisite is one of extreme simplicity, consisting merely of a vessel in which the solution of the salt is effected, and a can wherein are placed a number of moulds of different sizes, circular in cross section, and formed with a slight taper. These moulds, previously filled with water, are inserted in the freezing mixture, and a thin film of ice is formed round their edges in a few minutes; these slightly tapered tubes of ice are then withdrawn from the moulds, and placed one inside the other, thus forming a small stick of ice. The relative dimensions of the moulds are of course such as to form the ice tubes suitably proportioned to admit of the above operation.

In Siemens' apparatus calcium chloride is employed as the frigorific agent. The dissolution of this salt in water produces a reduction of temperature of only about 30° Fahr., and to admit of this reduction being sufficient to produce ice with water at an initial temperature of 65° Fahr., a heat interchanger is provided, wherein the spent liquor, which is at a temperature of about 30° Fahr., is employed to cool the water before it is mixed with the salt. It will thus be seen that there will be a gain in reduction of temperature equivalent to the amount of this cooling action. The salt can be recovered by evaporation, and employed over and over again. This apparatus is stated to have worked well, producing ice on a large scale in a satisfactory manner, but owing to its being on the whole found to be inferior, and more costly than purely mechanical methods of producing ice, it has never come into general use.

In an American machine, wherein ammonium nitrate is likewise employed as the frigorific agent, cylindrical receptacles fitting one within the other, so as to leave annular spaces or clearances, are provided. The water to be frozen is placed in the centre, the frigorific agent in the said annular spaces or clearances, so that the first or outermost acts to cool the second, the second the third, and the third the fourth, and so on, the cold being intensified at the centre in accordance with the number of the said annular spaces containing the frigorific agent. The series of cylindrical vessels or receptacles are arranged in a wooden outer casing so mounted as to be capable of being slowly revolved, and thereby promoting the more rapid dissolution of the salt. This apparatus is analogous to that employed many years ago on a small scale for laboratory experiments by Walker, and by means of which he succeeded in sinking the spirit to -91° Fahr.

When any of the above methods are employed for refrigerating purposes, brine, previously cooled in the apparatus, is circulated in the usual manner through a system of cooling pipes.

The general law governing the production of cold by frigorific mixtures is, that during the liquefaction of a solid, a certain amount of heat not indicated by, or sensible to, the thermometer is absorbed, which heat is abstracted from any surrounding bodies. The absorption of heat, consequently the production of cold, in the said environmenting bodies is the more marked in proportion as the solid is more suddenly or rapidly liquefied.

The following observations on frigorific mixtures are extracted from a paper* on "Refrigerating and Ice-making Machinery and Appliances," by Mr. T. B. Lightfoot, C.E., M.I.C.E., who is a well-known authority upon the subject: "When a substance changes its physical state, and passes from the solid to the liquid form, the force of cohesion is overcome by the energy in the form of heat. The effect may be produced without change in sensible temperature, if the heat be absorbed at the same rate as it is supplied from without. Thus, as is well known, the temperature of melting ice remains constant at 32° Fahr., and any increase or decrease in the heat supplied merely hastens or retards the rate of melting without affecting the temperature. Mixtures of certain salts with water or acids, and of some salts with ice, which form liquids whose freezing points are below the original temperatures of the mixtures, do not, however, behave in this way; for under ordinary circumstances the tendency to pass into the liquid form is so strong, that the heat is absorbed at a greater rate than it can be supplied from without. The store of heat of the melting substances themselves is therefore drawn upon, and the temperature consequently falls until a balance is set up between the rate of melting and the rate at which heat is supplied from outside. This is what takes place with ordinary freezing mixtures. The amount of the depression in temperature appears to depend to some extent on the state or hydration of the salt; and the percentage of it in the mixture. Almost the only salts used are those of certain alkalies, few others possessing the requisite solubility at low temperatures."

* "Proceedings, Institution of Mechanical Engineers," 1886, p. 201.

TABLE OF PRINCIPAL FREEZING MIXTURES.

COMPOSITION OF FREEZING MIXTURES.	Reduction of temperature in degrees Fabr.		Amount of fall in degrees Fabr.
	From	To	
Snow or pounded ice, 2 parts; muriate of soda 1 part		- 5	
Snow 5; muriate of sodium 2; muriate of ammonia, 1		-12	
Snow 24; muriate of sodium 10; muriate of ammonia 5; nitrate of potash 5		-18	
Snow 12; muriate of sodium 5; nitrate of ammonia 5		-25	
Snow 4; muriate of lime 5	+ 32	-40	72
Snow 1; chloride of sodium or common salt 1	+ 32	0	32
Snow 2; muriate of lime crystallized 3	+ 32	-50	82
Snow 3; dilute sulphuric acid 2	+ 32	-23	55
Snow 3; hydrochloric acid 5	+ 32	-27	59
Snow 7; dilute nitric acid 4	+ 32	-30	62
Snow 8; chloride of calcium 5	+ 32	-40	72
Snow 2; chloride of calcium crystallized 3	+ 32	-50	82
Snow 3; potassium 4	+ 32	-51	83
Snow 2; chloride of sodium 1		- 5	
Snow 5; chloride of sodium 2; chloride of ammonia 1		-12	
Snow 14; chloride of sodium 10; chloride of ammonia 5; nitrate of potassium 5		-18	
Snow 12; chloride of sodium 5; nitrate of ammonia 5		-25	
Snow 2; dilute sulphuric acid 1; dilute nitric acid 1	-10	-56	46
Snow 12; common salt 5; nitrate of ammonia 5	-18	-25	7
Snow 1; muriate of lime 3	-40	-73	33
Snow 8; dilute sulphuric acid 10	-68	-91	23
Chloride of ammonia 5; nitrate of potassium 5; water 16	+ 50	+ 4	46
Nitrate of ammonia 1; water 1	+ 50	+ 4	46
Chloride of ammonia 5; nitrate of potassium 5; sulphate of sodium 8; water 16	+ 50	+ 4	46
Sulphate of sodium 5; dilute sulphuric acid 4	+ 50	+ 3	47
Sulphate of sodium 8; hydrochloric acid 9	+ 50	0	50
Nitrate of sodium 3; dilute nitric acid 2	+ 50	- 3	53
Nitrate of ammonia 1; carbonate of sodium 1; water 1	+ 50	- 7	57
Sulphate of sodium 6; chloride of ammonia 4; nitrate of potassium 2; dilute nitric acid 4	+ 50	-10	60
Phosphate of sodium 9; dilute nitric acid 4	+ 50	-12	62
Sulphate of sodium 6; nitrate of ammonia 5; dilute nitric acid 4	+ 50	-14	64

TABLE OF PRINCIPAL FREEZING MIXTURES—*Continued.*

COMPOSITION OF FREEZING MIXTURES. (Materials previously cooled.)	Reduction of temperature in degrees Fahr.		Amount of fall in de- grees Fahr.
	From	To	
Phosphate of sodium 5; nitrate of ammonia 3; dilute nitric acid 4	0	-34	34
Phosphate of sodium 3; nitrate of ammonia 2; dilute mixed acid 4	-34	-50	16
Snow 3; muriate of lime 4	+20	-48	68
Snow 1; muriate of lime crystallized 2	0	-66	66
Snow 2; muriate of lime 3	-15	-68	53
Snow 8; dilute sulphuric acid 3; dilute nitric acid 3	-10	-56	46
Snow 3; dilute nitric acid 2	0	-46	46
Snow 1; dilute sulphuric acid 1	-20	-60	40
Snow 2; muriate of lime crystallized 3	-40	-73	33
Snow 8; dilute sulphuric acid 10	-68	-91	23

CHAPTER IV.

THE VACUUM PROCESS.

Principles of.—First Machine Working on.—More Recent Types of Machines Working on.

THE abstraction of heat by the evaporation of a portion of the liquid to be cooled, the process being assisted by an air-pump, or the vacuum process, includes all such machines as operate to extract heat by the evaporation or vaporisation of a portion of the water or other liquid to be cooled or frozen.

The cooling of liquids on this principle depends upon the conversion of the sensible heat into latent heat during evaporation, and, in its most primitive form, its use is almost co-existent with that of the world, having been commonly employed for refrigerating purposes in all ages. It is obvious, however, that as a portion of the liquid to be cooled is permitted to go to waste, it can be only profitably applied direct to liquids of little or no value, such as water.

A common example of this method in its crudest form is found in the ancient plan, so universally adopted in hot climates, of cooling water by the evaporation of a portion of the contents of a porous jar or vessel from the outer surface thereof, by hanging the said vessel in a position where it will be subjected to either a natural or an artificial draught.

It is stated that the practice of procuring ice by exposing water to the night air in shallow porous vessels has been practised in India during the cool season from the remotest ages. The said vessels are placed on a bed of straw, cornstalks, or megass (crushed cane stalks) in shallow excavations made preferably in an exposed situation on an extensive plain, being filled with water to be congealed or frozen, and in the morning, provided the night be clear, are found covered with thin crusts of ice.

This process is also said to have been practised, both in France and in this country, in the latter part of the last century, with perfect success, so far at least as the production of ice was concerned, but it failed commercially by reason of the large expenses entailed.

The first machine on the vacuum principle for the production of artificial ice by the conversion of sensible into latent heat by evaporation, of which there is any record, was that invented by Dr. Cullen, in 1755, who in that year made the discovery that the evaporation of water could be facilitated by the removal of the atmospheric pressure by means of an air pump, to such a degree as to enable him to freeze water even in summer.

This apparatus was the parent of all those subsequently designed for cooling and congealing liquids by their own evaporation in vacuo, that is to say, wherein the vapour is drawn off from the partial vacuum

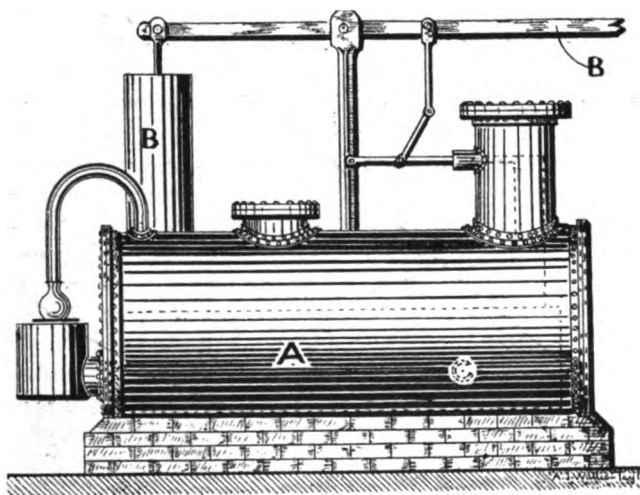


Fig. 4.—Carré's Sulphuric Acid Vacuum Freezing Machine. Vertical section.

wherein it is formed, and is condensed in another partial vacuum with or without the help of absorbents, and is expelled by pressure.

In 1777, Nairne found that, by the introduction of sulphuric acid into a receiver for the exhaust, the aqueous vapour could be absorbed from the rarified air and the latter dried; and by taking advantage of this discovery he was enabled, in 1810, to construct an apparatus wherein he got rid of the vapour that rose from the water, and thus prevented it from forming a permanent atmosphere, and hindering the continuity of the operation.

Further attempts were made by Leslie (1810), Vallance (1824), Kingsford (1825), and others, but without any much greater success

attending their efforts, Edmond Carré's sulphuric acid freezing machine being the first to be commercially successful.

This apparatus, acting to refrigerate by evaporation and rarification, and which was adapted to produce the *carafes frappés* commonly used in Parisian cafés and restaurants, consisted, as shown in Fig. 4, of a cylindrical vessel, A, intended to contain the charge of concentrated sulphuric acid; an air-pump, B, so arranged that it could be connected to the mouth of the carafe, and of an agitator, C, which is so coupled to the air-pump lever that it will be operated during the working of the said pump in such a manner as to keep the sulphuric acid in the cylindrical vessel A continually in motion.

The machine of course only operates intermittently, but the large body of sulphuric acid used in the vessel A prevents a rapid loss of absorptive power taking place through dilution, and the agitation obviates the formation of a more diluted stratum on the surface, which would be highly detrimental to the proper working of the apparatus.

The chief drawback to this machine, besides its intermissive action, is the difficulty experienced in maintaining the pump in good working order, and the various joints all perfectly gas tight.

Franz Windhausen patented in 1878 a compound vacuum-pump designed to produce ice directly from water without using sulphuric acid; and likewise a modified arrangement wherein sulphuric acid could be employed. In this latter apparatus the sulphuric acid is cooled by water whilst absorbing the vapour, and is subsequently concentrated, when it becomes over-diluted, thus obviating the necessity for the insertion of a fresh supply of acid.

An improved form of this machine constructed in 1881, nominally capable of producing from 12 to 15 tons of ice per 24 hours, and which was first put up at the Aylesbury Dairy, Bayswater, London, and afterwards removed to Brompton, was fully described at the time in a paper* written by Dr. Hopkinson.

The ice-forming vessels or moulds, which are six in number, are constructed of cast-iron, circular in transverse section, and slightly tapered. These cans, moulds, or cases moreover are steam-jacketed, so as to admit of the ice being melted or thawed off and readily disengaged therefrom, and are provided at their lower ends with hinged doors, which, when closed, form fluid-tight joints.

The sulphuric acid is contained in a long cylindrical vessel wherein rotating agitators maintain the said acid in continual motion during the operation of the apparatus, and the said cylindrical vessel is water-

* "Journal of the Society of Arts," 1882, Vol. xxxi., p. 20.

jacketed so as to carry off the greater portion of the heat that becomes liberated during the absorption of the vapour.

The sulphuric acid cylinder or vessel communicates with the upper parts of the ice-forming vessels or moulds, and with the vacuum-pump, which latter has two cylinders, viz., a large double-acting one and a small single-acting one.

The water is admitted to the moulds through nozzles at a regulated rate, the fine streams offering an extended surface for evaporation, and becoming instantly congealed into ice globules or particles which, falling into the bottoms of the said moulds, are frozen, together with the water that collects there.

In the operation of the apparatus the air, and any vapour that may pass over from the sulphuric acid cylinder or vessel, are drawn into the large pump-cylinder, by which they are slightly compressed and passed on into the condenser, wherein a portion of the said vapour is condensed by cold water, the rest, together with the air, entering the second or smaller pump-cylinder, where they are compressed up to the tension of the atmosphere and discharged. This pump, it is stated, admits of a vacuum of half a millimetre of mercury being constantly maintained; $2\frac{1}{2}$ mm., however, being as low a vacuum as it is found necessary to have during actual work.

By the employment of a compound pump with an intermediate condenser, and performing the compression in two distinct stages, the losses that would otherwise occur from the clearance spaces in the large pump are greatly reduced.

The concentrator for the diluted sulphuric acid consists in a lead-lined vessel or receptacle fitted with a steam-heated coil of lead piping and connected with an ordinary air-pump. The acid is transferred from one vessel to the other by atmospheric pressure, and the diluted or weak acid, which is at a comparatively low temperature, is heated on its way to the concentrator in an interchanger, by the strong concentrated acid returning from the latter.

The ice produced by this machine, like that of all those on the vacuum principle acting direct, is in an opaque and porous condition; and the avoidance of this defect, and the production of clear transparent crystal ice by freezing it in moulds plunged in brine previously cooled by evaporation in a vacuum, would render the process too expensive to be commercially successful.

The total amount of water that is used in working is from 10 to 12 tons per ton of ice, and the fuel 180 lbs. of coal to each ton of ice produced; the latter is employed in raising the requisite supply of steam

for driving the pumps, and heating the coil in the sulphuric acid evaporator.

Fig. 5 is a vertical central section partly in elevation showing Langé's improved pump for exhausting the air from the absorber of a vacuum machine. As will be seen from the drawing, three pistons, A, B, and C, are employed, placed in line one above the other, and working in three superimposed cylinders. The valves are so arranged that each of the uppermost cylinders draws from the one below, and they are sealed with oil, which latter constantly circulates through the pump. The mixed oil and air, on leaving the top or uppermost cylin-

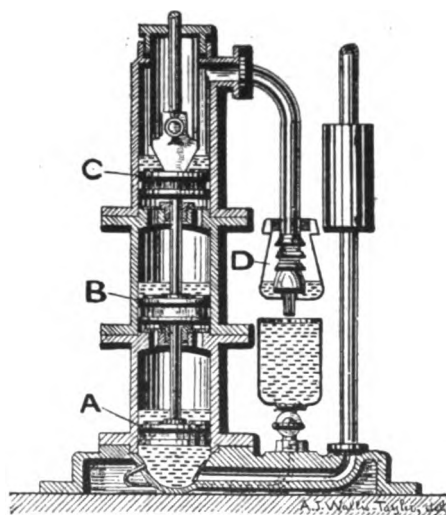


Fig. 5.—Langé's Exhaust Pump for Vacuum Freezing Machine. Vertical Section.

der, is discharged into a separator D, the air being permitted to escape into the atmosphere, and the oil passing into a receptacle from which it can be returned to the pump when required.

The vacuum apparatus for the refrigeration of a liquid by its partial evaporation, for which James Harrison took out a patent in 1878, is designed to produce opaque ice at a very low cost (about one shilling per ton), by reducing the fuel consumption, which, as already mentioned, is the chief item of expense. This is proposed to be effected by getting rid of the bulk of the friction engendered in the usual vacuum and air pumps, and also by a saving of the fuel expended in

concentrating the weak or diluted sulphuric acid in the previously described apparatus. The main feature of Harrison's invention is the process of refrigerating by the evaporation of the liquid to be cooled or congealed, by carrying its vapour under a head of neutral non-evaporable liquid, condensing the compressed vapour at the ordinary temperature, and removing the resulting liquid and air by a pump.

One form of his apparatus consists in a rotating pump or cylinder which seems to provide a ready means of exhausting large volumes of low tension vapour, without the expense of the labour entailed in maintaining ordinary piston packings in an effective condition, and the great loss through friction therefrom. This device consists, as will be seen from the sectional diagrammatical view, Fig. 6, of an iron cylinder,

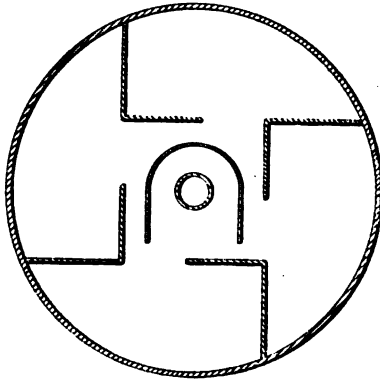


Fig. 6.—Diagram illustrating Harrison's Rotating Exhaust Pump or Cylinder.

rotatably mounted horizontally upon hollow or tubular shafts or axles, and divided internally into different compartments by longitudinal partitions of an L shape in transverse section. This cylinder is connected through one of the hollow shafts or axles with the refrigerating or ice-making vessels or moulds, which may be of any convenient form, and it is partly filled with oil or other liquid, which latter must invariably be either non-evaporable or one which is only vaporisable at a temperature greatly in excess of that at which the refrigerating liquid can be vaporised, and it must, moreover, be perfectly neutral chemically to the vapour with which it will be brought into contact when the machine is at work.

The operation of the apparatus is as follows, viz. :—The cylinder rotates upon one of the fixed hollow axles, through which the vapour

or gas to be compressed is delivered from the refrigerator or ice-making vessels, and the longitudinal partitions or compartments moving round with their apertures downwards carry with them charges of the vapour, and compress them to a degree varying in accordance with the depth to which they dip below the surface of the liquid. After attaining the lowest position the compressed vapour is liberated, and rises into a fixed hood or inverted channel, situated centrally and communicating with the other hollow shaft or axle, which is placed at the other side of the cylinder, through which it passes to a surface condenser. In this surface condenser the compressed vapour is partially condensed, both by direct cooling action and also by the evaporation of water flowing over the surface, and the condensation water, together with any air present, are then compressed to the atmospheric tension and discharged.

Several modifications are also described, viz. :—First, a series of buckets attached to endless chains dipping into a reservoir of the compressing liquid, and delivering the compressed gas or vapour into a reservoir. Secondly, a gasometer-shaped vessel, rising and falling in an annular space filled with a non-evaporable neutral liquid. The vessel, on being lifted, becoming filled with the air or vapour, and on being depressed delivering it under a head of liquid. Thirdly, a tapering archimedean screw working in a reservoir of non-evaporable neutral liquid by which the vapour is taken in at the larger upper orifices, and is discharged, compressed, and liquefied at the lower or smaller end. Fourthly, pumps with actuated valves and with arrangements for complete expulsion of air and vapour. And finally, fifthly, fans working in the air or vapour, and forcing it from one compartment into another, or exhausting it and forcing it into the atmosphere.

A patent was obtained by Blyth and Southby some years back for a vacuum refrigerating machine of great simplicity of design. The main feature of their apparatus consists in the provision of two pumps, viz., a large main pump and a small auxiliary one, the former being heated by means of a steam jacket or otherwise.

The large, single-acting, steam-jacketed vapour pump, is driven by a crank, which is situated beneath, and is enclosed in a suitable cylindrical casing or chamber, having at one side a door or cover, admitting of access thereto, and so arranged that when closed it forms a gas-tight joint. The crank is driven by belt gearing, from any suitable source of motive power, and the pulley for the latter is fixed upon the end of a shaft or spindle passing through a stuffing box provided upon the opposite side, or wall, of the crank chamber, to that fitted with the door or cover.

A heavy balanced fly-wheel is also mounted upon the crank shaft, and is enclosed within the said chamber, which, as above mentioned, is made perfectly fluid tight.

The ice box is fitted with an automatic feeding arrangement for filling the ice-can or case with water, which mechanism is operated by an eccentric upon the crank shaft, and the said box is connected with the pump through a pipe governed by a stop-cock or valve, a similar cock or valve being also fitted in the pipe leading to the cooling vessel, and another suitable valve in the vapour exit to the condenser.

A double-acting air or ejector pump worked off the eccentric is moreover provided for removing the air from the interior of the machine, and a vacuum gauge for ascertaining the degree of vacuum produced.

The operation of the machine is as follows, viz. :—Any air that may be contained within the large pump cylinder is first pumped or drawn off by the small air or ejector pump, thereby producing a vacuum which is filled by vapour from the water to be frozen or cooled. The large single-acting pump, which draws the vapour from the water through a suction valve situated in the piston, compresses this vapour and delivers it through the outlet or discharge valve to the condenser, where it is condensed by water in the usual manner, is removed by the small air or ejector pump, together with any air that may have passed into the machine through leakage, and is discharged into the atmosphere. The vapour is prevented from condensing in the cylinder by the steam-jacket, which maintains the temperature of the cylinder above that at which the vapour will condense into water. Were this not the case, and were the vapour permitted to condense in the cylinder, the quantity to be discharged would be so small as not to be capable of being forced through the delivery or outlet valve.

When starting the machine, communication between both ends of the vapour pump cylinder can be kept open for any requisite length of time during the first portion of the delivery stroke, so as to permit the air to return to the underside of the piston, and thereby lessen and regulate the expenditure of power required in getting up the vacuum. This is effected by means of a bye-pass and valve, which can be opened at starting, and kept open for about nine-tenths of the piston stroke, being closed gradually as soon as the vacuum becomes more perfect, and altogether as soon as all the air has been got rid of. The average pressure upon the piston is light, not exceeding about one-sixth of a pound.

In all the above arrangements, a portion of the refrigerating agent

itself, together with the heat it has absorbed, is rejected, consequently water, as the only one sufficiently inexpensive, is invariably employed. Water has a boiling point of 212° Fahr. at atmospheric pressure, a latent heat of vapour of 966.6 and a tension of vapour of 0.623, and having so high a boiling point it requires a vacuum of 0.89 lb. per square inch to boil at a temperature of 32° Fahr., and consequently a vacuum at the very least as high as this must be maintained to produce ice by the vacuum process.

An improved form of Carré's sulphuric acid freezing machine, adapted to be operated by hand-power, is manufactured in this country by the Pulsometer Engineering Co., Limited, London.

This machine is made in four sizes. The smallest sizes only admit of very small quantities of ice being made, but with the two larger sizes, upwards of 7 lbs., and from 20 to 30 lbs. of ice can be made respectively in an hour, or in the largest-sized machine about 80 lbs. per day.

It is claimed that the acid, after use in these machines, is especially suitable for use in soda-water making machines, as having been diluted slowly it has lost the heat generated by the mixture of acid and water, and is consequently ready for immediate service.

CHAPTER V.

THE COMPRESSION PROCESS OR SYSTEM.

Early History of.—Principles of.—Cycle of Operations obligatory in.—Improvements in.—Ether Machines.—Sulphurous Acid Machines.—Carbonic Acid Machines.

So far the refrigeration has been effected by evaporation, the air gaining access under natural conditions, or by an artificial draught, or the evaporation has been accelerated by reducing the atmospheric pressure, the latter operation being next still further facilitated and rendered practically continuous by providing for the absorption of the vapour given off or evolved by means of an absorbent, such as sulphuric acid.

More volatile liquids, however, are employed as agents, such as, for instance, alcohol, sulphurous and carbonic acids, bisulphide of carbon, gasoline, ether, methylic and sulphuric ether, carbon bisulphide, methyl chloride, ethylene, anhydrous ammonia, etc.

In the year 1755, Dr. Cullen found that, by removing the atmospheric pressure, ether and other liquids which boil at low temperatures would evaporate at temperatures below freezing point, with sufficient rapidity to congeal water brought into contact with the exterior surfaces of the vessels or receptacles wherein they were contained.

In a refrigerating and ice-making apparatus invented by Jacob Perkins about the year 1834, compression was first introduced, the volatile liquid used, according to Sir Frederick Bramwell, being one derived from the destructive distillation of caoutchouc. This invention of Perkins' is the origin from which has sprung all those machines operating upon the compression principle; that is to say, by the abstraction of heat by the evaporation of a separate refrigerating agent of a more or less volatile nature, which agent is subsequently restored to its original physical condition by mechanical compression and cooling.

Perkins' apparatus is shown in Fig. 7 in side elevation, partly in vertical section, and consists simply, as will be seen from the illustration, in a jacketed pan A, clothed externally with non-conducting mate-

rial, and a pump B connected to the upper part of the jacket, and to the first or uppermost convolution of a coil or worm fitted in a tank or vessel C wherein cooling water can be freely circulated, and the last or lowermost convolution of which coil or worm is connected to the lower part of the said jacket. The water to be frozen is placed in the jacketed pan, the space or clearance between the latter and the jacket being partially filled with the distillate from caoutchouc, or the ether, or other volatile liquid intended to form the refrigerating agent. The vapour given off or evolved from the volatile liquid contained in this space or clearance is drawn off from the top by the pump B, and is delivered compressed to the water-cooled worm or coil, which is shown by dotted lines in the tank C, wherein it is again liquefied and returned from the bottom of the latter to the lower part of the said space or clearance. The complete cycle of operations is thus con-

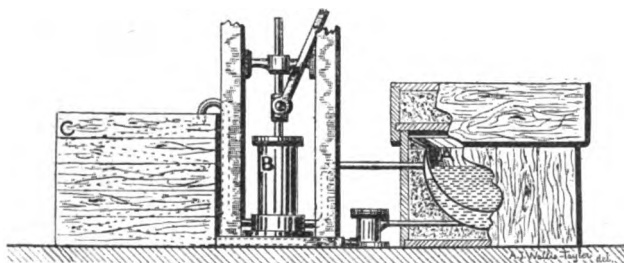


Fig. 7.—Perkins' Early Type of Compression Machine.

tinuous, and the only loss of the volatile liquid used as a refrigerating agent that is possible, is that which may take place through leakage.

The system of absorbing heat and thus producing cold, partly by the expansion and vaporisation or gasifying, and subsequent liquefaction, and partly by compression and cooling, is in accordance with the well-known law of physics, viz., that all gases during the process of passing from a liquid to a gaseous state are bound to absorb a certain amount of heat, and whilst returning from a gaseous to a liquid state to give up or throw off the same amount of heat.

Whatever the refrigerating or heat-absorbing agent that may be used, the following cycle of operations is obligatory in all machines working upon this principle, viz. :—

First, compression, that is the refrigerating or heat-absorbing agent in gaseous form, is subjected to a pressure sufficient to reduce it to a

liquid form, the said pressure varying with the nature of the agent, and the temperature of the condensing water. During this compression, a degree of heat is developed in accordance with the amount of pressure to which the gas is subjected, or to the volume to which it has to be reduced relatively to that of the gas, in order to produce liquefaction. This heat is carried off by means of condensing or cooling water.

Second, condensation, during which process the heat developed during the above-described compression of the gas is carried away by forcing the latter through water-cooled pipes, the heat being transferred to the cooling water. At this point the gas is ready to assume the liquid form, in doing which an additional amount of heat is given off to the water.

Third, expansion, during which the liquefied gas is admitted to series or coils of pipes, and being suddenly relieved of pressure, instantly flashes or expands into a gaseous form; in doing which, according to the above-mentioned law of physics, it is forced to absorb or take up a quantity of heat which it renders latent, and which it draws from the surrounding objects, viz., firstly, of course, the pipes or coil wherein it is confined, and secondly, such substances as may be brought in contact with the latter, and which it is desired to cool, as air, water, brine, etc.

The amount of heat thus abstracted or absorbed is equal to that previously given up to the cooling water in the condenser, the gas being then ready for compression, etc., and the cycle of operations can thus be repeated *ad infinitum*.

These three operations being essential, all machines of this class, however much they may differ in more or less important points of detail, must perforce consist of the three main parts shown in the diagram Fig. 8, viz. :—

First, a compressor, A, wherein the gas is compressed in some suitable and convenient manner.

Second, a condensing side, B, wherein the gas circulates through water-cooled pipes or coils or their equivalent, gives off its heat, and liquefaction takes place.

Third, an expansion side, C, consisting of pipes or coils, or other space, wherein the gas can re-expand and perform its work of cooling or refrigerating, by abstracting heat in the above-described manner from the surrounding objects. D is a regulating valve, E is the low pressure gauge, and F is the high pressure gauge.

It will be seen that the heat only that has been acquired by the refrigerating agent is rejected, the latter being used over and over

again, the only loss, therefore, is that sustained through accidental leakages.

Such liquids only, however, are capable of being used as refrigerating agents as possess vapours capable of being liquefied under pressure at ordinary temperatures. Hence, owing to the latter operation being an absolute essential, it is generally known as the compression process.

The next attempt at improvement in these machines was made by Professor Twining, who obtained a patent for his invention in this country in 1850, and in the United States in 1853. His apparatus comprises an exhaust or expansion vessel, a pump, and a condenser. The water to be frozen is placed in chambers or cells situated between thin metal pipes, plates, or partitions, through which circulates the

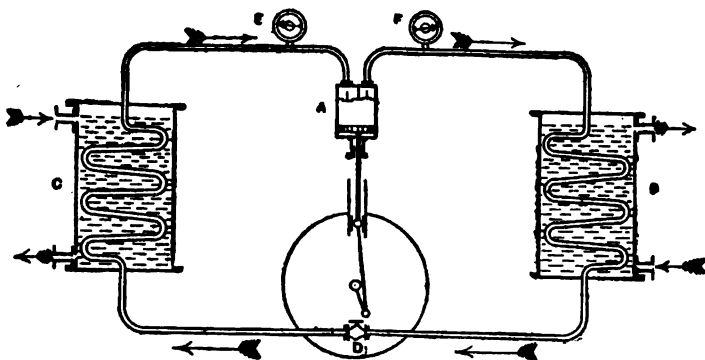


Fig. 8.—Diagram Illustrating the Operation of a Refrigerating Machine on the Compression Principle.

vapour evolved from a suitable volatile liquid, such as ether, sulphide of carbon, etc., which vapour is drawn off by an air pump, compressed, condensed in a coil or worm, cooled by water, and is then returned to the reservoir, in which it is once more vaporised in a manner substantially similar to that of Perkins'. In fact, as already intimated, all machines of this class are bound to operate upon the same principle as that of the latter inventor, and can only differ therefrom in details of construction of more or less importance.

It is stated that a machine of Twining's, of a capacity designed to produce 2,000 lbs. of ice in twenty-four hours, was in operation in 1855 in Cleveland, Ohio; and that, although working under somewhat serious disadvantages, it did actually produce 1,600 lbs. of ice per

twenty-four hours in a tolerably satisfactory manner, and was in use off and on for about three years.

Another machine, which comprises certain further improvements on Perkins' apparatus, was invented and patented by James Harrison in the year 1856.

The novel feature claimed especially, in Harrison's compression machine, is the evaporation of volatile liquids in vacuo, and the reduction to a liquid form in a separate vessel by pressure. The essential parts of his apparatus consist of three vessels connected by tubes, a vacuum being established throughout the apparatus, and the air being expelled by the vapour of ether, ammonia, or other volatile liquid. The first vessel is charged with the volatile liquid; the second vessel contains a pumping and compressing apparatus, by means of which

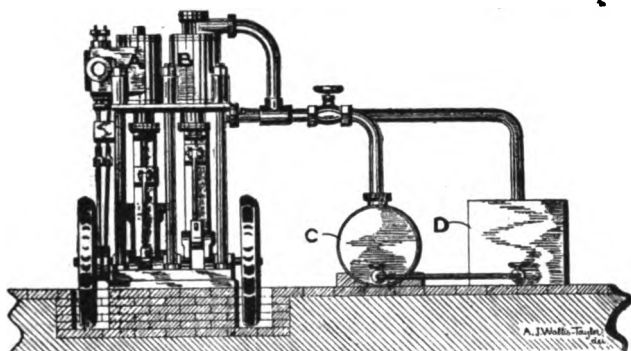


Fig. 9.—Harrison's Ether Compression Machine.

the vapour is withdrawn from the first vessel and forced into a third; and the third or last vessel is immersed in water or kept moist, so that the heat generated by the compression and liquefaction of the vapour may be carried off. The resulting liquid passes into the first vessel to be again evaporated under diminished pressure, and again withdrawn, compressed, liquefied, and returned, the process being capable of indefinite prolongation, until the apparatus be either injured or becomes worn out.

The general arrangement of an improved Harrison machine constructed by Siebe Gorman and Co., is shown in side elevation in Fig. 9, wherein A is the steam-engine cylinder; B is the pump or compression cylinder, which is kept cool by a suitable water-jacket; C is the refrigeration, which consists of a copper cylinder, fitted with sets of

copper tubes arranged horizontally; D is the ether condenser, which is composed of sets of copper tubes also arranged horizontally in a wooden tank or casing, and cooled by a circulation of water.

Suitable connections are provided between the refrigerator C, pump B, and condenser D.

The refrigerating agent employed in this apparatus is sulphuric ether, which is the result of the action of sulphuric acid upon vinous alcohol, and which has a specific gravity of 0.720, a latent heat of vaporisation of 165, a specific gravity of vapour of 2.24 as compared with air, and the boiling point of which is 96° Fahr. at atmospheric tension.

The liquid sulphuric ether is delivered from the condenser D to the refrigerator C, through a pipe fitted with a stop cock, by means of which the amount admitted can be nicely adjusted to the capacity of the pump B. The weight of ether capable of being drawn off by the said pump B is dependent upon the pressure at which evaporation takes place, as it is perfectly obvious that the denser the said vapour, the greater the weight drawn off at each stroke of the pump.

In order to ensure this apparatus working up to its fullest capacity the boiling point of the sulphuric ether must be so regulated as to impart the exact reduction of temperature desired, consequently the pressure at which evaporation is caused to take place depends upon the degree of temperature to which it is required to lower the brine.

The amount of water required to be passed through the ether condenser D, for cooling purposes, naturally varies in different climates, and in accordance with the season of the year; in this country it is stated to be about 150 gallons per hour for each ton of ice produced per twenty-four hours. The liquefaction of the vapour is said to take place with cooling water at the temperature usually obtainable here at a pressure of some 3 lbs. per square inch above that of the atmosphere; in a hot climate, however, a very much higher pressure is required, rising sometimes to as much as 12 lbs. above that of the atmosphere.

The apparatus, when employed for making ice, is provided with an ice-making tank, usually fitted with copper moulds; or, when used for refrigerating purposes, it may be connected with a system of cooling pipes. The brine circulation is maintained by means of a suitable pump, and the brine, which is, as a rule, reduced to a temperature of about 10° Fahr. during its passage through the sets of tubes in the refrigerator C, is returned, after circulation, to the refrigerator to be re-cooled. The sets of tubes in the refrigerator are so arranged that the brine to be cooled circulates through them successively, being thus gradually reduced in temperature.

When employed for cooling water or other liquids, the liquid is usually passed at once through the refrigerator *c* in place of the brine.

In Charles Tellier's apparatus, which was designed some years later, the refrigerating agent employed is methylic ether, which liquid has a latent heat of vaporisation of 473, and which enters into ebullition at tension of the atmosphere at a temperature of from 20° to 25° below zero Fahr., whereas sulphuric ether, employed in the improved Harrison machine, as before mentioned, boils at 96° Fahr., a difference of about 121° .

Methylic ether is the result of the action of sulphuric acid upon ligneous alcohol, that is to say, alcohol distilled from wood. To obtain methylic ether, sulphuric acid is mixed with ligneous alcohol in equal proportion, and heated until the ether is evolved, carrying with it a number of bye products, such as sulphurous acid, carbonic acid, and empyreumatic vapours, which must be eliminated by passing the impure vapour through or over liquids, etc., by which they will become absorbed and retained. For instance, by passing the adulterated vapour over potash, the carbonic and sulphurous acids will be retained by the alkali, the aqueous vapour being at the same time carried away mechanically.

In the distillation of methylic ether on a large scale, a great difficulty would be experienced, under ordinary conditions, in getting a liquid, having so low a boiling point as -25° Fahr., to flow through the requisite pipes. To overcome this difficulty, Tellier designed the special apparatus illustrated in sectional elevation in Fig. 10, wherein the vapour, after purification, is brought back to a liquid state by pressure, and is thus rendered manageable.

In the drawing, *A*, *B*, *C* are large cast or wrought-iron drums or receivers; *D* is the purifier; *E* is a special pump which sucks off the purified vapour and delivers it through the worm *F* in a liquid state into a set of receivers *G*, which latter are capable of withstanding a very high pressure, and from whence it can be drawn off, and will flow through the rest of the apparatus as easily as water.

Tellier's apparatus for the production of cold is shown in elevation in Fig. 11, wherein *A* is the refrigerator; *B* is a receiver or vessel in which the methylic ether is evaporated; *C* is the pump for drawing off the vapour from the latter; and *D* is the condenser, which is fitted with a suitable worm or coil. The vaporised methylic ether is either employed to lower the temperature of a solution of brine, by passing it through a series of tubes situated in the refrigerator and plunged in

the latter; or it is carried on and permitted to expand in a suitable system of pipes, and so act direct to reduce the temperature of air-

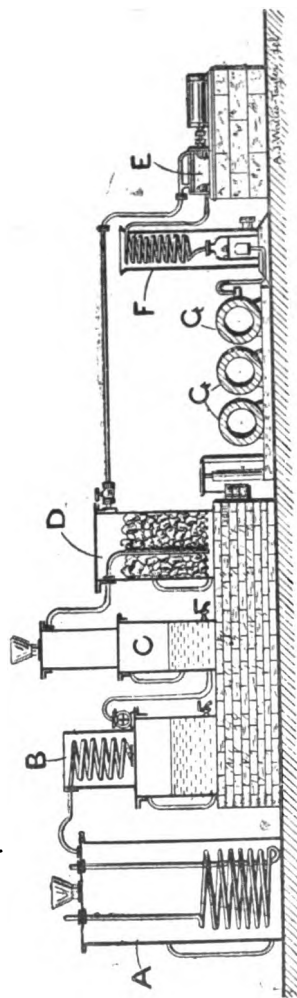


Fig. 10. — Tellier's Apparatus for the Distillation of Methylic Ether.

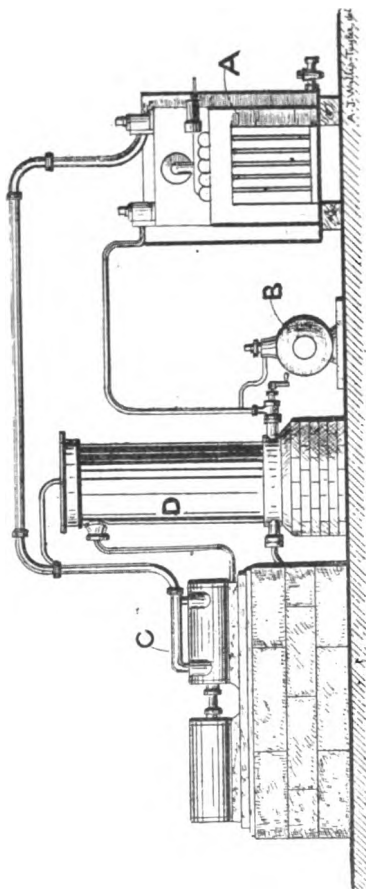


Fig. 11. — Tellier's Methylic Ether Compression Machine.

tight chambers. When in operation it is found that the pipes leading from the receiver B are so cold that they become coated with hoar frost; whilst, on the contrary when giving up the absorbed heat during

compression and liquefaction, the gas raises the tubes to a very high temperature, sometimes even approaching a red heat.

The liquefaction of the methylic ether in the worm or coil of the condenser *D* gives rise to a certain amount of pressure, and to allow for this, and at the same time to permit a supply of the liquid to pass from the said condenser to the evaporator *B* as required, an expansion valve or distributor, the construction of which will be readily understood from the enlarged sectional view, Fig. 12, is employed. *E* is the aperture through which the liquid methylic ether is delivered to a small chamber or recess *F*. *G* is the outlet aperture, the upper portion

of which is bifurcated as shown at *G'*, and which communicates with the refrigerator. *H* is a valve having two recesses *H'*, which correspond with the holes or apertures *G'*, and which valve is mounted on a spindle *I*, which is capable of being rotated through the bevel or mitre gearing *K*, and shaft *L*, and works upon a suitable seating in the bottom of the recess or chamber *F*. During the revolution of the valve *H* in the chamber *F*, which latter is always maintained full of liquefied methylic ether, the recesses *H'* become filled with the latter, and every time that the said recesses pass over the corresponding holes or ways *G'*, the liquid contained therein falls by gravity into the latter and passes away to the refrigerator through the outlet *G*.

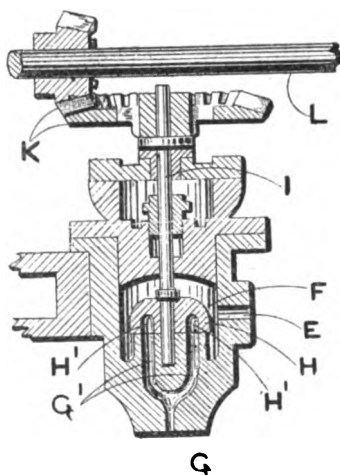


Fig. 12.—Expansion Valve or Distributor of Tellier's Methylic Ether Machine. Vertical section.

About the same time as the preceding, an ether machine was patented by Della Beffa and West, which comprised a multitubular refrigerator in which the ether was volatilised, a double-acting air or vacuum pump exhausting this vessel and pumping the ether vapour into a condenser; and likewise a special form of the latter for condensing the said ether vapour.

The following particulars regarding an ether machine are given* by Mr. Lightfoot as being the result of actual experiments made in this

* "Proceedings, Institution of Mechanical Engineers," 1886, p. 214.

country, and serving to show what may be expected under ordinary conditions :—

Production of ice per twenty-four hours	15 tons.
„ „ per hour	1,400 lbs.
Heat abstracted in ice-making, per hour .. \ ..	245,000 units*
Indicated horse-power in steam cylinder, excluding that required for circulating the cooling water and for working cranes, etc.	
Indicated horse-power in ether pump	83 I.H.P.
Thermal equivalent of work in ether pump, per hour	46½ I.H.P.
Ratio of work in pump to work in ice-making	119,261 units*
Temperature of water entering condenser	1 to 2.05
	52° Fahr.

Mr. Frederick Colyer, C.E., M.I.C.E., states† that he obtained the following results with a first-class apparatus when testing the working of some of the leading ether machines, viz.—“In an ether machine made by Messrs. Siebe Gorman and Co., capable of cooling 3,200 gallons of water from 60° down to 50°, or abstracting 320,000 heat units* per hour, the average experiments gave 4,250 gallons per hour cooled 10° Fahr. The temperature of the water at the inlet was 54°, and that of the water used for condensing purposes was the same. The maximum cooling effected was 449,437 heat units* abstracted per hour, being from 35 to 40 per cent. above the nominal power of the machine. The condensing water used per hour was 1,262 gallons, or about 3-10ths of a gallon for every gallon of water cooled. The coal consumed was 3¼ cwts. per hour; it was of indifferent quality, or the consumption would have been smaller. The steam cylinder was 21 in. diameter and 27 in. stroke; the air-pump 24 in. diameter and 27 in. stroke. The speed of the engine was 58 revolutions per minute, with 48 lbs. of steam cut off at one-third of the stroke. The indicated power of the engine was 53 horse power, and of the air pump, 29.2 horse power. The boiler was 7 ft. diameter and 24 ft. long, and gave an ample supply of steam.”

This, he stated, was the most efficient ether machine that had come under his notice at that date, and contained several improvements not usually found in others of the same class.

According to the same authority the ether system is more expensive than the ammonia system (which latter will be considered in the next chapter), especially in London where coal is expensive, and water has

* A thermal unit is that amount of heat required to raise the temperature of 1 lb. of water 1° by the Fahr. scale when at 39.4°. Mec. eq. 778 ft.-pounds.

† “Proceedings, Institution of Mechanical Engineers,” 1886, p. 248.

frequently to be obtained from the water companies. The latter item is undoubtedly in this case one of considerable moment, as water is required in larger quantities for condensing purposes in the ether system, and consequently the high temperature which it sometimes attains in the street mains during the summer months becomes a matter of serious importance as regards the economical working of the machines.

Other objections to the use of ether as a refrigerating agent are, that, owing to its low vapour tension, a very large volume has to be circulated to perform a given refrigerating effect, thus abnormally increasing the dimensions of the apparatus; rapid deterioration under repeated vaporisation and re-condensation; and finally that it is extremely inflammable and explosive. On the other hand, however, it is possessed of the quality of working with a low pressure in the condenser, which renders its use advantageous in hot climates.

Modern types of ether machines will be found dealt with in another chapter.

Van der Weyde's (American) apparatus comprises exhaust and force pumps, a cooling coil and two refrigerators, the latter also acting as reservoirs for the condensed liquid. The most usual refrigerating agents employed are naphtha, gasoline, rhigoline, or chimogene.* The water to be frozen is placed in moulds or vessels plunged in other vessels containing glycerine, and which latter are surrounded on the outside by cyrogene. The naphtha, gasoline, rhigoline, or chimogene is evaporated by means of an air pump and forced through the refrigerator, the evaporation of the cyrogene abstracting sufficient heat to form ice.

In Raoul Pictet's machine sulphur dioxide or sulphurous acid (SO_2) is employed as a refrigerating agent. Sulphur dioxide is prepared by burning sulphur in dry air or oxygen gas, or by removing the elements of water, and an additional atom of oxygen from sulphuric acid by heating it together with copper clippings or mercury. The purification of the resultant gas is effected by washing, and it is collected either by displacement, or over mercury. It is completely colourless, has the overpowering odour of burning sulphur, neither supports combustion or respiration, is 2.247 times heavier than air, is easily condensed, is liquefiable by cooling down to 14° Fahr. under ordinary atmospheric pressure, and congeals into a transparent solid at temperatures below -168° Fahr. This gas deviates considerably from Boyle's law of pressures, and occupies less space for equal increments of pressure than does air under like conditions, this variation becoming more

* Knight's "Practical Dictionary of Mechanics."

marked as the temperature is reduced. Sulphurous acid is extremely soluble in water, one volume of the latter at a temperature of 50° Fahr. being capable of dissolving 51.38, and at 68° , 36.22 volumes of the former. It has a molecular weight of 65 and a density of 32. The latent heat of vaporisation of this liquid is 182, and it boils at a temperature of 14° Fahr. at the tension of the atmosphere.

In Pictet's apparatus the refrigerator and ice-tanks are combined, the circulation of the brine being effected by means of a fan, and the space occupied is thus considerably reduced, the efficiency being also somewhat augmented.

In 1885 Pictet applied for a British patent for an improved material for use in refrigerating apparatus wherein anhydrous sulphurous acid is employed, consisting of the admixture with the latter of carbonic anhydride. The sealing, however, was successfully opposed and consequently no patent was granted for this invention.

The employment of sulphurous acid is objectionable, by reason of its liability to become converted, by combining with the constituents of the atmosphere, into sulphuric acid and to corrode the machine. Modern machines using this agent are described in another chapter.

In a patented machine of Windhausen's the refrigerating agent employed is what is indifferently known as carbon-dioxide (CO_2), carbonic anhydride, or carbonic acid, which material is gaseous at ordinary temperatures, and under ordinary pressures, but which liquefies at a pressure of 540 lbs. Carbonic acid gas does not burn, neither supporting combustion nor respiration.

Windhausen's apparatus is fitted with a pair of compressors placed in line with steam cylinders of the compound type, arranged side by side with a surface condenser between them. The gas condensers are situated in the base of the machine, and a separate refrigerator is provided in connection with each of them, constructed of coils of wrought-iron pipes mounted in a steel casing, wherein the brine is circulated. The duplicate portions of the machine are usually so arranged as to admit of either of them being worked separately, or both together, if desired. This is advantageous inasmuch as it renders the apparatus practically equal to two independent or separate machines, and affords the same immunity from a complete breakdown. The later patterns of this machine, which will be found described in another chapter, comprise several patented improvements by J. and E. Hall, Ltd., who are also the proprietors of the original Windhausen patent.

Fig. 13 is a vertical central section, some of the parts being left in elevation, showing the Windhausen compressor for treating the gas in

two stages. Figs. 14 and 15 are enlarged views, showing more clearly the details of construction of the inlet or suction valve, and of the outlet or discharge valve. As will be seen from the illustration the inner cylinder A is surrounded by an annular space communicating with the former through the valve D; C is the inlet which communicates with the cylinder A through a suitable valve, and through which the gas to be compressed is drawn or sucked into the cylinder; B is the piston, and E is a valve through which the annular space or clearance round the cylinder A communicates with a pipe leading to the condenser.

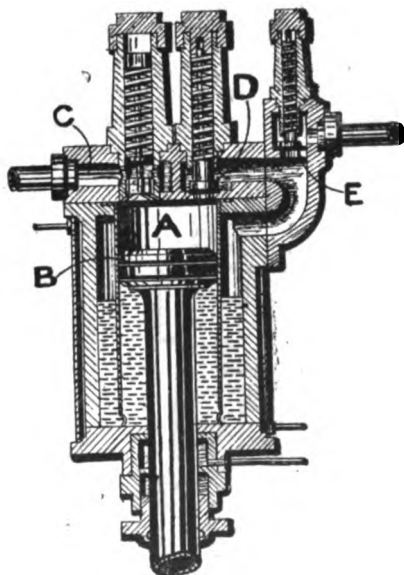


Fig. 13.—Original Type of Windhausen Compressor, with Liquid Piston, for treating the gas in two stages. Vertical section.

In operation the gas is primarily drawn into the cylinder A, through the inlet valve C, where it is compressed, and discharged through the valve D to the above-mentioned annular space, wherein it is finally compressed by the oil shown in the latter and the cylinder A, which communicate at their lower ends through suitable holes or apertures, and which oil forms a liquid piston. After this second and final compression the gas is discharged through the valve E to the condenser.

Another machine adapted for the use of carbon dioxide as a refrigerating agent is found in that of Lowe. It comprises a gasometer or gas-holder, a pump, a condenser or cooler, a drier charged with chloride of calcium, a water-cooled condensing coil, and a refrigerator or ice-making tank. In operation the gas is admitted to the pump, liquefied under the action thereof, and the heat thus generated is absorbed or taken up in the cooler, after which it is allowed to expand into the refrigerator, where it acts in the usual manner, and is finally returned to the gas-holder.

A number of other refrigerating machines on the carbonic acid

or carbonic anhydride system will be found described in another chapter.

Carbonic acid, carbon dioxide, or carbonic anhydride (CO_2) is completely inodorous; incombustible; and has the further advantage that, as it has no affinity for copper, it can be used with that metal with impunity. This is an important quality for marine installations, and consequently it has been used to a large extent for that purpose. On the other hand, however, its presence in quantity is fatal to animal

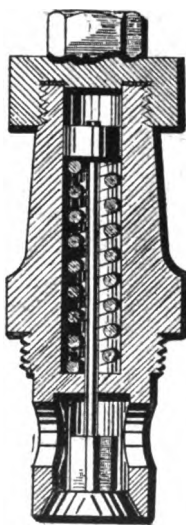


Fig. 14.—Suction Valve of Windhausen Compressor, for treating the gas in two stages.

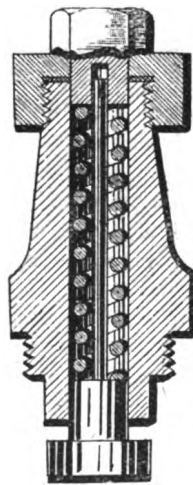


Fig. 15.—Outlet or Discharge Valve of Windhausen Compressor, for treating the gas in two stages.

existence, and it has the further drawback that with the cooling water at a high temperature, it requires a considerable pressure to liquefy it, viz., with condensing water at a temperature of 70° Fahr. it would require a pressure amounting to about 1,000 lbs. per square inch.

Carbonic acid or carbon dioxide must not be mistaken for the still more deadly gas known as carbon monoxide or carbonic oxide gas (CO), the inhalation of even a minute quantity of which will produce death. Carbonic acid or carbon dioxide (CO_2), which is the gas found at the bottom of old wells, etc., and forms the choke-

damp of coal mines, is nevertheless sufficiently dangerous, and according to Sir Henry E. Roscoe, F.R.S., air permanently contaminated with 0·1 per cent. (1 part per 1,000) of this gas is rendered unfit for continued respiration. The same authority gives the vapour tension of carbon dioxide or carbonic acid, at 35·5 atmospheres at a temperature of 0° Cent. (32° Fahr.), and at 73·5 atmospheres at a temperature of 30° Cent. (86° Fahr.).

CHAPTER VI.

THE COMPRESSION PROCESS (*continued*).

Ammonia Machines.—Properties of Ammonia.—Cycle of Operations.—Wet and Dry Compression Principle.—Construction of Gas Compressors.—Various Examples of Modern Machines.

A REFRIGERATING agent now very largely employed, and considered by many the most efficient one known at present, is anhydrous ammonia (NH_3), which has a molecular weight of 17 and a density of 8.5. This liquid boils at 40° below zero Fahr. at atmospheric pressure; it has a latent heat of vaporisation of 900, and a vapour tension of 108 lbs. per square inch at a temperature of 60° Fahr. Gaseous ammonia can be liquefied at a pressure of 128 lbs. to the square inch, at a temperature of 70° Fahr., and at a pressure of 150 lbs. at a temperature of 77° Fahr., the pressure required to produce liquefaction rising very rapidly with the temperature. To liquefy by cold it requires to be reduced to a very low temperature, viz., -85.5° Fahr. The latent heat of ammonia is very great, consequently its value as a refrigerating agent is proportionately large. Anhydrous ammonia is manufactured which contains only .025 per cent. of moisture.

The only alterations required in an ether machine to render it suitable for use with anhydrous ammonia as a refrigerating agent, are those made necessary by reason of the higher pressure of its vapour, and of the injurious action which it exercises upon copper, which causes the use of brass or gun metal in any of the parts with which either the liquid or the vapour comes in contact to be undesirable.

This latter quality is a serious drawback to its use for marine work, as is also its inflammable and irritant nature in case of an escape.

The chief advantages derived from the use of anhydrous ammonia as a refrigerating agent are that it possesses greater heat-absorbing power than any of the others named, excepting water; that it liquefies at a comparatively low pressure; and that it is not as explosive or as inflammable as ether.

Ammonia is, however, very far from being innocuous and safe, and due precautions should be taken to avoid accidents where it is in use. It is a colourless irrespirable gas, having an extremely pungent, peculiar, and easily recognisable odour, and it is also slightly combustible

when mixed with a sufficient proportion of air, burning feebly with a flame of a greenish-yellow hue, and when mixed with about twice its volume of air, being capable of exploding with considerable violence. From this it will be clear that it is absolutely essential that no part of an ammonia apparatus should have a naked light inserted into it, until it has been open and exposed to the air for a sufficient time to render the presence of such light harmless. The tendency of ammonia gas, owing to its being only half the weight of air, is to rise when set free, so that there is the less likelihood of any person who might chance to be near when an ammonia pipe happens to burst, or a bad leak to take place, becoming overpowered by the gas.

Another objectionable feature of ammonia, which has been already alluded to, is its very strong action on copper and its alloys, by reason of which no such material can be employed for any part of an ammonia machine.

Common ammonia of commerce is a solution of ammonia gas in water, and its usual strength is 26° Beaumé.* Anhydrous ammonia is pure dry ammonia gas compressed to a liquid, and it is manufactured by the distillation of the ordinary 26° ammonia of commerce in a suitable apparatus. This apparatus, which should be of sufficient strength to stand a pressure of 65 lbs. on the square inch, comprises a still, a condenser, these separators, and a drier or dehydrator. The still is heated, by a suitable steam coil, to a temperature of about 212° Fahr., when the ammoniacal gas, together with a certain amount of water, passes off into the first separator, which latter is usually situated on the top of, and forms an upward extension of, the still. In this first separator the greater portion of the watery particles carried over are eliminated by a series of perforated plates, through which perforations the gas has to pass, and are returned to the still through a dip pipe. From this first separator the partially dried gas passes through a water-cooled worm in the condenser, and then successively through the two other separators to the drier or the dehydrator, where it is passed through a set of similarly perforated plates to those in the first separator, but having small sized lumps of freshly burnt lime placed upon them, by which any moisture that may still remain in the gas is removed, and the completely anhydrous product can then be passed into the ammonia pump or compressor.

It is found advisable to work the still at a pressure of about 30 lbs. to the square inch, so as to admit of its being raised to a slightly higher temperature than the boiling point of water at atmospheric

* See Table of Comparison of various hydrometer scales, p. 538-9.

pressure, without causing the water to boil, the result of this being that the whole, or practically the whole, of the ammonia will be set free, whilst at the same time the least possible amount of the water will be vaporised and pass over with the ammonia gas.

To ascertain whether or not all the ammonia has been eliminated, two methods of testing the charge in the still are usually practised. The first is to draw off a small quantity of the charge, and if this fails to turn litmus paper, then the charge is exhausted, and all the ammonia has been driven off. The second is to allow a small amount of the gas leaving the still to escape through a small cock or valve specially provided for the purpose, when if this gas be tested with turmeric paper, and if this latter remains unchanged in colour (yellow), the charge is completely spent; if, however, the paper on the contrary turns of a brown hue, there is still some ammonia left.

After the distillation is finished the water remaining in the still should be run out, and as soon as the temperature of the latter is sufficiently lowered it can be again charged. The water accumulating in the second and third separators, being saturated with ammonia gas, may be returned into the still when recharging the latter. The amount of ammonia water, however, that becomes deposited in the separators will be very small if the pressure in the still is maintained at about 30 lbs., as above-mentioned.

The lime in the drier or dehydrator must be removed whenever it is found to have become in any degree slacked.

Commercial ammonia of 26° Beaumé contains 38·5 per cent. of anhydrous ammonia by volume, it is therefore easy to calculate from this the quantity that it would be necessary to distil in order to produce any given amount of anhydrous ammonia.

Ammonia gas or vapour is, owing to its searching nature, very troublesome to deal with, even at a low pressure, consequently this difficulty is greatly increased by the comparatively high pressure or tenuity that is obtained in a compression machine, and which rises in the condenser to as much as 180 lbs. per square inch. Liability to leakage of the ammonia gas at the pump glands and other parts of the apparatus forms, therefore, one of the objections to the use of ammonia as a refrigerating agent, and the means employed to prevent this leakage one of the chief points of difference between ammonia and ether machines. Another difficulty to overcome is the liability to an imperfect discharge of the gas from the compressor-pump, and the expansion and consequent back pressure of that remaining therein.

The most important part of an ammonia machine working on the

compression principle, and indeed of all apparatus wherein a volatile liquid is compressed, is the gas compressor. In ammonia machines both single and double-acting compressors are employed. A single-acting compressor has the advantage when working with a gas of the tenuity of ammonia, owing to its only carrying the lesser pressure of the suction side over the stuffing box, of preventing the stuffing box from being subjected to the high pressure of the condenser, which is unavoidably done at the termination of each stroke in a double-acting compressor, and on this account the chance of leakage is, of course, greatly reduced. On the other hand, however, it is obvious that a double-acting compressor must be more advantageous from an economical point of view, inasmuch as it deals with nearly twice the amount of gas at each revolution of the crank-shaft that a single-acting compressor of the same diameter and stroke is capable of operating upon. Moreover, the same amount of friction is engendered in each case (although with a double-acting compressor double the duty is being performed), at least, so far as regards the friction of such moving parts as the cross-head, piston, and connecting-rod—which friction causes no inconsiderable loss, for to overcome friction power has to be expended, and waste of power means loss of fuel, *i.e.*, money. But in a double-acting compressor a considerable amount of extra friction is caused by the necessity of working with a tighter gland. Taking everything into consideration, however, it is estimated that the amount of saving effected in a machine having two gas compressors may be placed at one-eighth of the whole amount of power required for compressing the gas. A further economy is that a double-acting compressor is capable of performing the work of a pair of single-acting ones of the same size, and consequently there is a saving in the first cost of the apparatus and in space occupied.

The construction of a gas compressor for operating with ammonia does not, as already mentioned, vary in any very material point from that of one intended to work with ether, and, however much they may differ from one another in minor points of detail, they all work upon the following broad principles, *viz.* :—

The gas compressor, which is operated by a steam-engine or other suitable motor, draws the gas or vapour from the evaporating coils or tubes of the refrigerator after it has performed its duty of cooling, compresses it on the return stroke of the piston, and forces it into a system or series of pipes or coils in the condenser, in which coils, under the cooling action of water, it resumes its liquid form. From the condenser it is again passed in the liquid state, through a minute opening

of the expansion or regulating cock, into the evaporating coils or tubes of the refrigerator, wherein it again expands into gas or vapour, owing to the diminished pressure there prevailing, by reason of the sucking action of the gas compressor. The pressure in the pipes or coils in the refrigerator is usually maintained at from 15 lbs. to 30 lbs., whilst that in the condenser, as above-mentioned, may rise as high as 180 lbs., the former depending of course on the amount of opening given to the expansion cock. The liquid ammonia passing suddenly from the above high pressure of the condenser to the comparatively low pressure in the refrigerator, instantly flashes into gaseous form, and whilst doing so, in conformity with the well-known natural law, is forced to absorb a quantity of heat which it renders latent; this it does from the surrounding objects, which in the present instance are either the pipes or coil in the refrigerator, and the brine circulating round the latter, or when used for cooling on the direct system, the sets of refrigerating pipes into which it is passed and the surrounding air.

In order to avoid any chance of accidents occurring through the machine being started with all the valves closed, a suitable relief or safety valve and by-pass should invariably be provided.

Expressed generally, then, the cycle of operations in machines on the ammonia compression system is the same as that of those described in the preceding chapter, viz., compression, condensation, and expansion; and the said machines, no matter how they may differ in more or less important points of constructional detail, must all likewise consist of three different parts, viz., a compression side, a condensing side, and an expansion side (see Fig. 8). The operations are rendered continuous by suitably connecting all these sides or parts together so that the gas passes through them in the above order.

Ammonia compression machines are operated on two systems, viz., wet compression and dry compression, and as regards the respective merits of these systems theoretically, considerable diversity of opinion seems to exist. In practical work, however, it will be found that what are termed dry compression machines work more or less wet, and, therefore, the efficiency as regards this point is about the same in the case of both types of machines.

When intended to work on the wet compression system the expansion cock or valve is adjusted in such a manner that the vapour will come back to the compressor in a supersaturated condition, with the result that this surcharge of liquid becomes evaporated during the compression stage, absorbing the required quantity of heat, and maintaining a correspondingly low temperature in the compressor cylinder.

An obvious objection to this method of working is the constant liability of too large a quantity of liquid finding its way into the compressor cylinder, the result of which would be the filling of clearance spaces with liquid ammonia, which latter would re-expand upon the return stroke of the piston, and take up space which is required for the reception of the inflowing gas or vapour.

With a machine adapted to work on the dry compression system, the expansion cock or valve is so adjusted that the whole of the liquid ammonia admitted to the expansion coil will become expanded into gas or vapour, and the latter consequently reaches the compressor cylinder in a dry condition, superheating taking place during compression. It will be observed that this plan admits of the full value of the liquid ammonia being utilised for purposes of refrigeration, a drawback being experienced, however, by reason of the higher pressure which becomes necessary to liquefy the ammonia, and the larger amount of heat generated which calls for special cooling arrangements for its removal. For this reason in this system compressors are, as before mentioned, usually worked partly wet.

The principal qualities to be sought for in a compressor in order to ensure the maximum amount of efficiency are:—As complete a discharge from the compressor cylinder of the gas during compression as is practically feasible, and the removal during compression of the greatest possible amount of heat from the gas. Amongst other points of importance are the perfection of the means provided for preventing any leakages taking place at the stuffing box, pistons, and valves, and of those for ensuring the proper lubrication of the working parts of the machine.

Of these desiderata the first is the most important, and it is thus specially desirable to see that the compressor possesses all the requisite conditions to ensure its fulfilling its purpose in the best possible manner. One method of effecting the desired object is by the injection of a certain amount of sealing oil into the cylinder at each stroke of the piston, which oil forms what is called a liquid base. The injection of this oil serves not only the purpose of sealing the piston, but also lubricates the latter and the valves, and prevents leakage at the stuffing box, and that, moreover, owing to the small amount of such sealing oil that is employed, without appreciably reducing the capacity of the machine.

The practically complete discharge of the charge of ammonia from the compressor cylinder, at each stroke of the piston, can also be ensured by allowing the latter to work right up to the heads without

clearance. In the ordinary form of compressor this would of course give rise to a great liability of knocking out the cylinder head in the event of any foreign body or obstruction obtaining access to the cylinder, but such action is rendered possible with perfect safety by so arranging the head that it is loose, but normally retained in position by means of suitable springs. In this manner the head forms practically a large relief valve adapted to open should the pressure in the compressor cylinder from any cause exceed that requisite to produce liquefaction of the ammonia gas.

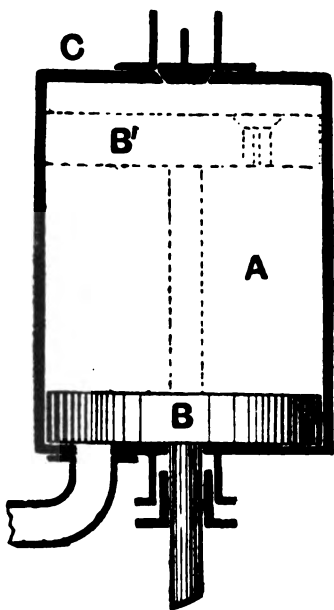


Fig. 16. — Diagram illustrating Loss due to Clearance Space in Compressor Cylinder.

The diagram Fig. 16, which is intended to represent the cylinder of a single-acting compressor, illustrates the loss due to clearance space. As is well known, according to Boyle's or Marriot's law the volume of gas will vary in an inverse proportion to the pressure. Assuming, then, that the pressure of the gas on entering the cylinder A be 20 lbs. per square inch, and that of the condenser 180 lbs. per square inch, it will be seen that if the piston B is moved into the position shown in dotted lines at B' through a stroke of 9 inches, and neglecting loss of heat during compression, the pressure of the gas will be increased nine times, whilst its volume will have become, at the same time, correspondingly reduced to one-ninth of its original volume, and this pressure of 180 lbs. per square inch is that at which it is required that the gas should leave the cylinder A.

If the clearance space left between the piston B at the termination of its stroke, and the cylinder head C, be one inch, it is obvious that the gas at a pressure of 180 lbs. per square inch left in this clearance space will re-expand until the pressure becomes reduced or decreased to a ninth of what it was originally, or to 20 lbs. per square inch, whilst the volume will, at the same time, be increased to nine times what it was before. It will be seen that in such a case as the above the inch of gas at 180 lbs. pressure would re-expand into 9 inches of

gas at 20 lbs. pressure, and that consequently the entire efficiency of the compressor would be lost, as this back pressure in the cylinder of 20 lbs. per square inch is that of the entering gas, and would thus render impossible the entrance of any more gas. Were the stroke of the piston B, on the other hand, to be the full length of the cylinder A, so that no clearance be left at its termination between it and the cylinder head, it will be seen that all the gas would be expelled from the cylinder when it reaches that point, and consequently its efficiency, so far as this is concerned, would be practically perfect. In practice, however, it is found impossible to construct ordinary compressors without a certain amount of clearance at the termination of their strokes, it becomes necessary, therefore, to find out what is the minimum amount that can be allowed compatible with safety of working, and also how best to arrange the clearance so that the loss due to it will represent as small a percentage of the entire work of the compressor as practicable.

Obviously, whatever the space in the cylinder that will be occupied by the gas left in the clearance space after it has re-expanded to a pressure of 20 lbs. per square inch on the return stroke of the piston, the space thus occupied will represent the loss of efficiency. Say for example, that we have a cylinder of 10 inches in diameter, by 10 inches stroke, and that a clearance of one-eighth of an inch be left at the termination of the stroke, with this clearance filled with gas at a pressure of 180 lbs. per square inch, the space filled by this gas on the return stroke of the piston, when the gas remaining over has expanded down to a pressure of 20 lbs. per square inch, will be $1\frac{1}{8}$ inch, and the loss of efficiency will consequently be equal to about 11 per cent. If, however, we now assume that the diameter of the cylinder be still retained at 10 inches, whilst the length of stroke be doubled, or increased to 20 inches, the loss of efficiency will obviously be reduced to $5\frac{1}{2}$ per cent., whilst by again in like manner increasing it to 40 inches, and subsequently to 60 inches, it will be reduced to $2\frac{3}{4}$ per cent. and $1\frac{3}{8}$ per cent. respectively, and so on, the greater the ratio between the diameter and the stroke the less will be the loss of efficiency due to the clearance left in the cylinder at the end of the stroke of the piston.

In actual practice, however, there is a limit to the amount of the ratio between the diameter and the stroke that can be used with due regard to economy of working. The practice in this respect amongst builders of refrigerating machinery varies considerably, some employing a ratio of two to one, whilst some others use less, and others again more. Mr. Peter Neff, from whose articles upon "Mechanical Refrigeration" (New York "Engineer"), and from an abridgment of these

articles which appeared in "British Refrigeration," much of this information has been derived, recommends, as the result of his experience, a stroke of three times the diameter as being that giving the most favourable results.

Another important point is to see that no unnecessary amount of clearance space be left at the inlet and discharge valves. In the case of a single-acting compressor of the vertical type, this is a comparatively easy matter, as the inlet valve can be arranged flush with the top of the piston, and the outlet or discharge valve flush with the head of the cylinder, thereby reducing as far as possible loss from the re-expansion of any gas remaining between the seats of the valves and the interior of the cylinder. This difficulty is not, however, by any means so easily overcome in a double-acting compressor of the horizontal type, although many more or less ingenious arrangements have been devised for the purpose, one of the most efficacious of which is perhaps that wherein cages containing the valves are so mounted in the cylinder that the seats of the valves will be brought into close proximity with the interior of the latter.

Even in the case of the best possible designs of compressors of the ordinary type, there must be an unavoidable appreciable loss of efficiency from back pressure, but, on the other hand, they are of very much simpler construction, and can be built considerably cheaper than those provided with special means for avoiding, or rather minimising, this loss, whilst at the same time they are found to be perfectly well able to perform the work required of them. It must also be borne in mind that upon the engineer in charge of the plant, and the care which he expends to see that the valves are working satisfactorily, etc., etc., depends to a considerable extent the greater or lesser efficiency of the compressor under his charge.

In the De La Vergne type of ammonia compressor, which is made in this country by L. Sterne and Co., Limited, the characteristic feature consists in the patented system for preventing the occurrence of any leakage of gas taking place past the stuffing box, piston, and valves, and of extracting the heat from the gas during compression, by the simple device of injecting into the compressor, at each stroke, a certain quantity of oil or other suitable lubricating fluid. By means of this sealing, lubricating and cooling oil, not only are the stuffing box, piston, and valves effectually sealed, and the heat developed during compression taken up, but all clearances are entirely filled up. This latter is a matter of great importance, as it ensures a complete discharge of the gas from the pump cylinder, and obviates the above-mentioned loss of power and efficiency.

This method of sealing the stuffing box and piston enables the leakage and consequent introduction of air into the pump, or drawing out or wasting of a volume of the refrigerating gas at each alternate stroke of the piston, to be effectually prevented without necessitating the packing of the said piston and gland so tightly as to bind and set up an excessive amount of friction, the power required to overcome which has been sometimes found to exceed that necessary to perform the entire work of compression. Moreover, when working constantly against a pressure of from 125 to 180 lbs., it is obvious that the slightest wear would cause a considerable leakage of gas to take place past the piston into the adjoining chamber, and like difficulties would also be encountered with the valves, allowing the gas to regain access to the pump cylinder by leaking past the discharge valves, or to be re-admitted to the suction side past the corresponding valves. The losses occasioned in this manner through abnormal friction, and the reduction in efficiency and loss of valuable material through leakages, constitute in some machines a very large item, and are the chief cause of failure to give satisfactory results.

It is claimed by the inventor that the oil injected into the compressor cylinder for the above-mentioned sealing purposes not only effectually overcomes the above difficulties, but also acts in a more efficient manner to absorb or take up the heat generated during compression by the mechanical energy exerted by the compressor piston or plunger upon the gas than does a water-jacket to the cylinder and hollow water-cooled piston and rod, the useful effect of which latter is to a great extent prevented by the thickness of metal required in a pump destined to work at a high pressure. In order to ensure the highest efficiency in a compressor, it is essential that the heat generated by the act of compressing be eliminated as far as practicable, as otherwise the said heat, by expanding the gas itself during compression, increases its volume, and consequently necessitates an opening of the discharge valve prior to the time that would be required were the gas cooled during compression. It is obvious that all the energy expended in effecting such premature discharge of the increased volume of gas is so much loss.

The oil used is of a special quality, which is unaffected by the chemical action of the ammonia, it being absolutely essential that it be of a nature that will not saponify, and that it be also capable of withstanding both extremes of heat and cold.

Fig. 17 is a vertical central section, showing a double-acting compressor on the De La Vergne system, fitted with Louis Block's patent

arrangement of valves, the main object of which is to secure the discharge of the oil at the lower end of the cylinder taking place immediately after all the gas is gone

and not before, as in the latter case re-expansion will take place, resulting in loss of efficiency of the pump. To effect this, two valves are provided in the lower end of the compressor cylinder, one above the other.

Either or both of these valves may open on the down stroke of the piston, until the latter covers the upper one, when only the lower one is left open to the condenser. During the remainder of the stroke of the piston, after the lower valve is also closed, the other or upper one opens communication with an annular chamber formed in the said piston. In the bottom of this annular chamber are provided, moreover, valves which open as soon as all the other outlets from the underside of the piston are closed, to ensure which they are loaded with springs, so arranged as to require somewhat more pressure to open them than the discharge valves on the side of the cylinder. The gas, and afterwards the oil, then all pass out through the piston, no trace of the former being present at the completion of the down stroke. In this manner the oil system of sealing can be advantageously retained, and the pump

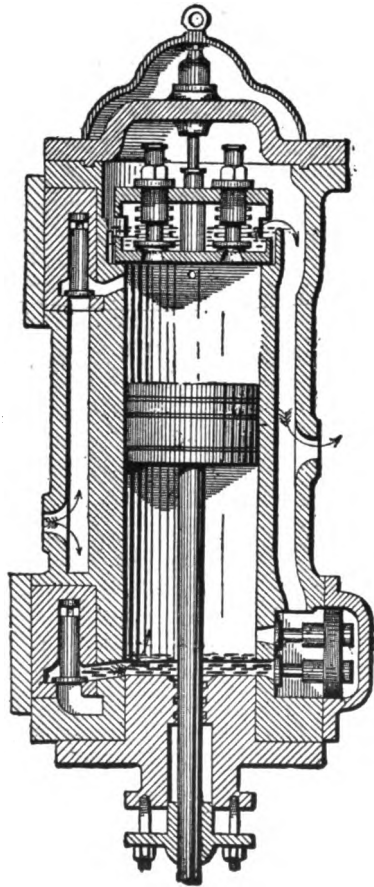


Fig. 17.—Double-acting Vertical Type, De La Vergne Ammonia Compressor. Vertical Section through Compressor Cylinder.

will work as well at the lower side as the upper. Fig. 18 is a view illustrating the complete machine, which is driven as shown by a horizontal tandem condensing engine.

A complete installation of a refrigerating plant on the De La Vergne ammonia compression system is shown in side elevation in Fig. 19, from which view the circulation of the ammonia and sealing oil can be easily traced, viz :—

Firstly. Following the path taken by the ammonia, in order to produce the frigorific effect. A is the compressor cylinder, which is of the double-acting type, and similar in construction to that shown drawn to a larger scale in Fig. 17 ; and R is the steam-engine cylinder, which is arranged horizontally, as shown in Fig. 18. B is a pipe

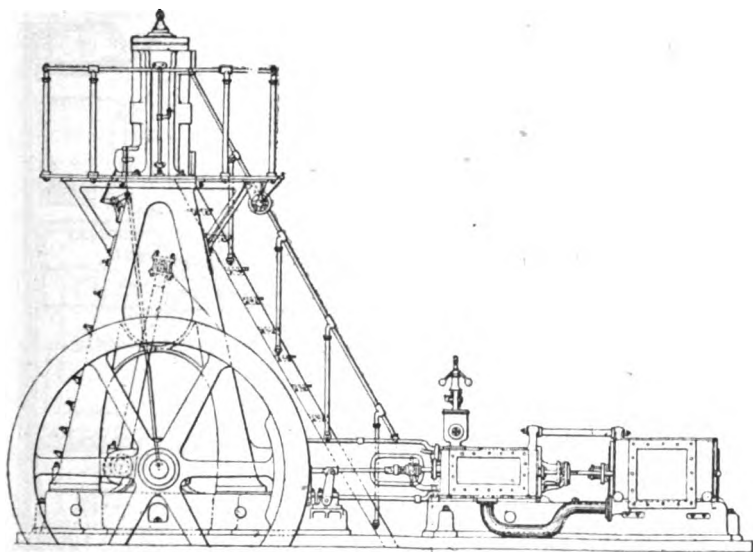


Fig. 18.—Double-acting Vertical Type De La Vergne Ammonia Compressor and Horizontal Tandem Condensing Engine. Side elevation of complete machine.

through which the gas is drawn or sucked from the evaporating coils into the compressing cylinder A. The gas is then discharged by the action of the compressor A through the pipe C into the pressure tank D, where the sealing oil or liquid, the course of which will be next followed, falls to the bottom ; the upper half or portion of the pressure tank being fitted with suitable cast-iron baffle or check plates serving to more completely retain the oil and ensures its deposition. From the pressure tank D the gas, which still retains the heat due to compression, passes through the pipe E into the bottom or lower pipe of the condenser F, wherein, by the cooling action of cold

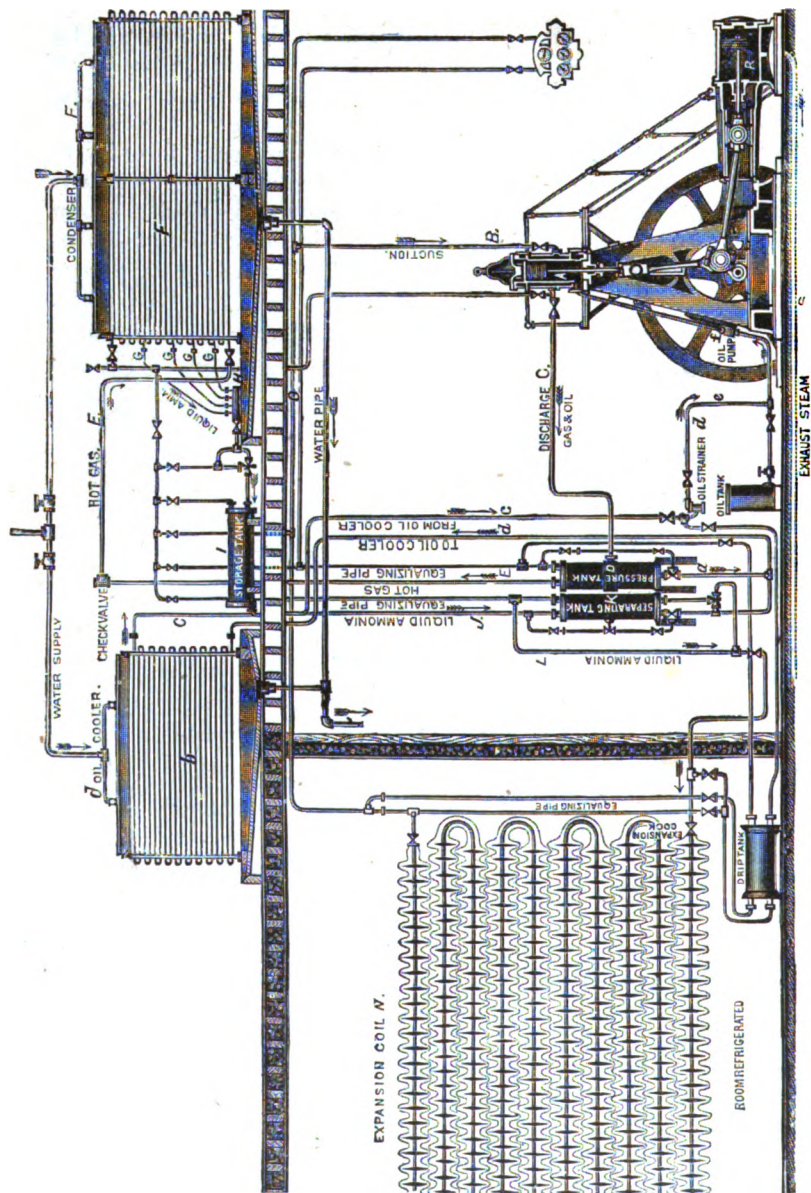


Fig. 19.—Diagrammatical view showing complete Installation of a Refrigerating Plant on the De La Vergne Ammonia Compression System.

water running over the pipes, the heated gas is first cooled and then liquefied. The ammonia, in this liquid condition, is then led by the small liquid pipes *G*, through the liquid header *H*, into the storage tank *I*, from whence it flows through the pipe *J* into the lower part of the separating tank *K*, which latter must be constantly maintained at the very least three-quarters full. *L* is a pipe of small bore, through which the liquid ammonia is forced, by reason of the pressure to which it is now subjected, to the expansion cock or valve, through which it is injected into the evaporating or expansion coil *N* which is situated in the room or chamber to be refrigerated or cooled.

The ammonia gas resulting from the expansion and evaporation of the liquid ammonia in the evaporating or expansion coil *N*, having absorbed or taken up the heat from the surrounding atmosphere, passes away through the pipes *O* and *B*, back again into the compressor cylinder, and the cycle of operations of compressing, etc., are again performed as above.

Secondly. Following the course of the oil employed for sealing, lubricating, and cooling purposes, which, as previously mentioned, is heated with the gas during compression, and is passed into the tank *D*, to the bottom of which it falls. From the bottom of the tank *D*, the heated oil is conducted through a pipe *a* to the lowermost pipe of the oil-cooler *b*, which is practically similar in construction, but on a smaller scale, to the ammonia condenser, and is likewise cooled by sprayed or atomised cold water. After being sufficiently reduced in temperature in the oil-cooler *b*, the oil flows through the pipe *c*, strainer *d*, and pipe *e*, into the oil pump *f*, which latter is so constructed that it delivers the cooled oil into the compressor, distributing it to either side of the piston or plunger during its compression stroke, that is to say, in such a manner that no oil is furnished during the suction stroke of the piston, but only during the time of compressing, thereby cooling the gas during its period of heating. The heated oil, after leaving the compressor, then again returns, together with the hot compressed gas, to the pressure tank *D*, and follows the same round through the oil-cooler *b*, strainer *d*, and oil pump *f*, back to the compression cylinder. It will be obvious that the oil, as well as the ammonia, is used over and over again, no loss or waste of either taking place except that which may occur through leakage.

Any small quantities of oil, however, that may be carried over with the current of the gas from the pressure tank *D* into the condenser *F*, pass along with the liquid ammonia into the separating tank *K*, where, by reason of its greater weight, this oil falls to, and collects

at, the bottom of the tank. As soon as a sufficient quantity of oil has become thus deposited, it is drawn off and passed through the oil-cooler back into the oil-pump. The oil reservoir or tank is also connected to the oil pump F.

When the apparatus is employed for the manufacture of ice, the evaporating coils *N* are placed in a tank containing brine, sufficient space or clearance being left between them to admit of the insertion of ice-cans or moulds containing the water to be frozen. In this instance the steam used for driving the motor, after doing its duty in the steam-engine cylinder *R*, is led through the exhaust pipe *s* into a steam filter and condenser, where it is purified and condensed. The purified condensation water then passes from the said condenser into

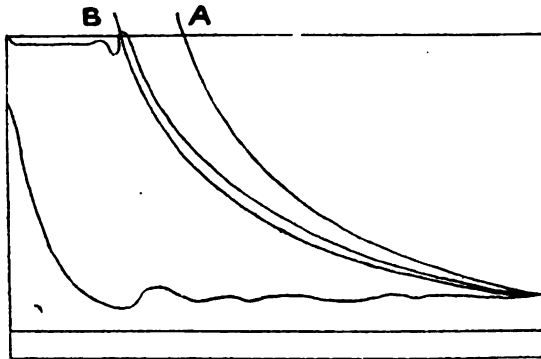


Fig. 20.—Diagram taken from Single-acting De La Vergne Ammonia Compressor, without Sealing, Lubricating, and Cooling Fluid.

a water regulator tank, and from the latter through a water-cooled coil of substantially similar construction to that of the ammonia condenser *F* and oil-cooler *b*, and finally is delivered into the ice cans or cases, which are usually constructed of galvanised iron, through suitable india-rubber hoses, fitted with stop-cocks or valves.

When the water in the ice-cans or cases is frozen, they are lifted out and transported by means of the overhead travelling crane to the dip-tank or a sprinkler, where the blocks of ice are thawed or melted out, after which the empty cans are refilled with water through the hose, and the process of making other blocks of ice is commenced.

The various parts are clearly indicated upon Fig. 19, and the paths taken by the ammonia, the sealing, lubricating, and cooling oil, and the steam are shown by the arrows.

The advantages derived from the use of the sealing, cooling, and lubricating liquid in the compressor cylinder will become very apparent on a comparison of the diagram shown in Fig. 20, which was taken from a gas compressor worked without employing the liquid, with that shown in Fig. 21, which was taken from a similar compressor, but with the charge of liquid.

The diagram shown in Fig. 20 was taken from a 14 in. $\times$ 28 in. single-acting gas compressor, working with a direct pressure of 157 lbs., and a back pressure of 20 lbs., and at a speed of thirty-six revolutions per minute, no sealing, cooling, and lubricating liquid being used. A indicates the adiabatic curve, and B the isothermal curve.

The adiabatic curve is, as is well known, that curve which would

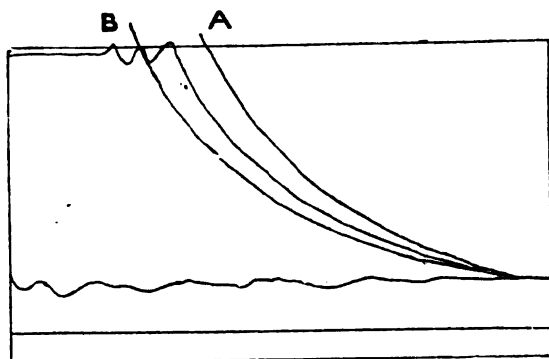


Fig. 21.—Diagram taken from Single-acting De La Vergne Ammonia Compressor, with Sealing, Lubricating, and Cooling Fluid.

be produced were the air or gas to be instantaneously compressed, that is to say, without transmission of heat, and the isothermal curve is that which would result if it were possible to compress the same without raising its temperature at all. In actual working the curves obtained fall between the adiabatic curve and the isothermal curve.

It will be seen by an inspection of this diagram that the compression curve, which by right should approach the adiabatic curve A, on the contrary falls into close proximity to the isothermal curve B, and indicates the existence of a leakage past the piston of 15.2 per cent. of the gas being compressed, and, as is shown by the curved line, which is produced by the re-expansion of the gas filling the clearance between the piston and compressor head or cover, a further loss from the latter source of 7.4 per cent., that is a total loss of 22.6 per cent., due to not

employing the liquid. The horse-power shown on this indicator card is 44.

The diagram shown in Fig. 21 was taken from a similar compressor running at the same speed, and working at 150 lbs. direct pressure, and with a back pressure of 27 lbs. The actual power indicated by this card is 48. The horse-power measured to the adiabatic curve A equals 53·6. The horse-power saved by employing the sealing, lubricating, and cooling liquid is 5·6 for each compressor, or in a machine having two compressors a total saving of 11·2 horse-power. The efficiency of the compressor is 98·6 per cent. of its theoretical value, a result attained by the use of the liquid. The efficiency of the compressor, as indicated by the card shown in Fig. 20, is only 77 per cent. of that

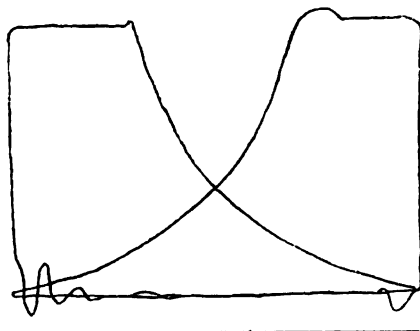


Fig. 22.—Diagram taken from Double-acting De La Vergne Ammonia Compressor, with Sealing, Lubricating, and Cooling Fluid.

indicated by the card shown in Fig. 21, the loss being the result of the non-use of the sealing liquid.

Fig. 22 shows a diagram taken from a 12 in. $\times$ 24 in. double-acting gas compressor, running at a speed of thirty-four revolutions per minute, and fitted with Louis Block's patent improvements, which latter have been already described on pages 57 and 58.

The steam cylinder actuating the above-mentioned 14 in. $\times$ 28 in. gas compressor, whilst the diagrams shown in Figs. 20 and 21 were being taken, was 18 in. $\times$ 42 in., and was working under a steam pressure of 68 lbs. per square inch, the speed being, of course, the same as that of the gas compressors, viz., 36 revolutions per minute.

Indicator diagrams taken from this steam cylinder showed on the card an initial pressure of 65 lbs., and the mean effective pressure of the diagrams equalled 32·4 lbs. The horse-power developed was 63,

and the expansion line approached so close to the theoretical curve as to show that the cut-off valve worked well, thus effecting a great economy in steam consumption.

Machines on the ammonia compression system are made by a number of other firms, both in this country and abroad, certain specific improvements being claimed to give to each of them some particular advantage. It would be impossible in this little work to give extended descriptions of these machines, or, indeed, even to make brief mention of all of them. The following, however, are the most salient features of some of the principal amongst them :—

The characteristic feature in the Frick machine is the means adopted for permitting the compressor to be safely worked without clearance, and thereby ensuring the complete, or practically complete, discharge of the gas therefrom. Two forms of compressors constructed on this principle, are illustrated in Figs. 23, 24, and 25.

Referring to the drawings, *A* is the compressor pump piston, in which is placed the suction valve *B*, which is of ample area, and is balanced by a spring; the piston working metal to metal against the top cylinder head without clearance. *C* is the inlet for the ammonia gas, and *D* is the outlet way through which the compressed gas is discharged from the pump barrel or cylinder through the aperture and valve in the dome. *F* is a jacket surrounding the pump cylinder, and into the clearance or space thus provided, a constant stream of cold water is kept circulating, so as to take up as much of the specific heat of compression, and of the latent heat, through the wall of the cylinder as possible, and thus obviate super-heating thereof. *G* is a relief valve situated in the cylinder head, which valve in Fig. 23 also forms the discharge valve, and is acted on by springs *E* and *G*¹, the first being compressed for the ordinary discharge, and the second when the safety device comes into operation. In the arrangement shown in Fig. 24, which is that used in the large machines, the relief valve *G* is normally retained upon its seating by the powerful springs *G*¹, and the ordinary discharge or outlet valve *D*, is situated centrally in the latter. *I* is the piston rod stuffing box. *K* is an oil reservoir and hand pump for lubricating the piston rod, and through the small pipe and valve *L* the pump cylinder when required, which is usually only when starting a new machine, or one that has been standing for a considerable time; the latter also serves for the attachment of an indicator, to enable indicator diagrams to be taken from the pump.

It will be seen that the compressors in question are of the single-acting type, the pistons are long, and are each provided with carefully-

F

fitted rings, and the arrangement of the stuffing boxes and glands shown, moreover, is such as to render the escape of gas round the piston rods practically impossible under proper working conditions.

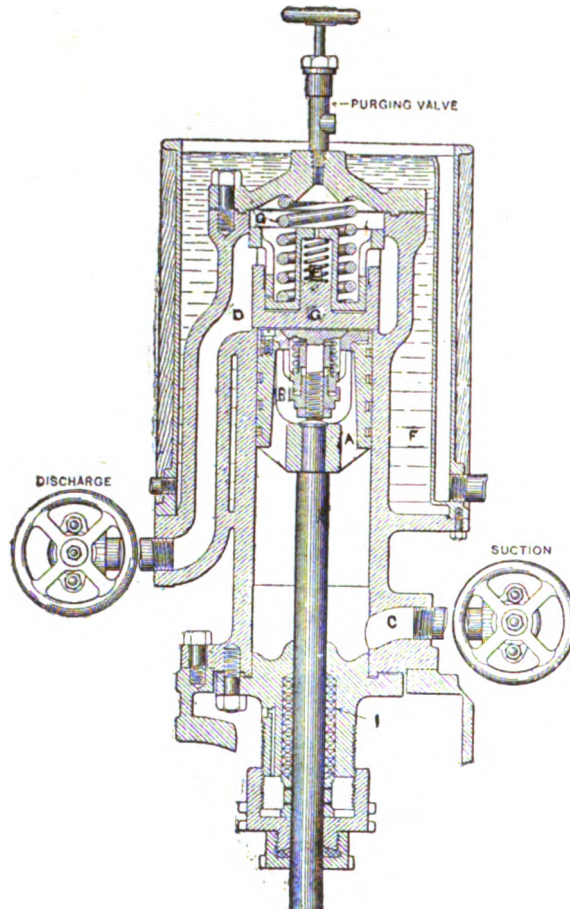


Fig. 23. —Small Single-acting Vertical Type Frick Ammonia Compressor.
Vertical Central Section through Cylinder.

The two patterns of compressors are constructed upon a substantially similar principle; that shown in Fig. 23 being the form of construction employed in the case of small machines, and that in Fig. 24 in large

ones. In both arrangements the discharge valve, relief valve, together with the guides, speeder, and false seat, are entirely self-contained and independent of the pump cylinder, rendering it possible to expedi-

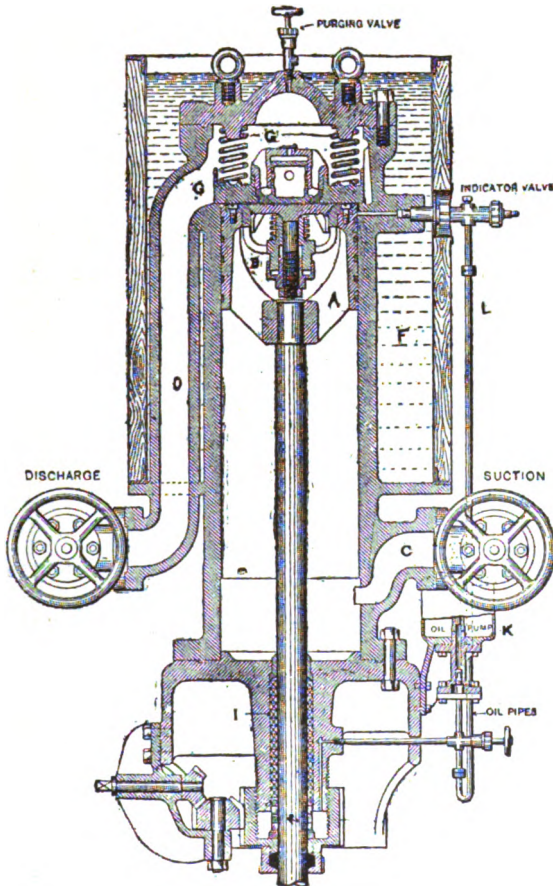


Fig. 24.—Large Single-acting Vertical Type Frick Ammonia Compressor.
Vertical Central Section through Cylinder.

tiously replace the whole mechanism by a new one, or to speedily execute any necessary repairs. It will be seen that the valve mechanism can be easily got at, it being only necessary for that purpose

to remove the light pump head. Fig. 25 is a vertical central section showing the complete machine.

The operation is as follows :—The suction valve *B* being, as before mentioned, of very ample area and balanced by a spring, affords no resistance to the passage of the gas upon the return or backward stroke of the piston, but allows of its flowing freely and rapidly into the pump

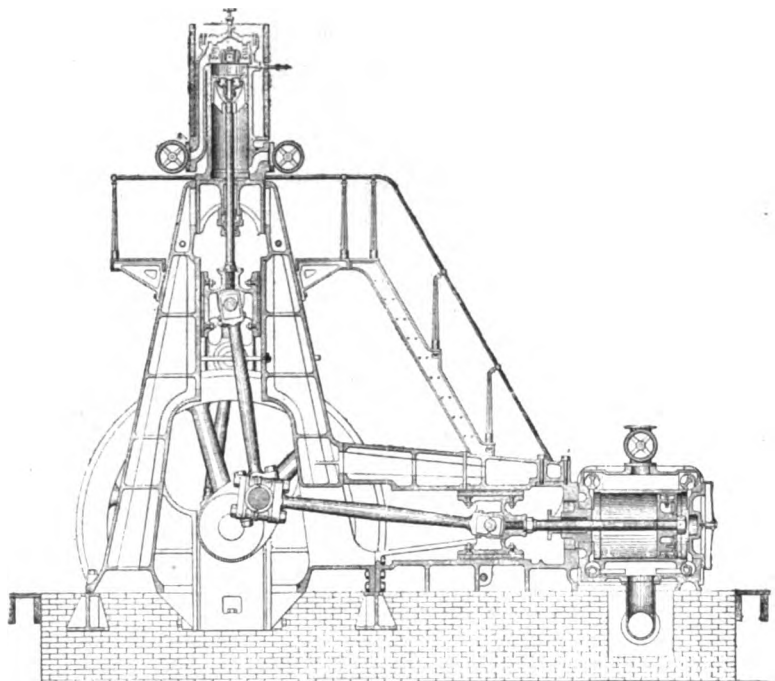


Fig. 25.—Large Single-acting Vertical Type Frick Ammonia Compressor and Horizontal Steam Engine. Sectional Elevation of Complete Machine.

cylinder, through the gas inlet *c*, under the action of the back pressure, to the vacant space above the piston. The rapid closing of the suction valve *B* at the instant of the piston beginning its forward or up-stroke is ensured by a cushion spring, and the gas is gradually compressed until it equals the condensing pressure acting upon the discharge valve in the relief valve located in the cylinder head, which then opens to admit of its escape to the condenser. There being no clearance between the piston *A*, when at the termination of the upward

or forward stroke, and the cylinder head, practically no gas remains in the cylinder to re-expand on the return or backward stroke of the piston, and destroy the vacuum.

It will be seen that it is rendered possible to do this with perfect




Fig. 26.—Diagram taken from Frick Compressor.




Fig. 27.—Diagram taken from Frick Compressor.

safety, as in the event of any foreign body or obstruction getting accidentally between the piston A and the cylinder head, the valve or movable portion G of the latter, which is of the full dimensions of the




Fig. 28.—Diagram taken from Frick Compressor.




Fig. 29.—Diagram taken from Frick Compressor.

pump bore, will give way and allow the compressed gas to pass into the dome, and thence to the condenser, the said movable portion or relief valve G being returned to its seat, under the action of the spring




Fig. 30.—Diagram taken from Frick Compressor.




Fig. 31.—Diagram taken from Frick Compressor.

G¹, and the back pressure. Under normal conditions, however, this relief action does not take place, the discharge, as already mentioned, being effected through the preliminary opening of the relief valve,

or through the smaller discharge or outlet valve D, which is usually of steel, and is fitted upon a seat in the centre of the movable portion of the head or relief valve G.

Were no provision, such as the above-described relief valve or safety head G, provided, and any obstruction to become accidentally interposed between the piston and the cylinder end, not only would the latter be knocked out, and serious damage to the mechanism ensue, but the full charge of ammonia gas, which in a large machine is worth a considerable sum, would be lost.

Figs. 26 to 31 show several indicator cards taken from Frick compressors, the originals of which are in the possession of the company. It will be noticed on an inspection of these cards that they show sharp corners and straight vertical lines, which is the indication of a practically perfect non-clearance pump, furthermore, it will be seen that the horizontal lines are very straight, and the compression curves demonstrate great regularity, which latter features indicate perfect, or practically perfect, action of the valves.

In practical working spring safety heads of the type just described are apt to give trouble owing to the difficulty of adjusting the springs to work under the variations of temperature to which they are exposed within the compression cylinder, and also by reason of the liability of dirt or other foreign bodies becoming lodged upon a seating when the head is raised, and preventing it from forming a tight joint upon its return to its normal position. Mr. Arthur G. Enock has endeavoured to obviate these objections, and at the same time to provide a spring safety device which will admit of the piston being worked in the compressor absolutely without clearance, and which device, being located externally to the cylinder, will be unaffected by the variations in temperature caused by compression of the working agent therein.

Mr. Enock's compressor is fitted for the above purpose with the safety device shown in section in Fig. 32.

In the construction of this machine, the crosshead is provided with a short extended trunk in which is placed a powerful spring. The piston rod is provided with a disc screwed upon it which butts upon the top of the spring, and a cap or cage encircling the piston rod is employed for attaching the latter to the crosshead trunk. The pistons are so placed that, at the end of the compression stroke, they make metallic contact with the cylinder head, when a slight compression takes place upon the spring of the crosshead, and the lost motion is taken up at this point. This not only secures immunity from danger of knocking out the compressor head or damaging the piston and piston

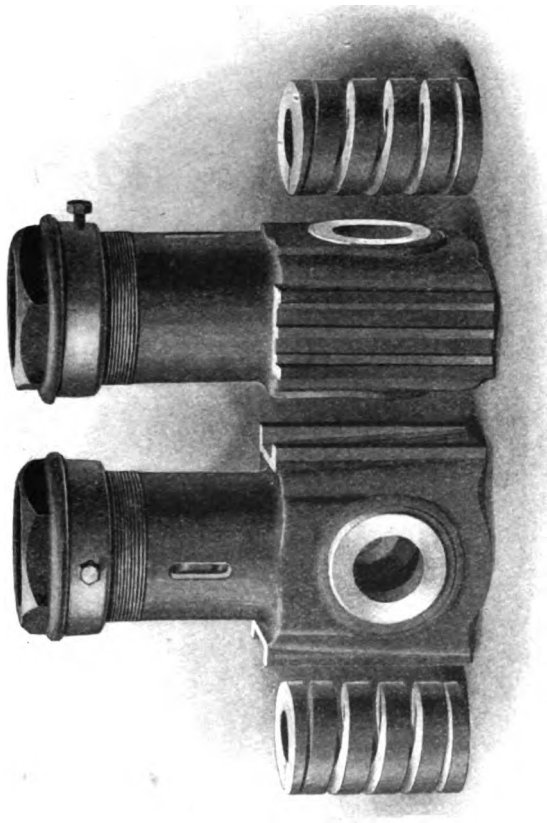


Fig. 32A.—Safety Crossheads and Springs Enock's Patent Compressor.

[To face p. 70.

rod, but also allows the valve an extra moment for closing, and it will be readily seen by reference to the drawing that the back rush or

"slip" of gas as the piston commences the suction stroke will be entirely prevented. In Fig. 32A, which is a direct reproduction from a photograph of the actual parts, the crosshead, spring, and cap are shown removed from the machine.

It need hardly be pointed out that this machine should pump a good deal more gas with a given compressor capacity than is possible in any of the other types, as it would not only discharge the whole of its capacity, but it would not allow of any back leakage. This, the inventor avers, has been found to be actually the case in practical work, and to be proved beyond doubt by severe and extended trials. The crosshead trunk has vertical slots in it through which the spring can be seen and examined, and the spring is only subject to the ordinary temperatures found in an engine room.

The lift and fall of the suction and discharge valves are vertical, and there is consequently no lateral wear and tear of any kind, and the valves and valve seats are cut from special pieces of solid tool steel, and are consequently subject to very little hammering out.

The compressor jacket is provided with a spiral or helical annular space, through which the

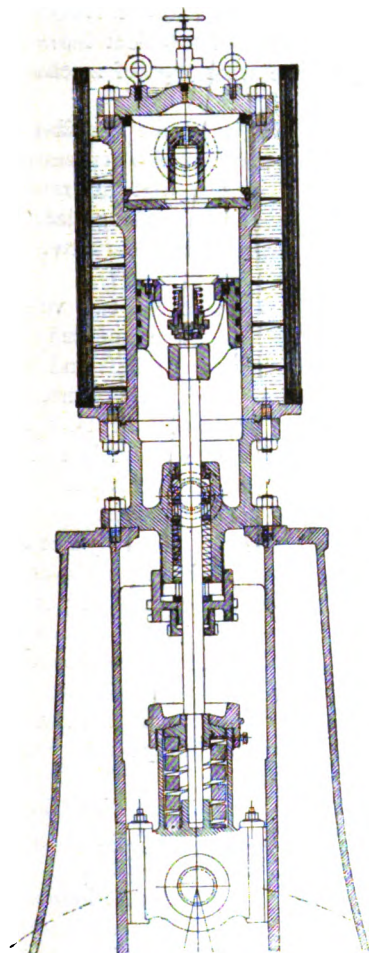


Fig. 32.—Vertical Section through Crosshead and Cylinder, "Enock" Patent Compressor.

jacket water circulates, and considerable velocity is thus secured to the cooling water, and a much more rapid transfer of heat takes place. It is also impossible for air or gas bubbles to adhere to the outside walls

of the compressor cylinder, and this is in itself a valuable improvement.

The patent crosshead is applicable not only to vertical machines of the type shown in our illustration, Fig. 32, but also to horizontal machines for single or double action, and where sufficient headroom is not available for vertical compressors the same type of machine is made of an horizontal pattern.

This patent safety crosshead arrangement, as above described in its application to large ammonia compressors, is also successfully applied to compressors of the enclosed type such as that illustrated in Fig. 32B, which is suitable for refrigerating and ice-making plants on a small scale, and is made of capacities varying from one quarter of a ton to five tons of ice per twenty-four hours.

The compression machine in this case consists of two vertical single-acting ammonia compression cylinders, which are mounted upon a cast-iron body, with end covers containing the crank-shaft and bearings. There are no pump rod glands to pack in this type of machine, as the evaporating gas returns from the pipe system or tank coils direct to the body of the compressors, and then flows freely through the suction valves into the compressors, the suction valves being of a special balanced type and located in the compressor pistons.

This construction does away with the expense and annoyance consequent on the escape of refrigerant through pump rod glands, and it also secures the operation of the machine with the smallest possible expenditure of power, on account of the absence of that extensive friction upon pump rods, which is always present in any double-action machines which have hitherto been placed upon the market.

The lubrication of these enclosed compressors is automatic throughout, and the machines have been run for extended periods without any attention in this direction.

The crank-shaft runs in a bath of oil, which is contained in the lower part of the compressor body, and both bearings, connecting-rod, and piston are automatically lubricated from the crank-shaft.

The suction and discharge valves are so arranged that immediate access can be obtained to them by simply removing the top cover of the machine, which can be done without breaking pipe joints. The suction and discharge pipes are provided with the ordinary stop valves and hand wheels, and also with a set of bye-pass valves and pipes so arranged that the refrigerant can be drawn from one part of the system and stored in another.

A certain amount of oil will always find its way out of the discharge

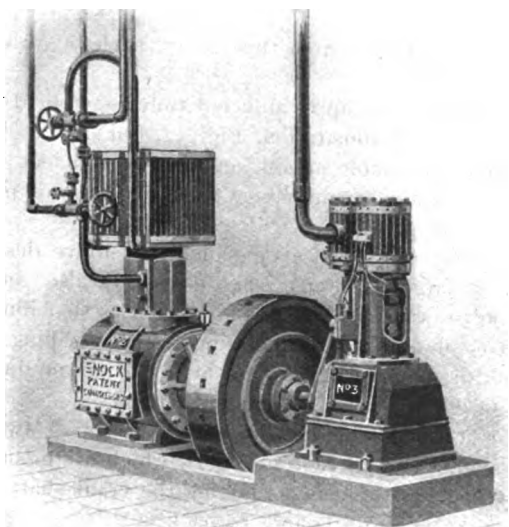


Fig. 32B.—5-ton “Enock” Patent Compressor, enclosed type, with Coupled Vertical Steam Engine.

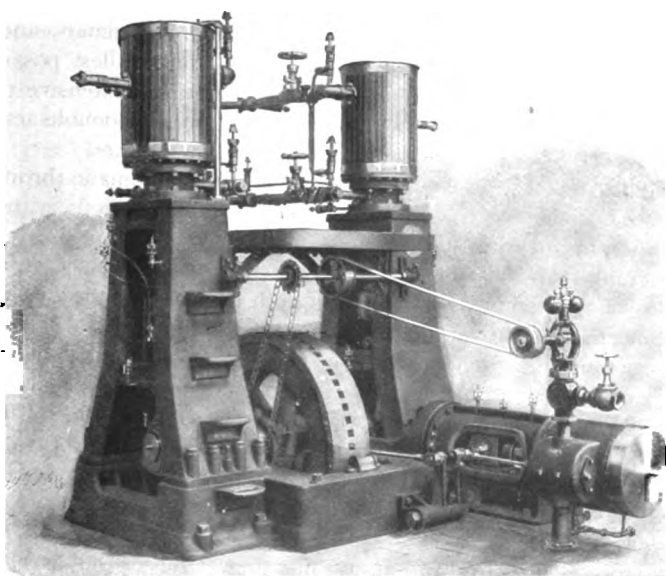


Fig. 32C.—20-ton open type Compressor, fitted with Enock's Patent Safety Crosshead.

[To face p. 70n.

valves in a properly lubricated compressor, but owing to the special arrangement of the crank-shaft and pistons very little oil gets through in this machine. An oil separator of a special type is, however, employed as a safeguard, the gas being discharged downwards through a series of perforated baffle plates, and then rising again through the slots in these baffle plates, which effectually separate and retain any oil which may have been discharged with the compressed ammonia. The gas itself passes out of the top of the separator, and thence into the condenser. Whatever oil is separated in this way is returned to the bottom of the compressor body by an arrangement of valves and pipe connections.

Fig. 32C illustrates a 20-ton open type of York pattern machine, fitted with the "Enock" patent safety crosshead.

As regards the position of the valves in the Enock Compressor, the suction valve is placed in the piston, and the discharge valve in the pump head. By placing the valves in these positions a very large valve area is obtained, and in order to get sufficient opening for the free passage of the gas, it is only necessary for the valve to lift a very short distance. The advantages of this are twofold, the first being that while the piston is performing the downward or suction stroke the gas can flow into the pump easily and without any back pressure being set up. Second, owing to the slight lift necessary with the large valve, but little beat upon the seat takes place. The same remarks apply to the discharge valve, and with a very free passage for the discharge of the compressed gas, the pump can be worked with the least possible necessary expenditure of power. Another point is that of the rarefaction, or otherwise, of the gas as it enters the pump during the suction stroke. In the Enock Compressor the suction valve being placed in the piston and the cold gas always coming into the pump at the bottom, the entrance of the gas into the pump at the lowest possible temperature is ensured. The gas increases in volume as it increases in temperature, and if the temperature is kept as low as possible the weight of gas pumped at each stroke is greater than it would be if the gas is rarefied on entering the compressor.

The ammonia compression machines designed by Carl Linde, and first patented in 1870, are extensively used, and this type of machine is said to give very good results.

In the Linde compound ammonia compressor the high and low pressure pistons are both coupled to the same piston-rod, and an intermediate chamber connected with the suction and back pressure side connects the cylinders. The pressure of the gas at its inter-

mediate stage is conducted by a suitable pipe from the front of the low pressure piston to the rear of the smaller cylinder, where it acts on the smaller piston in the reverse direction, and directly balances an equal area of the large piston.

Fig. 33 is a plan view showing a compound ammonia compressor, combined with a compound steam engine. In the drawing M is the high pressure cylinder, and N the low pressure cylinder of the compound steam engine, and O is the low pressure cylinder, and P the high pressure cylinder of the ammonia compressor.

In this machine it will be seen that the entire power of the engine is applied to one crank, and the compressor is driven off the other

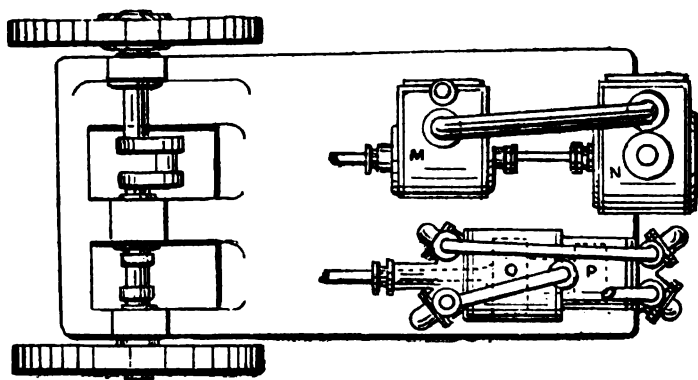


Fig. 33.—Linde Horizontal Type Compound Ammonia Compressor and Compound Steam Engine. Plan View.

crank. This arrangement entails the provision of a very powerful crank-shaft and bearings to admit of its safely withstanding the double strain to which it is thus subjected during work. An objection to the arrangement is the additional amount of friction to which it gives rise.

A type of Linde machine, intended especially for land installations, comprises compound ammonia compressors, arranged in line horizontally and driven from a crank upon a crank-shaft placed centrally between the two compressors, and at right angles thereto. The necessary motion is imparted to the crank-shaft by means of a tandem compound jet-condensing engine.

The method employed by Linde to prevent leakage of gas past the piston rod stuffing box and gland, is to provide a chamber or recess in the stuffing box, glycerine or some other suitable lubricant being constantly forced into this chamber or recess at a somewhat higher

pressure than that existing in the compressor cylinder, the result of which is that the tendency is rather for the lubricant to leak or escape inwardly, than for the ammonia to leak outwardly. A suitable separator is provided for the elimination of any lubricant that finds its way into the pump or compressor cylinder, and passes out with the ammonia.

Another important feature in the Linde machine is the method of cooling the vapour in the compression cylinder, by the introduction into the latter of a small portion of liquid ammonia with the gas or vapour, at the commencement of each stroke, whereby it is reduced to a refrigerating temperature.

According to Mr. Lightfoot, the following are the results that were obtained from tests made, in an exhaustive and impartial manner, by a committee of Bavarian engineers, with an ammonia compression machine constructed on the Linde system, and erected in a brewery in Germany :—*

Nominal capacity of machine, ice per 24 hours	24 tons
Actual production of ice, per 24 hours	39·2 tons
" " " per hour	3,659 lbs.
Heat abstracted in ice-making, per hour	731,800 units †
Indicated horse-power in steam cylinder, excluding that required for circulating the cooling water, and for working cranes, etc.	53 I.H.P.
Indicated horse-power in ammonia pump	38 I.H.P.
Thermal equivalent of work in ammonia pump, per hour	97,460 units †
Ratio of work in pump to work in ice-making	1 to 7·5
Total feed-water used in boiler, per 24 hours	26,754 lbs.
Ratio of coal consumed to ice made, taking an evaporation of 8 lbs. of water per lb. of coal	1 to 26·3

The pumps were driven by a Sulzer engine, developing one indicated horse-power with 21·8 lbs. of steam per hour, including the amount condensed in the steam pipes.

The Linde machine, as built in the United States, shows several constructional differences as compared with the first type of machine made in Germany. Fig. 34 is a sectional view illustrating the most recent design of Linde compressor cylinder, as made by the Fred. W. Wolf Co., of Chicago, U.S.

The pattern of machine made by the Vilter Manufacturing Co., of Milwaukee, U.S., consists of either one or two horizontal double-

* "Proceedings, Institution of Mechanical Engineers," 1886, p. 218.

† A thermal unit is the amount of heat necessary to raise the temperature of 1 lb. of water 1° by the Fahr. scale when at 39·4°. Mech. eq. 778 ft. pounds.

acting ammonia compressors driven by a horizontal Corless engine, the engine and compressor cranks being keyed on the extremities of the crank-shaft at angles to one another, so as to cause the highest gas pressure in the compressor to take place at the time when the highest steam pressure is acting on the engine. The ammonia compressor is cast with slides and pillow block all in one piece. The wearing surface of the compressor consists of a cylindrical bushing or lining which is forced into the water-jacket after the latter is bored. Four ammonia compressor valves are located in the two circular heads,

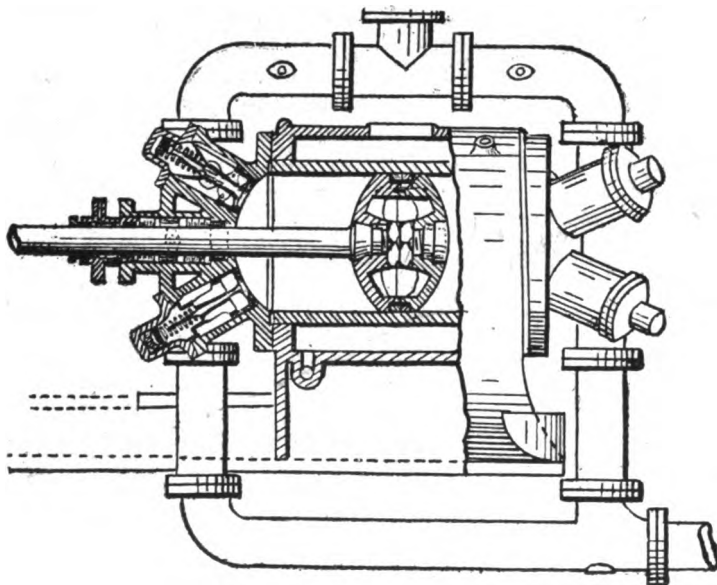


Fig. 34.—American Pattern, Linde Horizontal Type of Ammonia Compressor. Part Sectional View.

the latter fitting into recesses and being packed with metallic packing. The suction and discharge valves are rendered noiseless in action and their life considerably prolonged by the provision of gas cushions. The compressor plunger is fitted with self-adjusting packing rings and also bull rings, and the piston and follower are turned circular to exactly fit the front and rear heads of the compressor, and thus to reduce the amount of clearance as far as practicable, the plunger rod being, moreover, adjustable lengthways, thus admitting of an equal division of the clearance being made, and the wear of the crank and cross-head boxes being taken up when desired.

Leakage of gas past the piston or plunger-rod is prevented by a stuffing box and gland fitted with a metallic packing, held in position by a long sleeve, oil being circulated through the latter by means of an automatically operated oil pump, and the oil acting both to lubricate the piston or plunger-rod, and to form a seal to prevent the escape of ammonia. A separate support bolted to the frame of the compressor holds the outer extremity of this hollow sleeve in place, a

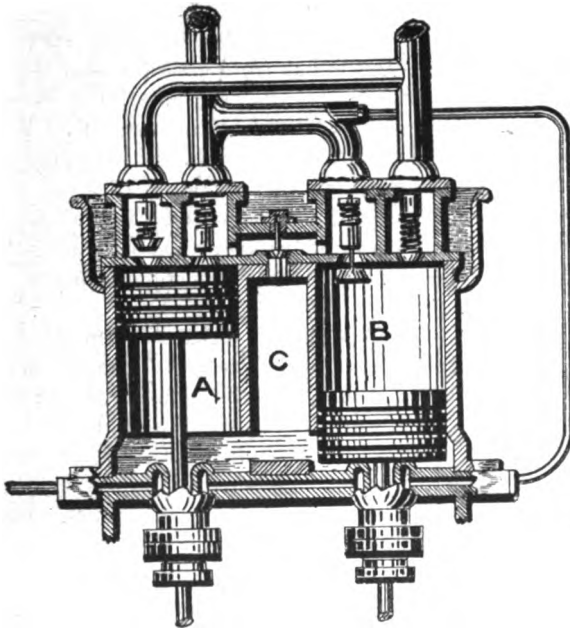


Fig. 35.—Two-Cylinder Single-Acting Fixary Compressor. Vertical Central Section.

packing being provided at the outer end of this support for retaining the oil.

By-passes are provided between the suction and discharge pipes in close proximity to the compressor, thereby admitting of the valves being operated for pumping out the condenser.

Wedge adjustable shoes are provided in the cross-heads, and the connecting rods are fitted with solid heads, the former having a solid brass box, and the crank pin a brass box lined with babbit metal, wedge adjustment being provided in both instances.

The Fixary compressor is shown in vertical central section, some of the parts being left in elevation in Fig. 35. It consists of two vertical, single-acting cylinders A, B, having an equalising chamber C, situated between them, at the upper extremity of which is provided a small valve governing an aperture leading to the suction side of the compressor. In the upper extremity of each of the cylinders A, B, are provided two valves, that on the right-hand side opening inwardly and being the suction or inlet valve, and that on the left-hand side opening outwardly and being the outlet or delivery valve. The space below the pistons is filled with oil which lubricates the pistons, whilst at the same time preventing the gas from escaping past them to any great extent. Any gas that does find its way beneath the pistons passes into the equalising chamber C, where any accumulation of it is drawn off by the compressor, through the small valve in the upper extremity thereof, and one or other of the suction or inlet valves, and again returns to the system through the outlet or delivery valves. The oil that may be carried through the valve in the equalising chamber, serves the purpose of sealing the valves and filling up the clearance spaces.

The characteristic feature of the Neubecker system is the special device for preventing leakage taking place round the piston-rod. To effect this, the stuffing or gland box, through which the piston-rod passes, is so enlarged as to form an annular recess or chamber surrounding the rod, which chamber is partly filled with oil, and maintained at a corresponding pressure to that prevailing in the surrounding atmosphere, by means of a compensating chamber, which latter is connected at its upper extremity to a small auxiliary pump through a pipe, the inlet to which is governed by a valve connected to, and controlled by, a metallic diaphragm, the upper side of which diaphragm is exposed to the pressure of the atmosphere.

The operation of this compensating chamber is as follows:—The gas which may escape into the stuffing box chamber, passes into the compensating chamber, and as soon as sufficient has thus accumulated to raise the pressure therein above that of the atmosphere, it acts upon the flexible diaphragm to expand it outwardly, and thereby open the valve communicating with the above-mentioned auxiliary pump, by which the gas is drawn off or removed and delivered into the refrigerator. The pressure in the separating chamber then again falls below that of the atmosphere, and the diaphragm being forced inwardly by the atmospheric pressure, the outlet valve closes. The lower portion of the compensating chamber forms a well, wherein any

oil that leaks past the piston-rod gland of the compressor, as also that coming from the separator, accumulates, and is heated by a steam coil or worm, so as to drive off any gas that has been absorbed by the oil, after which the latter is drawn off from the bottom of the compensating chamber to be cooled and filtered for further use.

Various patterns of ammonia compressors are constructed by the Pulsometer Engineering Company, Limited, on their improved system, ranging from one ton ice-making capacity per twenty-four hours, up to installations on the same principle, with a capacity for an output up to 25 tons of ice or more per day of twenty-four hours.

In a type of apparatus particularly suited for export, everything, including the steam-engine, compressor, gas condenser, refrigerator, and ice tank, is mounted on one continuous bed, all the ammonia connections are ready made, and the whole can be readily put in one case and sent abroad, all that is necessary on its arrival being to charge the machine with gas and the ice tank with brine.

In the case of a small machine of one ton ice-making capacity, such as that first mentioned, either a vertical high-pressure engine, or an horizontal one, or any other suitable motor, is employed; for larger sizes, however, these makers prefer to use cross compound condensing engines of the horizontal type, and of extra size to provide an ample margin of power in hot weather, and to give the best results as to saving in steam consumption from an early cut-off, and each engine driving a compressor tandem. The engine condenser is generally made of the surface condensing type, and, together with the water circulating pump, placed between the engines and driven from the low pressure cross-head. This arrangement has been found in practice to be, with long strokes of, say, at least 30 inches, most reliable, and it admits, moreover, in the event of an emergency, of running at a high speed. In cases where the very highest economy is desirable, triple or quadruple expansion engines are desirable.

Fig. 36 illustrates one of a pair of pumps employed in a brewery and having a cooling capacity of one hundred barrels per hour. As will be seen from the drawing the ammonia pump is of the double-acting type, and is arranged horizontally. It is intended to be driven from any convenient source of power already extant in the brewery. To obviate leakage and loss of ammonia gas, the stuffing box is fitted with a special oil-lubricating arrangement, by means of which a gas-tight joint is secured without any necessity for screwing up the gland so as to grip too tightly. The valves work without any springs or buffers, and in the larger sizes are so arranged that they can be ad-

justed from the exterior; they are also of ample area, thereby reducing the pressure on the pump, and preventing the latter and the engine from being overworked.

The condenser is fitted with sets or series of lap-welded tubes, which are subjected to high tests both by hydraulic and air pressure, and are secured in a patented arrangement of return heads or ends of forged steel. The inlet and outlet valves are also of forged steel.

The evaporator or refrigerator consists of a welded steel shell,

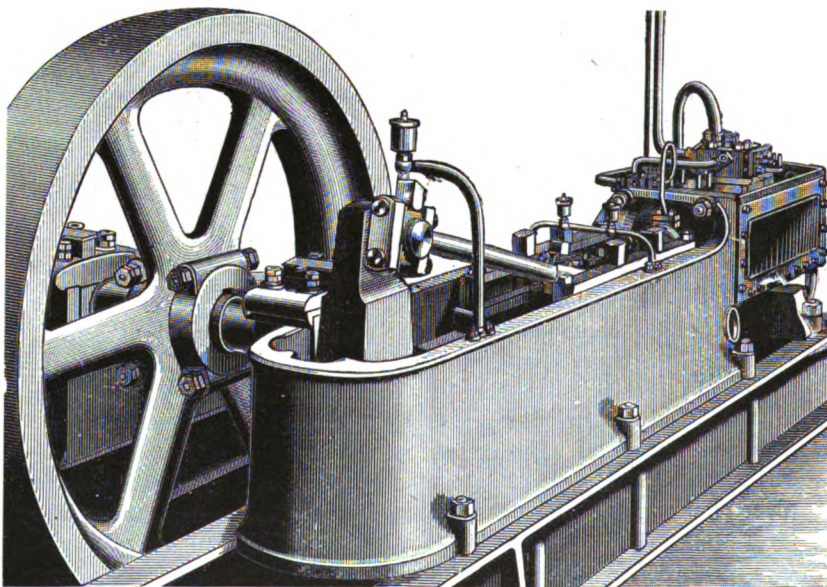


Fig. 36.—Horizontal Double-Acting Ammonia Compressor, Pulsometer Engineering Company, Limited.

having hammered steel tube plates into which are fitted lap-welded tubes (subjected to a similar test to those of the condenser) in such a manner that they can be readily withdrawn from the shell for inspection or renewal, and the whole is fitted in a tank with suitable brine-pump connections. The inlet and outlet tubes are likewise of forged steel. This arrangement is also patented.

The makers prefer the use of sets or series of tubes in their condensers, and refrigerators, to that of coils or worms, for the following reasons. That coils or worms are usually made in long lengths with a number of welds, consequently should such a tube at any time ex-

hibit signs of weakness it would entail a heavy expense to renew it, both on account of the weight of metal and the difficulty of replacement. In a refrigerator, in addition to the above, the use of a coil gives rise, according to them, to a tendency to prime, and thus cause damage to the pump, and there is, moreover, they say, considerable trouble in bringing the brine into such intimate contact with the outer surfaces of the tubes as is advisable.

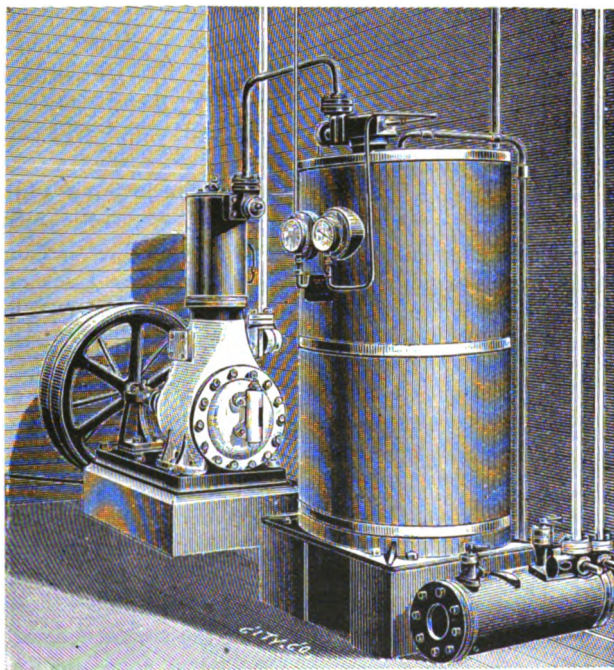


Fig. 37.—Small Vertical Single-acting Kilbourn Inclosed Type Ammonia Compressor and Condenser.

When desired, an arrangement can be fitted to this ammonia compression machine, by means of which the ammonia can be pumped from the refrigerator into the condenser or *vice versa*, or, if desired, out of the machine altogether.

An advantage of no small importance possessed by this apparatus is that of the utmost simplicity of construction, thus considerably facilitating the management. The workmanship and design, more-

over, are calculated to ensure the attainment of the greatest strength and of the maximum durability possible.

Fig. 37 is a perspective view illustrating a small single-acting vertical ammonia compressor and condenser, constructed on the Kilbourn inclosed type system. In this installation the machine is intended to be driven by a gas-engine, or other suitable source of power, and it is designed for cold storage on the direct expansion system. The floor space occupied is small, being only for the entire plant, including a gas-engine of 4 N.H.P., 12 ft. by 4 ft. 6 in., and the machine is capable of maintaining a storage capacity of from 8,000 to 10,000 cubic ft. at a suitable temperature for frozen mutton, or, with the necessary appliances, of making $2\frac{1}{2}$ tons to 2 tons of ice per twenty-four hours. The condenser and refrigerator are composed of lap-welded iron coils fitted in steel or wrought-iron shells.

The late Mr. J. K. Kilbourn, C.E., was the inventor and patentee of a number of improvements in, and connected with, refrigerating machinery, his chief speciality being, however, marine refrigeration, he having had a wide experience in this direction, and several marine types of ammonia compression machines, constructed on his system, will be found described and illustrated in the chapter on Marine Installations.

Fig. 38 is a sectional view of the Triumph Ice Machine Company, Cincinnati, O., U.S., horizontal pattern double-acting ammonia compressor. It will be seen from the illustration that the compressor is provided with five valves, viz., three suction valves and two discharge valves, the third, or auxiliary suction valve, being much lighter than the main valves, and perfectly balanced, and it being claimed by the makers tending greatly to increase the economy of the machine.

Obviously the main suction valves must necessarily be of sufficient dimensions to admit the charge quickly at the commencement of each stroke, and the springs controlling them must consequently have an appreciable tension. It will be readily seen that owing to this fact the pressure of the gas in the cylinder, during admission, must be less than it is in the suction pipe by an amount equal to the tension of these springs. By the use of the above mentioned third, or auxiliary suction valve, which is comparatively light, and is consequently operated with a very light spring, the pressures in the compressor pump are equalised, and a fuller charge is obtained at each stroke, thereby increasing the efficiency of the machine.

The valves comprise each a guard screwed on to the stem, fitted inside a cage, and so ribbed as to reduce the port area, the bottom of

the stem being enlarged for that reason. Stems extending from both the suction and discharge valves to the exterior, and passing through stuffing boxes, admit of their being adjusted from the outside, and any desired degree of tension being put upon the springs. The object of this arrangement is to adjust the machine for working at different pressures, and the relative temperatures thereof.

There are three packing compartments in the piston-rod stuffing box, and it is fitted with a suitable relief valve communicating with the suction. The heads are formed concave, and of a radius which enables a larger valve area to be secured. The principal shut-off valves are of such a form of construction as to admit of their being

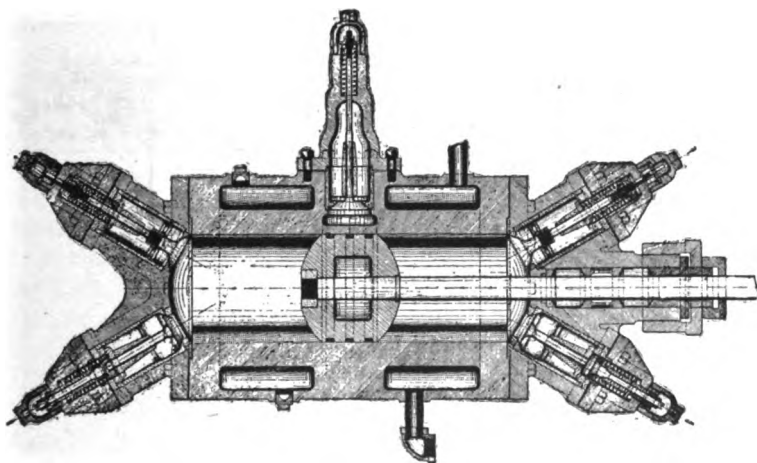


Fig. 38.—Double-acting Horizontal Type Triumph Ammonia Compressor.
Sectional View.

packed whilst the machine is working, and a feature in the design of this machine which is of by no means inconsiderable advantage, is that every portion of the compressor is easily accessible.

Fig. 39 is a plan view showing a double-acting compressor, coupled direct to a tandem compound condensing steam engine. This machine is of 400-ton capacity, and comprises the features already described with reference to Fig. 38. It is so arranged that each cylinder can be operated, single or double-acting, on either end. A separate crank and outer bearing are provided, thereby adding considerably to the strength of the shaft. Another point of construction which is of considerable advantage is that the whole machine is arranged on a straight

line, thereby giving great strength and rigidity. It is also claimed by the makers that there is no breathing of the cylinder in this construction, and that a great deal of unnecessary clearance is not allowed to take place at each compression stroke of the machine.

The main feature of novelty claimed in the ammonia compressor invented by Thomas Bell Lightfoot, and for which he obtained a patent in 1885, is that compression is effected at one side only of the piston, the other side being exposed merely to the pressure of the vapour as drawn in from the refrigerator. The suction valve is placed concentrically within the piston, and the delivery valve within the cylinder cover.

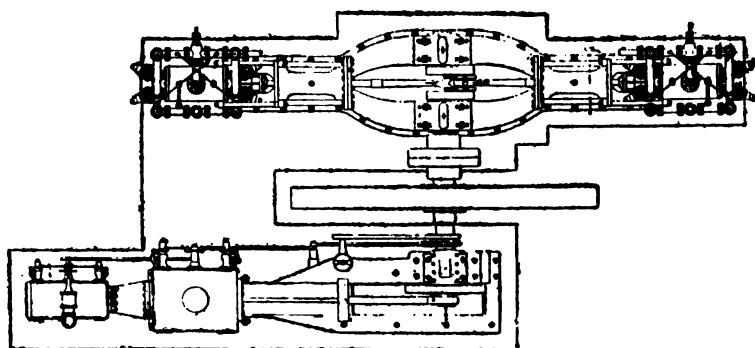


Fig. 39.—Double-acting Horizontal Type Triumph Ammonia Compressor and Tandem Compound Condensing Engine. Plan View.

The main distinctive feature of the Pictet machine is the means adopted for preventing superheating of the ammonia gas during compression in the cylinder of the pump, and the loss that would ensue therefrom, which, were there no means employed for its reduction, might amount to as much as 30 per cent. in a double-action compressor. In some arrangements, as has been already mentioned, provision is made for effecting this by injecting a small quantity of liquid into the compressor, which liquid in evaporating maintains the gas or vapour in a condition of saturation, thereby admitting of the compression being effected under such conditions as to approximate more closely to the isothermal function; in others, again, the compressor cylinder is water-jacketed for a like purpose. In the Pictet machine, however, in addition to a water-jacket round the compressor cylinder or barrel, the

piston and piston-rod of the compressor are likewise formed hollow, and through this space a constant stream of water is kept circulating for cooling purposes.

The results obtained by this arrangement are much lessened by the great thickness of metal that is required in the parts. The loss in a well-jacketed and water-cooled compressor, according to the experiments* of Professor Denton, amounting to 21·4 per cent., and where less efficiently jacketed the loss will be from 21·3 to about 25 per cent.

In the specification of a patent granted to Raoul Pictet in 1887 he describes an improved vessel or compartment for use in a refrigerating apparatus, wherein the volatile liquid employed is subjected to evaporation so as to produce cold, which refrigerates brine or other non-congealable liquid surrounding the evaporating compartment. The said improved cooler or refrigerator is claimed to be suitable for use with either a compression or an absorption machine, and consists of two tubes arranged horizontally, and connected at their extremities by bent tubes, and at their lower sides by pendant U-shaped tubes, which latter are preferably secured by means of solder joints to sockets brazed on the tubes, and are further connected with each other by conducting bands.

In the latter part of 1887 a patent was obtained by Samuel Puplett and Jonathan Lucas Rigg for improvements in refrigerating machines, and several further improvements have since been added by Puplett.

The main features of the 1887 patent, which are equally applicable to any ice-making and cooling apparatus wherein any one of the condensable gases is used as a frigorific agent, are as follows:—

The provision of chambers or reservoirs either situated directly at the bottom of, and communicating with the inlet valve chests, or in any other suitable position, and connected thereto by means of pipes. These chambers or reservoirs serve to receive the oil which finds its way into the cylinder of the compressor pump, principally round the piston-rod, and which would otherwise accumulate beneath the valves. To the undersides of the said chambers or reservoirs are fitted draw-off cocks, by means of which the oil may from time to time be withdrawn whilst the machine is in motion, and without any appreciable loss of gas or admission of air taking place.

Complete liquefaction of the gas is ensured by carrying the return-liquid pipe between the condenser and refrigerator through the refrigerating or ice-making tank or box, instead of outside the latter, as is

* "Transactions, American Society of Mechanical Engineers," vol. xii.

usually done, thus utilising the low temperature of the brine to complete the condensation of the gas.

In Fig. 40 is illustrated a modern type of Puplett ammonia compression machine especially designed for use in breweries for cooling worts and yeast rooms.

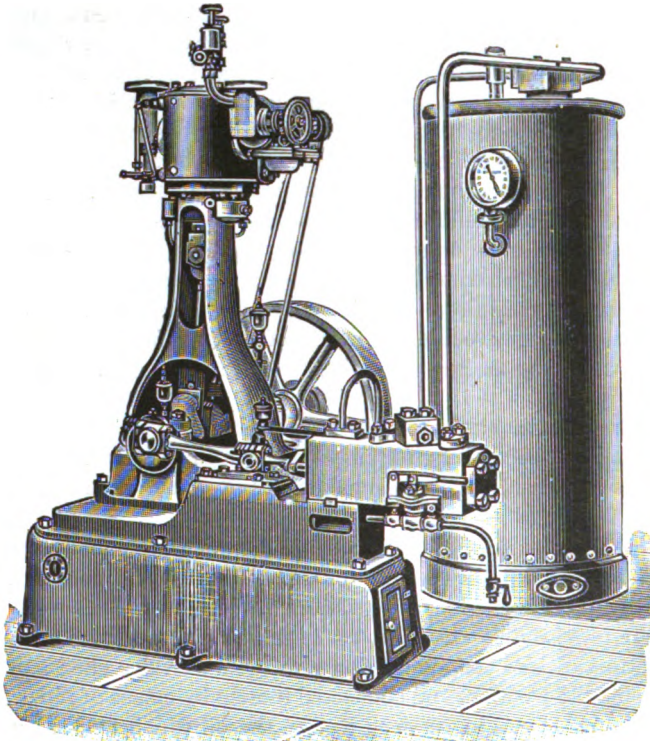


Fig. 40.—Double-acting Puplett Ammonia Compression Machine.

The cooling capacity of this machine varies from 20 barrels of worts per day to 200 barrels per day, and the horse-power required from 3 up to 12, in accordance with the size of the machine. The apparatus can be connected to existing hot and cold liquor backs and collecting tanks.

Sir Alfred Seale Haslam took out a patent in 1894 for an improved compressor especially intended for use with refrigerating machines, and particularly applicable to compound compressors wherein the gas is

compressed in stages. The objects of the invention are to prevent the gas from escaping or coming in contact with the air, and to avoid dead spaces in the apparatus. The chief novel features are claimed to be

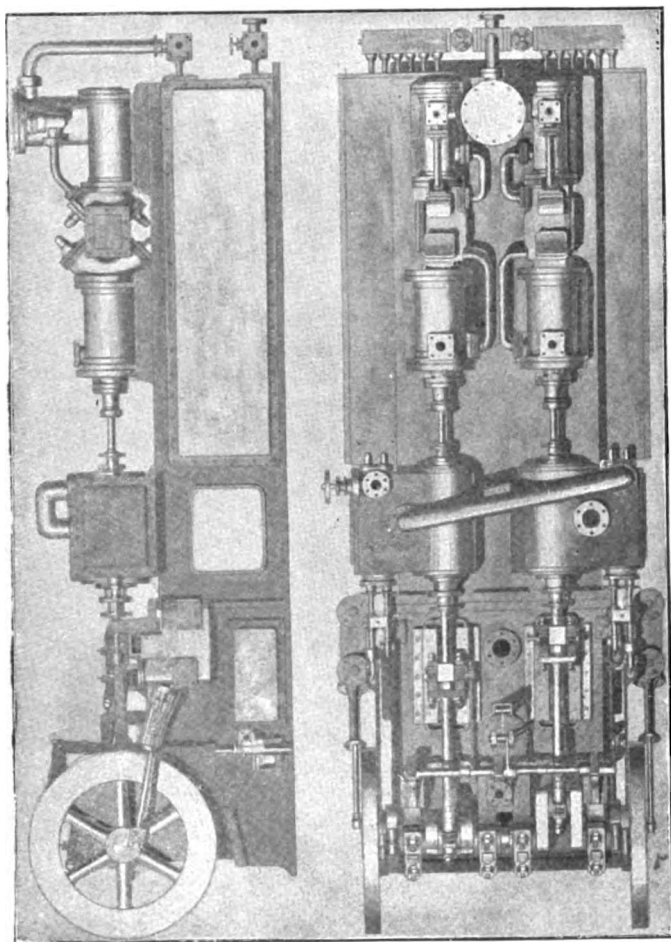


Fig. 41.—Horizontal Type Compound Haslam Ammonia Compression Machine.
Plan and side elevation.

as follows :—First, a pump cylinder having a chamber at one or both ends through which the piston-rod passes, and which is kept supplied with lubricating and sealing liquid from a reservoir through which the gas to be compressed also passes. Second, two single and double-act-

ing pumps arranged tandem to each other, and with the compression

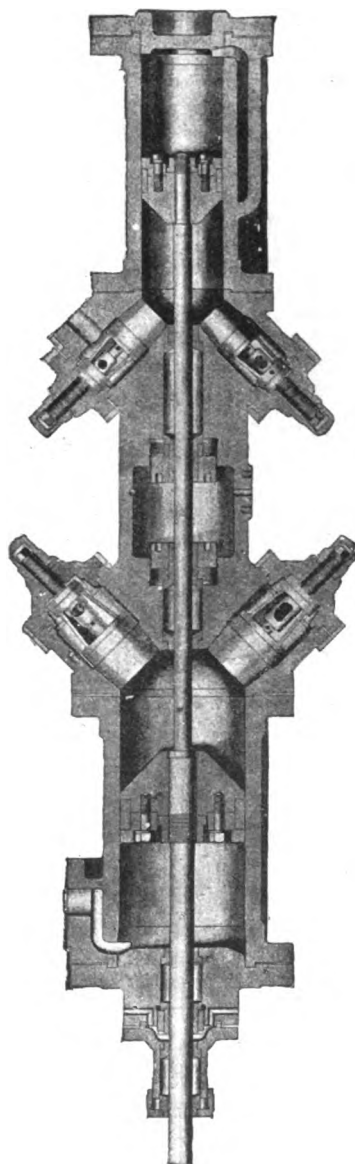


Fig. 42.—Horizontal Type Compound Haslam Ammonia Compressor. Vertical central section.

ends of their cylinders next each other, and having between them a chamber supplied with lubricating and sealing liquid, through which their common piston-rod passes. Fig. 41 shows this machine in plan and side elevation, and Fig. 42 is a vertical central section through one of the ammonia compressor cylinders, drawn to an enlarged scale, illustrating the self-sealing oil-chamber.

The operation of the Haslam compressor is as follows:—After adjusting the glands of the receiving and separating vessel, the latter, and the central chamber, is charged with lubricating and sealing fluid to a suitable height. The gas is then drawn through the supply pipe, accompanied by the requisite amount of the lubricating and sealing fluid, which latter is admitted to the low-pressure cylinder by a cock or valve, through the suction valve, and compression to the desired extent is then carried out.

Fig. 43 shows a Haslam belt-driven horizontal double-acting ammonia compressor of the latest design, which is made in standard sizes from 4 tons ice-making capacity up to 12 tons ice-making capacity, and requiring from 12 to 50 I.H.P.

Fig. 44 illustrates a large Haslam type of machine consisting of two double-acting horizontal ammonia compressors coupled direct

to a powerful triple expansion vertical steam engine, shown in the foreground, of the latest and most improved marine type, the cylinders of which are mounted upon massive supports, and the whole bolted securely to a box bed-plate. The compressors are fitted with Haslam and Co.'s special oil sealing gland.

This machine, which has a refrigerating capacity of 200 tons, was recently built by Messrs. Haslam for the River Plate Fresh Meat Company.

The pioneer of refrigerating machinery in the United States was Mr. David Boyle. The modern type of Boyle ammonia compressor consists of two vertical single-acting pumps arranged in combination

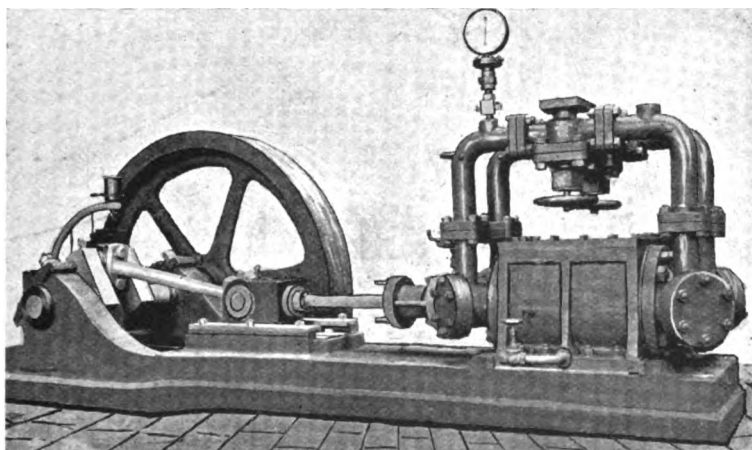


Fig. 43.—Belt-driven Horizontal Type Haslam Double-acting Ammonia Compressor. Latest Pattern.

with a vertical or an horizontal engine. The compressor valves are mounted in removable valve boxes, and both the suction and discharge valves are situated in the upper head, where they are held in place by cross-bars and a set screw to each of them. There is a division in the centre of the head. The gas being delivered through its pipe, which is secured in an extension on the cylinder communicating with the inlet chamber, enters the cylinder through its valve on the downward stroke of the piston. The gas is compressed upon the upward or return stroke of the piston until such time as it becomes equal to the pressure in the condenser, when the discharge valve in the opposite side of the head rises and permits the discharge of the

gas through the valve and communicating chamber to the compressor discharge pipe, to take place.

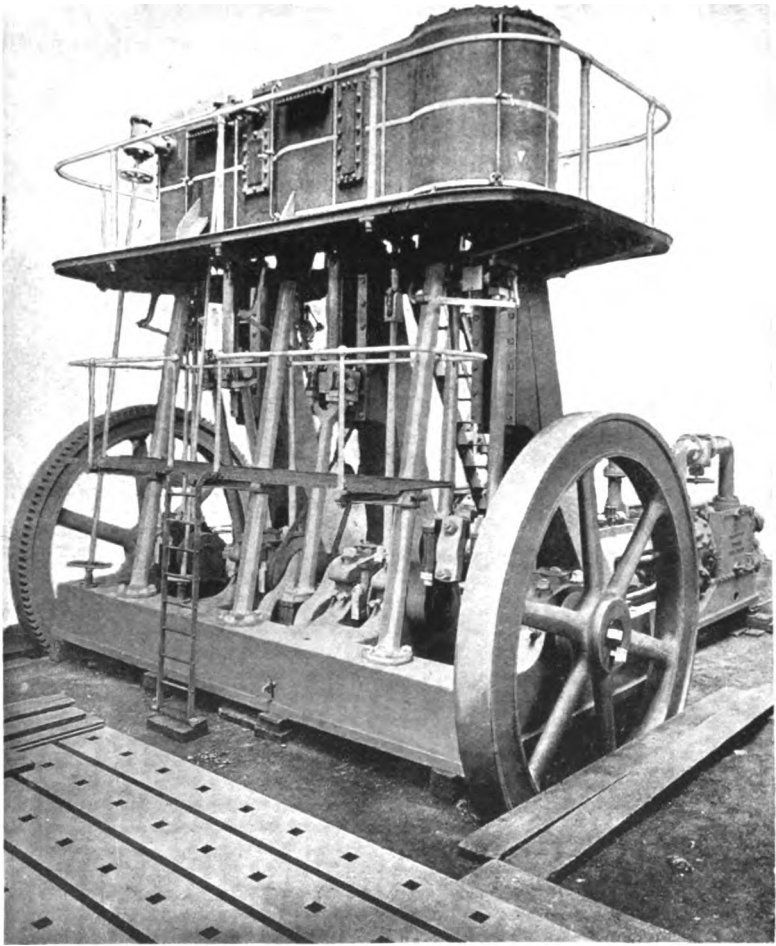


Fig. 44.—Pair of Large Horizontal Type Haslam Double-acting Ammonia Compressors and Triple Expansion Vertical Steam Engine.

The suction chamber likewise communicates with the lower end of the cylinder of the compressor so as to allow the latter to be filled with gas during the upward stroke of the piston, and to permit its escape

therefrom during the downward stroke of the piston. A solid pattern of piston fitted with a number of snap-rings having sufficient tension to prevent any leakage of gas, is employed, and the piston-rod stuffing-box gland is adjustable through a worm and worm wheel arrangement by means of a hand wheel from the exterior.

A water-jacket surrounds the upper part of the compressor cylinder and an inlet and outlet admit of a constant flow of water being maintained through the same.

The York Manufacturing Company, of York, Pa., U.S., are makers of compound ammonia compressors in which all the gas has to be drawn through the suction valves, and these latter have to divide the space on the heads of their cylinders together with the delivery valves, being consequently limited in dimensions. When the compressors are of large size the gas is passed through a condenser between the two stages of compression for the purpose of abstracting a portion of the heat, reducing the volume and saving power. The connecting pipes are located on the top, and in some instances a tubular condenser is provided, which arrangement is said to give good results. The valve in the low pressure cylinder is formed annular, and, therefore, requires only about half the lift of a mitre valve in order to give the same discharge opening.

These makers arrange their compressor cylinders vertically, but they employ in combination therewith both vertical and horizontal steam engines.

The medium-sized machines are made with two low pressure cylinders placed on the outside, and one high pressure cylinder placed between them. The crank pins of the low pressure pistons are all in line, and the high pressure crank pin on which the horizontal engine works is placed at 180 degrees.

In the case of the very large-sized machines four compressor cylinders are arranged in a row, and are worked by four cranks, the two outside ones of which are high pressure, and the two intermediate ones between these being low pressure. The two connecting rods from a cross-over compound engine each operate respectively one of the outer cranks. The fly-wheels are overhung, and the pipes from the cylinder heads connect the high and low pressure cylinders through a condenser or cooler.

This company also build single-acting compressors, and in Fig. 45 is shown one of their latest designs of a vertical type of single-acting machine. A large type of compressor constructed by them, and having a capacity of 400 tons refrigeration, has two single-acting ammonia

pumps 30 inches in diameter by 48 inches stroke, and driven by a horizontal cross compound condensing engine, having a high pressure cylinder of 30 inches in diameter, and a low pressure cylinder of 58 inches in diameter, by 48 inches stroke, the crank-shaft being provided with two throws and four bearings, and the fly-wheel

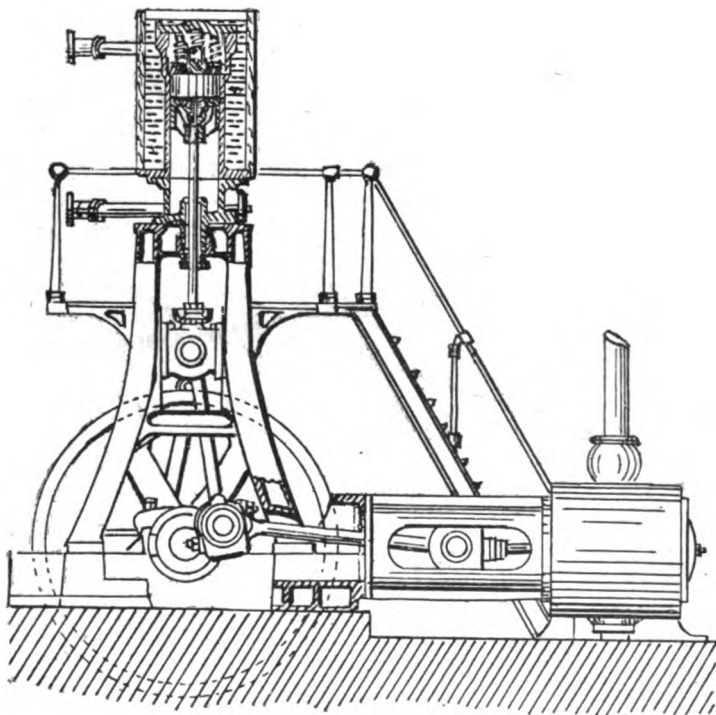


Fig. 45.—Single-acting Vertical Type Ammonia Compressor (York Manufacturing Company). Sectional elevation of complete Machine.

being in the centre of the bed-plate between the two cranks. The weight of this machine is over 178½ tons.

The vertical type of ammonia compressor made by the Remington Machine Company, Wilmington, Del., U.S., is of the single-acting inclosed crank pattern, the crank-shaft extending through one side of the casing only, and being fitted with a single stuffing box on that side, and a central bearing, so as to render the construction more rigid. In the bottom of the casing is an oil bath into which the cranks dip, and

the central bearing is at all times flooded with oil. There are two cylinders, cast in one, and fitted with heads carrying the suction and discharge valves mounted in cages. The heads of the two cylinders are connected on the suction side to a strainer-box for intercepting any dirt or foreign matter, and the discharge side is connected with a throttle valve which is common to both the cylinders. The pistons are of the common trunk pattern. This machine is typical of the

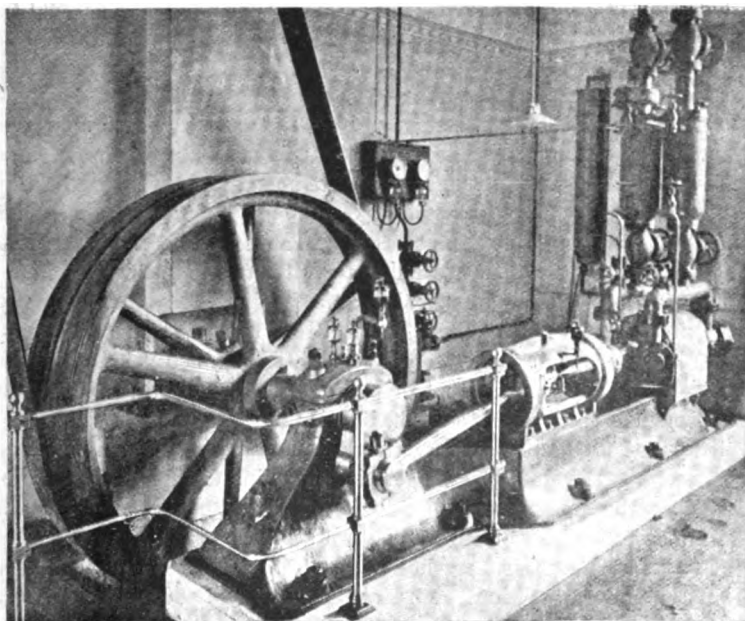


Fig. 46.—Horizontal Type of Belt-driven Tuxen and Hammerich Ammonia Compressor.

inclosed compressor made by the Automatic Refrigerating Machine Co., Sydney, N.S.W. and San Francisco, and of a number of machines of this class made by various other makers.

The ammonia compressors constructed by the Tuxen and Hammerich's Engineering Works, Limited, of Nakskov, Denmark, are mostly of the horizontal double-acting type. Fig. 46 shows a belt-driven machine. The pump cylinder is fitted with a lining made from a special hard mixture of cast iron, so as to obviate the porosity which is inevitable when they are cast in one piece, and thus to prevent the

absorption of ammonia by the metal. When worn, moreover, a liner, or bush, of this description, can be removed, and replaced by a new one, the cylinder being thus renewed at much less cost in time and money than is the case when the cylinder is made of a single casting. The valves are made of steel, and the valve boxes are arranged in such a manner that the valves can be withdrawn without necessitating the disconnection of any other portion of the machine or connections.

A gas-tight joint is formed at the piston or plunger-rod stuffing box by means of an oil chamber formed between the packing rings, and by a patented arrangement the pressure of the gas in the compressor is employed to maintain a constant pressure of oil in this sealing chamber; in this manner, it will be seen, the tendency of the ammonia itself to escape is utilised to prevent its escape. Another feature in this compressor is that the oil chamber is connected to the suction side of the compressor, so that in the event of the machine running hot it may be cooled by the simple expedient of running a current of cold air through the oil chamber. This arrangement is free from valves, and other working parts which are liable to fall into disrepair, and, moreover, requires practically no attention, and is claimed by the makers to admit of a pressure being kept up equal to the pressure of the ammonia, however much the latter may vary, a duty which it is impossible to perform by any arrangement of pump, and besides which the latter arrangement is, according to them, inferior in many other respects.

In a type of double-acting vertical ammonia compression machine constructed by the Buffalo Refrigerating Machine Company, of Buffalo, N.Y., U.S., the ammonia pump cylinder and the steam engine cylinder are in line vertically, and are bolted to a cast-iron framing mounted on a heavy bed-plate. Fig. 47 shows the ammonia compressor cylinder in vertical central section. The piston is fitted with self-adjusting packing rings, one at each end, and the pressure of the gas acts upon the conical surfaces of these rings so as to expand them outwardly equally in all directions, and so form a gas-tight joint. The pressure and suction valves are of large area, so that all wire-drawing of the gas is avoided; moreover, they are so arranged as to leave a minimum of spaces to retain gas, and they are formed with lengthy guide surfaces, and supplied with cushioning chambers, to prevent improper strains, and admit of their closing upon their seatings without noise and hammering. On the bottom of the suction valve stem a collar is provided, which has the advantage of preventing it from falling into the compressor cylinder should the nut on the upper end of the valve stem accidentally work off.

The valves are mounted in cages, which, it will be seen from the drawing, are so constructed that they can be readily removed from, or replaced in position, without necessitating the dismounting of any other

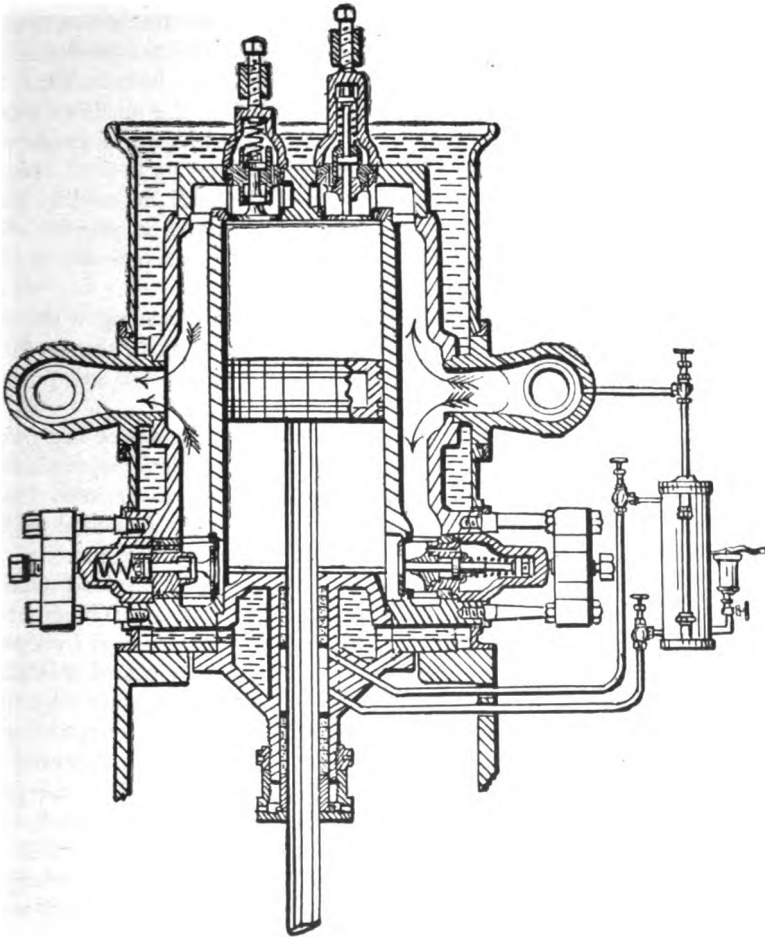


Fig. 47.—Vertical Type of Steam-driven Buffalo Ammonia Compressor. Vertical Central Section through Cylinder.

part. A lengthy stuffing box is provided to prevent leakage of gas round the piston-rod, and an oil chamber therein, between the upper and lower packings, is automatically supplied with oil from an oil tank.

This oil tank is charged with oil, as necessary, by means of a hand pump connected to the tank. The lower part of the stuffing box oil chamber is connected with the lower part of the oil tank, and the upper part of the latter is connected with the suction valve of the compressor, as shown in the illustration (Fig. 47). The result of this arrangement is that the oil in the oil tank is constantly under the suction pressure of the machine on both top and bottom ends of the cylinder. The oil tank being higher than the stuffing box oil chamber, the oil flows from the former to the latter by gravity, and should any leakage of ammonia occur through the first layers of packing into the stuffing box oil chamber, it will be drawn into the suction pipe of the machine, and in this manner, according to the makers, provision is made to prevent the stuffing box pressure ever exceeding the working suction pressure of the condenser.

Suitable valves, on the connecting pipes communicating with the oil tank, admit of regulating the amount of oil passing to the stuffing box oil chamber, and enough oil adheres to the piston-rod, and passes into the cylinder to lubricate the latter.

The clearance spaces between the piston and the heads of the compressor cylinder are reduced to the lowest possible point, the thickness of a sheet of packing being all that is provided. As will be seen from the drawing the compressor cylinder is completely surrounded by a water-jacket to carry off the heat generated during compression.

The Arctic Machine Manufacturing Company, of Cleveland, Ohio, U.S., have been successfully manufacturing refrigerating machinery for the past twenty-two years or more, and machines constructed by them as far back as 1879 are still running. The modern types of machine built by the Company comprise a double-acting vertical ammonia compressor, combined with a vertical steam engine, and two vertical compressors combined with a horizontal steam engine. The fly-wheel is now generally located between the upright columns, but in some patterns of machine it is still placed on the exterior, and is provided with an outside bearing. The valves of the compressor are mounted in cages, and are so arranged as to be readily get-at-able. The stuffing box of the compression piston-rod is formed deep, and provided with oil sleeves.

The ammonia compression machine made by Geo. Challoner, Sons, and Co., of Oshkosh, Wis., U.S., belongs to the inclosed class. A pattern made by this company is a triple cylinder single-acting machine, the entire box frame of which is cast in one piece, and is secured to an arched bed-plate. Circular removable flanges at each extremity carry

extra long babbitted crank-shaft bearings, and are provided with stuffing boxes and glands, made of considerable length to prevent leakage of oil or gas round the crank-shaft. The interior crank-shaft bearings are so mounted within the box frame as to be easily dismounted when desired. The working parts of the machine run in an oil bath in the hollow box frame, and lubrication is thus ensured without exterior aid. The upper part of the frame is faced and bored to receive the pump cylinders, which latter can be removed and replaced, if required, without disturbing the box frame.

In the larger patterns of machines the pump-cylinders are provided with safety heads. The suction valves are located in the pistons, and the discharge valves are either in the safety heads or in the false heads, and both suction and discharge valves are so arranged that they can be removed without necessitating the disconnection of the pipe connections. The connection to the suction is in the box frame beneath the cylinders, so that the frame is maintained cool by the low temperature gas returning to the pump cylinders. The discharge connections are formed to the pump cylinders above the safety heads, and both connections are fitted with stop valves, and a bye-pass is also provided, so as to admit of the pumps being reversed to pump the gas from the high to the low pressure side. A suitable purge valve on the discharge connection admits of the box-frame being pumped out, and likewise the discharge of any air gaining admission to the interior on the opening of the frame.

A machine made by the Ideal Refrigerating and Manufacturing Company, of Chicago, is fitted with an arrangement for the more even distribution of the work of the compressor piston. To effect this the diameter of the crank pin circle is formed much larger than the piston stroke, and connection is made through a toggle lever arrangement. It is claimed that as the connecting-rod to the crank-shaft brings the two toggle levers connected to the piston-rod into line, the force that is available for moving the piston will increase independently of the action of the toggle levers.

According to the makers the effect of the intermittent motion which the cam head on the piston imparts to the valve is to somewhat more than double the life of the latter, owing to the length of time during which motion is arrested whilst the crank is passing the dead centre, the toggle being then in a straight line with the piston-rod. They, moreover, aver that it affords a considerable advantage, inasmuch as it gives the valve ample time to get properly seated, and for all the gas to be expelled from the cylinder, and not be sucked in

again on the return stroke, thus greatly increasing the efficiency of the machine.

A vertical single-acting ammonia compressor (Stallman's) manufactured by the Creamery Package Manufacturing Company, of Chicago, Ill., U.S., consists of a pair of pumps, the lower portion of the cylinders being cored out so as to form a series of ports, which lead from the suction inlet round the piston and communicate with the cylinders at such times as the pistons are at the bottom or limit of their downward stroke. In this manner, the cylinders having been partly filled by the gas delivered through the suction valves in the pistons during their downward stroke, the charge will be fully completed at the termination of the stroke, and the utmost pressure of evaporation be obtained in the cylinders owing to the passage of gas through the above mentioned ports.

The discharge valve seat rests upon a shoulder formed by the enlargement of the upper part of the cylinder. This seat is made of tool steel, and is forced into position before the last, or finishing cut is made, and is bored out with the cylinder, forming practically a portion of the walls of the latter. The outlet port, to which is connected the discharge pipe, is situated immediately above the valve seat, connected with the enlarged portion of the cylinder, and branching off from same at right angles. The discharge valve is of steel, and turned up from the solid. It has a disc-shaped bottom of larger diameter than the cylinder, and rests upon the above mentioned seat in the annular enlargement in the cylinder, the upper part of the valve is cylindrical, and this trunk-shaped portion slides in the enlarged bore of the cylinder to form a guide.

When making its upward stroke the piston passes through the discharge valve seat, and comes into contact with the valve itself. The pressure on this valve is regulated by a spring having a screw adjustment through the cylinder head. This arrangement admits of the complete discharge of the gas from the cylinder, and at the same time forms a safety-head, there being no clearance at all, and no loss of efficiency from the re-expansion of gas from such clearance. Another advantage claimed for this arrangement is that owing to the size of the valves, a very slight movement only is required, whilst they give very large areas of openings, and allow of large volumes of gas passing rapidly.

The cylinders are so mounted upon the frames containing the crank-shaft bearings, and cross-head guides, as to cause all the strains to fall upon the frames direct, instead of upon bearings in a separate

bed-plate. The result of this form of construction is an absolute rigidity of alignment, and the frames are firmly secured in position by a massive bed-plate of box pattern. The two compressors can be provided with independent suction connections, and can then be worked independently in installations so operated that different conditions of temperature, and varying back pressures exist, as, for instance, in cases where both ice-making and refrigerating are carried out together, or where freezing chambers are run along with ordinary cold stores.

Fig. 48 is a vertical section through the pump cylinder of a single-acting vertical ammonia compressor, designed by Mr. C. A. Mac Donald, and made by the Hercules Ice-Making and Refrigerating Machinery Co. of Chicago, Ill., U.S.

A special feature in this pump is that an arrangement is provided for allowing free communication between the inlet branch and the interior of the cylinder when the piston is right down, or at the end of its travel in a downward direction. This consists of a belt or passage cast around the lower part of the cylinder which is in connection with the inlet branch, holes being formed into this belt or passage through the walls of the barrel. The positions of these holes are such that some will be lower than the piston when it is at the extremity of its downward stroke, thus affording free access for the gas, entirely independently of the valves, before the return stroke. These holes have to be formed by cores when casting the pump cylinder, and the arrangement causes the casting to be rather a difficult one to make. The holes, however, serve to compensate for the reduction in the size of the inlet valve, and allow of a full back pressure of gas being obtained above the piston before compression is commenced.

Somewhat similar arrangements to the above are provided in the Antarctic single-acting compressor (designed by Mr. Norman Selfe, C.E.) made by the Antarctic Refrigerating Machine Co., of Sydney, N.S.W. and San Francisco, and in that of the Auldjo Machine Co., Australia.

The ammonia compression machines constructed by the Case Refrigerating Machine Company, of Buffalo, N.Y., U.S., are of massive build, and at the same time are so designed as to take up a comparatively small amount of floor space.

A special feature in their construction is that the piston-rods of both the compressor cylinder and the steam engine cylinder are connected to the same cross-head which works between the said cylinders. The steam cylinder is situated below and directly in line with the compressor pump cylinder, thus admitting of a direct

H

transmission of power in a straight line, and doing away with all the

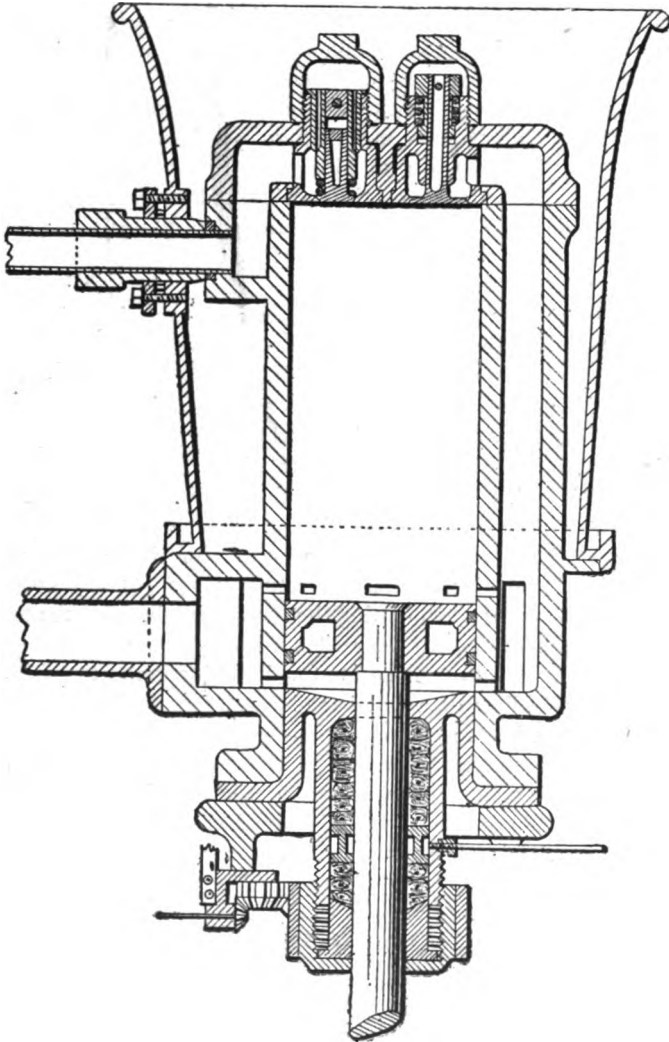


Fig. 48.—Vertical Type of Steam-driven Hercules Ammonia Compressor.
Vertical Central Section through Cylinder.

strains and friction which occur in the case of a crank-shaft and connecting-rods. A constant stream of water is kept flowing through a

water-jacket surrounding the compression cylinder to keep the latter cool during work.

Another point in this make of compressor is that the suction and discharge valves work horizontally, an arrangement which admits of allowing only a very small pocket for the retention of compressed gas, and of reducing the clearance to the lowest possible fraction.

A double-acting horizontal ammonia compressor manufactured by the A. H. Barber Manufacturing Company, of Chicago, Ill., U.S., is shown in Fig. 49.

The machines of this company are as a rule built with a box framing

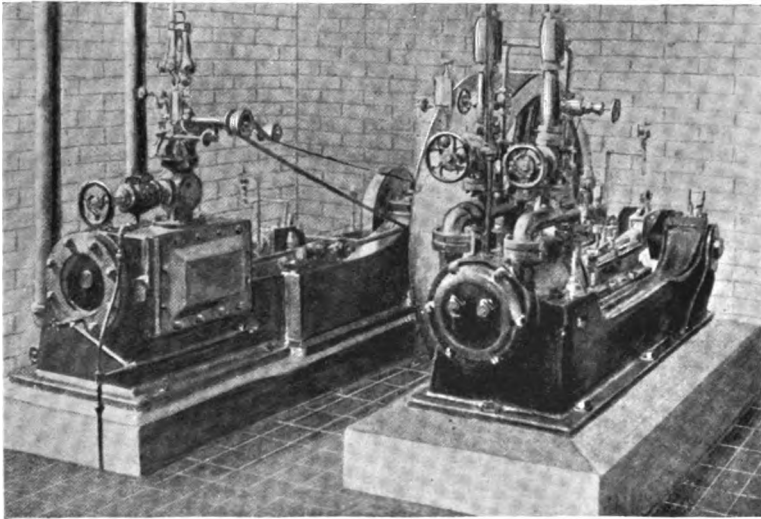


Fig. 49.—Double-acting Horizontal Type Barber Steam-driven Ammonia Compressor.

and a central crank in the case of belt-driven machines, and a Tangye pattern frame and side crank when coupled directly to a steam engine. The cylinder is sunk into the frame, the cylinder flanges being set in the centre of and strongly bolted to the frame, thus equalising the pressure, so that the cylinder has no possible chance to move or rock; and a flat locomotive pattern guide is employed which admits of the frame of the machine being formed both deep and rigid and rendering it practically impossible for the cylinder to get out of line.

The cylinder and valves are completely surrounded by water, thereby

preventing the springs of the latter from becoming overheated and losing their tension, and in this manner increasing their efficiency. The valves and their seatings are constructed of tool steel, and are hardened to render their life as long as possible. The valves, moreover, can be easily removed without having to disturb any other joints. The piston is light, fitted with metallic packing rings, and the piston-rod stuffing box is rendered perfectly gas tight by a double packing with a central oil chamber. The arrangement of the lubricator is such that it will oil the cylinder, valves, and piston-rod. A strainer placed in the suction pipe or conduit near the compressor prevents any scale or other matter passing into the latter.

The smallest possible amount of clearance (one-sixty-fourth of an inch at each end of the piston stroke) is left, and provision is made for the taking up of any slackness in the connecting rod through wear on the crank-shaft or guide.

The valves, which are of a patented form of construction, cannot by any chance drop into the compressor cylinder, there being no nuts or keys to wear out and get loose. The compressor shown in Fig. 49 is one of 12 ton refrigerating capacity, and is connected directly with the driving shaft of a horizontal Corliss engine, with a heavy fly-wheel located between to answer for both. The floor space occupied by this machine (engine and compressor) is 8 ft. by 9 ft.

It is claimed by the makers that, owing to the extremely small amount of clearance in the pump cylinder, and the arrangement of the valves, it is possible for each stroke of the piston to compress the full area of gas contained in the cylinder.

In Fig. 50 is illustrated an 8 ton compressor supplied by the above company to do refrigerating work in the dairy building at the Trans-Mississippi Exposition, at Omaha, Neb., U.S. This machine is connected by a shaft to an electric motor through a raw-hide pinion and cut gear, the motor and compressor being both mounted upon the same base or bed-plate. As this arrangement does away with all belts, hangers, or shafting, it occupies but little space, and it is always ready for work. The makers state that they can from experience thoroughly recommend the adoption of this pattern machine when electric power is to be used, having installed a number of different sized compressors with the electric motor connected up in this manner, and they being found in practical working to give great satisfaction, and to require but little attention.

Fig. 51 shows a very small single-acting ammonia compressor known as the "baby compressor," made by the same company. As

will be seen from the illustration this compressor is of the inclosed type, the piston and crank-shaft running in an oil bath, and therefore working noiselessly and requiring little or no attention. The compressor is coupled direct to a vertical engine, the power required to drive being under 3 horse-power. The refrigerating capacity of this little machine is one and a-half tons, and it is adapted for use in creameries, meat markets, butchers' cold stores, hotels, etc., in fact in any place where only a small plant is needed.

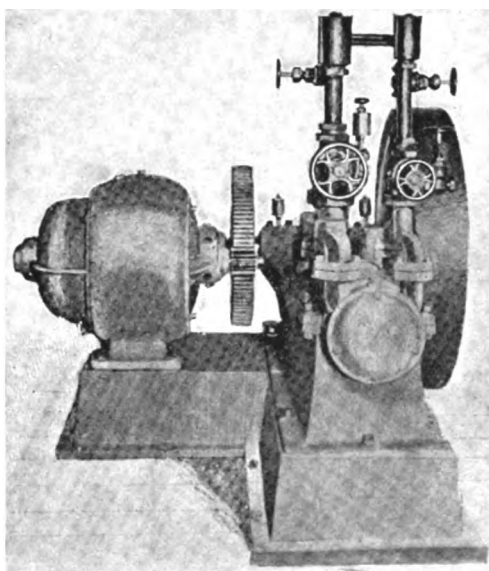


Fig. 50.—Double-acting Horizontal Type Barber Electrically-driven Ammonia Compressor.

Ammonia compression machines of several different patterns are built by the Vulcan Iron Works, San Francisco, California, U.S. Their horizontal, double-acting type of compressor has a strong girder frame. The compressor pump cylinder (Fig. 52) is furnished with a piston of extra length fitted with special packing rings that will take up any wear that may develop. A are the suction inlets, and B are the discharge outlets. The suction and discharge valves are of steel, simple in construction, of large area, easily removable for cleaning or inspection, and they are so

made and arranged, being provided with a proper safety device (which will be seen from the sectional view, Fig. 52), that in case of accident, they cannot fall into the cylinder and wreck the machine. As will be seen from the illustration, moreover, the stuffing-box of the piston-rod is provided with an oil cellar or chamber *c* through which cold oil is constantly circulated by means of a pump attached to the top of the frame, this oil bath serving, as in other machines, the double purpose

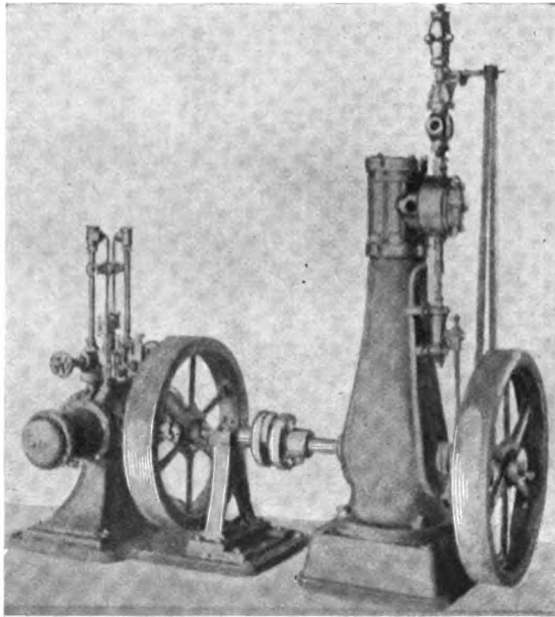


Fig. 51.—Small Single-acting Horizontal Type Barber Steam-driven Ammonia Compressor.

of acting as a seal to prevent the leakage of any ammonia, and of lubricating the piston-rod. The cylinder of the ammonia compressor is water-jacketed, and neatly lagged, a circulation of water being kept up through the jacket to remove the heat generated by the compression of the ammonia gas.

The compressor is provided with a dirt trap for catching and intercepting any foreign matter that may be brought back from the expansion piping, and preventing it from passing into the cylinder.

Suitable cross connections are also provided for enabling the condenser to be pumped out for examination, repairs, etc. The cross-head and connecting-rod, as well as the crank-pin and the main bearing, are formed of extra strength and with large wearing surfaces, every provision being made for meeting any excess of regular duty.

The construction of the compressor will be readily understood from the above description and from an inspection of the sectional view, Fig. 52. They are built in sizes from 10 tons refrigerating capacity and upwards, and can be worked either on the dry or wet gas system. The compressors are constructed for belt driving, or are connected direct to a Corliss or Meyer cut-off steam-engine.

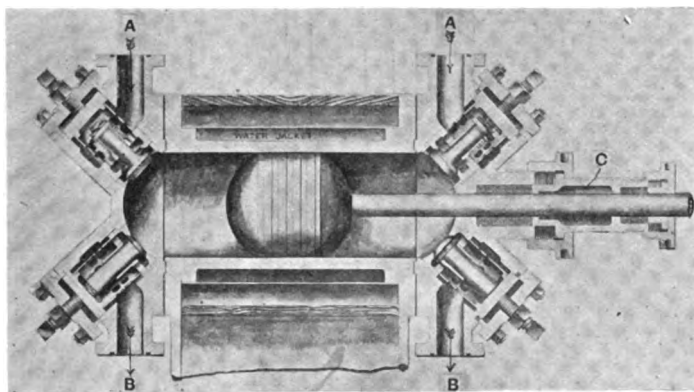


Fig. 52.—Double-acting Horizontal Type Vulcan Ammonia Compressor.
Central Section through Cylinder.

A small vertical single-acting compressor of the inclosed type, also made by the above firm, is shown in the sectional views, Figs. 53 and 54. The construction of the machine is as follows: A is the piston yoke. B is the piston yoke guide. C are the yoke blocks. D is the crank box. E is the crank sleeve. F is the guide bushing. G is the crank-shaft bushing. H is the crank-shaft stuffing box gland. I is the oil valve. J is the suction valve. K is the discharge valve. L is the discharge valve guide. M is the cylinder head. N is the discharge valve cap and tension spring. O is the suction valve seat. P is the pipe gland. Q are the gauge valves. R is the packing or dividing ring. S is the relief valve. T is the hollow box frame or casing cover. U is a dirt trap for intercepting any foreign matter and preventing

access thereof to the pump cylinder. *v* is the body or frame of the compressor. *w* is the bed or base plate. *x* is the guide cover. *y* is the crank-shaft. And *z* is the crank box wearing strip.

The cylinder opens, it will be seen, into the crank chamber, the sides of which constitute the supporting frame, thereby bringing the

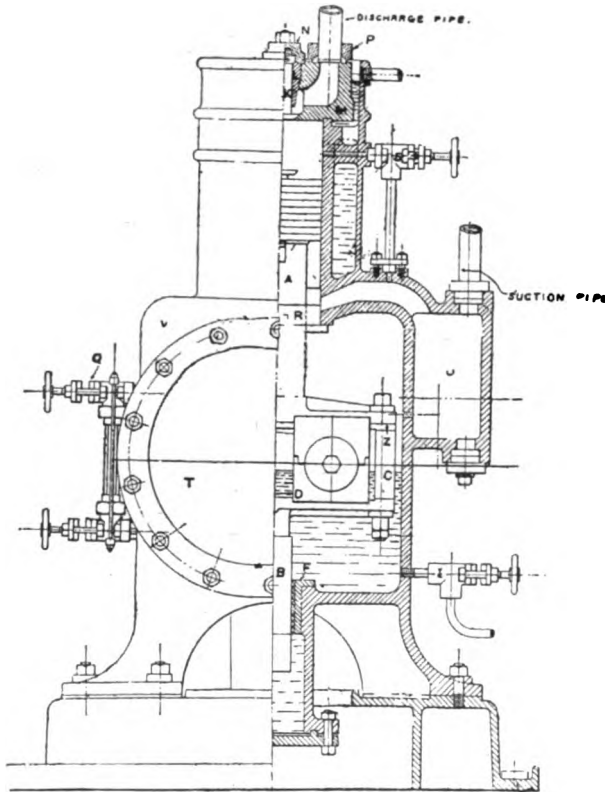


Fig. 53.—Small Single-acting Vertical Inclosed Type Vulcan Ammonia Compressor. Elevation partly in Vertical Section.

cylinder and shaft close together. The crank is forged on end of a heavy steel shaft which passes through a stuffing or packing box and gland in the side of the crank chamber, and the crank pin is of special construction, having a hardened steel sleeve held in place by a collar. The motion is transmitted to the piston through a strong yoke having a guide on its lower side. A movable cover or bonnet plate *r* admits

of access being had to the crank chamber. The latter chamber is filled with oil to a level just above the packing box of crank-shaft, the height of the oil in the chamber being shown at any time by the gauge glass shown in Fig. 53, and this oil bath both acts as a lubri-

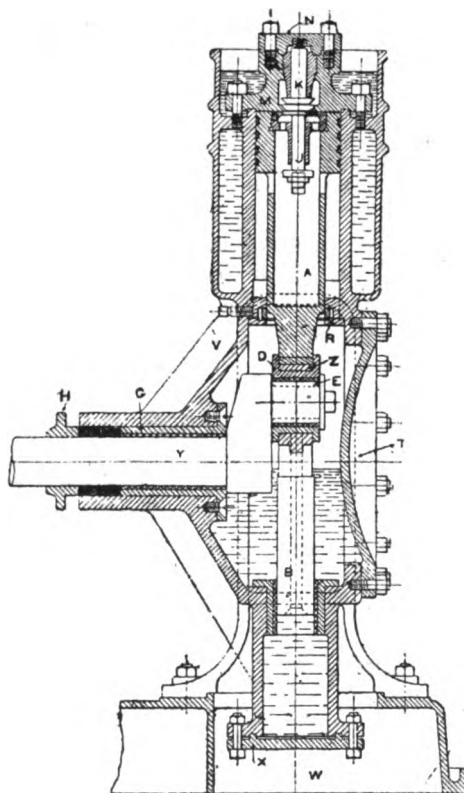


Fig. 54.—Small Single-acting Vertical Inclosed Type Vulcan Ammonia Compressor. Transverse Section.

cant to the moving parts of the machine in the crank chamber, and also as a seal for the packing box of the crank-shaft.

The ammonia gas enters the crank chamber below the piston, the suction valve is provided with a safety cage and is situated in the centre of the piston, and the discharge valve is placed in the cylinder head, and both these valves are made of forged steel. A water-jacket

having a proper outlet surrounds the pump cylinder, and suitable facilities for cleaning are provided. The wearing parts being supplied with removable bushings tends to prolong the life of the machine at a small future expense.

This inclosed type of vertical single-acting compressor is made in sizes varying from $\frac{1}{8}$ ton up to $3\frac{1}{2}$ tons refrigerating capacity per 24 hours. Another pattern of this machine has two of these compressors mounted upon one base or bed-plate, and connected by a solid steel shaft with a crank on each end, and a single fly-wheel located centrally between the cylinders. The working parts of this compressor are identical with the above, and this type is made of from 5 to 10 tons refrigerating capacity per 24 hours. The small $\frac{1}{8}$ ton machine requires only from $\frac{1}{4}$ to $\frac{1}{3}$ horse-power for driving purposes, and the floor-space occupied is only 18 in. $\times$ 30 in.

A compressor of the inclosed type with two cylinders in line horizontally is likewise made by Mr. B. Lebrun, of Nimy, Belgium, in which any escape of ammonia past the pistons is received in a bell-shaped receptacle above the crank chamber, and after passing through a strainer is drawn in by the pumps on their suction strokes.

The St. Clair compressor is one of the compound type, consisting of a combination of two or more single-acting compressors in such a manner that the gas is partly compressed at a lower pressure in one compressor, and then passed to another wherein the higher compression is applied. This machine has been lately greatly improved by Mr. Thomas Shipley, and is manufactured by the York Manufacturing Company, of York, Pa., U.S.

A number of other types of ammonia compression machines will be found described in the chapter devoted especially to marine refrigeration.

CHAPTER VII.

THE COMPRESSION PROCESS (*continued*).

Properties of Ether.—Modern Ether Machines.—Properties of Methyl Chloride.—Methyl Chloride Machines.—Properties of Sulphurous Acid.—Sulphurous Acid Machines.—Properties of Carbonic Acid.—Carbonic Acid Machines.

PROPERTIES OF ETHER, AND ETHER MACHINES.

Ether $\left. \begin{matrix} \text{C}_2\text{H}_5 \\ \text{C}_2\text{H}_5 \end{matrix} \right\}$ O is a colourless liquid of great mobility, and possessed of a strong and peculiar ethereal smell. Ether is lighter than water having a specific gravity 0.736, and it is not miscible with the latter liquid. The boiling point of ether is 34.5° , and its vapour is 37 times heavier than hydrogen. Ether burns with a luminous flame, and explodes when it is mixed with air. The specific heat of liquid ether is 0.51.

The advantages and disadvantages of ether as an agent or medium have already been touched upon (page 43), but they may be here recapitulated.

The great feature of ether is that it possesses the quality of working with a low pressure in the condenser, an advantage of considerable importance in very warm climates, as the efficiency of a low pressure ether machine does not fall off appreciably, even when the condensing water attains to a comparatively high temperature. This is also advantageous by reason of the low condenser pressure—not exceeding from 7 to 10 lbs. per square inch, even in the hottest climates—being favourable to the maintenance of tight joints, and the consequent economy of the chemicals. This low working pressure and the great simplicity of all the working parts, renders this class of machine, moreover, comparatively easy to manage.

On the other hand the large size of the compressor required, about seventeen times that of an ammonia compressor of the same capacity, is objectionable, both by reason of first cost of the machine, and the space occupied by it. Another serious objection is the highly inflammable nature of ether. Owing to its low boiling point great pre-

cautions are necessary to avoid explosions, when using this substance, by reason of the vapour becoming mixed with air.

All formula and rules intended for use with ammonia compressors are equally applicable to ether compressors, except, however, that it must be noted that the specific heat of the saturated vapour of ether is positive, and that consequently it will super-heat during expansion, and will condense during compression. This quality renders it unnecessary to make any provision against super-heating, and an ether compressor is invariably worked with dry vapour.

The ether machines of Twining, Harrison, Tellier, Siebe Gorman and Co., and Della Beffa, have been already briefly alluded to on pages 36 to 43. In Fig. 55 is illustrated a modern standard type of ether machine constructed by H. J. West and Co., Limited, London, which the company now supply for use in tropical countries. A commercially successful ether compression machine for the manufacture of ice in large quantities, was built by Mr. Henry J. West, the founder of this firm, in the year 1859, and the manufacture of machines of this type has been continued successfully up to the present day. The machine shown in the illustration (which is intended to be belt-driven) is of the horizontal type, and is arranged with the condenser on one side, and an ice-making tank upon the other.

In the larger pattern of ether machines made by the firm, having a capacity of from 12 cwts. of ice daily and upwards, the ether compressor is placed on the same bed plate as the steam engine, and is connected tandem-wise to the engine piston-rod. The motion work of these machines is of sufficiently massive construction, and all wearing surfaces are of ample proportions, each bearing, moreover, being provided with an automatic lubricator.

An ether compression machine not being called upon to withstand the same high pressures as a carbonic acid machine, or even an ammonia machine (the working pressure of an ether machine being only about 7 lbs. to 10 lbs. per square inch above that of the atmosphere), the same strength of construction is not demanded, and the design is very considerably simplified. The difficulty of making and maintaining tight joints is a comparatively easy matter. The pressure under which ether evaporates in the refrigerator being lower than that of the external atmosphere, but a very slight tendency exists towards leakage at the gland of an ether compressor. Any leakage, moreover, of air that may occur into the ether machine through faulty packing or joints, merely causes a slight accumulation of pressure in the condenser, which can be easily relieved by means of a valve provided for the purpose.

As ether possesses no affinity for the constituents of the atmosphere, there is consequently no danger of decomposition taking place, and the formation of acids or gases that may act injuriously on the interior surfaces of the machine, as is the case with sulphurous acid, which, under like conditions, decomposes and forms sulphuric acid.

A quality possessed by ether is that it is in a liquid state at the ordinary atmospheric pressure, and at the usual atmospheric tempera-

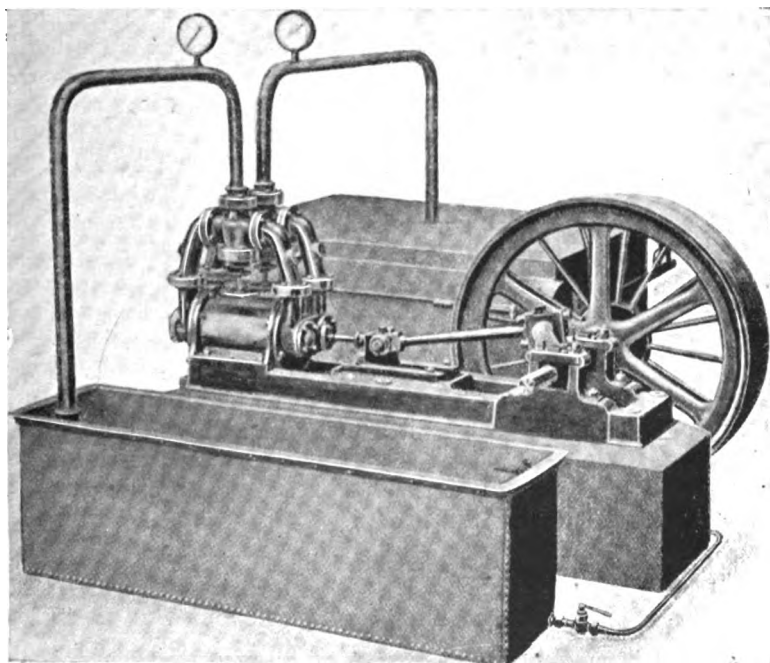


Fig. 55.—Belt-driven Horizontal Type West Ether Compression Machine.

tures, so that it can be drawn out of the plant at any time and stored in drums. This fact renders ether an especially suitable agent or medium for use in portable refrigerating and ice-making plants, consequently machines working on the low pressure ether anhydride process are those most usually chosen for military purposes, and such machines were successfully used by the British Government for military operations and field hospital work in the Abyssinian War in 1868, the Ashantee Campaign in 1874, the military operations in Egypt in 1883, the

Ashantee Campaign of 1895, the Soudan Campaign of 1896-97, and the present protracted and unfortunate war in South Africa.

PROPERTIES OF METHYL CHLORIDE, AND METHYL CHLORIDE MACHINES.

Another very low pressure agent or medium is methyl chloride (CH_3Cl), which is obtained as a colourless gas which condenses at -20° Fahr. Methyl chloride is formed by acting upon methyl alcohol with hydrochloric or muriatic acid, or with phosphorus pentachloride, and is also obtained, together with other substances, by the action of chlorine upon marsh gas.

Machines operating with methyl chloride as an agent are manufactured by Messrs. Douane of Paris. As the pressure used with this agent does not exceed 10 lbs. per square inch above that of the atmosphere, the same remarks apply to methyl chloride compressors as to ether compressors, and the construction is practically identical. The condenser and evaporator tubes of the methyl chloride machines made by Messrs. Douane are all covered with electro-deposited copper.

In Fig. 56 is illustrated in vertical central section a compression machine, designed by Mr. M. E. Douane. In this machine the cooler or refrigerator is shown on the left hand side of the drawing. There is a hollow standard surmounted by a single-acting cylinder, the top of which has valves for suction and discharge. The space above the discharge valve communicates with a coil leading by a tube to the stop-cock serving for the admission of the refrigerating liquid in the cooler. The chamber underneath the suction valve communicates by a pipe with the outlet of vapour from the cooler. A gauge screwed upon a nozzle shows the pressure in the cooler. The piston of the compressor is worked by a rod and crank shaft which passes through a stuffing box in the side of the hollow standard.

PROPERTIES OF SULPHUROUS ACID, AND SULPHUROUS ACID MACHINES.

Sulphurous Acid or sulphur dioxide (SO_2) is a gas obtained by the burning of sulphur, as has been already mentioned on pages 43 and 44. Sulphurous Acid has a molecular weight of 65, and a density of 32. The specific heat of liquid sulphurous acid is $\cdot41$ (water = 1). The critical pressure is 79 atmospheres, and the critical temperature 312° Fahr. The specific gravity of the gaseous acid is $2\cdot211$ (air = 1), and the specific gravity of the liquid at a temperature of -4° Fahr. is $1\cdot491$.

Andreef gives the following formula for expressing the relation of the specific gravity s of the liquid to the temperature t :—

$$s = 1\cdot4333 - 0\cdot00277t - 0\cdot000000271t^2.$$

Sulphurous acid or sulphur dioxide possesses the advantage

of being liquefiable at a comparatively low temperature, and machines adapted to use this agent or medium, whilst not operating at anything like as low a pressure as ether or methyl chloride machines, still work at a very much lower one than ammonia machines, with condensing water at normal temperature, the pressure being only from about 36.75 to 44 lbs. per square inch. Sulphur dioxide possesses certain lubricating qualities, consequently compressors using this agent require no extra lubrication.

Sulphur dioxide is liable to form sulphuric acid on exposure to the

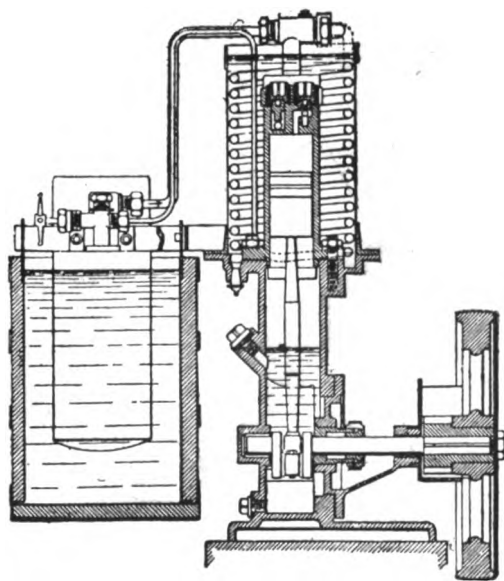


Fig. 56.—Single-acting Inclosed Type Douane Methyl Chloride Compressor. Vertical Central Section.

air, and cause corrosion—iron being the metal chiefly acted upon, and gun metal or copper being tolerably immune against attack. Consequently it is necessary to take great precautions against the presence of any leaky joints in the apparatus.

This comparatively low working pressure, and consequent correspondingly low temperature of compression, admits of machines using this agent working without superheating, and with dry vapour. This latter is not practicable in the case of machines working with either ammonia or carbonic acid, in both of which superheating is impossible

—especially so in the case of carbonic acid—on account of the overheating of the piston and stuffing box that would occur, and conse-

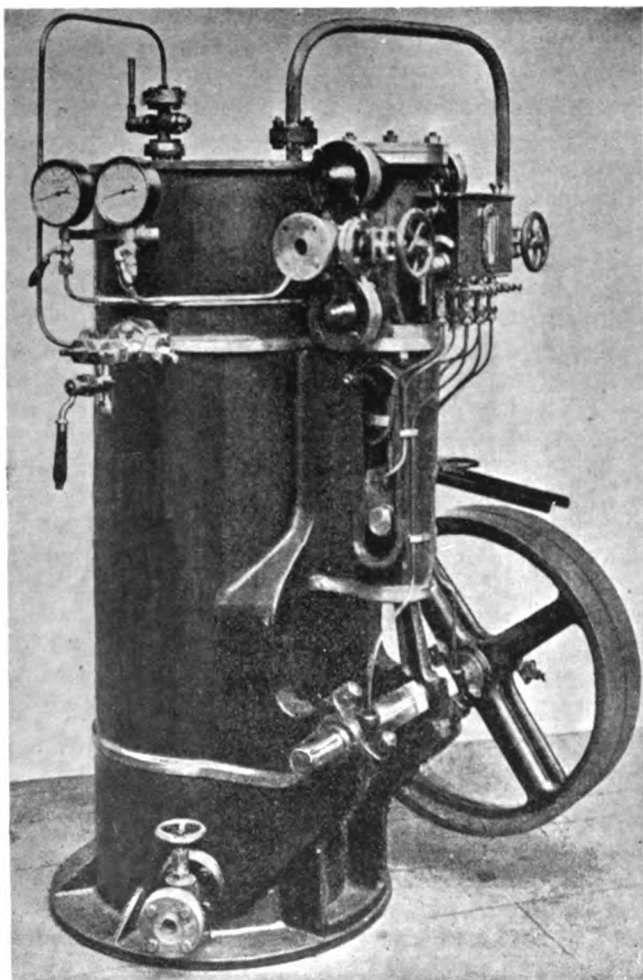


Fig. 57.—Belt-driven Double-acting Vertical Type of Quiri Sulphurous Acid Compression Machine.

quently all these latter machines work more or less on the wet system, and a small portion of the work of evaporation, which ought to take

place in the refrigerator exclusively, has to be effected in the compressor.

A number of different patterns of machines adapted to work with sulphur dioxide are made by Quiri and Co., Schiltigheim, Alsace. The smallest type of machine made by this firm, which is shown in Fig. 57, has a vertical compressor, the cylinder being bolted to the lower head which is formed in one piece with the guides, the latter, as well as the crank-shaft journals, being cast together with the condenser. The compressor is of the double-acting type, and is provided with

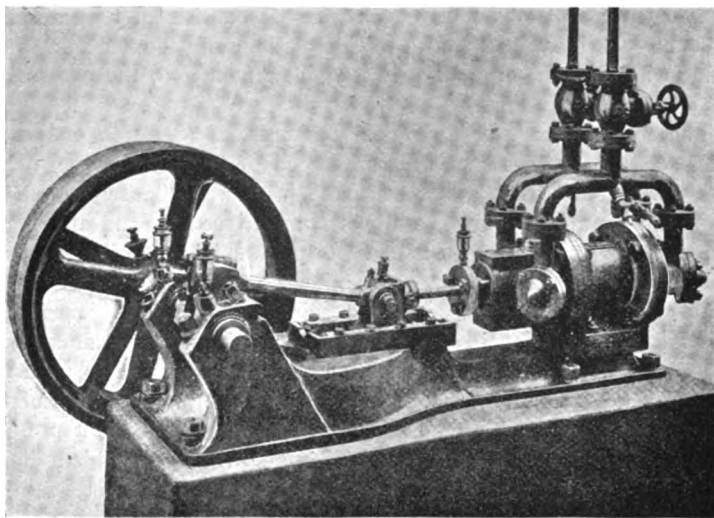


Fig. 58.—Belt-driven Double-acting Horizontal Type Quiri Sulphurous Acid Compressor.

valves of phosphor bronze, with steel spindles. These machines are made in sizes of from $4\frac{3}{4}$ cwts. to 12 cwts. ice-making capacity per 24 hours.

The larger sizes of machines are of the double-acting horizontal pattern, and are arranged either for belt or rope drive, or are direct coupled to a steam engine.

The belt-driven compressors consist either of a single cylinder double-acting pump, such as that shown in Fig. 58, which is of remarkably simple construction, or of two practically similar pumps, laterally coupled, that is to say, arranged side by side, and having a

single crank-shaft with two end cranks, and a central fly-wheel between the two compressors adapted for a rope drive.

In another arrangement, intended for rope driving, two similar compressors are mounted in line upon the ends of a single bed plate. Both the piston-rods of the compressor cylinders are in this case coupled through their connecting rods to the same crank-pin upon a crank at the end of a crank-shaft supported in a bearing upon the bed plate, and in an outside bearing in a suitable pedestal. Upon this crank-shaft is a fly wheel, grooved for rope driving. This machine may be coupled to a Sulzer steam engine.

One pattern of steam driven compressor consists of a compressor practically similar to that shown in Fig. 58, laterally coupled to a steam engine with slide valve motion, in a similar manner to the two pumps above mentioned.

These anhydrous sulphuric acid compressors are each connected with a condenser, either of the submerged or immersion type, or, in cases where condensing water is scarce, with a condenser of the atmospheric evaporative type, and with a refrigerator, and the entire refrigerating apparatus consists of these parts solely, no oil-pumps, oil-separators, rectifying apparatus, or other accessories, such as are required with ammonia and carbonic acid machines being necessary. This fact obviously enables anhydrous sulphuric acid machines to be very much simplified in construction, and renders their successful working a far easier matter to accomplish, as the manipulation of the above apparatus is troublesome, and to an unskilled attendant presents many serious difficulties. This system is one, therefore, which should most undoubtedly be advantageous for small machines intended for use in hotels, creameries, dairies, and in private houses, and by butchers, fishmongers, etc., and in other places where the machine is left to the care of a comparatively unskilled person.

A very small and remarkably compact belt-driven anhydrous sulphur dioxide or sulphurous acid machine, designed and patented by Messrs. Douglas and Conroy, and manufactured by W. Douglas and Sons, Limited, Putney, London, S.W., is shown in Figs. 59 to 62. Instead of the compressor being mounted vertically upon the side of the condenser, as it is in the small machine previously described, it is, it will be seen, placed horizontally upon the top of the condenser, and is of the inclosed type, consisting of two single-acting horizontal cylinders, arranged in line, the pistons being operated by a crank working in a box. The arrangement will be readily understood from the general view of the apparatus shown in Fig. 59, upon which for convenience the various

upper part of the condenser, and this shaft has mounted upon its outer end the fast and loose driving pulleys, and on the inner end, within the central crank box or chamber, a disc crank.

The two pistons working in the pump cylinders are rigidly fastened together by means of a rectangular frame or plate secured between them by bolts. The result of this arrangement is that the pistons act as a continuous guide, being entirely free from lateral thrusts, and the usual guides are thus dispensed with, thereby considerably simplify-

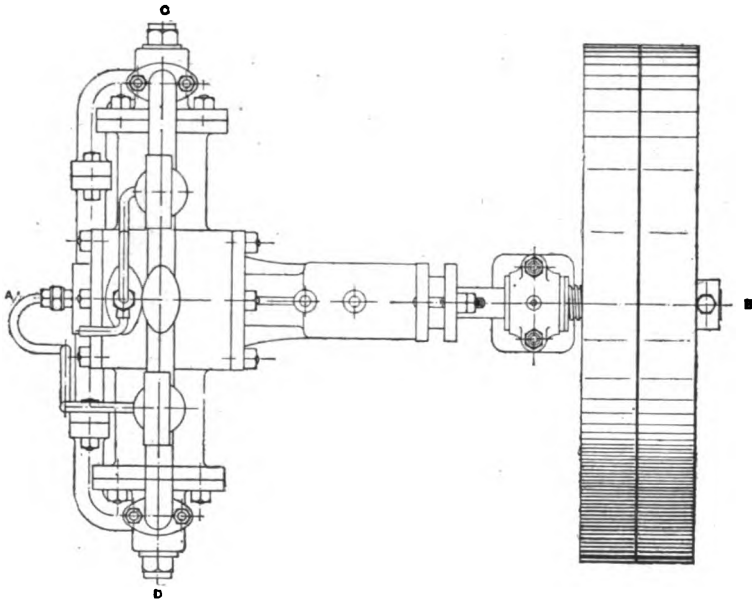


Fig. 60.—Belt-driven Horizontal Inclosed Type Douglas-Conroy Sulphurous Acid Compression Machine. Plan of Compressor.

ing the construction. The pin of the crank disc works in a slot provided in the central rectangular frame or plate connecting the pistons. This admits of a pause at the end of each stroke, which is advantageous inasmuch as it gives the valves time to re-seat themselves properly before the commencement of the return stroke.

Four valves are provided, two at each extremity of the duplex-pump cylinders, viz., one for compression and the other for suction, and each pair of similar valves is united into one pipe by means of a tee connecting piece. The central crank box or chamber is kept

partially full of oil, so that the working parts are immersed in an oil bath and have the most perfect lubrication.

The condenser consists of a cast-iron tank and serves as a pedestal to support the compressor. In this tank is placed a coil of wrought iron pipe tested to a pressure of 500 lbs. per square inch, and welded

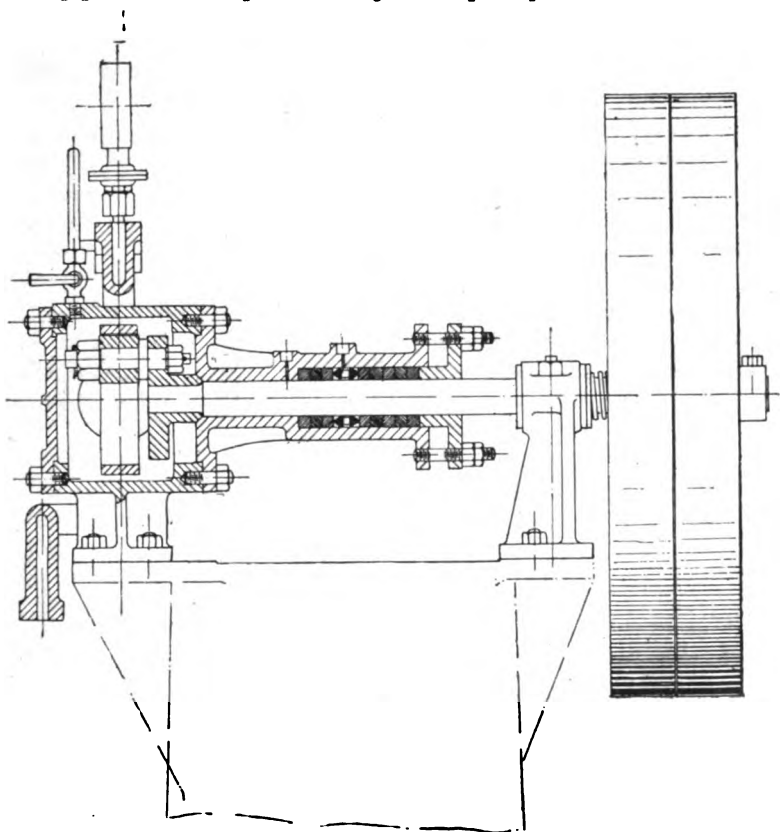


Fig. 61.—Belt-driven Horizontal Inclosed Type Douglas-Conroy Sulphurous Acid Compression Machine. Section on line A B Fig. 60.

into one piece without joints, in which coil the sulphurous acid gas is liquefied by the pressure from the compressor aided by the cold water circulating in the tank.

The evaporator or refrigerator consists of a suitable tank having a coil submerged in brine, and when the machine is used in connection

with a cold room or store this evaporator tank is formed of galvanised iron and of rectangular shape, and is placed directly in the room or store to be cooled.

Amongst other firms manufacturing sulphurous anhydride compres-

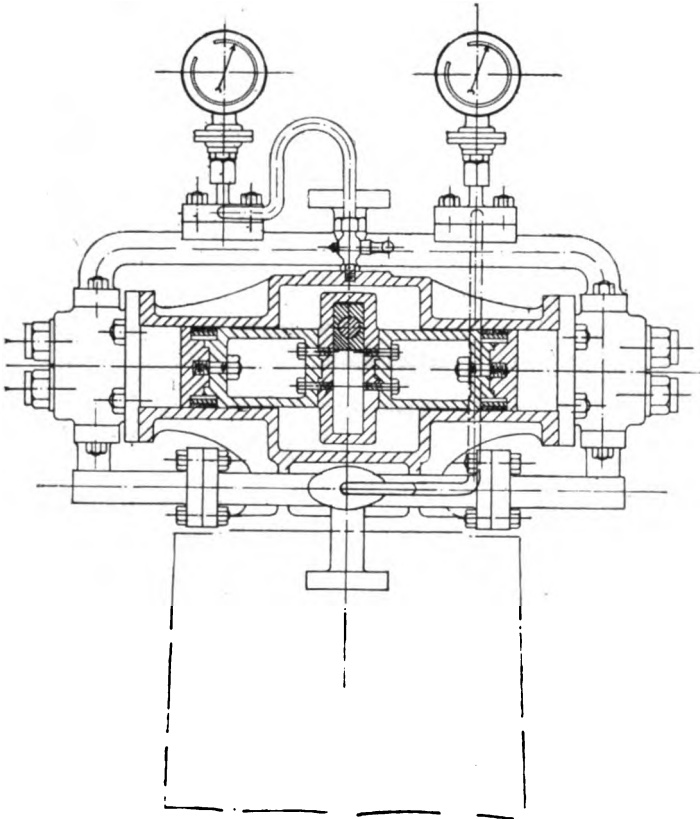


Fig. 62.—Belt-driven Horizontal Inclosed Type Douglas-Conroy Sulphurous Acid Compression Machine. Section on line C D, Fig. 60.

sion machines mention may be made of the following:—A. Borsig, Tegel, bei Berlin, Germany; The Raoul Pictet Company, of Paris; Delion and Lepen of Pré St. Gervais, Paris; the Société Genevoise de Construction of Geneva; and Thomas Ths. Sabroe and Co., Ltd., Aarhus, Denmark.

PROPERTIES OF CARBONIC ACID, AND CARBONIC ACID MACHINES.

Carbon dioxide, or as it is commonly called carbonic acid (CO_2), has a molecular weight of 44 and a density of 22. Carbon dioxide is invariably formed when carbon is burned in an excess of air or oxygen. The best method of preparation is by acting upon marble, chalk, or other form of calcium carbonate with hydrochloric or muriatic acid. Carbon dioxide occurs free in air, and in the water of some mineral springs, the quantity of the gas present in air being about 4 volumes per 10,000 volumes of air. As carbon dioxide is evolved in respiration and by the burning of coal-gas, etc., it is always present in larger quantities in dwelling houses than in the open air. Carbon dioxide gas is given off likewise during the process of fermentation, is found in the bottom of old wells, and constitutes the *choke-damp* of the coal mines.

The advantages to be gained by the use of this agent or medium are: non-inflammability, high specific gravity, thus rendering its heat of vaporisation for a given volume much higher than that of ammonia; and non-corrosive action on copper, which latter quality is of special advantage in marine refrigerating installations. The objections to its use have been already gone into in a previous chapter.

A simple and at the same time effective way to test the purity of liquefied carbonic acid is to solidify it, in which condition the slightest impurity can be instantly detected by smelling. A ready method of effecting this solidification is given by the Carbonic Acid Gas Company, London, as follows: "Place the tube on a box or chair in a horizontal position, tightly fasten a small linen or canvas bag (4 to 6 inches square) over the nozzle of the tube, and open the valve fully. The acid will then stream out with full force, become solid inside the bag, and remain in that state for hours, evaporating only very slowly, and showing a temperature of about 200° Fahr. below freezing point."

Carbon dioxide machines have already been dealt with on pages 44 to 47, where brief descriptions of the original machines of Windhausen and Lowe will be found. As will be found there mentioned the Windhausen machine has been greatly improved by J. and E. Hall, Ltd., of Dartford, Kent, the proprietors of the original patents, who have been instrumental in introducing this system all over the world.

Figs. 63 to 69 illustrate a small exceedingly compact and well-designed belt-driven carbonic anhydride machine made by the above firm. The design of this machine is, it will be seen, both simple

and compact, and as the use of this agent admits of a very small size of compressor being employed relatively to the work performed, the whole machine occupies but little space. The general arrangement of the machine will be readily understood from the sectional view, Fig. 64,

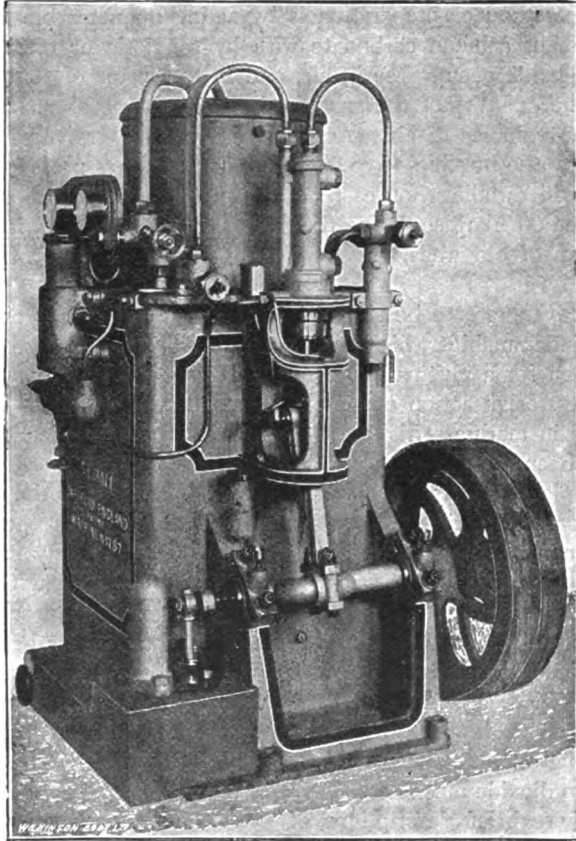


Fig. 63.—Belt-driven Vertical Type Hall Carbonic Acid Compression Machine.

in which *c* is the compressor vertically mounted, as shown, on the side of the condenser tank or casing *r*, the latter being fitted with coil *e*. *n* is the evaporator casing fitted with an evaporator coil *l*, and arranged inside the condenser *r*, so that its lower part is surrounded by the latter,

the condenser coils *c* occupying the annular clearance or space round the evaporator, and the evaporator casing *n* forming an insulated division between the condenser casing *r* and the evaporator coils *t*. *o* is the regulating or expansion valve or cock, and *g* and *p* are respectively the condenser and evaporator gauges. *s* is the separator, *P* is a patent

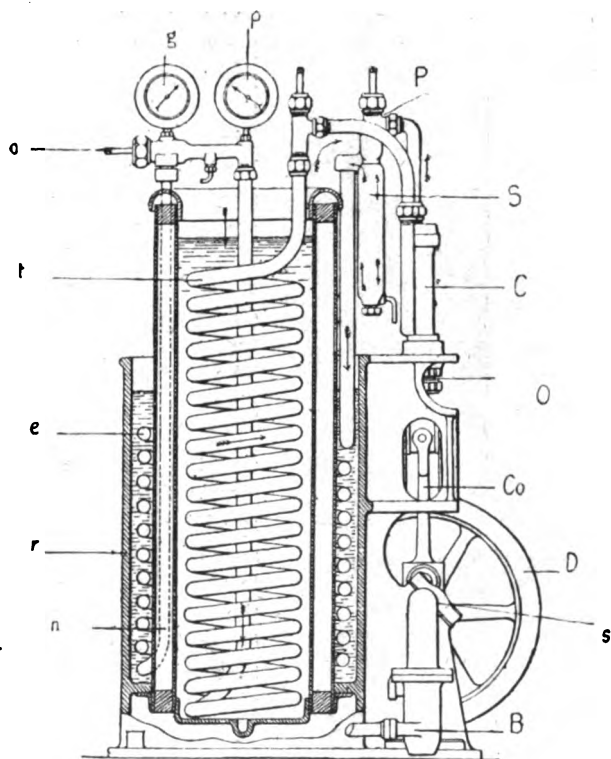


Fig. 64.—Belt-driven Vertical Type Hall Carbonic Acid Compression Machine. Sectional View.

safety valve, *o* is a patent hollow oil gland for preventing leakage taking place round the compressor piston-rod. *c o* is the connecting rod, *s* is the crank-shaft, *D* the driving pulley, and *B* the brine circulating pump.

It will be seen that the machine consists essentially of a circular or rectangular cast-iron tank *r* carrying the compressor *c*, inside which tank

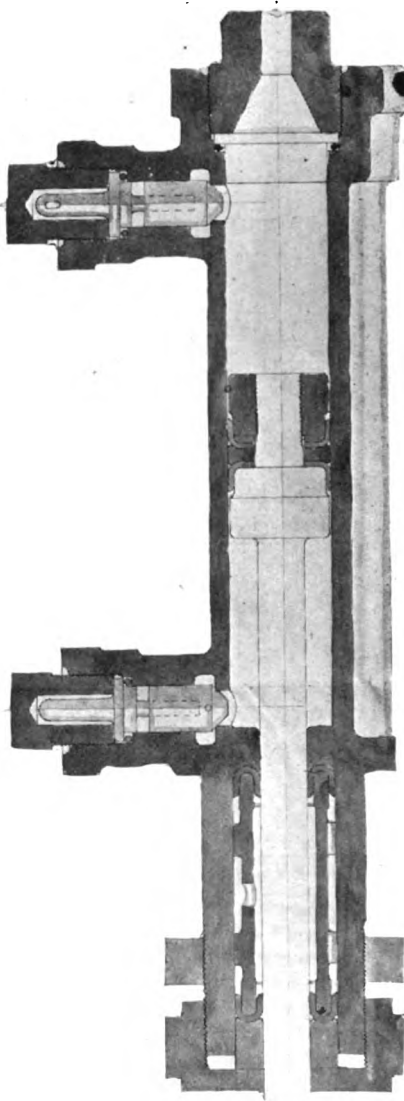


Fig. 65.—Belt-driven Vertical Type Hall Carbonic Acid Compression Machine. Vertical Central Section through Cylinder.

are the condenser coils *c*, and inside these again is a double tank *n*, with insulation between and the evaporating coils *t* in the centre.

The compressor cylinder *c*, which is shown in vertical longitudinal section in Fig. 65, and in transverse or cross section looking on back end in Fig. 66, is cast in a special hard bronze for these small-sized machines, by which means the two essentials of soundness and hardness are ensured, and the suction and delivery valves are identical for facilities of interchange. The compressor piston-rod gland *o* is kept gas-tight by means of two cupped leathers on the compressor-rod, as clearly shown in Fig. 65. A special oil is forced into the space between these two cup leathers at a pressure above the greatest pressure liable to occur in the compressor, so that whatever leakage takes place at the gland is a leakage of this special oil, either into the compressor cylinder, or out into the atmosphere, and there can be no leakage of the gas. What slight leakage of the special oil takes place into the compressor cylinder is advantageous, inasmuch as it serves both to lubricate the compressor and to fill up all clearances.

If the gland should require

packing and no cup leathers be available, the spiral ring shown in Fig. 67 may be used with ordinary packing (see chapter on "Management," etc.).

The loss of oil from the lubricator due to leakages is replaced by

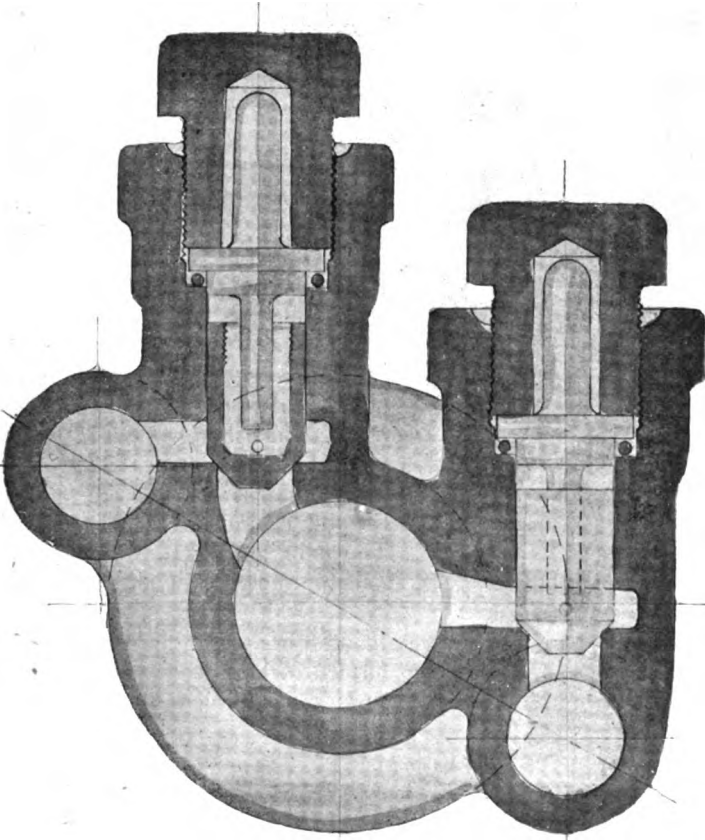


Fig. 66.—Belt-driven Vertical Type Hall Carbonic Acid Compression Machine. Cross Section through Cylinder.

means of a small hand pump, a few strokes of which will be required to be made every four or five hours whilst the machine is at work, as may be indicated by the position of the piston-rod of the hand pump.

The oil passing into the compressor cylinder serves the purpose, as

above mentioned, of filling up the clearance spaces, and any surplus above what is required for this purpose will be discharged with the

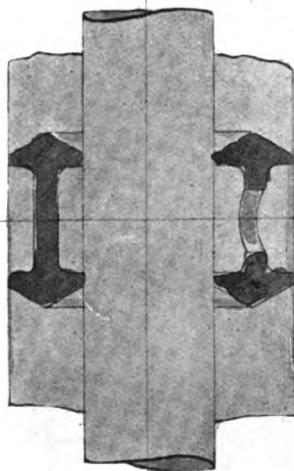


Fig. 67.—Belt-driven Vertical Type, Hall Carbonic Acid Compression Machine. Vertical Section through Spiral Packing Ring.

gas through the delivery valves. In order to prevent the oil discharged with the gas from passing into the condenser coils, all the gas is delivered into the separators wherein it is made to impinge against the sides of the vessel, and the oil adhering to the latter drains to the bottom, and is drawn off from time to time as occasion may require, whilst the compressed gas passes off by an opening at the top on its way to the condenser. In the suction passage is fitted a suitable copper strainer as shown in Fig. 68.

The condenser consists of coils *e*, of wrought-iron hydraulic pipe, usually of 13-16-inch bore, which in the submerged or immersed type employed in the present example are placed in the tank *r*, and surrounded with water.

The coils are electrically welded together into such lengths as to avoid the presence of any joints inside the tank *r*.

The evaporator, or refrigerator consists of an insulated tank *n*, containing nests of coils *t*, also formed of long lengths of electrically welded wrought-iron hydraulic pipes within which the carbonic an-




Fig. 68.—Belt-driven Vertical Type Hall Carbonic Acid Compression Machine. Vertical Central Section through Suction Passage.

hydride evaporates. The heat required for evaporation is obtained from the brine surrounding the pipes. A regulating or expansion valve *o* placed between the condenser coils *e* and the evaporator coils *t* ad-

mits of the quantity of liquid carbonic anhydride passing from the condenser being suitably regulated.

To enable the compressor *c* to be opened up for examination of the valves and piston without loss of carbonic anhydride, stop valves are fitted on the suction and delivery sides, by means of which the carbonic anhydride can be confined to the condenser and evaporator.

As the machine might be again started, after being thus shut down, without the delivery valve being opened, which would lead to an excessive pressure in the delivery pipe, owing to there being no outlet from the latter, and probably result in the fracture of this pipe, a safety valve *P* is provided. This safety valve, which is shown in vertical

central section, drawn to an enlarged scale, in Fig. 69, consists, it will be seen, of an ordinary spring safety valve, at the base of which is a thin copper disc *A*, which is designed to relieve any excessive pressure, considerably below that to which the machines are tested. The disc is made perfectly gas-tight, an object which it would not be possible to obtain by means of the spring safety valve alone, and this latter only comes into action upon the rupture of the copper disc *A*.




Fig. 69.—
Belt-driven
Vertical
Type Hall
Carbonic
Acid Com-
pression Ma-
chine. Ver-
tical Central
Section
through Safe-
ty Valve.

Great care has necessarily to be exercised in making these copper discs, so as to guard against variations in strength, due to any differences either in the thickness or hardness of the copper sheets out of which the discs are made.

About $1\frac{1}{2}$ brake horse-power is required to drive this smallest size self-contained vertical type of machine.

This vertical type of combined compressor, condenser, and evaporator, is also made with a horizontal steam engine attached at one side of the main casting, and driving on to the end of the crank-shaft.

A horizontal single cylinder double-acting Hall carbonic anhydride steam-driven compressor, tandem pattern, is shown in Fig. 70. This type of compressor is usually arranged with compound steam cylinders placed tandem-wise, and driving by means of a tail-rod the carbonic anhydride compressor. In this arrangement the tanks containing the condenser and evaporator are separate from the machine, and can be placed in any desired position with regard to the compressor.

Fig. 71 illustrates a horizontal duplex Hall carbonic anhydride machine, fitted with compound steam cylinders arranged side by side, and with a surface or jet steam condenser located in the front part of

the machine. The two compressors are, it will be seen, driven by tail-rods from the steam cylinders, and the cranks of the latter are placed at right angles to each other, thereby ensuring an even turning movement.

Each compressor cylinder is arranged to deliver the compressed carbonic acid or carbonic anhydride into an independent condenser consisting of coils of pipe, in which the compressed carbonic anhydride is condensed into a liquid form by the cooling water circulating round the pipes, the coils of pipes being contained in a steel casing through which the water is circulated. A separate evaporator or refrigerator is provided in connection with each of the above-mentioned condensers,

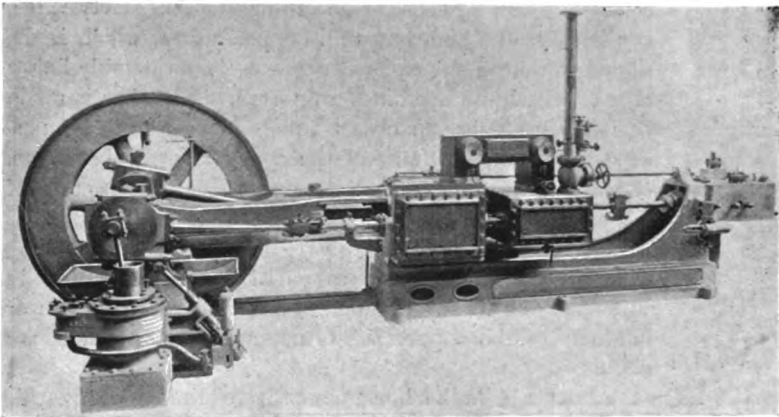


Fig. 70.—Horizontal Type of Steam-driven Hall Carbonic Acid Compressor.

this evaporator consisting of coils of pipes, in which the liquid carbonic anhydride evaporates, and during this process cools the brine surrounding these coils.

Fig. 72 illustrates a steam-driven vertical carbonic anhydride machine, built by H. J. West and Co., Limited, London. This type of machine is made in various sizes, from No. 1 machine of 3 cwt. ice-making capacity per 24 hours, up to the No. 8 machine of 2 tons ice-making capacity per 24 hours, the smaller sizes being belt-driven. The amount of condensing water at 55° Fahr. required for the smaller size is 48 gallons per hour, and that for the larger 400 gallons per hour.

The arrangement of this type of vertical compressor is very neat and compact. A rigid girder-shaped vertical cast-iron frame carries

the compressor and motion work, and the perfect alignment of the piston-rod and cross-head is secured by boring the pump seat and guide channel in one operation. The condenser, which is of the submerged type, is placed behind the compressor, and is coupled directly to it by an extension of the wrought-iron coil without any intermediate pipes or joints.

These small machines have compressor cylinders cast from a special bronze alloy, combining the requisite strength and soundness, and

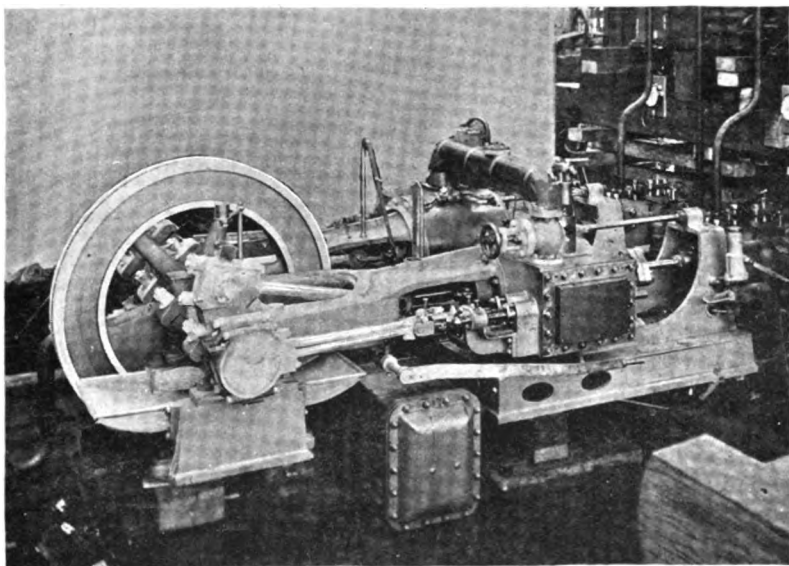


Fig. 71.—Horizontal Type of Duplex Steam-driven Hall Carbonic Acid Compressor.

finishing to a perfectly hard, smooth surface for the piston-rings to work on.

The construction of the compressor will be readily understood from the vertical central section shown in Fig. 73. The suction and delivery valves are made exactly alike, and of the same size for the purpose of interchangeability, so that one spare valve will replace either. The valve, which is shown in central section, drawn to a greatly enlarged scale in Fig. 74, is made of tempered steel, and beats upon a hard phosphor bronze seat, forming a perfectly gas-tight joint when closed. Another point is that the weight of the valve is reduced to a minimum,

and the lift is under one-eighth of an inch, so that it has no tendency to

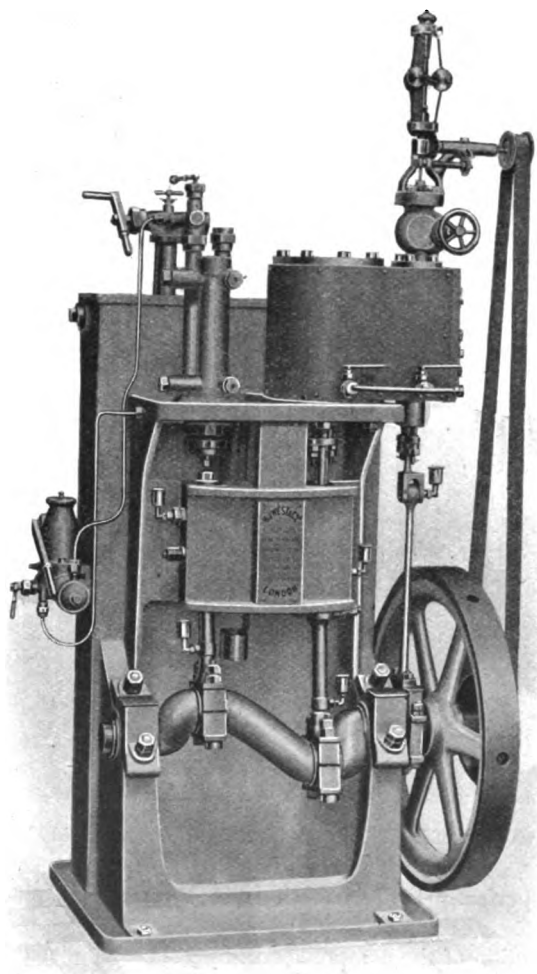


Fig. 72.—Vertical Type of Steam-driven West Carbonic Acid Compression Machine.

hammer itself to pieces. The method of forming a gas-tight joint round the piston-rod is shown in Fig 71, and is, it will be seen, prac-

tically similar to that employed in Messrs. Hall's carbonic acid compressor. Two capped hydraulic ram leathers are placed face to face upon the rod about three inches apart, the space between them being filled with oil, which is fed in from the small lubricator shown on the left-hand side of the illustration. The oil bath which surrounds the

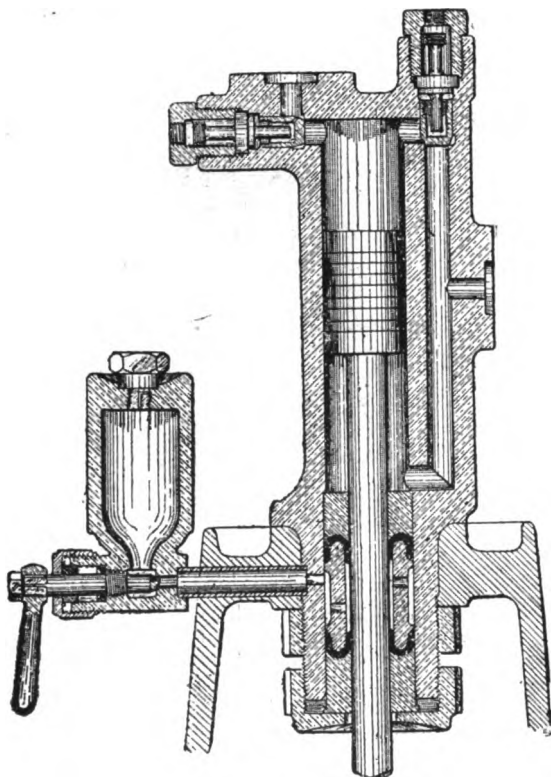


Fig. 73.—Vertical Type West Carbonic Acid Compression Machine. Vertical Central Section through Compressor Cylinder.

rod both effectively stops all leakage of gas, and, at the same time, serves to lubricate the piston-rod and cylinder, and to fill up the clearance spaces. The surplus oil passing through the compressor is trapped in an oil separator, from which it can be removed as desired.

A dead weight safety valve is fitted to all these compressors, except the very smallest size, and is set to blow-off a little above the highest

working pressure of the machine. The design and construction of this little machine is good, the bearings have liberal wearing surfaces, and are adjustable, thus reducing wear and tear to a minimum, and tending to prevent any noise when running. Special attention is paid to the lubrication of the working parts, every bearing and working surface is provided with an automatic lubricator, which feeds just sufficient oil to maintain the surfaces in proper working condition, and no more, thus

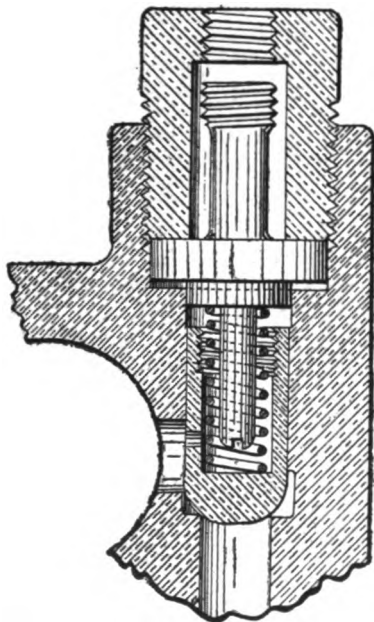


Fig. 74.—Vertical Type West Carbonic Acid Compression Machine. Vertical Central Section through Valve. Enlarged Scale.

preventing, or greatly reducing dirt, waste, and the tendency to hot bearings.

A standard pattern of belt-driven horizontal carbonic anhydride compressor is also made by the same firm. The steam-driven horizontal compressor is arranged tandem-wise to the steam engine cylinder, and the compressor piston-rod is coupled to a tail-rod on the steam piston. Steam-driven horizontal compressors are also made of the duplex type, coupled direct to compound or triple expansion condensing steam engines, and so arranged that one half the plant, consisting of com-

pressor, condenser, and evaporator, may be disconnected for overhauling or repairs, whilst the other half continues in operation.

Machines of six tons ice-making capacity and over are fitted with compressors bored out of a solid steel forging, by which both soundness

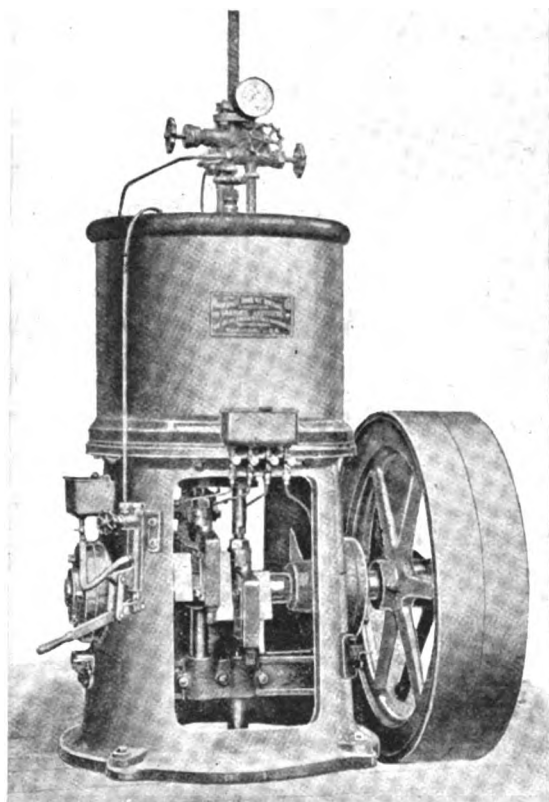


Fig. 75.—Vertical Type Belt-driven Kroeschell Carbonic Acid Compression Machine.

and strength of material is secured, and furthermore, a hard, smooth, glassy surface for the piston-rings and cup leathers to work upon.

Kroeschell Bros. Ice Making Company, of Chicago, Ill., U.S., manufacture carbonic anhydride machines of both vertical and horizontal patterns, the former being that used for the smaller sizes of machines, and the latter for the larger ones.

Fig. 75 shows a front view of a small vertical belt-driven machine of $\frac{1}{4}$ -ton ice-making capacity per 24 hours, and requiring 1 horse-power for driving purposes. This type of machine is made in seven different sizes, the smallest being the above, and the largest having an ice-making capacity of 3 tons per 24 hours, and requiring 12 horse-power. Two vertical single-acting compressors are located inside the cast-iron condenser tank, which latter is mounted upon a frame consisting of a box casting carrying the crank-shaft and guides. The compressor cylinders are made of semi-steel, which secures the two essentials of soundness and hardness, and the piston-rods are provided with a patent stuffing box sealed with glycerine. This device consists of cupped leathers on the compressor rod, into the spaces or chambers between which glycerine is forced at a pressure superior to the suction pressure in the compressor, so that any leakage at the stuffing box is a leakage of glycerine, either into the compressor cylinder or out into the atmosphere, and not a leakage of gas.

Obviously the leakage of glycerine into the compressor cylinder is an advantage, as it both serves to lubricate the piston and also to fill up all clearances. The glycerine is forced into the chambers by means of a hand-pump, a few strokes of which are required to be made every four or five hours. Each cylinder has a suction and discharge valve, all of which are located at the top of a joint or common cylinder head, thus rendering them easily accessible. The valves are made of forged steel, and are so designed as to combine strength with lightness. On one side of the cylinder head is provided a filling valve, which can be easily connected by means of a short pipe with the ordinary drum of carbonic anhydride now in common use. Stop valves are provided in the suction pipe as well as the condenser coil, so that the suction and discharge valves in the condenser coil can be examined without loss of gas.

The condenser consists of a spiral coil made of extra strong iron pipe, surrounding the compressor, and is connected at one end with the discharge side of the latter, and at the other end with a combined separator and liquid receiver, placed at the back of the frame.

The crank-shaft bearings are formed in the cast-iron frame supporting the condenser tank, and the double-throw crank-shaft actuates the compressor pistons by means of strong yokes, having guides at the lower side, thus enabling the long connections, such as connecting-rods and cross-heads, which would be otherwise necessary, to be dispensed with. The double-throw crank-shaft is made of forged steel, and is extended or overhanging at one side of the frame, so as to receive the fast and loose driving pulleys.

The receiver consists of a strong wrought-iron cylinder, with a stop valve located at the top, and a blow-off cock at the bottom, the latter admitting of the glycerine carried over from the cylinder being drawn off. A gauge mounted upon a three-way valve, by means of which it can be caused to communicate either with the compressing, or with the suction side of the machine, is provided on the top of the condenser tank.

On the opposite side of the machine to the driving pulleys is provided, as will be seen in the drawing, a small hand-pump, by the operation of which the cylinders can be lubricated. A safety valve is also provided to guard against possible accident through neglect or ignorance on the part of the attendant.

The larger sizes of vertical combined compressors and condensers are identical in design with the exception that they are fitted with connecting rods and cross-heads instead of yokes, and these cross-heads and connecting-rods, as also the main bearings and the double-throw crank-shaft, are all of extra strength, and have large wearing surfaces, and every provision is made in them, as in the smaller machine, for meeting any excess of regular duty. All the machines are fitted with an automatic lubricating device. The machines are also built direct coupled with a vertical steam engine, or geared to an electric motor.

The larger sizes of carbonic anhydride machines constructed by the firm are, as before intimated, of the horizontal pattern, and their standard sizes run from 2 tons ice-making capacity per 24 hours up to 50 tons ice-making capacity per 24 hours, requiring respectively 8 horse-power and 120 horse-power for driving purposes.

Fig. 76 shows a standard pattern of belt-driven Kroeschell horizontal double-acting compressor. The compressor cylinder is provided with a jacket through which the return gas passes, which arrangement it is claimed both imparts greater strength to the cylinder, and also keeps it perfectly cool. The piston-rods, connecting-rods, cranks, pins, and valves are made of forged steel, and the latter are made identical for facilities of interchange.

Leakage round the compressor piston-rod is prevented by an arrangement similar to that used on the small vertical type of machine, but instead of the hand pump, a belt-driven pump operating continuously is provided for replacing the glycerine which leaks out of the stuffing box.

Any glycerine which passes into the compressor beyond what is necessary to fill the clearance spaces is discharged with the gas through

the delivery valves. This glycerine is prevented from going into the system by a separator in which the glycerine drains to the bottom, and can be drawn off from time to time. As glycerine has no affinity for carbonic acid, and consequently undergoes no change in the machine, there is no chance of the condenser coils becoming clogged.

The condenser consists of coils of wrought-iron extra heavy pipes so welded as to avoid any joints in the tank, and arranged either on the submerged or on the atmospheric or evaporative principle. The evaporator also consists of similar coils of pipes, a regulating or ex-

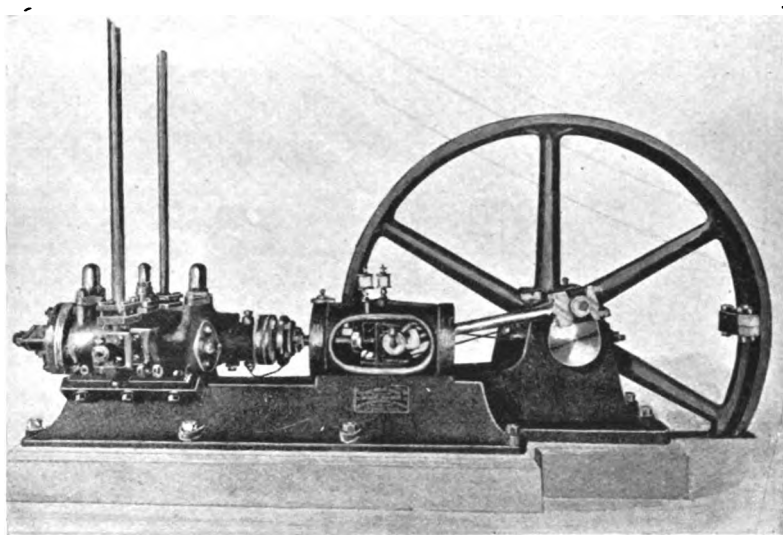


Fig. 76.—Horizontal Type Belt-driven Kroeschell Carbonic Acid Compressor.

pansion valve being provided between it and the condenser. The safety-valve consists of a housing at the base of which is a thin disc, calculated to blow off at a pressure considerably below that to which the machines are tested. The joints have all special flange unions, and brass bushings, and are made absolutely gas-tight with packing rings of vulcanised fibre which, whilst withstanding heat, have also sufficient elasticity to ensure the tightness of the joint when either hot or cold.

The firm also make belt or rope-driven horizontal double-acting double compressors arranged tandem-wise or in line, and driven from a crank on a central crank-shaft. These machines are suitable for large installations.

A carbonic acid machine made by the Cochran Company, Lorain, Ohio, United States, is of the belt-driven vertical pattern, and the compressor cylinder is mounted upon a box-shaped or hollow bed-plate in which is placed the condenser, thus forming a very compact and neat arrangement, and lending itself to transport.

A modern design of machine by this company has the hollow or box pattern bed-plate extended, and is driven by a motor mounted upon the latter.

A compact and well-designed horizontal type of carbonic acid compressor is made by the Atlas Company, Limited, Copenhagen, which firm manufacture the refrigerating machinery under the Schou patents, originally made by the Tuxen and Hammerich Company.

Fig. 76* shows a pattern of refrigerator or evaporator patented by H. H. Schou, which is divided into two or more sections, connected so that the cross area of a section will be suited to the state and feed of the cooling medium therein. These separate coils are either of equal or different lengths, and may be arranged in several ways. In the form shown in the drawing the liquefied agent enters the coil marked *f*, and as it evaporates passes through the coupling *h*, coils *d*, *e*, coupling *i*, and coils *a*, *b*, *c*, from which the gas is removed by the pipe *g*.

A recent design of carbonic acid machine built by Mollet, Fontaine et Cie, of Lille, France, consists of a single-acting compressor direct-driven by a horizontal steam engine. The arrangement for forming a gas-tight joint round the compressor piston-rod comprises a stuffing box having three compartments, the two outer ones being filled with glycerine, a small portion of which is drawn in by the rod into the inner box or compartment to act as a lubricant. One of these compressors was exhibited at the late Paris Exhibition in the French brewery section.

Another carbonic acid machine shown at the above Exhibition was one built by Escher, Wyss et Cie, Switzerland. This machine comprises a single compressor cylinder fitted with cast-steel valves on phosphor bronze seats, and driven direct by a horizontal 50 horse-power steam engine. The capacity of the machine is 12 tons of ice per 24 hours.

Thomas Ths. Sabroe and Co., Ltd., Aarhus, Denmark, are manufacturers of a vertical type of carbonic anhydride machine, which has the foundation plate of the compressor and the condenser cast in one




Fig. 76*.—
Schou's Patent Refrigerator or Evaporator.

piece, and all the parts made interchangeable. The general arrangement of the apparatus resembles that of Hall's vertical pattern machine.

Carbonic acid machines are also made by Wegelin and Hübner, Act.-Ges., Halle on Saale; D. Stewart and Co., Ltd., Glasgow; Haslam, Ltd., Derby, and others, whose machines the space at our disposal does not permit us to undertake to describe here.

CHAPTER VIII.

CONDENSERS AND WATER-COOLING AND SAVING APPARATUS.

Submerged Condensers.—Amount of Condenser Surface Required.—Amount of Cooling Water Required.—Atmospheric or Open-Air Evaporative Surface Condensers.—Amount of Condenser Surface Required.—Amount of Cooling Water Required.—Supplementary Condensers or Forecoolers.—Double-Pipe Condensers.—Hendrick's Condenser.—Water-Cooling and Saving Apparatus.—Water Towers.

As has been already mentioned in the fifth chapter, one of the three essential parts of any compression machine is the condenser, the function of which is to supplement the action of the compressor or pump.

The condensers in most general use may be classified under two main heads, the submerged type of condenser and the atmospheric or open-air evaporative surface type of condenser, the first having always some arrangement of coils immersed or submerged in a tank of cooling water, and the second invariably consisting of coils of pipe or tube exposed to the air, with water trickling over them.

SUBMERGED CONDENSERS.

The submerged type of condenser is the only one applicable in some cases, as for instance in marine installations; it has, besides, certain specific advantages which will be next treated of, but it may be premised that it consumes a large amount of cooling water, which, where water has to be paid for at a high figure, may amount to a serious item in the working expenses. The system, however, admits of the condenser being located in any part of the building, or in the open air, as may be desired, occupies comparatively little space, allows the cooling water to be admitted to the condenser at the bottom near the exit for the condensed gas, so that the water gradually rises as it becomes warmer, until it is discharged at the top, whilst the warm gas entering the condenser at the top-header, flows downward through the coils, and parting with its sensible and latent heat to the cooling

water becomes liquid and drains away to the bottom-header. And, finally, the submerged pipes in a condenser of this description remain clean, and therefore in an efficient condition, much longer than they do when exposed.

To secure the utmost efficiency of a condenser of the submerged type it is absolutely necessary that the cooling water should be kept in a state of agitation by some suitable means so as to prevent the formation and collection of a film of warm water round the pipes.

Several condensers of the submerged type have been already illustrated, and briefly described, in connection with various compression machines, in previous chapters.

Fig. 77 shows in vertical central section a patent condenser of the submerged type, invented by Mr. Leuig Chew, and manufactured by Messrs. H. J. West and Co., Limited, London.

The construction of this apparatus is almost sufficiently obvious from the drawing, and but little explanation is needed. A special feature is the automatic device for breaking up the above-mentioned film of warm water, and dispersing the air bubbles, thus bringing the cold water into intimate contact with the surfaces of the pipes, and promoting the most complete interchange of heat. This device consists of a revolving agitator, fitted with helical blades, which is slowly and automatically rotated by a small turbine fixed on the top of the condenser, and operated by the same water which is afterwards used to circulate through the condenser for cooling purposes. This arrangement offers the obvious advantage of saving the expenditure required for driving the agitator, as well as enabling the more or less complex arrangement of toothed gearing and belt pulleys, used when it is driven in that manner, to be dispensed with.

Compound submerged condensers are also constructed by some makers. In one arrangement of this description the hot gas from the compressor is first passed into a primary condenser, consisting of a single coil of pipe submerged in a tank, the gas and liquid leaving this coil at the bottom is passed on to a secondary condenser, and is there delivered by a distributing head, or manifold inlet, to the tops of three coils submerged in a second tank located above the first one. The cooling water is admitted to the bottom of the upper or secondary condenser tank, and is taken from the top of the latter to the bottom of the lower or primary condenser tank, and finally runs off by an overflow at the top of the latter.

In a better arrangement than the above the single coil primary condenser, to which the hot gas from the compressor is first delivered, is

located on the top, and the secondary condenser with three coils, to

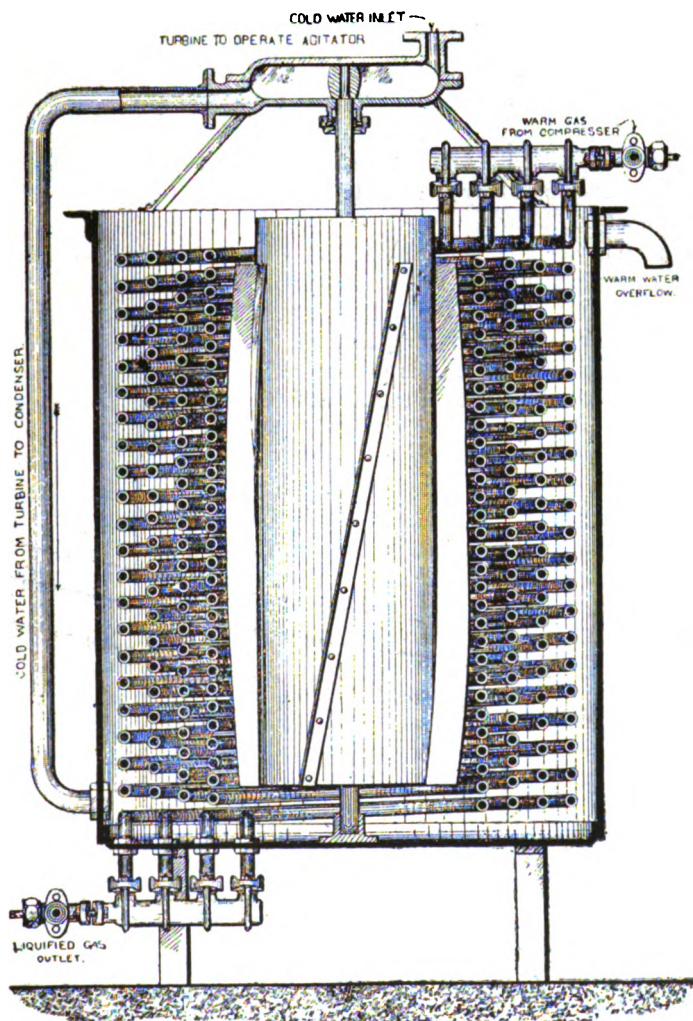


Fig. 77.—Chew's Patent Submerged Type Condenser. Vertical Central Section.

which the gas and liquid is next passed, is placed below or underneath the former. The cooling water is, in this arrangement, delivered simul-

taneously to the bottoms of both condensers, and is finally run off in a like manner at the tops thereof.

A type of condenser, patented by Mr. T. B. Lightfoot in 1885, consists of coils or zig-zag pipes, arranged with one or more zig-zag passages between them, formed in a tank or vessel, the arrangement being such that the water or refrigerating medium enters the coils or zig-zag pipes at the bottom, the vapour being drawn off by a pump at the top, whilst the fluid to be cooled enters the tank or vessel at the top of the tank, and after travelling along the whole length of each coil or zig-zag, is drawn off at the bottom.

The coils of pipe in a submerged condenser usually consist of $1\frac{1}{4}$ -inch to 2-inch pipe in one or more sections, preferably a number connected by manifold inlets and outlets, so that one or more of the sections may be shut off for repairs, etc. In some constructions the pipe at the vapour inlet end is of larger dimensions, and arranged to taper down to the outlet end, the agent being there partially liquefied, and occupying less space.

The amount of condenser surface to be employed is best determined by practice. According to Professor Siebel it has been found that for average conditions (incoming condenser water 70° and outgoing condenser water 80° , more or less) for each ton of refrigerating capacity (or for $\frac{1}{2}$ -ton ice-making capacity), it will take 40 square feet of condenser surface, which corresponds to 64 running feet of 2-inch pipe, or to 90 running feet of $1\frac{1}{4}$ -inch pipe. Frequently 20 square feet of condenser surface, and even less, are allowed per ton of refrigeration (double that for actual ice-making capacity), but this necessitates higher condenser pressure, etc., and is deemed poor economy by many engineers.

The Triumph Ice Machine Company give for their ammonia condensers about 120 feet of $1\frac{1}{4}$ -inch pipe, or 70 feet of 2-inch pipe per ton. They also recommend at least 20 inches clearance space between the coils to admit of easy access to all parts; that the condenser should never exceed 20 feet in length; and that it should never be above 16 pipes high.

According to Professor Siebel* again the number of square feet of cooling surface F , required in a submerged condenser, may be approximately calculated after the formula—

$$F = \frac{h \cdot k}{m (t - t_1)} \text{ square feet,}$$

* "Compend of Mechanical Refrigeration," H. S. Rich & Co., Chicago, 1899.

in which h is the heat of vaporisation of one pound of ammonia at the temperature of the condenser, k the amount of ammonia passing the compressor per minute, and m the number of units of heat transferred per minute per square foot of surface of iron pipe, having saturated ammonia vapour inside, and water outside. t represents the temperature of the ammonia in the coils, and t_1 that of the cooling water outside of the coils, *i.e.*, mean temperature of the inflowing and outflowing cooling water. Taking the figures already given as a guide, the factor m is equal 0.5, so that the formula reads :—

$$F = \frac{h \cdot k}{0.5 (t - t_1)} \text{ square feet.}$$

This formula, like others which have been given on this subject, is, it must be understood, an empirical or experimental one.

Referring to amount of cooling water required, the same authority observes that the heat which is transferred to the ammonia whilst producing the refrigeration, and also the heat equivalent to the work done upon the ammonia by the compressor (superheating being prevented), must be carried away by the cooling water, expressed in thermal units; and speaking theoretically, the sum of these two heat effects is equal to the heat of vaporisation of the ammonia at the temperature of the condenser. On the basis of this consideration, the amount of cooling water A_1 , in pounds required per hour, may be expressed by the formula—

$$A_1 = \frac{h \cdot k \times 60}{t - t_1} \text{ pounds.}$$

or in gallons after division by 8.33, the signs having the same significance as in the foregoing formulas, with the exception of t , which represents the actual temperature of the outgoing, and t_1 , which represents the actual temperature of the incoming cooling water. Practically the amount of water used varies all the way from three to seven gallons per minute per ton ice-making capacity in 24 hours.

The following table, compiled by Mr. Eugene T. Skinkle, gives the dimensions of submerged condensers of some plants in actual operation in the United States :—

DIMENSIONS OF SUBMERGED CONDENSERS.

Ice-making Capacity in Tons.	Refrigerating Capacity in Tons.	Tanks.				Number of Coils.	Pipes High.	Feet Long.	Size of Pipe in Inches.	Total Feet of Pipe in Condenser.	Feet of Pipe per Ton Ice-making Capacity.	Feet of Pipe per Ton. Refrigerating Capacity.
		Length in Feet.	Width in Feet.	Depth in Feet.	Thickness of Iron in Inches.							
5	10	10	3½	6½	⅛	9	12	7½	1	855	171	85.5
10	20	10	7½	6½	⅛	20	12	7½	1	1,900	190	95
12½	25	10	8½	6½	⅛	22	12	7½	1	2,090	167	83.6
15	30	10	8½	6½	⅛	25	12	7½	1	2,375	151.6	79.16
20	35	10	10	6½	⅛	27	12	7½	1	2,565	128.25	73.28
30	50	10	10	12½	⅛	27	24	7½	1	5,130	171	102.6
40	75	14	10	13½	⅛	27	24	11½	1	7,695	191.1	102.6
60	110	14	13	13½	⅛	35	24	11½	1	9,975	166.25	90.68
Average											167	89

ATMOSPHERIC OR OPEN-AIR EVAPORATIVE SURFACE CONDENSERS.

In this class of condenser the lines of pipes or tubes through which the agent passes are so located as to be exposed to more or less constant currents of air, and generally in addition to the latter, cooling water is caused to trickle over the pipes. The vaporised agent should preferably be passed in this arrangement in an opposite direction to the cooling water. That is to say, it should be admitted at the bottom of the condenser, and in this case the liquid, as fast as it is formed, passes off to the side into a vertically-placed manifold. By this means the warm gas entering the condenser meets the warmer water, and the gas as it ascends in the condenser, constantly meets colder water, until its temperature is nearly reduced to that of the water when it first comes in contact with the condenser pipes, liquefaction then taking place.

Atmospherical condensers which are said to give excellent results are also formed of vertical sections of pipe, the compressed vapour being delivered to each section at the top from a common manifold or distributing head, and discharging the liquid at the bottom into another common manifold or distributing head, which latter is connected with the liquid receiver.

The ordinary form of atmospheric condenser is of very simple construction, and consists essentially of a stack of tubes placed in lines,

with return bends and heads, and some water-distributing arrangement. Fig. 78 is a diagram showing a simple plan for distributing the water, which is self explanatory. It will be noted that the cooling water should pass through an exactly contrary sequence to that undergone by the compressed vapour, viz., during its downward course it should constantly meet warmer gas or vapour, and consequently be gradually increased in temperature until it finally leaves the condenser by the trough shown at the bottom. By means of this gradual extraction of heat the difference between the initial and final temperature of the water will be greater than could be obtained were the gas and the

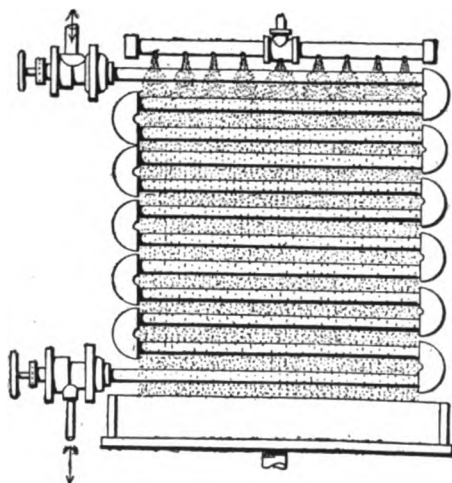


Fig. 78.—Diagram showing Simple Method of Distributing Water in Atmospheric Condenser.

water to flow in the same direction. In the De La Vergne, Eclipse, and other standard American condensers, the gas enters at the bottom, whilst the cooling water is applied at the top.

In Fig. 79 is a diagram showing a common arrangement for the distribution of water, *r* indicating the water trough in transverse section, and *s* the condenser tubes through which the hot gas or vapour passes. This arrangement, it will be seen, results in the water spattering to such an extent that partitions have to be provided between and at the ends of the series of vertical coils. Fig. 80 shows diagrammatically a very simple plan, given in an American journal, for avoiding this objectionable spattering, which consists of a strip of metal or fin, *t*, which is

attached to the underside of each of the condenser pipes or tubes *s*, and which serves to guide the water falling from the trough *r* quietly to the top of the pipe or tube below where the stream divides, one half passing down and round one side of the tube, and the other half down the other side of the tube as shown.

Fig. 81 shows an arrangement adopted by some American and other makers for removing the liquefied agent from the condenser, and delivering it into the storage tank, as soon as formed. This is effected by the introduction of drip-pipes, *v*, connected with the return heads

u of several of the coils of pipe or tube *s*, and with the storage tank or liquid receiver *w*, so as to draw off the liquid at different levels. In this manner the liquid formed near the top of the condenser at a lower temperature is prevented from falling to the warmer lower coils, in which a re-absorption of a certain amount of heat would take place, with a resultant loss of work.

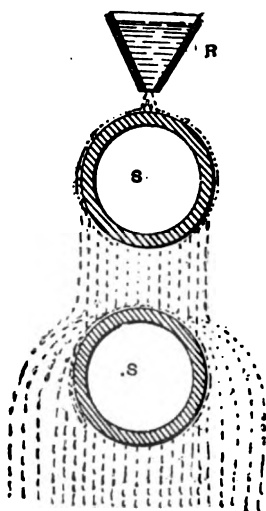


Fig. 79.—Diagram showing Objections to Common Plan of Distributing Water in Atmospheric Condensers.

Fig. 82 illustrates an open-air evaporative surface condenser, built by Messrs. Haslam, of Derby, which is arranged to work upon the principles above enunciated, by which the greatest possible amount of efficiency is secured. The condenser shown is built in a nest of five sections, thus rendering it more convenient for transport, and also admitting of easy access being had to all parts of the apparatus for repairs. Each section is provided with independent valves and cocks, so that any particular section may

be shut off at any time if desired.

In Fig. 83 is illustrated an atmospheric or open-air condenser made by the Triumph Ice Machine Company, Cincinnati. This condenser is arranged in sections, and is so constructed as to permit of the ready removal of any pipe or fitting, without the necessity for shutting down the plant or losing any of the agent. The apparatus has double, extra heavy, wrought-iron pipe headers.

The atmospheric condensers designed and manufactured by the Fred. W. Wolf Co., of Chicago, has pipes made from selected skelp,

with drop-forged Bessemer steel flanges screwed on to same whilst hot, thus admitting of its shrinking in place when cool. Galvanised iron troughs, fitted with a patent levelling device, are provided for distributing the cooling water, and perforated steel strips are secured between the pipes. An inlet and an outlet valve are fitted to each section, so that any one of them can be emptied without interfering with the operation of the others.

In Fig. 84 is illustrated an atmospheric or open-air evaporative surface condenser, built on Rau's system, with either copper or iron pipes,

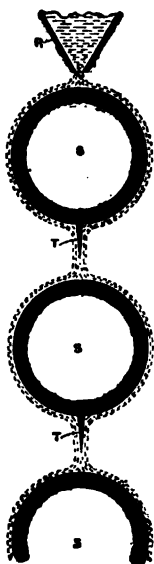


Fig. 80.—Diagram showing Method of Avoiding Spattering in Distributing Water in Atmospheric Condenser.

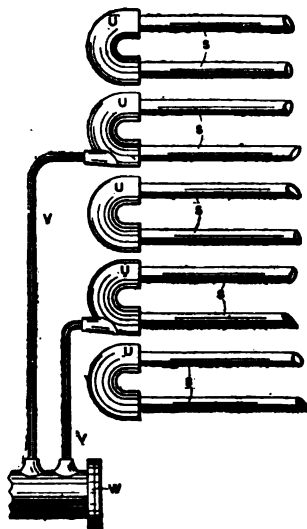


Fig. 81.—Arrangement for Removing Liquefied Agent from Atmospheric Condenser.

by Quiri and Co., Schiltigheim, Alsace. The construction of this condenser will be readily understood from the engraving.

Evaporative condensers are also cooled by artificial currents of air, propelled by a fan or blower, in which case a very powerful evaporation is established. Whether or not an arrangement of this description would prove to be an economical one, depends upon the temperature and cost of the cooling water procurable relatively to the cost of driving the fan.

The amount of condensing surface for an open-air condenser is, according to Professor Siebel, 40 square feet per ton of refrigerating capacity (or for one-half ton ice-making capacity), which amount is equivalent to 64 running feet of 2-inch pipe or to 90 running feet of 1 $\frac{1}{4}$ -inch pipe.

The amount of cooling water required for an open-air or atmospheric condenser is upward of 50 per cent. less than that required for a submerged condenser, and if made of sufficient height, the same water may be used repeatedly in an open-air condenser.

The following table, compiled by Mr. Eugene T. Skinkle, gives the dimensions of open-air or atmospheric condensers of some plants in actual operation in the United States:—

DIMENSIONS OF OPEN-AIR OR ATMOSPHERIC CONDENSERS.

Ice-making Capacity in Tons.	Refrigerating Capacity in Tons.	Condenser Pans.				Number of Pipes High.	Number of Pipes Wide.	Size of Pipe in Inches.	Length of Coil over Bends in Feet.	Total Feet of Pipe in Condenser.	Feet of Pipe per Ton Ice-making Capacity.	Feet of Pipe per Ton Refrigerating Capacity.
		Length of Pan in Feet.	Width of Pan in Feet.	Depth of Pan in Inches.	Thickness of Iron in Inches.							
12 $\frac{1}{2}$	25	21	10 $\frac{3}{8}$	8	1 $\frac{3}{8}$	40	5	1	17	3,680	294.4	147.2
20	35	24 $\frac{1}{2}$	10 $\frac{3}{8}$	8	1 $\frac{3}{8}$	40	5	1	21	4,440	222	126.8
30	50	24 $\frac{1}{2}$	14	8	1 $\frac{3}{8}$	50	7	1	21	7,750	258.3	155
40	75	24 $\frac{1}{2}$	14	8	1 $\frac{3}{8}$	50	7	1 $\frac{1}{4}$	21	7,750	193.75	103.33
50	100	24 $\frac{1}{2}$	14	8	1 $\frac{3}{8}$	90	7	1	21	13,950	279	139.5
60	125	24 $\frac{1}{2}$	14	12	1 $\frac{3}{8}$	80	7	1 $\frac{1}{4}$	21	12,400	206.6	99.2
80	150	27 $\frac{1}{2}$	17	12	1 $\frac{3}{8}$	80	7	1 $\frac{1}{4}$	24	14,080	176	93.86
Average for 1-in. Pipe per ton											263.42	142.12
Average for 1 $\frac{1}{4}$ -in. Pipe per ton											192.12	98.79

SUPPLEMENTARY CONDENSERS OR FORECOOLERS.

An arrangement intended to create a saving of power and of cooling water is a supplementary condenser or forecooler consisting of one or more coils of pipe through which the hot compressed gas is caused to pass before entering the main condenser. This supplementary condenser is cooled by the overflow water from the main condenser. When the supplementary condenser consists of one coil only it should be equal in size to the discharge pipe from the com-

pressor. Should a series or number of coils be provided, however, the manifold pipe and the aggregate area of the small pipe openings should be equal to that of the discharge pipe.

THE WESTERLIN AND CAMPBELL DOUBLE-PIPE CONDENSER.

This condenser, which is shown in side and end elevation in Figs. 85 and 86, consists of a coil made up with one pipe inside another, the water being on the inside of the internal pipe, and the hot compressed gas in the annular space or clearance between the pipes.

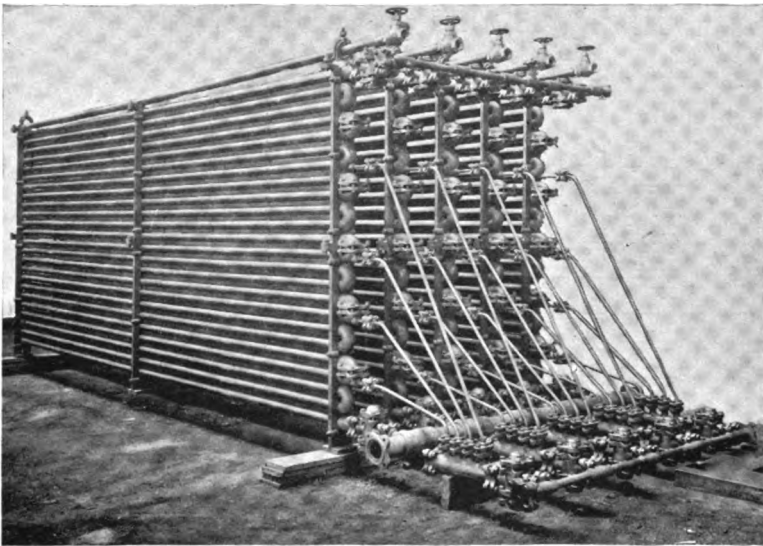


Fig. 82.—Haslam Atmospheric or Open-air Evaporative Surface Condenser.

This type of condenser is an attempt to secure the best features of both the submerged and atmospheric types in one apparatus, and is specially suitable wherever the water is to be used over again for some other purpose, and where the open-air type cannot be used by reason of structural difficulties. The hot gas is arranged to travel in a downward direction, and the cooling water in an upward direction, so effecting an interchange of temperature that results in the warmer water meeting the current of the warmest gas. The condenser is constructed in a nest, comprising several sections or stands, so that any one section

can always be cut out for repairs, without having for that reason to shut down the plant, and such a cross connection of the water connections is provided that the water current can be reversed when it is desired to wash out the internal pipe.

An objection to this type of condenser would appear to be the liability of the deposit of scale in the pipes from certain classes of water.

HENDRICK'S CONDENSER.

This type of condenser differs from those previously described. It consists essentially of a vertical cast-iron shell containing two or more

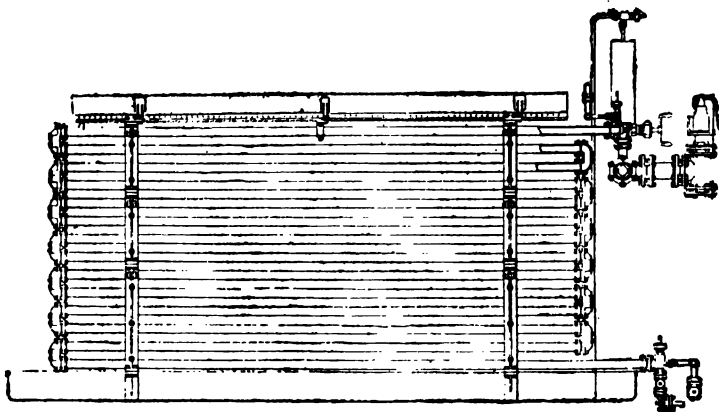


Fig. 83.—Triumph Atmospheric or Open-air Evaporative Surface Condenser.

spiral coils of $1\frac{1}{4}$ -inch pipe of extra thick gauge, the tail ends of which project through the heads or covers of the shell and are connected together by suitable manifolds.

The hot compressed gas is delivered into the upper part of this shell, and the condensing water is circulated through the spiral coil or coils of pipe located therein. The hot compressed gas is liquefied by reason of pressure and by coming into contact with the coil or coils, and the liquid will collect at the bottom of the shell, which thus forms also a storage tank or receiver for the anhydrous liquid, from which it can be discharged into the evaporator or refrigerator. The shell is fitted with a level and gauge to indicate the amount of liquid therein.

WATER-COOLING APPARATUS.

In large towns and cities where the water from the water companies' mains has to be used, and paid heavily for, it is often doubtful economy to attempt to reduce the temperature of the condensed gas below a certain point, say 60° Fahr. during the winter months, and 70° Fahr. during the summer months. It is obvious that when a high price has to be paid for the water employed for cooling and other


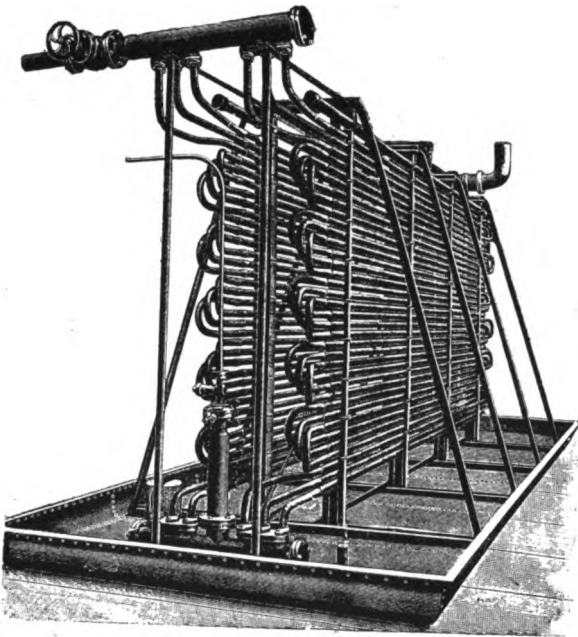


Fig. 84.—Rau's Atmospheric or Open-air Evaporative Surface Condenser.

purposes, every effort possible should be made to utilise it to the fullest extent, and, with this end in view, it is desirable to use the overflow water from the condenser for boiler-feeding purposes, or to employ some means, such as a cooling tower, for saving that which would be otherwise run to waste and be completely lost.

An efficient and economical arrangement for this latter purpose is Puplett's improved water-saving and cooling apparatus, which is illustrated in Fig. 87. It is claimed by the inventor that the use of

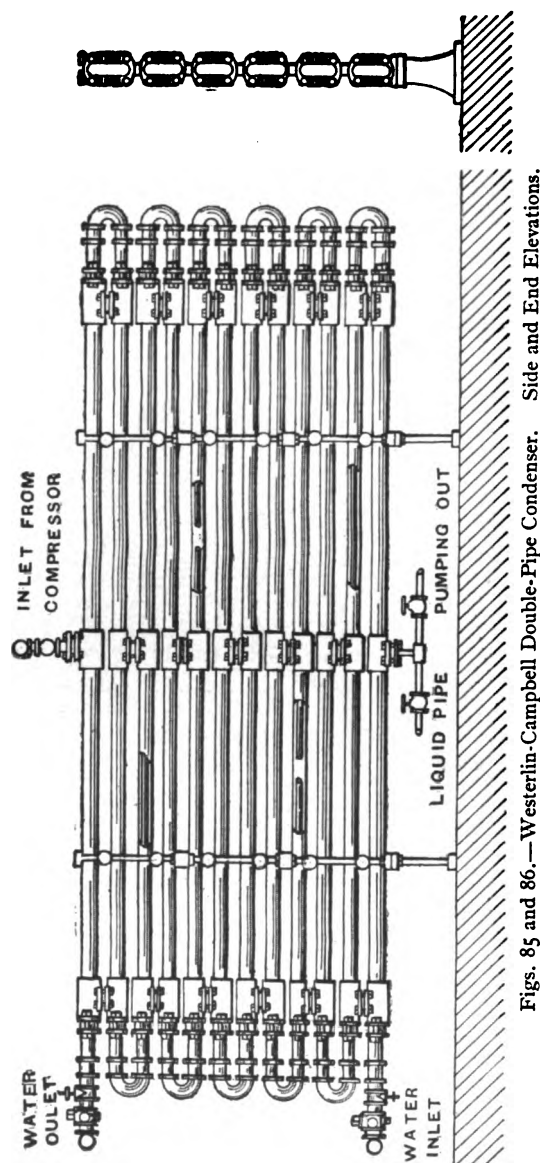

Figs. 85 and 86.—Westerlin-Campbell Double-Pipe Condenser. Side and End Elevations.

this contrivance enables the condensing water to be used over and over again with comparatively little loss, the waste indeed being practically confined to the quantity taken up by evaporation, which loss is, of course, more considerable in hot weather, and the consumption of condensing and circulating water is thus minimised as much as possible. It is stated to have been clearly demonstrated that in regular working for a considerable period, with a temperature in the sun of 93° Fahr., the entire loss experienced did not exceed 3 per cent. of the total quantity of water circulated. The cost of the up-keep of the apparatus, moreover, is trivial, being one farthing per thousand gallons cooled, and the power required under ordinary conditions is one horse-power indicated for the same amount.

The scope of this work does not admit of entering into an extended dissertation upon what are known as cooling towers, consequently space can only be found for a few general remarks and very brief descriptions of some examples of water-cooling towers, with which this chapter will be brought to a conclusion.

First, as regards the general efficiency of any apparatus of the kind under consideration, this will be found to depend upon the

following three principal points, viz. :—The extent of the water surfaces exposed. The quantity of air that is brought into contact with those surfaces. And, thirdly, upon the difference of pressure which exists on the vapours at the water surfaces, and in the surrounding atmosphere. The first two will be seen to relate to the construction of the apparatus, the third to the general or normal atmospheric conditions.

From the above it will be gathered that the chief features to be looked for in a water-cooling apparatus are the provision of the maximum amount of cooling surface, the most even distribution of the water over this cooling surface possible, and an effective air circula-

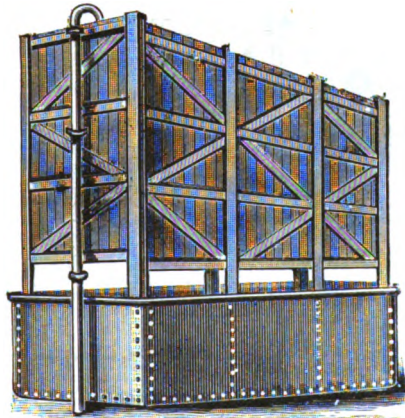


Fig. 87.—Puplett's Water-Saving and Cooling Apparatus.

tion. Cooling towers are extensively employed in the United States in connection with refrigerating plants, and the following very brief descriptions of a few of the best known will give an idea of their construction.

The Worthington consists of a steel tower enclosing the evaporating surfaces, which latter are formed of hard glazed tiles, supported upon T-beam grating, or of re-galvanised tube tiling.

The Klein is constructed entirely of wood, a polygonal vertical shaft forming the frame for a checker work of boards, which are arranged in horizontal layers.

The Stocker, which consists essentially of a strong wooden casing, the interior of which is made up of cross-pieces of boards arranged in horizontal layers set at right angles to each other, and having between their intersections upright oblique partitions. The water is distributed by a system of funnel-shaped troughs at the top of the structure.

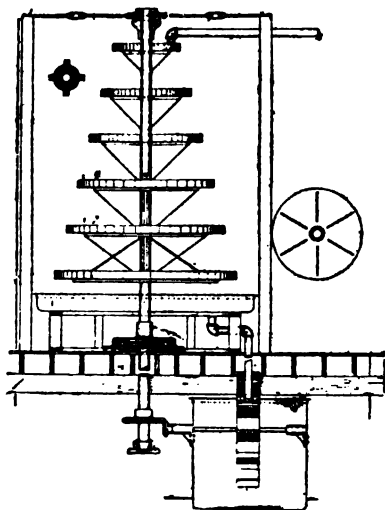


Fig. 88.—Triumph Water-Cooling Tower. Elevation.

The Barnard has a steel casing within which are hung a number of mats made of a special galvanised wire cloth.

In all these cooling towers except the Stocker one fan only is employed, the latter has two fans mounted upon one steel shaft at the base of the apparatus, which arrangement is claimed to enable a more equal

distribution of the air to be effected, and a saving of driving power, as compared with the amount of air discharged.

The Zschocke cooling tower is also said to afford first-rate results, and to be most economical in working. This apparatus consists essentially of a main distributing water-trough located above the cooler, into which the water to be dealt with is delivered direct, or, where it consists of injection water carrying a considerable amount of oil, after passing it through an oil filter. In the walls of this main distributing trough, and near its bottom, are fitted a number of small iron pipes,

through which the water will pass into a series of smaller distributing troughs, the walls of which are serrated both top and bottom, so as to cause the water to be distributed in drops over the top layer of the wooden battens composing the body of the cooler. These battens are evenly spaced, and are placed at a slight inclination, so that each drop of water will be caught and broken on the rough surface, and will spread itself out into a thin film, which will flow down each of the battens, and again form itself into drops on the lower edge of it, owing to its being also serrated, and will fall on to the next batten in the layer below, and so on, until the bottom or lowermost layer is reached. The air has free access to every batten, and, consequently, as the water parts with a portion of its heat at each, it will fall into the receiving tank beneath in a suitably cooled condition. The open type of cooling tower is provided at the sides with louvres, which serve to prevent the water from being blown away in the case of strong winds, whilst at the same time admitting air to every part.

The Triumph Ice Machine Company's water-cooling tower is shown in Fig. 88. This apparatus works on the principle of exposing the water to be cooled in a thin sheet to the cooling effect of the atmosphere, the result being said to be increased in the above tower by imparting to it a rotary motion against the air current. This rotary motion is given by a small water-wheel in the manner plainly shown in the illustration.

A cooling device made by the Linde Company for use in connection with submerged condensers consists of the following arrangements: The condenser pipes are placed in an iron tank, the cooling water being kept in motion by a stirrer. At the top of the tank are provided a number of sheet-iron cylinders, so arranged that they are immersed in the water below to the extent of about one-third of their diameter. These cylinders are caused to rotate slowly upon their axes, and their water-covered surfaces are subjected to the action of a current of air generated by a fan, the consequent evaporation producing the cooling effect. This apparatus is identical in principle to the Wetzel pan for concentrating the syrup or liquor in the manufacture of sugar.

CHAPTER IX.

THE ABSORPTION AND BINARY ABSORPTION PROCESS OR SYSTEM.

The Principle of the Absorption Process.—Early Machines.—Later Patterns of Machines.—The Binary Absorption Process, or Machines using a Compound or Dual Liquid.

THE principle involved in the operation of machines for the abstraction of heat by the evaporation of a separate refrigerating agent of a volatile nature under the direct action of heat, and without the use of power, which agent again enters into solution with a liquid, is, as has been previously observed of the liquefaction process, more a chemical or physical action than a mechanical one. It is founded upon the fact of the great capacity possessed by water for absorbing a number of vapours having low boiling points, and of their being readily separable therefrom again, by heating the combined liquid; hence it is commonly known as the absorption process.

The absorption process was invented by Ferdinand Carré (brother to Edmond Carré, whose sulphuric acid freezing apparatus has been previously mentioned) about the year 1850. This system involves the continuous distillation of ammoniacal liquor, and requires the use of three distinct sets of appliances, viz. :—

First, for distilling, condensing, and liquefying the ammonia. Second, for producing cold, by means of a refrigerator, and absorber, a condenser, a concentrator, and a rectifier. Third, pumps for forcing the liquor from the condenser into the generator for redistillation. The three operations are each distinct from the other, but when the apparatus is in actual work they must be continuous, and are dependent upon one another, forming separate stages of a closed cycle.

An advantage of the absorption process is that the bulk of the heat required for performing the work is applied direct without being transformed into mechanical power. The first machines, however, constructed upon this principle were very imperfect in operation, by reason of the impossibility of securing an anhydrous product of distillation, and as the ammonia distilled over contained as much as 25

per cent. of water, a very large expenditure of heat was required for evaporation, and the working of the apparatus, moreover, was rendered intermittent. This was owing to the distillation, which is the most important operation, and has of necessity to be executed in a rapid manner, being, in the first machines, very imperfectly effected, and the liquor resulting therefrom being naturally much diluted with water. Another serious result of the above defect was the accumulation of weak liquor in the refrigerator, and the consequent necessity for constant additions of ammonia.

By subsequent improvements, however, made by Rees Reece in 1867-70; Mort in 1870, who introduced an improved temperature exchanger or economiser; H. F. Stanley, 1875; F. Carré (the original inventor), in 1876; W. H. Beck, in 1886; Mackay and Christiansen, and E. H. Tomkins, in 1887; and later still in the same year by E. L. Pontifex, the distillate has been rendered nearly anhydrous, and absorption machines have been brought to a very considerable degree of efficiency.

In Fig. 89 is illustrated F. Carré's continuous-acting absorption machine. As above mentioned, the agent employed in this apparatus is ammonia. In the drawing A indicates the generator, B is the liquefier, C is the refrigerator, D is the absorber. Aqua ammonia is introduced into the generator A, the level of the liquid being indicated by a gauge glass which is shown on the left-hand side of the said generator, and which is practically similar to that used on steam boilers, and the evaporation is effected by heat from the furnace shown beneath. The gas from the generator A is conducted by a suitable pipe E to the liquefier B, wherein it passes through a congeries or series of coils or zigzags arranged in a bath of cold water, which is kept constantly renewed from the reservoir F. By the time the ammonia has reached a vessel situated at the termination of the coils or zigzags in the liquefier it is in a liquid condition, and under a pressure of about 150 lbs. per square inch, which pressure is constantly maintained in the generator A.

In the liquid state the ammonia flows through the pipe G to the regulator H, by which it is admitted to the distributor I through a pipe K, which latter is wound spirally round the pipe or tube L, which is of larger bore, and through which the vaporised or gasified ammonia returns from the refrigerator C after having performed its heat-absorbing duties therein. By this arrangement the returning vapour or gas is made to do some further work by absorbing or taking up heat from the liquid ammonia on its way to the refrigerator.

The refrigerator represented in the drawing consists of a set or series of six or other suitable number of spiral or zigzag tubes c^1 , c^1 ,

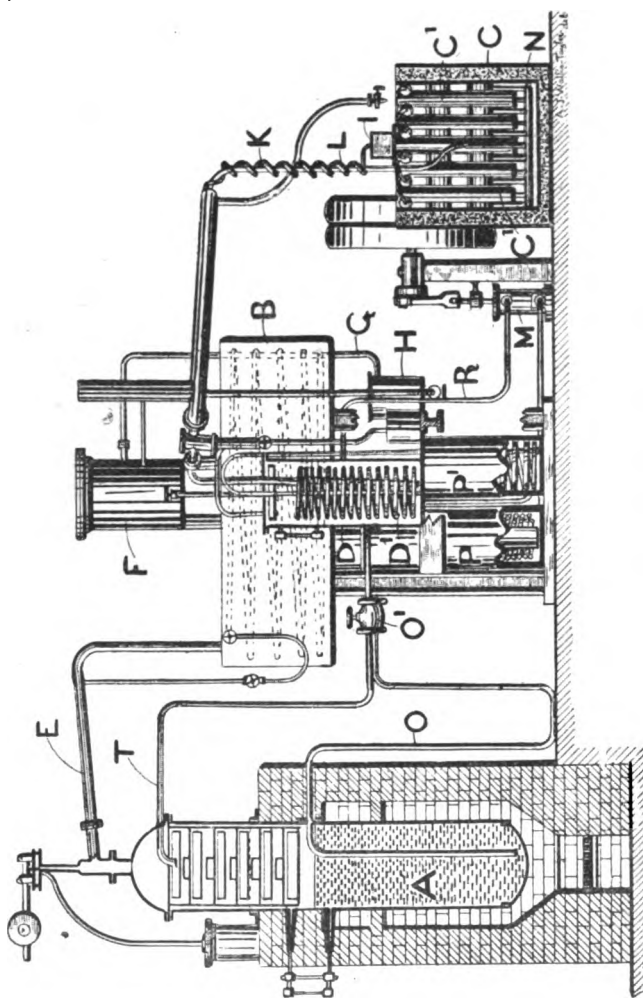


Fig. 89.—Carré's Continuous-acting Ammonia Absorption Machine.

which return upon themselves, forming an equal number of partitions in the tank wherein they are immersed, which latter is lagged with suitable non-conducting material. Each of these zigzags receives an

equal supply of the liquid ammonia from the distributor I, and the space in the insulated tank surrounding them is filled with some uncongealable liquid, or one that will congeal only at very low temperatures, such as alcohol, or a solution of chloride of calcium or of common salt, which is usually known as brine.

The ice-cans or cases are immersed in the liquor between the zig-zags, and are sustained upon a carriage capable of being moved by the same mechanism that works the pump M, by which the re-saturated solution of ammonia and water is returned to the generator.

The ammonia gas or vapour from the zigzags in the refrigerator C is collected in the cylindrical vessel N, from which it passes up through the tube L to the absorber D, where it meets the water that has been brought from the bottom of the generator A, and which partially fills the latter. This water being nearly free from ammonia, it having been exhausted therefrom by evaporation in the generator A, greedily absorbs or takes up the ammonia gas or vapour injected into it from the tube L.

The absorber D is fitted with a worm D¹ which receives cooling water from the supply tank F, and the water from the generator A, which is brought by the pipe O, is first passed through the coolers P, P¹, before delivery into the absorber D, and is thereby cooled so as to fit it to absorb the ammonia gas or vapour in the absorber D more freely.

The transference of the water from the bottom of the generator A to the absorber D is effected by the pressure in the former, whenever the stop-cock or valve O¹ in the pipe O is opened. The pipe O is carried in a double coil through the cooler P, which consists of two concentric cylinders, and in a single coil through the cooler P¹, discharging through a sieve, strainer, or perforated tray, in a fine shower into the absorber D. The strong ammoniacal solution from the absorber D, which is considerably reduced in temperature, is passed through the spaces round the coils of pipe O in the cooler P, and whilst reducing the temperature of the hot exhausted solution or water from the bottom of the generator A on its way to the absorber D, is itself raised several degrees before being returned to the generator, to the mutual advantage of both. The coil of pipe O, in the second cooler P¹, is water cooled from the supply tank F.

The saturated solution from the absorber D is drawn off by the force pump M (which is driven by a steam-engine or other motor), through the pipe R, and is delivered thereby to the space round the coil in the cooler P, passing from the cooler, through the pipe T, to

the dome on the upper part of the generator A, where it falls upon, and trickles downward through, a series of perforated strainers or trays, whilst the ascending ammoniacal gas or vapour, on the other hand, takes a sinuous upward course, alternately passing round the edge of one of the trays, and through a central hole or aperture provided in the next, and so on to the gas or vapour pipe E; any aqueous vapour, which might otherwise be carried off with the ammoniacal gas or vapour, being thus condensed and returned to the generator.

The constant pressure maintained in the generator A is, as already mentioned, about 150 lbs. per square inch, and to prevent this pressure from being exceeded a safety valve is provided on the dome of the generator A. And gas that escapes through this safety valve is led through a suitable pipe to a small water tank, where it is absorbed.

As will be seen from the above description, the operation is, shortly, as follows:—

The aqua ammonia is first introduced into the generator A, the gas or vapour expelled therefrom by heat into the condenser B; and so that the process may be carried out continuously and not be arrested by the exhaustion of the solution, the exhausted or impoverished liquor is slowly drawn off at the bottom of the generator, an equal volume of fresh strong solution being constantly inserted at the top thereof. The united effects of the cooling and pressure produce liquefaction of the ammoniacal gas or vapour in the condenser, and the liquid ammonia passes to the refrigerator. It will be seen that the ammoniacal gas or vapour from the tubes of the refrigerator is re-absorbed, and a rich solution is formed to feed the generator, the absorbing water used being that withdrawn exhausted from the latter. Thus the generator and the condenser will keep up a continuous supply of the liquid, and the refrigerator will continue to freeze successive charges of water in the ice-cans or cases, provided, however, that the requisite heat to vaporise or gasify the ammonia is supplied to the generator. If, therefore, the entire apparatus be perfectly fluid-tight, as it is theoretically supposed to be, no escape could take place by leakage or otherwise, and the same materials would go on indefinitely producing the same uniform effect.

In starting a machine constructed on the absorption principle it must be first blown through to expel all the air. In Carré's apparatus the air escaping from the absorber is conducted by a suitable pipe into what is known as a purger, where it is passed below the surface of water to absorb or retain any ammonia that would otherwise escape with the air.

A large amount of water is required for cooling purposes in the condenser or liquefier, and absorber, and a considerable consumption of fuel is also necessary to heat the generator, when this is performed directly by means of a furnace, as above described; when, however, this is effected by steam-heated pipes, as in Stanley's 1875 patent, or, as will be described later on, by coils of pipe heated by the exhaust steam from an engine, or even by direct or live steam from a boiler, there is a considerable saving on this head. Steam or other motive power is likewise required for driving the force pump.

It is claimed by Mr. Carré that for each pound of coal consumed as fuel, from 8 to 12 lbs. of ice can be produced, in accordance with the size of the apparatus. For working the larger form of machine, capable of making 500 lbs. of ice per hour, two men are required; the force pump is capable of forcing 220 gallons of liquid per hour into the generator, and during the same time 100 lbs. of pure ammonia is liberated from solution, liquefied, evaporated, and re-dissolved or re-absorbed.

Rees Reece's chief improvement is founded on the fact that two vapours having different boiling points, when united, can be recovered by fractional condensation, and by means of his apparatus a practically anhydrous distillate can be obtained.

The special feature in the invention described in his 1867 patent is the method of obtaining nearly anhydrous liquid ammonia by means of an analyser, a rectifier, and a condenser, the peculiar construction and arrangement of which enables a continuous distillation and rectification of a dilute solution of ammonia to be effected upon the separative principle. The ammoniacal gas is reduced by its own pressure to a liquid condition in the condenser, from which it passes into the refrigerator at a very low temperature, quickly abstracting the heat from any fluid passed through the latter.

A boiler is connected with an analyser consisting of a series of plates arranged in the usual manner within a strong iron vessel. The analyser is connected with a rectifier, which is provided with a series of vertically arranged tubes surrounded by cold water, through which tubes the ammoniacal fluid passes to the condenser; or in an alternative arrangement the rectifier is provided with a series of vessels placed one above the other with a space between them, the vessels being so connected that a passage is formed from end to end thereof for a continuous stream of cold water. The condenser is either fitted with tubes and is practically similar in construction to the first arrangement of rectifier above mentioned, or it consists simply of a cylindrical

or other suitably shaped iron vessel, of sufficient strength to resist the internal pressure of the gas, and immersed in cold water. From this condenser the condensed ammonia passes to a refrigerator, which may be of any convenient form and construction. The liquid cooled in the refrigerator parts with the greater portion of its heat to the condensed ammonia, which is again vaporised, and in this form passes into an absorbing vessel which is kept cool by water, and which serves to maintain the required vacuum in the refrigerator. The ammoniacal solution passes from the absorber into a heating vessel, from which it is returned into the analyser. The latter may, however, on occasions be dispensed with, and the boiler connected directly with the rectifier.

In his 1870 invention further improvements are introduced, and the entire apparatus comprises a generator, an analyser, a rectifier, a liquefactor, a receiver, a refrigerator, an absorber, and a heater, an engine placed between the refrigerator and the absorber being sometimes, moreover, employed.

The first five of these vessels form what may be called the distillery part of the apparatus, and the main object of these improvements is likewise to ensure the more perfect elimination of liquid ammonia in an anhydrous condition, or practically so, from its aqueous solution, and in one continuous uninterrupted operation.

The analyser consists of a vessel fitted with a series of perforated cups or dishes, a dividing plate, an overflow pipe, and a dead plate or baffle to prevent the direct passage of the steam through the cylinder. The absorber comprises a series of pipes arranged together within a tank or cistern.

The ammoniacal gas eliminated from its solution in water by the action of the generator, analyser, and rectifier, passes onwards to the liquefactor or liquefier, wherein by its own pressure it is reduced to a liquid, and is collected in the receiver; the liquid ammonia so obtained being practically anhydrous. This anhydrous ammonia is then passed into the refrigerator, in which is placed a coil of pipe, any liquid passing through which will be cooled by the evaporation of the liquid ammonia surrounding it.

The refrigerator is connected through a stop-cock or valve to another coil contained or enclosed in an iron pipe, which coil extends to the absorber vessel, the latter being connected to the coil of piping contained in the refrigerator. The object of this second vessel and coil is to effect an interchange of temperature with the gas.

During its further onward passage to the absorber the ammoniacal

gas comes in contact with the spent or exhaust liquor of the distilling apparatus in which it dissolves, yielding back the original quantity of the ammonia solution, to be used over again repeatedly without any appreciable loss or waste. This solution of ammonia is forced by a pump into the top of the analyser, wherein the ammonia is separated from the water, and passes to the condenser to be liquefied, whilst, on the other hand, the exhausted liquor goes to the generator, and from thence into the temperature exchanger or heater, and on to the absorber.

The tension or elastic force possessed by the gas as it passes from the refrigerator to the absorber, especially when employed for cooling water, admits of its being utilised for driving the pumps of the apparatus, or for other purposes.

The operation of Reece's improved apparatus is briefly as follows:—

The charge of liquid ammonia (the ordinary commercial quality of a density of 26° Beaumé) is vaporised by the application of heat, and the mixed vapour of water and ammonia passed to the vessels called the analyser and the rectifier, wherein the bulk of the water is condensed at a comparatively elevated temperature, and is returned to the generator. The ammoniacal vapour or gas is then passed to the condenser, where it is treated in a substantially similar manner to that in Carré's apparatus, that is to say, it is caused to liquefy under the combined action of the condensation effected by the cooling water circulating round the condenser tubes, and of the pressure maintained in the generator. The liquid ammonia (in this case practically anhydrous) is then used in the refrigerator, and the vapour therefrom, whilst still under considerable tension, is admitted from the refrigerator to a cylinder fitted with a slide valve, and entry and exhaust ports, practically similar to those of a high pressure steam-engine, and is thus utilised to drive the force pump for returning the strong solution to the generator, after which it is passed into the absorber, where it meets, and is taken up by, the weak liquor from the generator, and the strong liquor so formed is forced back into the generator by means of a force pump as before described.

The temperature exchanger or economiser introduced by Mort in 1870, provides for the hot liquor on its way from the generator to the absorber giving up its heat to the cooler liquid from the absorber on its way to the generator, thereby saving the abstraction of so much heat from the generator, and admitting of the liquid in the absorber being kept at a lower temperature, which is of great importance to the economical working of the apparatus.

The invention which Harry Frank Stanley patented in 1875 comprises several important improvements upon the foregoing, the chief of which are as follows :—

In place of applying fire heat to the generator, as had been hitherto customary, a coil of steam pipes is employed for evaporating the ammoniacal vapour. The advantages derived from this are that the pressure and temperature in the generator can be much more easily regulated, and, moreover, the ammonia separates from the water better at a low heat, and an even temperature is found to be most essential to the efficient working of the apparatus. The steam-heated evaporating pipes consist of a number of straight pipes connected together by bends, giving a very large heating surface, and when the exhaust steam from the engine is employed therein for heating purposes, a very great saving of fuel is effected.

The analyser is placed upon the generator so as to economise space and save the connections otherwise necessary. This analyser is formed preferably cylindrical, and is fitted with a series of dishes or trays having passages so arranged that the vapour impinges on the undersides thereof, and traverses the vessel without passing through the liquid. Each of the dishes or trays is provided with an overflow pipe which is raised above the level of the bottom thereof, so as to keep some liquid in the dish or plate, but always below the top of the vapour outlet. As the ammonia vapour is driven off from the solution of ammonia and water, by the heat of the vapour rising from the tray below, it passes through the vapour outlets into the rectifier without going through the liquor on the tray or trays above.

By this means a considerable saving of fuel is effected, as the ammonia when once separated from the water on each tray or plate is at once delivered to the rectifier. Otherwise, were this not so, water has such a strong affinity for ammonia, that the vapour which had been separated from the liquor on one plate would quickly become absorbed again by the liquor it had to pass through on the next plate.

The rectifier is placed on the condenser, the two forming in fact one vessel, and the same condensing water does duty for both, the latter passing in at the bottom of the condenser where the coldest water is wanted, and up the outside of the coil into the rectifier, from which it passes to the absorber. The ammoniacal gas or vapour passes from the analyser into the top of the coil in the rectifier, which coil is fitted at intervals with pockets to carry off the water resulting from the condensation of the vapour coming from the analyser, so that immediately any such condensation occurs the liquor passes at once

out of the coil, and the ammoniacal vapour does not come in contact with the water after being separated from it. By providing these pockets with cocks or valves suitable adjustments of the apparatus can be effected.

The ammonia gas thus passes to the condenser in a practically anhydrous condition, which is absolutely essential to the economical working of the apparatus, and which would not otherwise be the case, as if the said gas comes into contact with the water resulting from its condensation it would re-absorb a portion of it.

The condenser coil is contained in a cast or wrought-iron cylinder, and to simplify the apparatus and to save space, the condenser is placed upon the receiver, the latter being a plain wrought or cast-iron vessel serving, as before, to store the anhydrous ammonia before it goes into the cooler or refrigerator; it is fitted with a glass gauge, or a float gauge to indicate the level of the liquid therein. When the latter is employed, revolving spindles or rods working vertically through stuffing boxes in the usual way are preferably used, as tending to minimise friction and prevent leakage.

The refrigerator or cooler is substantially similar to that employed in the former arrangements, but is fitted with a self-closing gauge in case of breakage.

The absorber is constructed of smaller pipes or tubes, so as to enable a greater number to be used than heretofore, and thus for a given content to secure a very much larger surface exposed to the action of the cold water which surrounds the tubes; the latter are preferably constructed of wrought-iron.

Another saving of condensing water is effected by having a few of the top pipes above the upper extremity of the water cistern, and letting the warm water coming from the rectifier drip over the outside of the pipes. The heat due to the ammoniacal gas being absorbed by the weak liquor, which is given off from the inside, is sufficient to vaporise a portion of the water, and a large quantity of heat becomes latent in the vapour, producing a refrigerating effect.

The pump employed for drawing the strong solution of ammonia produced in the absorber, and forcing it through the coil of pipe in the heater into the analyser, against the pressure, is so constructed that there are the very least possible clearances, and that the whole, or practically the whole contents, are discharged at each stroke, thus preventing expansion of gas on the return stroke, tending to keep the suction valves closed. The pump cocks, valves, and gauges, are provided with water containers, so that should any leakage of ammonia

through the stuffing box occur, the water will absorb it, the latter being returned into the apparatus when it becomes thoroughly saturated. The stuffing box cock is constructed with a guard, and with an adjustable clamp screw, which holds the key to its seat, preventing leakage from compression of the packing, and admitting of the stuffing box being repacked whilst the apparatus is at work.

To allow for the gradual weakening of the solution of ammonia, a small vessel or still is provided in connection with the generator, wherein the weak solution from the latter is evaporated off at a low temperature into the apparatus, where the least pressure exists.

In the invention patented by William Henry Beck, in 1886, some still further improvements in various details of construction are described, notably in the arrangement of the analyser and rectifier, and the absorber.

In the first-mentioned vessel a series of sheet iron or steel trays with or without perforations, the edges whereof are drifted or set up so as to form short adjutages, are provided. Each alternate one of these trays has a central opening, and each intermediate tray an annular space left between its circumference and the enclosing case or cylinder. An inner sheet metal casing is, moreover, provided in which the water-separating trays are secured, and which, together with such trays, can be easily removed and replaced in position; and the mouth of the vapour outlet pipe is sometimes surrounded by a finely perforated wire gauze chamber or guard.

The absorber is formed with a primary absorbing vessel, wherein the absorption of the ammonia gas is effected to an extent dependent upon the temperature of the ordinary cooling or condensing water, combined with a secondary absorbing vessel wherein a further absorption of the ammonia gas is effected by the cooling action of a current of cold brine, or of water, cooled to a temperature below that of the ordinary cooling or condensing water used in the primary absorber.

The weak liquor cooler, the liquid ammonia receiver, the condenser, and the rectifier are contained in a single open-topped tank provided with divisions or partitions so arranged as to ensure the passage of the cooling or condensing water successively through each of the compartments.

Frederick Noel Mackay and Adolph Gothard Christiansen obtained a patent for improvements in ammonia absorption machines in 1887, the main features of which that are claimed as novel being as follows, viz. :—

The separation of the ammoniacal gas from the liquor in which it is absorbed, by boiling the liquor in stages within the same boiler.

An analyser consisting of a chamber containing superimposed spirally corrugated plates having perforations or openings.

The combination within one chamber of an ammoniacal liquor boiler and analyser.

A rectifier consisting of such an arrangement of a coil or coils that the gas will take an upward direction, and the liquid a downward direction.

A condenser wherein the coils are so connected that the gaseous ammonia passes from coil to coil in an upward direction, whilst the liquid ammonia flows in a downward direction.

A multiple coil condenser so constructed that it has but one single through way.

A rectifier and condenser consisting of chambers containing coils, all the joints whereof are situated on the exterior.

An auxiliary cooler composed of a chamber fitted with a coil and regulator, and suitable connections.

A vaporiser and refrigerator wherein the brine flows through a chamber, whilst the liquid ammonia expands through small perforations or apertures into tubes contained in this chamber.

An absorber constructed with a concentric corrugated chamber.

Ammonia pumps provided with a chamber through which ammonia liquor from the absorber passes.

An arrangement whereby ammoniacal liquor from the absorber is caused to cool ammoniacal liquor from the boiler.

In Edward Henry Tompkins' patent, which was granted in the latter part of 1887, for improvements in refrigerating apparatus of the kind or class for which previous letters patent were granted to Rees Reece and William Henry Beck, the chief novel points claimed are :—

The placing of the generator within the boiler so as to secure the full efficiency of the heat given off by the steam generated therein.

The combination and connection with the main gas pipe from the generator, of a vessel doing the triple duty of heater, rectifier, and analyser; which vessel consists of an iron tank with an arrangement of tubes, and a sealed joint or joints at the base through which the gas rises.

An improved form of condenser, consisting of an ordinary condenser of the multi-tubular pattern, wherein the tubes are passed through a tube plate and expanded in the usual manner, but having in addition horizontal partition plates of metal at the alternate ends of the tubes, whereby the ammonia is caused to travel backwards and

forwards along the alternate layers or sets of tubes, and thereby to receive the full benefit of the cold of the condensing water. By the removal of the end covers, moreover, each layer or set of tubes is rendered readily accessible for cleaning or repairs.

A cooler or refrigerator comprising a system of horizontal tubes placed in a large tank, within which latter a solution of chloride of calcium is caused to circulate so as to secure an equable temperature throughout the entire length of the tank.

An absorber, wherein provision is made for intimately mixing the ammonia gas from the refrigerator or cooler, with ammonia liquor, cooled, firstly, by passing it through a small cooler, and secondly by bringing it in contact with a series of tubes through which water is made to circulate, thereby effecting a considerable gain in the working of the apparatus.

An ammonia pump provided with a stuffing box wherein is inserted a hollow steel or iron ring of suitable dimensions, to which ring is connected a pipe leading to a receiver having a glass gauge to show the height or quantity of liquor ammonia which has escaped past the first series of packing, and is contained therein. From this receiver a pipe fitted with suitable stop-cocks or valves leads to a small hand-force pump or compressor of the ordinary type, so that by opening and closing these stop-cocks the escaped liquor can be withdrawn into the pump or compressor, or forced back into the generator, as may be desired.

The provision of means whereby the ammonia liquor from the absorber is passed through a coil contained in the compound vessel doing triple duty as heater, rectifier, and analyser, and consequently enters the generator at a high temperature, and the temperature of the ammonia gas on its way to the condenser is likewise reduced. The condensation from this ammonia gas which occurs in the rectifier and analyser, is conveyed back to the generator by gravitation; the above-mentioned compound or triple vessel being situated above the level of the generator, and the pressure in both vessels being equal.

A small cooler wherein the weak liquor ammonia coming from the generator in its heated condition, is reduced to a state of comparative coolness, by contact with tubes cooled by a circulation of cold water, to which water may be added, if required, waste ice to increase its cooling capacity. The advantage claimed for thus reducing the temperature of the weak ammonia solution, is that its power of absorbing the ammonia gas from the cooler or refrigerator is thereby greatly increased.

The patent granted to Edmund Lionel Pontifex in 1887, subsequently to both those just mentioned, for improvements in cooling and refrigerating machines of the class described in the specification of former letters patent, granted to H. F. Stanley, in 1875, lays claim to the following :—

The method of mounting the condenser coils upon brackets projecting inwards from the side of the cistern, and retaining them in position by means of uprights extending vertically from these brackets; some of which uprights are extended above the tops of the condenser coils for the purpose of supporting the rectifier coil, and also for carrying a vertically arranged cylinder occupying a space in the centre of the rectifier coil, and extending to above the level of the overflow from the cistern. The object of this cylinder is to ensure that the cooling water, that rises up through the cistern, should flow only through the annular space or clearance situated between the exterior surface of the cylinder and the inner surface of the cistern, and thus cause it to act in a more efficient manner to cool the rectifier coil which is contained in this space or clearance.

An arrangement for ensuring an uniform action taking place in all the concentric coils of the condenser, and causing the liquid coming therefrom to be of the same temperature, consisting in spacing the outer coils vertically further apart than the inner coils, so that the increased diameter of the outer coils is compensated for by the greater number of the inner coils.

To provide for the more perfect regulation of the admission of the anhydrous ammonia liquid to the cooler, which requires very fine or minute adjustment, a stop-cock is provided with a plug through which, in addition to the way or passage which is usually formed therein, there are, at the sides of this way or passage, other narrow passages which, when the stop-cock is partially turned on, allow of a small and easily regulated quantity of liquid or fluid being permitted to pass; whilst, on the other hand, it likewise admits of a large volume of the liquid being allowed to pass quickly, whenever the cock is turned full open, as is sometimes necessary for the purpose of clearing the small passages by blowing out any obstructions which may lodge therein and tend to choke them.

The insurance of a more effective absorption of the gas, by so arranging the absorber that the weak ammonia liquor or solution is made to fall in the form of a shower on to the surface of a tray, which latter is provided with small holes or perforations arranged in concentric circles. Through these holes the weak ammonia liquor

percolates or drops down on to the tops of the coils of cooling pipes, trickling slowly from coil to coil until it reaches the bottom of the absorber, from which latter it is sucked by the ammonia pump through a pipe fitted at its inlet end or extremity with a perforated strainer or guard, in order to prevent the ammonia pump suction pipe from becoming accidentally choked or stopped up by any foreign bodies.

In order to enable the interior of any of the coils of pipe in the absorber being readily cleared of any deposit, suitable means are provided for admitting of a pump cylinder being easily attached to the outlet of each of the coils. This cylinder is fitted with a piston which, by means of a piston-rod extending therefrom, can be jerked or moved suddenly and violently to and fro, whilst the cooling water is flowing through the coil. The shock thus caused liberates any scale that may have become deposited inside the coil, and this scale is carried off by the flow of the condensing or cooling water.

An improved method of forming gas-tight joints, for use wherever the end of a coil or of a pipe is to be secured to the sides or ends of any of the vessels or chambers, is moreover set forth and claimed. A nut is screwed on to the pipe on either side of the plate, and on one or both sides of the plate a circular recess is formed around the pipe. Into this recess, and around the pipe, is inserted a packing ring or insertion of india-rubber or of any other suitable material, which ring is circular in transverse section. The nut screwing on the pipe is likewise shaped circular at one end so as to enable it to enter and fit into the recess, or in some instances a washer, so formed, or dished or hollowed out, that when forced against the packing ring it will cause it to press inwardly against the pipe, is interposed between the nut and the plate. In this manner a perfectly gas-tight joint, capable of withstanding considerable pressure, is formed, the india-rubber or other packing ring or insertion being firmly held in position so that it cannot escape from the pressure that is put upon it.

The Pontifex ammonia absorption machine has been further improved by Wood, and the Pontifex-Wood apparatus, as at present constructed, is probably as near to perfection as can be attained in machines of this class.

Fig. 90 is a perspective view, showing the elevation and general arrangement of a machine of the Pontifex and Wood type, which comprises a generator, a separator, a condenser, a refrigerator, an absorber, and an economiser, all of which are fitted with the latest improvements.

Referring to the illustration A is the generator, B is the separator, C is the condenser, D is the refrigerator, E is the absorber, and G is the

economiser. H are the ammonia pumps, the construction of which will be more clearly understood from the enlarged views, Figs. 91 and 92.

The generator A consists of a horizontal cast-iron cylindrical vessel, containing a coil of steam-pipe adapted to be heated by direct or live steam from the ordinary steam boilers, and into which the charge of commercial ammonia is inserted.

The separator B, which is connected to the top of the generator by suitable flanges, and arranged vertically, and at right angles to the

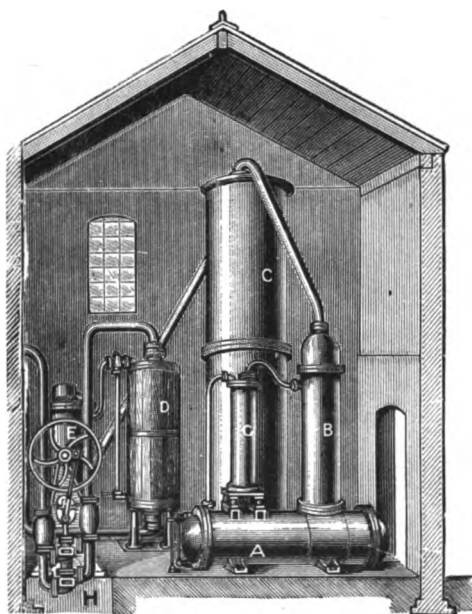



Fig. 90.—Pontifex-Wood Improved Continuous-acting Ammonia Absorption Machine.

latter, is so constructed that any aqueous vapour that rises with the vaporised or gasified ammonia from the generator, will be arrested or trapped by a suitable arrangement of baffles or checks, and is returned into the generator; the practically anhydrous ammonia passing through a pipe from the top of the separator to the condenser D.

In the condenser D, which consists of a number of coils of pipes enclosed in a wrought-iron vertical cylinder which is constantly kept full of cold water in circulation, the anhydrous ammoniacal gas or

vapour is condensed and liquefied by the pressure caused by its own accumulation.

The liquid ammonia, which leaves the condenser at a temperature of between 70° and 80° Fahr., next passes into the cooler or refrigerator D, which is a vertical cast-iron vessel fitted with coils of wrought-iron pipes, through which a circulation of water or brine is kept running. In this cooler or refrigerator the liquid ammonia instantly expands, and again takes the form of gas or vapour. During this ex-

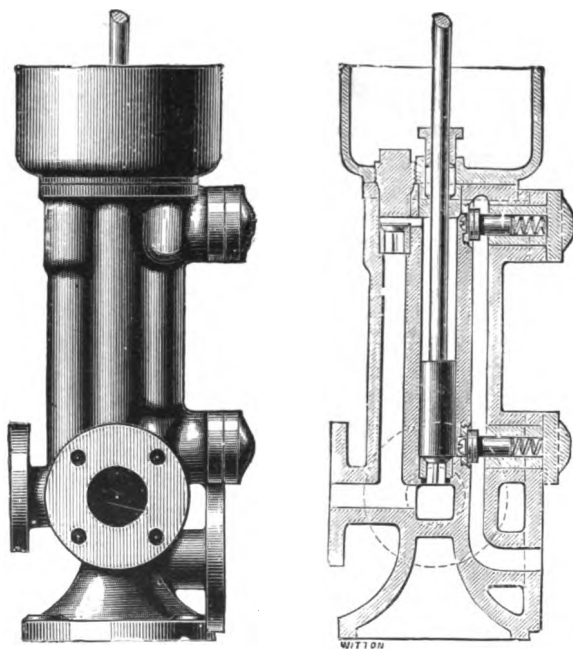

Figs. 91 and 92.—Pontifex-Wood Improved Ammonia Pump.
Elevation and Vertical Central Section.

pansion its sensible heat becoming latent, as already stated, its temperature is reduced instantly to from 10° to 20° Fahr., or considerably lower if required, and the water or, where employed for ice-making, the brine is reduced or cooled down to any predetermined temperature.

After performing its cooling office in the refrigerator D the ammonia gas or vapour is led through another pipe into the absorber E, wherein it comes into contact with, and is taken up and absorbed by, the water from which it was first eliminated in the generator A, the strong solu-

tion thus formed being drawn off by the ammonia pumps H and forced back through the economiser or heater G (wherein its temperature is raised by the water which is passing from the generator into the absorber) into the generator A to be re-evaporated.

The improved ammonia pumps, which are of a patented design, are mounted in A frames, as shown in Fig. 90, and when employed with a brine circulation, a brine pump is also attached to the outside of one of the A frames, and is driven by means of a disc crank fixed upon the shaft carrying the eccentrics for working the ammonia pumps.

One of the ammonia pump cylinders is shown in side elevation, and vertical central section, in the enlarged views Figs. 91 and 92. As will be clearly seen from the sectional view, Fig. 92, the pump is of the piston type and double-acting.

A great advantage in having two ammonia pumps is that they can be so arranged, that, if necessary, one of them can be shut off for repairs or overhauling, whilst the other is continued in work.

The method of working the Pontifex-Wood improved ammonia absorption machine is as follows :—

All connections being properly made, and the generator filled or charged, with the ordinary ammoniacal liquor of commerce, up to the proper level, as indicated by the gauge attached thereto, a little steam is admitted to the coil of pipes inside the generator, so as to raise just sufficient pressure of gas or vapour to expel all the air from the apparatus through an escape valve provided for that purpose in the absorber.

As soon as all the air is thus expelled, the full pressure of steam is turned on to the heating coils in the generator, and the ammonia in the solution, being extremely volatile, is instantly driven off in the form of gas or vapour, and passes up through the separator, where any aqueous vapour is arrested, and returned to the top of the condenser; the aqueous portion of the ammoniacal solution remaining behind in the generator.

The condensing water is admitted at the bottom of the condenser and is taken off at the top, the ammoniacal gas or vapour taking the opposite course, and passing downwards through the coil of pipe therein, the upper portion of which coil is provided at intervals with traps or pockets, and is known as the rectifier. During its passage through this coil the gas, or vapour, is reduced in temperature by the condensing water, and any watery particles that may have escaped the separator, and been carried over with the ammonia, are caught in the above mentioned traps or pockets, and are immediately passed out of

the coil and returned into the separator, through the connection shown in the drawing. After passing the lowermost trap or pocket the ammoniacal gas or vapour is quite dry or anhydrous, and it is the practically perfect reduction thereof to this condition that constitutes the chief advantage of the Pontifex-Wood improved machine.

The dry or anhydrous ammoniacal gas or vapour now continues to descend the coil in the condenser, until, by reason of its accumulation, it reaches a pressure at which it becomes liquefiable, the liquefaction being greatly forwarded by the reduction of temperature effected in the condenser by the constant circulation of the cooling water. The apparatus is so constructed and regulated, that, as the gas or vapour becomes liquefied, the product of liquid anhydrous ammonia passes into the refrigerator, wherein it vaporises at the ordinary atmospheric pressure at a temperature as low as -28° Fahr., and at the moment it thus changes its form it absorbs and renders latent a very large amount of heat, as has been already mentioned.

The water or other liquid to be cooled is passed direct through the coil arranged in the refrigerator; or, where ice-making is carried out, a strong solution of chloride of calcium or brine is passed through it, cooled to the requisite low temperature, and pumped into the ice-making or freezing tanks.

The ammonia, which has now again assumed a gaseous form, passes from the top of the cooler or refrigerator into the absorber, which latter is connected to the bottom of the generator, through a suitable pipe, the pressure in the latter forcing a constant stream of the water left in it at starting into the absorber, where this weak solution greedily absorbs or takes up the gas coming from the refrigerator, and the strong solution thus formed, which is similar to that first placed in the generator, is drawn off by the ammonia pumps.

The strong rich solution is then forced through a coil of pipe in the economiser or heater into the top of the separator, wherein it passes down through a succession of trays, which latter are heated by the hot vapour or gas ascending from the generator, and the ammonia is once more separated from the water in which it is dissolved, the solution gradually becoming weaker, until it finally falls back into the generator almost entirely exhausted of ammonia.

As in Carré's apparatus the complete process forms, it will be seen, a continuous closed cycle, the changes from liquid to gas and *vice versa* being constantly repeated.

Theoretically the only outlay for working the machine, outside the small amount of oil required for lubricating the moving parts and the

labour, is that entailed for the coal or other fuel consumed in raising steam for heating purposes, where exhaust or waste steam is not employed, and for supplying the small steam-engine requisite to drive the ammonia pumps; in cases, however, where water has to be paid for, there is an additional outlay for the water that is used for condensing and other purposes. The boiler power required, where direct or live steam is used, varies from 2 horse-power in the smaller machines, which are capable of performing work equal to the reduction of 225 gallons of water 10° , or of 60,000 cubic ft. of air 20° Fahr. per hour, or of an ice equivalent melted per 24 hours of $1\frac{1}{2}$ tons; up to 15 horse-power in the larger sizes adapted to so treat 8,000 gallons of water, or 1,900,000 cubic ft. of air, or of an ice equivalent in tons melted per 24 hours of 50 tons. In like manner the indicated horse-power that is necessary for driving the ammonia pumps will run from one, in the small machines, up to six in the larger sizes; and the amount of condensing water at 50° Fahr. from 100 to 3,000 gallons per hour.

In practice a certain amount of the ammonia is always unavoidably lost by leakage, even under the most favourable circumstances. The amount of ammonia that thus goes to waste and has to be replaced depends chiefly upon the care taken in packing the ammonia pumps, but under average conditions it usually varies from 240 to 400 lbs. per annum. The price of the ordinary commercial liquor ammonia used in the machine is from 3d. to 4d. per lb. In some exceptional cases, however, machines have run in a satisfactory manner for two or three years without any additions of ammonia having been made.

Other refrigerating machines acting on the above principle, of which mention may be made, are those of Hill, Seeley, and another one of French origin.

A number of British patents have been obtained by Frederick Barker Hill, both singly and in combination with others, for improvements in ice-making and refrigerating machinery. No. 3427 of 1876, Nishigawa and Hill; No. 6808 of 1885, Hill and Gorman; and No. 15914 of 1886, Hill and Gorman, claims certain improvements in absorption machines, the latter patent comprising mainly improved means for heating the ammonia boiler and for the formation of cold stores for refrigerating purposes. Hill, No. 13487 of 1887, describes a refrigerating machine with mercurial pump, wherein mercury is employed for drawing air or other gas or vapour into and discharging it from one or more chambers. It is stated that the mercury acts as a seal to close the aperture of the suction pipe, and that, consequently,

the use of a suction valve can be dispensed with. This pump may be adapted for use with an apparatus such as described in the previously mentioned patent.

No. 17071 of 1888, Hill and Sinclair, contains a description of a refrigerator or ice-making machine mounted upon road or travelling wheels, and provided with suitable means whereby motion may be transmitted to its driving-shaft from one of the wheels during transport.


No. 20811 of 1889, Hill and Sinclair, contains certain improvements in the absorption machine described in No. 15914 of 1886. The ammonia boiler or still is formed in this case of two horizontal tubes connected by suitable pipes which extend longitudinally within the tubes. The horizontal parts of the pipes are perforated at their upper sides to ensure uniformity in the action of the apparatus. In combination with the refrigerating apparatus are employed two slabs or tables formed of metal or other suitable material of good thermal conductivity, beneath which circulates brine or other non-congealable liquid for conveying the cold from the refrigerating tubes or chambers to the slabs or tables. These cold slabs or tables are adapted for facilitating and expediting the manufacture of chocolate, confectionery, pastry, and other substances which are formed in moulds, and which can be manipulated upon the slabs or tables.

Hill, No. 16253 of 1889, describes an improved refrigerating and ice-making machine, adapted to work on the intermittent ammonia-absorption process. The main features of the invention consist in the production of cold by this method, wherein impoverished ammoniacal liquor from the ammonia boiler is caused to pass into one or more supplementary or auxiliary absorbers, in which the ammoniacal gas is subsequently absorbed, and from which the liquor together with the gas absorbed thereby is then returned to the ammonia boiler.

In ammonia-absorption refrigerating and ice-making machines as constructed before the date of this invention, it was necessary, after the distillation of the ammonia, to reduce the temperature of the liquid in the boiler until the pressure became sufficiently diminished to permit the vaporisation of the liquid ammonia in the refrigerator, and until the liquid in the boiler was sufficiently cool to permit the absorption of the ammoniacal gas thereby. This cooling of the liquid necessarily occupied a considerable space of time. Besides, in many of these refrigerating and ice-making machines the absorption of the ammoniacal gas took place only at the surface of the liquid in the boiler, and was necessarily a slow process, the liquid being of higher tempera-

ture at the surface than at any other part thereof, and having its temperature raised at the surface by the condensation of the gas.

The inventor claims to have discovered that, by employing one or more separate or auxiliary absorbers, which can be put in communication with the boiler, the cooler or condenser, and the refrigerator as required, and in which the ammoniacal gas can ascend through a body of liquid, he can very rapidly diminish the pressure in the ammonia boiler by absorbing the gas from the boiler, the rectifier, and the condenser in the absorber or absorbers; and is enabled to effect the absorption of the ammoniacal gas from the refrigerator, either in the

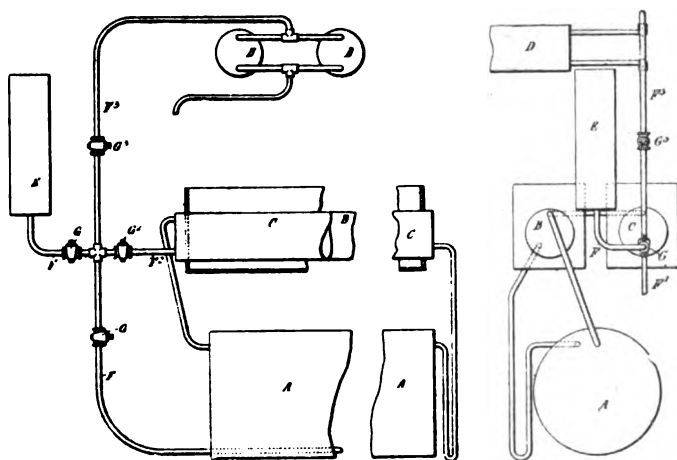

Figs. 93 and 94.—Hill's Ammonia Absorption Machine with Supplementary or Auxiliary Absorber. Diagrams showing Front and End Views.

supplementary or auxiliary absorber or absorbers or in the boiler, immediately or very soon after the distillation, thus greatly expediting the production of cold by the machine.

Fig. 93 is a front view partly in section, and Fig. 94 is an end view of Hill's refrigerating apparatus provided with a supplementary or auxiliary absorber.

A indicates the ammonia boiler, B the separator or rectifier, C the cooler or condenser, and D the refrigerator. E is the supplementary or auxiliary absorber, which is connected with the boiler A, the condenser C, and the refrigerator D by pipes F, F¹, F², F³, fitted with stop-cocks or valves G, G¹, G², G³. By the manipulation of these cocks as may be

required, the impoverished ammoniacal liquor from the boiler may be introduced into the absorber *E* after the distillation of the ammonia, and the liquid charged with gas by absorption may be caused to return from the absorber to the boiler. Thus when the liquid anhydrous ammonia has been collected in the refrigerator *D*, the cocks G^2 , G^3 , are closed and the cocks G , G^1 partly opened, so as to admit of the weak or impoverished solution from the boiler *A*, or a sufficient portion of it, being forced into the absorber *E*; the cock or valve G^1 is then closed, and the cock G^2 is opened to rapidly relieve the pressure in the condenser, rectifier, and boiler, by allowing the gas therefrom to become absorbed by the weak solution in the absorber *E*. As soon as the solution in the boiler is sufficiently cooled to permit re-absorption of the gas thereby, the boiler is placed in communication with the refrigerator by opening the cocks or valves G^1 , G^3 . The ammonia solution from the absorber *E* will be returned by gravity or in any other convenient manner into the ammonia boiler *A*, through the cocks G , G^1 , when required.

Instead of placing the refrigerator *D* in communication with the boiler *A*, it may be so connected with the supplementary or auxiliary absorber *E*, thereby permitting the vaporisation of liquid ammonia in the refrigerator, and the absorption of the ammoniacal gas by the impoverished ammoniacal liquor previously introduced into the absorber *E* from the ammonia boiler. While the vaporisation of the ammonia in the refrigerator is thus proceeding, the weak solution in the ammonia boiler may be cooled, after which the refrigerator may be put into communication with the ammonia boiler.

In Fig. 95 is shown a complete machine constructed on the foregoing principle. *L* is a coil boiler for heating the solution in the ammonia boiler *A*, with which the coil boiler is connected through the medium of a separator *M*.

The type of absorption machine made by the Henry Vogt Machine Company, of Louisville, Ky., U.S.A., has no round coils and bent pipes. The generator operates on the fractional distillation principle, and is claimed to produce practically anhydrous ammonia. It consists of a main casting divided into four compartments communicating the one with the other, and four horizontal pipes connected to the main casting, which contain the steam heating coils. The highest compartment of the main casting is connected to a stand-pipe containing an analyser and rectifying coil by which the gas is dried before it leaves the still. The strong liquor is passed in at the top of the stand-pipe, and descending through the rectifying coils and the analyser reaches

the upper compartment of the main casting, from which it flows over the steam coil in the horizontal pipes, passing from one to the other until the lowermost compartment is reached. The gas that is generated is delivered through the aperture in each compartment to the stand-pipes, where it deposits its moisture, and the dried gas goes on to the condenser.

The heat exchanger or economiser consists of an arrangement of straight concentric tubes, the outermost of which are connected at their alternate extremities by H-shaped pieces, and the inner ones being coupled together by external bends also acting as glands to the jointing. The strong ammonia liquor enters the heat exchanger at the bottom on its passage to the still or generator, and is delivered out at

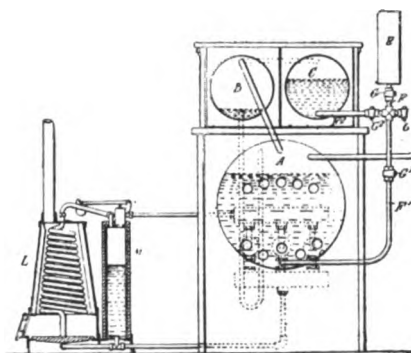


Fig. 95.—Hill's Ammonia Absorption Machine, with Supplementary or Auxiliary Absorber. Diagrammatical View of Complete Machine.

the top. The weak liquor from the still or generator on the other hand enters the heat exchanger at the top, and leaves it at the bottom.

A double-acting horizontal fly-wheel pattern pump, running at a speed of 25 revolutions per minute, is employed, the special feature of which is the construction of the ammonia stuffing box with a surrounding water chamber, which acts as a lubricator to the piston rod.

The absorber is constructed in the form of an upright tubular boiler open at the top, the tubes being uniformly distributed, and so arranged that they can be cleaned whilst the machine is running. The cooling water is admitted at the bottom, and passes out at the top, an automatic regulator controlling or governing the flow.

The type of absorption machine made by the Ice and Cold Machine Company, of St. Louis, Mo., U.S.A., is a modification of the

Carré apparatus by Mr. Ball. The generator is constructed of steel and is of a vertical cylindrical form, having a removable top head, steam heated, and with drying trays or pans arranged in the gas dome. An open-air or a submerged type of condenser is employed in accordance with the water supply. The heat exchanger or equaliser is a cylinder fitted with removable heads containing tubes. From the shell of this

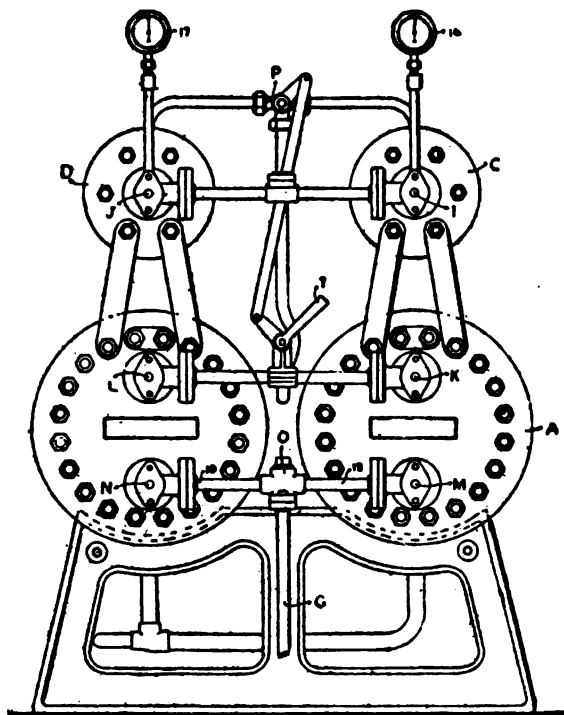


Fig. 96.—Tyler and Ellis (Cracknell's Patent) Ammonia Absorption Machine. Front View.

heat exchanger the poor liquor passes to the coils of the poor liquor cooler, which is also either of the submerged or open-air surface evaporative type, and thence to the absorber.

The gas liquefied in the condenser tubes passes through the expansion valves to the expansion or evaporating coils in the freezing tank, and it returns from thence to the absorber.

This latter apparatus is a cylindrical-shaped vessel fitted with ver-

tical tubes, up through which the water passes, removing the heat from the ammonia.

The ammonia is raised by two single-acting vertical pumps driven by a vertical steam engine, to which they are directly coupled. These pumps lift the enriched ammonia from the absorber through the exchanger tubes into the top of the generator, and thus complete the cycle.

To dry the gas and separate any moisture therefrom the air-blast is maintained at a temperature of 14° below zero Fahr., and the temperature of the ice-making box or tank is from zero to 2° Fahr.

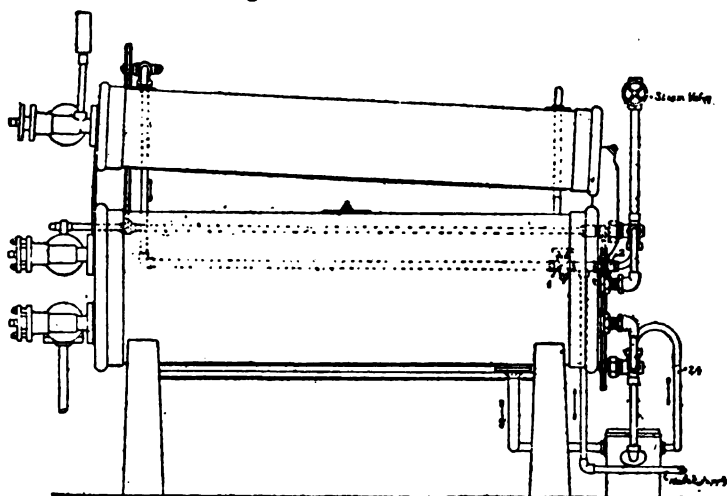


Fig. 97.—Tyler and Ellis (Cracknell's Patent) Ammonia Absorption Machine. Side Elevation.

Fig. 96 is a front view, Fig. 97 is a side view, and Fig. 98 is a vertical longitudinal central section through either A, C, or B, D; Fig. 96 showing Cracknell's patent ammonia absorption machine, formerly made by the Tyler and Ellis Mfg. Co., Ltd., now by Ransome and Rapier, Ipswich, and known as the "Simplex." The machine consists essentially of two vessels (A and B), one of which vessels (say B), contains strong anhydrous ammonia liquor, and is heated by a steam coil, whilst the other vessel A is filled with the spent liquor from the last operation, and is cooled by a water coil. Ammonia is given off in B under considerable pressure, and passes through the valve to the condenser, where, becoming cool, it condenses or liquefies, and passes to the expansion valve as liquid anhydrous ammonia. After getting

by the expansion valve, which latter is regulated to pass the liquid according to the amount of heat to be abstracted, or cooling to be performed, the pressure disappears, and the liquid ammonia rapidly evaporates as it traverses the succeeding pipes and coils, producing a large volume of gas of an intense cold. After traversing the cooling coils in the evaporator or refrigerator the gas returns to the machine through another valve, where it meets the weak liquor in the vessel A, and is absorbed by it. This process continues until the charge in B becomes spent, and that in A concentrated, when the valves I and N must be closed, the valves L and K opened, the reversing handle T turned

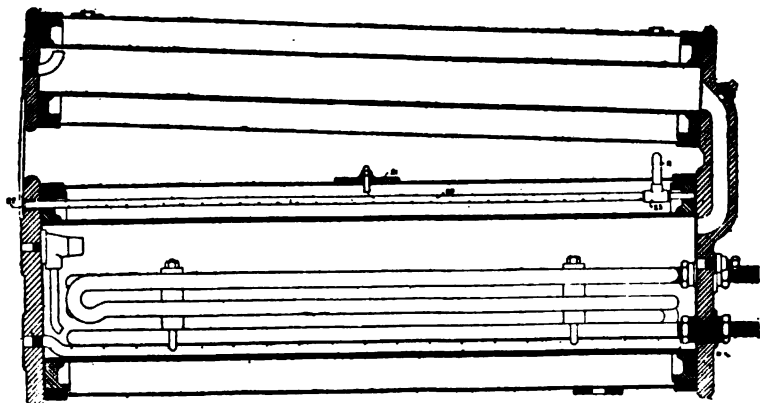


Fig. 98.—Tyler and Ellis (Cracknell's Patent) Ammonia Absorption Machine.
Vertical Longitudinal Central Section.

towards D, and upon the equalising of the pressure on the two gauges the valves L and K should be closed, the valve J opened, and, as soon as the pressure falls below 30 lbs. on the pressure gauge on A, the valve M should be also opened. The effect of this will be to exactly reverse the order of things, A then becoming the high pressure or hot side, and B the low pressure or cool side. Each of these operations will average about an hour.

Fig. 99 is a plan, Fig. 100 is front view, and Fig. 101 is a vertical longitudinal section illustrating a small refrigerating machine, on the absorption system, designed by Mr. Lyon, of Glasgow. The illustrations, as well as the following description, are taken from his patent specification.

G is the generator, and A is the absorber, both of which are horizontally placed cylindrical vessels, the absorber being located at a higher level than the generator. Heat is applied in the generator G, through

a pipe *s*, through which steam is passed, or an electric heater or other known heating appliance may be used; and the vessel is encased in a shell packed with a material *H*, which is a bad conductor of heat. The upper part of the generator *G*, is connected by a pipe *B*, to the lower part of a vessel *R*, termed a rectifier, which is kept at a moderate temperature by a water jacket *J*, and in which ammonia vapour entering it from the generator *G*, separates from traces of water which return to the generator. From the rectifier *R*, the ammonia vapour passes through a pipe *D*, to a worm condenser or other condenser *C*, in which it is acted on by cold water so as to become cooled and liquefied.

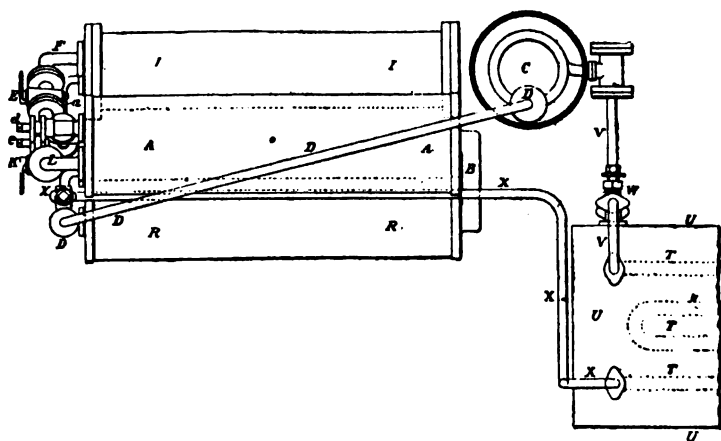


Fig. 99.—Lyon's Patent Ammonia Absorption Machine. Plan.

The ammonia thus condensed and liquefied is employed in the ordinary way so as by its expansion in tubing *t*, indicated by dotted lines, immersed in brine in a tank *U*, to produce refrigeration, the ammonia proceeding from the condenser *C*, by a pipe *v*, having on it a regulating or expansion valve *w*, to the expansion tubing *t*. From the expansion tubing the ammonia vapour passes by a pipe *x* into the absorber *A*, which is provided with an internal pipe coil *y*, and with an external jacket *z*, through which cold water is passed.

On starting the machine the absorber *A* will be partly filled with water or with a weak solution of ammonia, there being then in the generator *G*, a strong solution of ammonia. During the operation the solution in the generator *G*, becomes weakened because of the evaporation of the ammonia, whilst that in the absorber *A*, becomes strength-

ened by absorbing ammonia vapour from the expansion tubes *r*; and when the operation has been continued as long as is desirable, the strong solution in the absorber is run through a stop-cock *E*, and pipe *F*, into an intermediate vessel *I*. Then there is opened a stop-cock *K*, on a pipe *L*, which extends from the absorber *A*, down to the lower part of the generator *G*, whereupon owing to the excess of the pressure in the generator over that in the absorber, the weak solution in the former

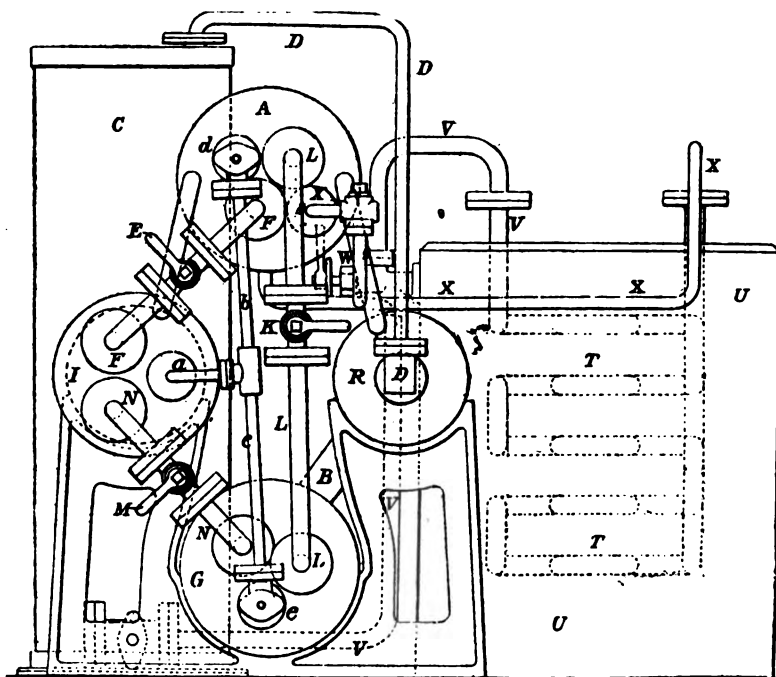


Fig. 100.—Lyon's Patent Ammonia Absorption Machine. Front Elevation.

is transferred to the latter. Finally a stop-cock *M*, in a pipe *N*, connecting the intermediate vessel *I* with the generator, is opened, and the strong solution is run into the generator ready for a fresh operation.

For the purpose of equalising the pressure, the intermediate vessel *I*, has connected to it a pipe *a*, with branches *b*, *c*, connected to the absorber *A*, and to the generator *G*, the branches having stop valves *d*, *e*. Thus when the solution is being transferred from the absorber *A*, to the intermediate vessel *I*, the upper valve *d*, is opened, the lower one *e*,

being closed, and when the solution is being transferred from the intermediate vessel I, to the generator C, the upper valve *d* is closed, and the lower one *e*, opened.

Fig. 102 is a diagram illustrating a patent automatic electrically heated absorption machine lately designed by Mr. C. J. Coleman, of Chicago, U.S. In the diagram the apparatus is shown partly in vertical central section, and A represents a combined absorption and generating chamber; B an auxiliary absorption chamber; C the rectifier or water separator; D the storage or condensing coils or chamber in which the ammonia gas collects in a liquid or highly condensed state; E the

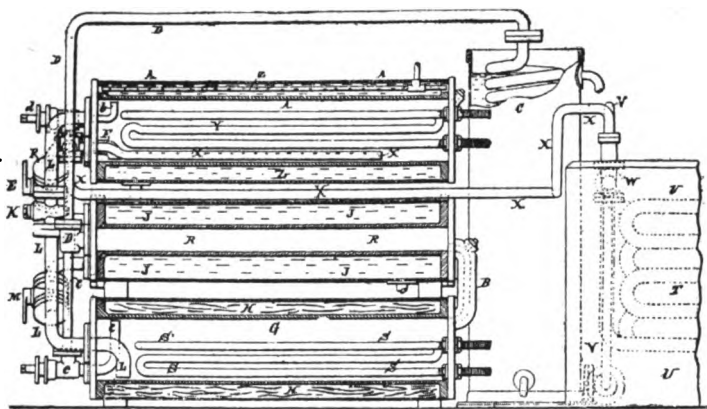


Fig. 101.—Lyon's Patent Ammonia Absorption Machine. Vertical Longitudinal Section.

automatic expansion valve or cock; F the expansion chamber, or coils, wherein the condensed ammonia gas from the storage chamber is allowed to expand so as to effect the cooling step or operation of the system.

As shown the generator A is connected by means of a pipe G with the water separator or rectifier C, and this latter is in its turn connected by a pipe H with the condensing or storage chamber D, a check valve I being provided in this pipe connection to prevent any backflow into the rectifier and generator. The condensing chamber D is connected to the expansion or cooling chamber F by a pipe J, in which latter is arranged the expansion valve or cock E, and the expansion or cooling chamber is in its turn connected to the

auxiliary absorption chamber B, by means of a pipe K, the auxiliary absorption chamber being connected to the main generator by a pipe L, fitted with a check valve M, to prevent any backflow from the generator into the former.

The rectifying chamber C is provided with a partition or diaphragm N, which is constructed of some material of a porous nature that will allow of the passage there-through of a gaseous body such as ammonia gas, but will prevent the passage of water or aqueous vapour. For this purpose the inventor finds unglazed and highly vitrified porcelain

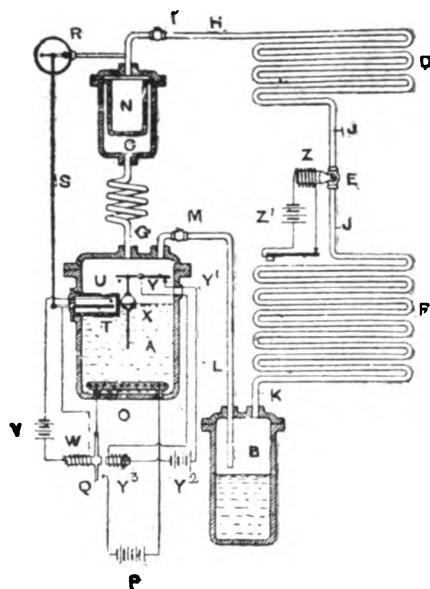


Fig. 102.--Diagram illustrating Coleman's Electrically-heated Absorption Machine.

to be a good material, and a similar material to that employed in the manufacture of the ordinary porous battery cups that has been treated with some antihygroscopic material, such as paraffin, is likewise found to be suitable for the purpose. The cup or pot-shaped form shown in the drawing is found to be preferable, as affording the maximum amount of working surface, in combination with cheapness and simplicity of construction.

Electricity is employed for heating purposes, and O represents an electric heater, which is arranged within the generator A, so as to

raise the temperature of the latter to the desired point. The operating circuit of this electrical heating apparatus includes, in addition to a battery, or some other source of electrical energy *P*, a switch mechanism *Q*, which is adapted to open and close the circuit, and which is so pivoted that it will have more or less friction on its pivotal bearing, and thus will have a tendency to remain in the position to which it may be set or moved, until such time as it is positively moved from such position; *R* is a pressure gauge or motor, located in the pipe connection *H*, leading from the rectifier *C*, to the storage tank or coil *D*, and the duty of which is to indicate the pressure within this coil or tank, and also to impart movement in unison with the pressure in this latter to a connecting rod or link *S*, which latter is in operative connection with a pivoted thermostat *T* of a bimetallic formation. These connections are so arranged that with the variations of pressure in the storage tank or coil *D*, the thermostat *T* will be correspondingly moved towards or away from the contact point *V*. This operating circuit, which is controlled by the thermostat, in addition to a battery or other source of electrical energy *V*, also includes an operating electro-magnet *W*, by which the switch mechanism *Q* is worked, so as to break or open the circuit of the heating apparatus *O*.

X is a float arranged in the interior of the generator *A*, which float is connected with a pivoted bimetallic thermostat *Y* in such a manner that the final movement of the float in an upward direction will move the thermostat *Y* towards the contact point *V*¹, and will thus complete or close the circuit. In this circuit is also included a battery *V*², and an operating electro magnet *V*³, by which the switch mechanism *Q* is worked to close or complete the circuit of the heating apparatus. The electro-magnet *Z*, is adapted to open the expansion valve or cock *E*, and the operating electrical circuit in this magnet, in addition to a battery or other source of electrical energy *Z*¹, also includes a thermostat *Z*², which is within the influence of the expansion or cooling chamber *F*, of the system, and which is adapted to maintain the temperature within the expansion chamber constant.

In Fig. 103 is shown diagrammatically the general arrangement of a leading type of modern American absorption machine.

The construction of this apparatus will be readily understood from the particulars given upon the drawing and from the foregoing descriptions.

In Seeley's absorption machine anhydrous ammonia is also the agent or medium employed. The novel feature in his apparatus is the

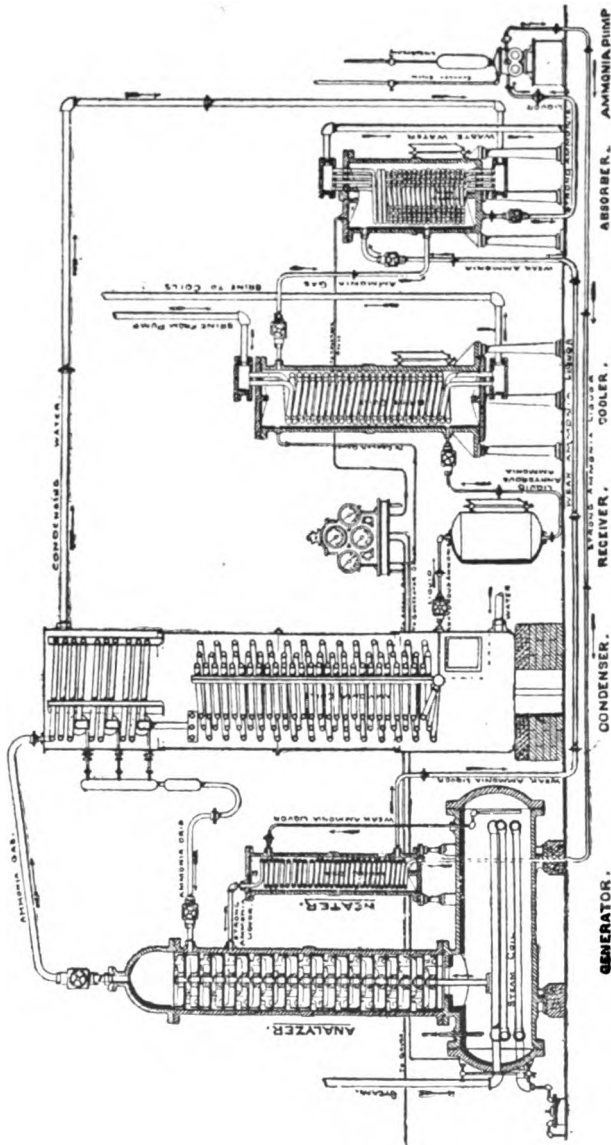


Fig. 103.—Diagram illustrating Leading Type of American Ammonia Absorption Machine.

arrangement of the generators, which can be alternately heated by means of steam coils, and which are charged with dry pulverised chloride of calcium. On heat being applied to one of these generators the liberated gas rises, is passed through a condenser, expanded and evaporated in a refrigerator, and lastly returned to the second generator, wherein it is taken up or absorbed by the dry chloride of calcium. Heat is then applied in its turn to the second generator, and the operation is reversed, and so on *ad infinitum*, the generators alternately becoming absorbers.

In a French machine, the refrigerating agent used is amylic ether, which is capable of dissolution under the action of sulphuric acid. The ether is first extracted from the acid under the action of heat, is liquefied under a considerable pressure, and is passed into a suitable receiver or container, from which it can be admitted by means of a stop-cock or valve to spiral ducts surrounding a cylinder or vessel containing the water to be frozen, wherein by its expansion into gas it abstracts the heat, as already mentioned with respect to other machines of this class. The vapour is then returned to a vessel containing sulphuric acid, by which it is once more absorbed, to be subsequently again expelled or driven off therefrom by heat, and to pass through the same cycle of operations as before.

Those machines wherein a refrigerating agent is used, which consists of a compound or dual liquid, one of which is capable of liquefaction at a comparatively low pressure, taking the other or second one into solution by absorption; or, in which the refrigerating agent is liquefied partly by absorption and partly by mechanical compression, are said to work on what is usually known as the binary or dual absorption system.

Johnson and Whitelaw's machine is designed for use with bisulphide of carbon. This refrigerating agent is first vaporised, and with the air introduced by the force-pump is passed through chambers charged with oil, by which the bulk of the moisture of the gas is taken up or absorbed, provision being made for extracting that of the air by passing it through a pipe leading to the air-pump, which pipe is partially filled with chloride of calcium.

Pictet's refrigerating agent consists in a combination of carbon dioxide and sulphur dioxide, which forms a liquid having a vapour tension much less than that of carbon dioxide, or even of sulphur dioxide, at temperatures above 78° Fahr. An improved cooler or refrigerator patented by Pictet in 1887, which can be employed either with a compression or an absorption machine, has been already briefly described on page 83.

In Nicolli and Mort's machine the refrigerating agent used is ammonia. The apparatus consists essentially in three main parts, viz., an evaporator, a pump, and an absorber, and the operation is as follows:—

The evaporator or generator is first charged with strong ammoniacal liquor, vaporisation being affected by reducing the pressure through the action of the pump, and heat being abstracted thereby from the liquor to be cooled in the usual manner; the evaporator or generator thus performs a dual office inasmuch as it also acts as the refrigerator.

The weak or exhausted liquor passes out at the bottom of the evaporator and is conducted through suitable pipes to the pump, where it meets the ammonia gas or vapour, and, together with the latter, is pumped into coolers, sufficient pressure being applied to liquefy the vapour, and cause a re-dissolution thereof; the strong solution is then returned to the evaporator, passing on its way through an interchanger wherein its temperature is reduced by that of the cold, exhausted, or weak liquor also passing there—through to the pump.

De Motay and Rossi use as a refrigerating agent a mixture of common ether and sulphur dioxide or sulphurous acid (SO_2), which compound is known as ethyl-sulphurous dioxide. It was found by experiments that, at ordinary temperatures, liquid ether has the power of taking up or absorbing large volumes of sulphur dioxide, amounting to as much as three hundred times its own bulk, the tension of the vapour given off from the dual liquid being below that of the atmosphere at a temperature of 60° Fahr.

The two liquids are evaporated in the refrigerator by reducing the pressure through the action of the air-pumps. The pressure in the condenser is at no time in excess of that required to cause a liquefaction of the ether. The capacity of the pump need not be so large as that which would be necessary were ether employed by itself, but it is necessarily somewhat more than that demanded for pure sulphur dioxide.

De Motay and Rossi's apparatus is said to have given very good results in the United States, where it has been used for a number of years.

CHAPTER X.

THE COLD-AIR SYSTEM.

Principles of.—Early Machines.—Modern Patterns of Machines.—The Allen Dense-Air Ice Machine.—Maximum Theoretical Efficiency of Cold-Air Machines.—Comparative Tests of Cold-Air Machines.

MACHINES on the cold-air system, that is to say, which abstract heat by first compressing air or other gas, cooling same, and afterwards permitting it to expand, or by first applying heat in order ultimately to produce cold, operate on a principle which is one of the simplest in physics, viz., that the compression of air or other gas generates heat, and the subsequent expansion thereof cold.

Mechanical work and heat being respectively convertible, it follows that should a gas be caused to perform certain work on a piston during expansion, its store of caloric will be exhausted thereby to a degree equal to the thermal equivalent of the work done, the gas after expansion being at a lower temperature than it was before expansion, that is, provided always no heat is supplied from any other source to restore that so lost.

Machines of this kind or class, although they have been used from time to time for cooling hydrocarbons of a volatile nature, are more generally employed with ordinary atmospheric air only, hence they are commonly known as cold-air machines.

There have been several notable improvements made in cold-air machines during the last few years, practically removing most of the old defects, and, in the author's opinion, putting them quite to the forefront for the refrigeration of food-stuffs, and the smaller sized plants giving results which have hitherto been thought impossible, thus enabling them to compare favourably for power, efficiency, and upkeep, with machines using chemical agents. Cole's Patent "Arctic" Cold-Air Machine, which will be found illustrated and described in this chapter, is of the most recent type, and embodies some important improvements; the chief amongst these being that all moisture is automatically extracted from the compressed air before expansion, thus obviating the difficulties that were experienced in earlier machines of this class, in the valves becoming clogged with frozen moisture. Figures are given on page 220 showing the results of tests taken by the author from the "Arctic" machines as against those of earlier types; but in addition to the better results obtained in power and efficiency, the

freedom from snow and moisture is the great consideration in the preservation of comestibles.

The advantages of cold-air machines are :—First, that no chemicals of any description are required, consequently their employment is not attended by constant dangers from possible explosions and fires, or loss of life through the accidental escape of deadly gases. Very low temperatures can be rapidly obtained by their use. Their construction is comparatively simple, and their application is easy. The entire machine is situated externally to the chamber or store being refrigerated, and every part thereof is consequently accessible at all times.

A matter of the greatest importance with cold-air machines was to ascertain to what degree any water that might be present, either in the form of steam or mist, or of actual liquid, might affect the heating or cooling of air, and alter the working of the machine, besides the formation of snow and ice, which unavoidably resulted therefrom, and which was a most objectionable feature in early machines.

On this head Mr. Lightfoot observes,* “The important fact to be noted in this investigation is, that air at constant pressure, having free access to water, will hold a different quantity of water in solution or steam at each different temperature; or conversely the temperature of the ‘*dew point*’ for any body of air varies with each quantity of water held in solution by it. The hotter the air, the more water can be held without depositing. (See table on page 495.)

“Thus, if air is highly heated by compression, and water is then admitted to it, in the form of spray or injection, it will take up much more water before becoming saturated than it could have held before it was thus heated. Again, if air under compression and saturated with vapour is allowed to expand, a large quantity of such vapour will condense and freeze into snow, thereby giving up a large quantity of heat to the air, which air is, in consequence, cooled less than it would have been had it been dry air to start with. This freezing is also a serious practical evil, from the deposition of ice about the valves and in the air passages, which necessitates frequent stoppages even in small machines. . . .

“Various means have been devised for ridding the air more or less completely of its contained moisture by employing some chemical material, such as chloride of calcium or sulphuric acid, which is a powerful absorbent of water. But, in the Author’s opinion, the use of such chemicals as are known to him is inadmissible, except perhaps for small machines, or for those working under special conditions, because of the trouble which would be experienced in changing the

* “Proceedings, Institution of Mechanical Engineers,” 1881.

material and evaporating off the water it has absorbed, so as to render it again fit for use."

In a subsequent paper * the following particulars are given by the same authority as the result of his very extensive experience in the working of machines of this class:—"The amount of aqueous vapour present in the atmosphere varies from that required to produce saturation down to about one-fifth of that quantity. At any given temperature a volume of saturated air can contain only one definite amount of vapour in solution; and if from any cause additional moisture be present, it cannot exist as vapour, but appears as water in the form of fog or mist. The temperature of saturation, or dew point, varies according to the quantity of vapour in solution; the smaller the quantity, the lower being the dew point. The capacity of air for holding moisture is also affected by pressure, a diminution in volume under constant temperature reducing this capacity in direct proportion.

"In the former paper reference was made to various means that had been devised for ridding the air more or less completely of its contained moisture, in order to obviate as much as possible the practical evils resulting from its condensation and freezing; this being at the time considered one of the most important points in the construction of cold-air machinery. Since then, however, experience has demonstrated that these evils were much exaggerated, and that the condensation of the vapour and deposition of the moisture in the ordinary cooling process after compression, which is common to every cold-air machine, are amply sufficient to prevent any serious deposition of ice about the valves and in the air passages: provided, firstly, that these valves and passages are well proportioned; and, secondly, that proper means are adopted for obtaining in the coolers a deposition of the condensed vapour, which would otherwise pass with the air into the expansion cylinder in the form of fog, and become converted into ice.

"Reference to the table (page 495) shows that, if the compressed air be thoroughly deprived of its mechanically suspended moisture, the amount of vapour entering the expansion cylinder is extremely small. Another matter from which the mystery has now been dispelled is the meaning of the term 'dry' air, so much used by the makers of cold-air machinery; this being a point that was just touched upon towards the close of the discussion upon the previous paper. No doubt it is still to a great extent popularly supposed that, unless the air be subjected in the machine to some special drying process, it will be delivered from the expansion cylinder in a moist or damp state, and in

* "Proceedings, Institute of Mechanical Engineers," pp. 225, 226; 1886.

consequence be unfitted for use in the preservation of perishable food and for other purposes. But no such state could really exist; for whether the air be specially 'dried' or not, its humidity when delivered from the expansion cylinder is precisely the same, so long as its temperature and pressure remain the same, inasmuch as in practice it is always in a saturated condition for that pressure and temperature. The difference lies in the amount of ice formed, which of course is greater if the amount of moisture entering the expansion cylinder is greater; but this quantity, it has been already stated, may, in the author's opinion, be brought down within perfectly convenient limits by a proper construction of the cooling vessels. In his latest machines, therefore, all special drying apparatus has been dispensed with, the air being simply compressed, passed through a surface cooler, and expanded back to atmospheric pressure."

The invention of the cold-air machine is ascribed to Gorrie, who is said to have designed the first machine of this class in 1849. In Gorrie's machine the cooling water is injected into the compression cylinder, and brine to be refrigerated or cooled into a jacket surrounding an expansion cylinder. His apparatus consists essentially of a double-action pump or compressor, a cooler connected with a compressed air vessel or reservoir, and a jacketed auxiliary pump. The operation of the machine is as follows: Water is injected into the compressor cylinder at each stroke, on the side of the piston on which condensation or compression is taking place. The compressed air is then led through a worm or coil in the cooler to the compressed air vessel or reservoir, from whence it is admitted to the auxiliary pump, which latter is driven by the expansion thereof. Through the jacket surrounding this auxiliary pump a circulation of brine or other non-congealable fluid is maintained, which brine is cooled by the expansion of the air in the pump cylinder, and which in turn reduces the temperature of an ice-making tank situated above the latter to the requisite degree.

Imperfect cooling of the air after compression, combined with the damp condition of the air, caused the failure of this machine to act in a satisfactory manner.

The next advance was made by Dr. Alexander Kirk in 1863. Dr. Kirk's machine has three cylinders, viz., one for compressing the air and two for the expansion thereof, all three of which have reciprocating motion imparted to their pistons by a single crank. One of the expansion cylinders is connected to each end of the compressor, thus actually forming two distinct systems. The pistons of the expansion cylinders are hollow and are perforated by a number of small holes,

and fitted internally with filters consisting of several layers of very fine wire gauze, the reciprocating action of the pistons alternately causing air to pass through these perforations and filters, and drawing back the air.

The operation of the machine is as follows:—The air is compressed between the piston of the compressor, during its stroke in one direction, and one of the expansion cylinder pistons, the heat of compression being carried off by a suitable water-jacket provided round the expansion cylinder. On the descent of the expansion piston, the air passes through the perforations, parting with some more of its heat whilst traversing the sheets or layers of wire gauze, and finally expanding in the upper portion of the cylinder and performing work upon the descending piston. The cold air is caused to abstract heat from brine which circulates round the top cover of the expansion cylinder, and through a number of hollow corrugations. The operation of the second or other expansion cylinder which is connected to the opposite end of the compression cylinder is, of course, identical.

This machine can be worked up to a pressure of 200 lbs. per square inch, and a temperature of -39° Fahr. has been obtained.

In 1869 a cold-air machine adapted to compress air in stages was invented by Marchant. In his apparatus the air passes first into one cylinder, wherein it is compressed, and is then exhausted into another cylinder of smaller dimensions in which it is still further compressed.

Giffard's first (1873) machine is so arranged that the air mingles in the compression cylinder with sprayed water, which becomes vaporised by the heat of compression, and renders the heat latent. The discharge valve from the expansion cylinder is heated in the piston, and is so adjusted that it will open automatically upon the pressure in the cylinder falling below a predetermined point, the air then passing through to the other side of the piston, and afterwards to the refrigerator.

In the same year (1873) Postle designed a machine which was practically a modification of Kirk's cold-air machine. As in the latter the compression cylinder is connected at each end to an expansion cylinder, but the pistons of the expansion cylinders, which are each composed of an upper part of smaller diameter and a lower part of larger diameter, are so arranged, that when the compressor piston starts upon its stroke in either direction, the valve connected with that end of the compressor is forced upon its inner seat, and the air

pressure moves that particular expansion piston to the inner end of its cylinder, the valve being opened outwardly, however, before the end of its stroke by its projecting spindle striking against the inner cylinder end, and the latter part of the compression taking place in a small space cooled by a water-jacket, and wherein the heat of compression is carried off. Upon the reverse stroke of the piston the valve is raised against its outer seat by the current of air passing through the circumscribed passage around it, and a partial vacuum having been formed above the small portion of the expansion piston, the latter is moved outwardly by the unbalanced pressure in the expansion cylinder, the cooled compressed air passing through the piston to the inner portion of the cylinder.

Similarly, however, to the action on the inward, the valve is opened before the end of the outward stroke of the piston by the other extremity of its spindle coming in contact with the top of the cylinder, but this time outwardly, and the air in the inner portion is thus expanded, and at the same time performs work on the compressor piston. The air reduced in temperature during expansion cools brine circulating through a jacket which also forms the inner cylinder head of both expansion cylinders, the latter being placed end to end.

The great improvement in this machine is that the bulk of the compression is performed during the period wherein the compressor is in connection with the water-cooled spaces, and most of the expansion whilst the compressor is exhausting from the spaces in contact with the brine circulation.

A very decided advance was next made by Windhausen, for whose improved cold-air machine a German patent was granted about this time. The characteristic feature of his apparatus, is the improved method by which the air, that had become heated by compression, is first cooled in a series of condensers or coolers by means of a circulation of cold water, and is then passed into a chamber where expansion or dilation takes place behind a piston. That is to say, in point of fact expansion is effected by the simultaneous action of the machine before the air is utilised for refrigerating purposes.

The original Windhausen cold-air apparatus is shown in plan and side elevation Figs. 104 and 105, by which the principle of the machine is sufficiently clearly illustrated to render an extended description thereof unnecessary. On the drawing, A indicates the compression cylinder, B the expansion cylinder, C the steam engine or other motor for operating the machine, and D, D¹, D², the condensers or coolers through which a constant current of cold water is maintained

for cooling purposes. The cylinders A and B are arranged tandem fashion, and are worked simultaneously from the engine crank-shaft E, through the crank E', and connecting rod F.

The air enters the compression cylinder A through the inlet A', as

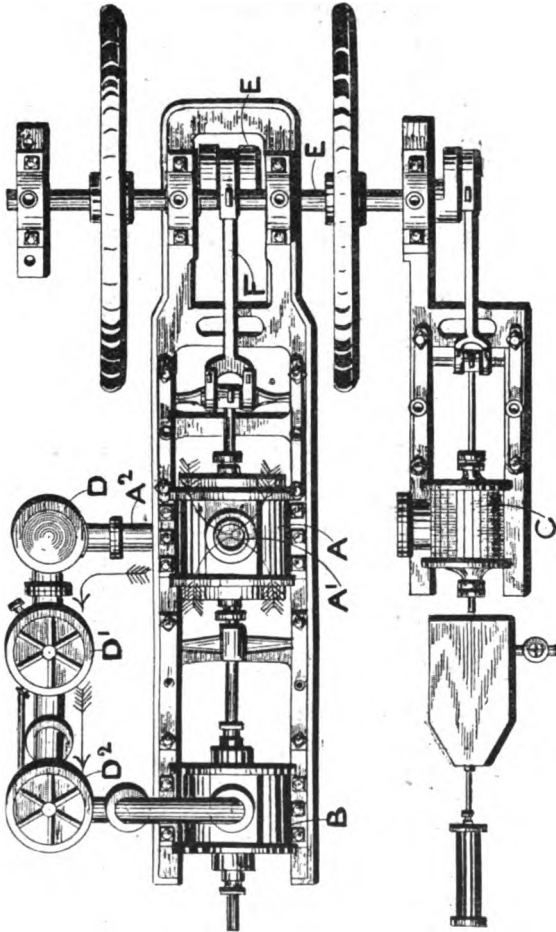


Fig. 104.—Original Pattern of Windhausen Cold-Air Machine. Plan View.

indicated by the arrows, and after compression the current passes through the pipe A² to the first condenser or cooler D, from which it is conducted successively to the coolers D', D², and from the latter to the expansion cylinder B, as shown by the arrows.

Within the coolers or condensers D , D^1 , D^2 , are arranged a series of pipes through which the blast passes, and around which a constant

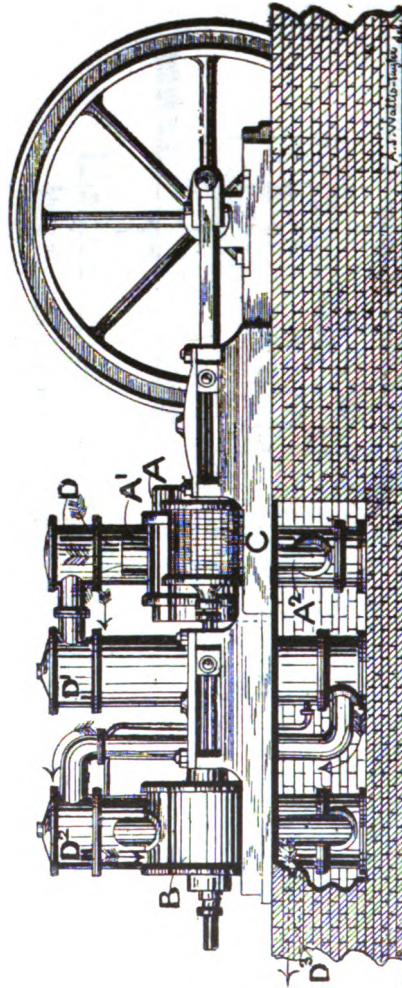


Fig. 105.—Original Pattern of Windhausen Cold-Air Machine. Side Elevation.

circulation of cold water is kept up, the latter entering the cooler D^2 at a suitable inlet, and flowing through the coolers in the opposite direction to the compressed air. A portion of the heat that has been

imparted by compression is thus extracted, and the compressed air, which is at a temperature only a few degrees above that of its natural state, is led into the expansion cylinder B, wherein the expansion is effected under a gradually decreasing pressure, which latter is automatically regulated by valves operated by the simple expansive force of the compressed air itself.

Were the air to be dilated to its normal volume it is clear that an amount of heat equal to that which has been abstracted or taken up by the cold water in the coolers would be required; as this, however, can be only partially returned by the small volume of air within the expansion cylinder, a low degree of temperature is immediately obtained, which is more and more reduced with each stroke of the compressor, as the original air in the expansion cylinder is replaced by the cooled compressed air.

From the compression cylinder B the air is conducted to the space to be cooled, escaping with a velocity sufficient to admit of the current being conducted for 300 ft. through a channel 2 ft. in diameter, the temperature at the orifice of the latter being from -30° to -35° Fahr., or from 62° to 67° of frost. It has not been found advisable however, in practice, to employ a conduit of this excessive length.

In the apparatus shown the dimensions of the compression cylinder are such that at each stroke of the piston 35 cubic ft. of air, and at every complete revolution of the engine 70 cubic ft. of air, are compressed, being reduced to the extent of from two-and-a-half volumes to one volume, or to a pressure of 35 lbs. per square inch; thus, at a speed of 36 revolutions per minute, over 150,000 ft. of cubic air will be compressed per hour.

From actual experiments it was found that with the air entering the compression cylinder at a temperature of 80° Fahr., it rose after compression to 205° , thus giving a gain of 125° , inasmuch as this acquired heat is subsequently got rid of in the condensers or coolers and expansion cylinder; and an atmosphere is thus obtained which, whilst under a tension of two-and-a-half atmospheres, is almost at the same temperature as the air previous to treatment, the expansive force, and effect, of a volume two-and-a-half times larger, being at the same time retained.

Fig. 106 is a vertical central section illustrating a modified arrangement of Windhausen's cold-air machine, wherein a single cylinder is used for compression and expansion, the air being condensed or compressed at one side of the piston, and expanded on the other. Two coolers are provided, situated in the bed of the machine, one of which is cooled by a circulation of cold water, and the other by the expansion

of the compressed air. The refrigerator is situated above the compressing and expansion cylinder, and receives the expanding air from the expansion side of the cylinder through a temperature regulator.

In the drawing A is the compression side of the cylinder, and B is the expansion side thereof; C is the piston, which is formed hollow and filled with non-conducting material C¹; D is the cooler, through which a circulation of cold water is kept constantly flowing, and which is connected to the compression side A of the cylinder through the pipe or tube D¹ and valve D², and E is the second cooler, which is connected to the first cooler D, and to which a certain amount of the expanding compressed air from the expansion side of the pump is admitted for cooling purposes. The tubes in both the coolers D and E, through which the compressed air passes from the compression side A of the

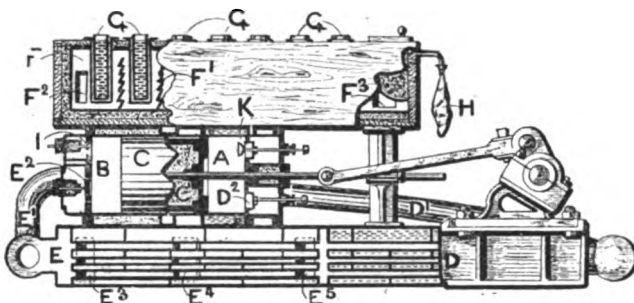


Fig. 106.—Modified Form of Windhausen Cold-Air Machine. Vertical Central Section.

cylinder, communicate through the pipe or tube E¹ and valve E² with the expansion side B thereof.

F is the ice-making tank or refrigerator, and G, G, are the ice-cans or cases. The ice-making tank F consists of a double-cased rectangular wooden box or vessel, the spaces between the outer and inner cases of which are filled or packed with loose cotton, or other suitable non-conductor of heat. The cover, which is formed of a single thickness of wood, is pierced with holes in which are fixed metallic cases or pockets for receiving the ice-cans G. F¹, F¹, are zig-zag partitions arranged between the rows of ice-cans, so as to cause the air to come fully into contact with the metallic cases or pockets supporting them. H is an india-rubber bag, which acts to maintain an uniform pressure within the ice-making tank or refrigerator F, by admitting or giving out air in

accordance as to whether the pressure happens to be above or below that of the atmosphere. *I* is a valve which is open during the entire compressing stroke of the piston *C*, and which communicates through a suitable pipe or tube with the temperature regulator, from which a portion of the expanding air passes to the ice-making tank or refrigerator through a tube communicating therewith through the aperture *F*³, the remainder being delivered through another pipe or tube to the space round the compressed air tubes in the cooler *E*, through the aperture or orifice *E*³, with which latter space the ice-making tank or refrigerator is likewise connected through a suitable pipe or tube, and the apertures *F*³, *E*⁴.

The temperature regulator and pipes or connections are situated at the rear of the apparatus, and are not shown in the drawing. The compression side *A* of the cylinder is also connected with, and derives its supply of air from, the expanded air space in the cooler *E* through a suitable pipe opening into the latter at *E*⁵, and communicating with the former through the valve *K*.

The operation of the apparatus is as follows, that is to say: The piston *C*, during its forward or compression stroke, compresses the air contained in the compression side *A* of the pump cylinder, and under the pressure of this air the valve *D*² opens, and the latter passes through the pipe or tube *D*¹ to the water-cooled tubes of the first cooler, *D*, from which it then passes to the air-cooled tubes of the second cooler *E*. The cool compressed air next flows into the pipe or tube *E*¹, and is admitted through the valve *E*² to the expansion side *B* of the pump cylinder during a portion of the stroke, when the said valve *E*² is closed, and the air expands in the said chamber *B* during the remainder of the stroke. The cooled and expanded air flows out of the expansion chamber *B* through the valve *I*, during the entire return or back stroke of the piston *C*, to the temperature regulator, from whence a portion of it passes to the ice-making tank or refrigerator *F*, and the remainder to the space round the compressed air tubes in the second cooler *E*. On the return or back-stroke of the piston *C*, the air in the space round the tubes in the second cooler *E* is drawn or sucked into the compression chamber *A* through the inlet valve *K*.

The improvements introduced into cold-air machines in 1877 by Bell-Coleman added very considerably to their practical value. This invention comprises suitable means for cooling the air, both in and as it leaves the compressor, by spray or jets of water, and also for drying it again before it is passed into the expansion cylinder. The latter object is effected by causing it to flow through a set of coils, or pipes,

situated in the chamber cooled by the machine; or by providing for exposing these pipes to a current of the used or spent air passing out from the chamber.

On leaving the compressor the moist air is first passed through a chamber with perforated diaphragms, and is then conducted to the expansion cylinder through coils or pipes which have a very extended surface, and are cooled on the exterior to a lower temperature than that of the cooling water, thus still further reducing the temperature of the air, and inducing a deposition of moisture.

A great objection to this system of cooling by internal injection is the loss occasioned by the saturated condition in which the air, even when employed continuously over and over again, is constantly delivered to the machine.

In 1877 Giffard also greatly improved his (1873) machine, and brought it to the form shown in Fig. 107. In the drawing (which illustrates the apparatus in side elevation, some of the parts being shown in vertical central section) A indicates the compression cylinder and B the expansion cylinder, which are both of the single-acting type, and open at their upper ends; C is the condenser or cooler. The inlet and outlet valves to the expansion cylinder B, as also the inlet valve to the compression cylinder, which, as shown in the drawing, are situated in the lower ends to these cylinders, are actuated through cams upon the shaft of the machine. The outlet valve from the compression cylinder A governs the delivery of the compressed air to the lower end of the condenser or cooler C, wherein, after passing through top and bottom chambers or spaces and a central series or set of vertical water-cooled tubes, it is delivered through a suitable pipe to the inlet valve of the expansion cylinder, from which latter, after doing work upon the expansion piston, during its upward stroke, it is discharged during its return or downward stroke through the outlet valve (shown on the right-hand side) and led away through a suitable pipe to perform its cooling office where desired. The compression cylinder A is jacketed, and the heat generated during compression removed as far as possible by a circulation of cold water.

In operation the air which enters the compression cylinder A through the inlet valve (shown on the right-hand side) is first compressed up to the normal pressure existing in the condenser or cooler C, when the outlet valve lifts and admits of its being passed into the latter, wherein it is cooled and dried by contact with the water-cooled tubes. The valve regulating the admission of compressed air to the expansion cylinder B is so arranged that it will admit to the latter an

amount of air equal to that which is being forced into the condenser or cooler *c* during the downward or compression stroke of the compressor piston, thus tending to maintain an equality of pressure in the

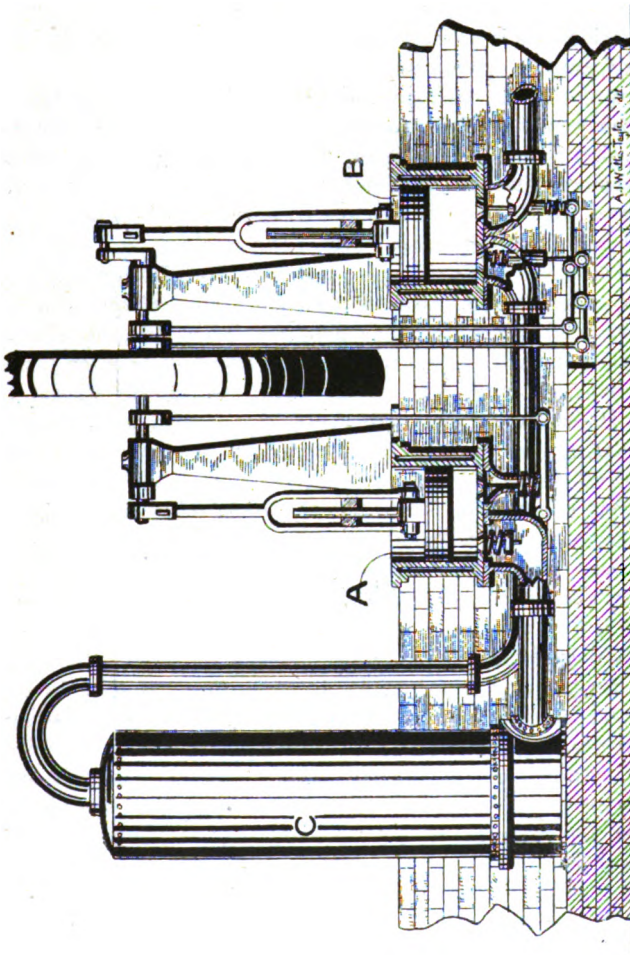


Fig. 107.—Improved Type Giffard (1877) Cold-Air Machine. Sectional Side Elevation.

condenser. The pistons are thus constantly moving in opposite directions, that of the expansion cylinder being, however, a quarter stroke in advance of that of the compressor. During the upward stroke of the

expansion piston, the inlet valve from the condenser or cooler *c* (shown on the left-hand side) remains closed, the expanding air performing a portion of the work of driving the machine; whilst on the down stroke the outlet or exhaust valve (shown on the right-hand side) opens, so as to admit of the cooled air passing through the discharge pipe, by which it is led away, as above mentioned, to perform its cooling or refrigerating office where required.

A form of cold-air machine was designed by Hargreaves and Inglis in 1878, wherein they dispensed with the use of separate compression and expansion cylinders, employing instead a single cylinder having two pistons connected by means of a trunk. The inlet and outlet valves, which are of the Corliss pattern, are arranged to be operated through suitable eccentrics on the main shaft of the machine.

In Tuttle and Lugo's machine the air is forced after compression through a set or series of tubes in a cylindrical or tubular chamber or vessel, which is cooled by a constant circulation of cold water, and through a similar set of tubes in a chamber or vessel, wherein the latter are surrounded by a volatile liquid. After leaving this second vessel the air is allowed to expand into the refrigerator or ice-making tank, rising through some such volatile liquid as ether or bisulphide of carbon, which is placed in the bottom of the latter, and the air and the vapour from the volatile liquid fill the interior of the refrigerating chamber surrounding the ice-cans or cases, and freeze or congeal the water therein. A bye-pass is also provided through which the compressed air can be conducted direct to the ice-making tank or refrigerator.

Lugo and McPherson's apparatus comprises a blower, the air from which is forced through a cooler consisting of a chamber filled with some suitable porous material kept saturated with water. The cooled air is then passed into a compressor, the upper part of which is kept full of water, which serves to keep it cool and also to prevent leakage of the air past the piston. From the compressor the air is led to a cooler, and from this to a compressed air reservoir or vessel, from which latter it is in turn admitted to, and allowed to expand in, the interior of a large ice-making tank or chamber, having non-conducting walls and rails for cars carrying the ice-cans or cases. The piston of the compressor is worked by La Hire's epicycloidal device.

Hick Hargreaves' machine is of the double-acting horizontal type, water being injected into the compressor at each stroke for cooling purposes. After compression it is passed through a series of receivers wherein the watery particles carried over are deposited, after

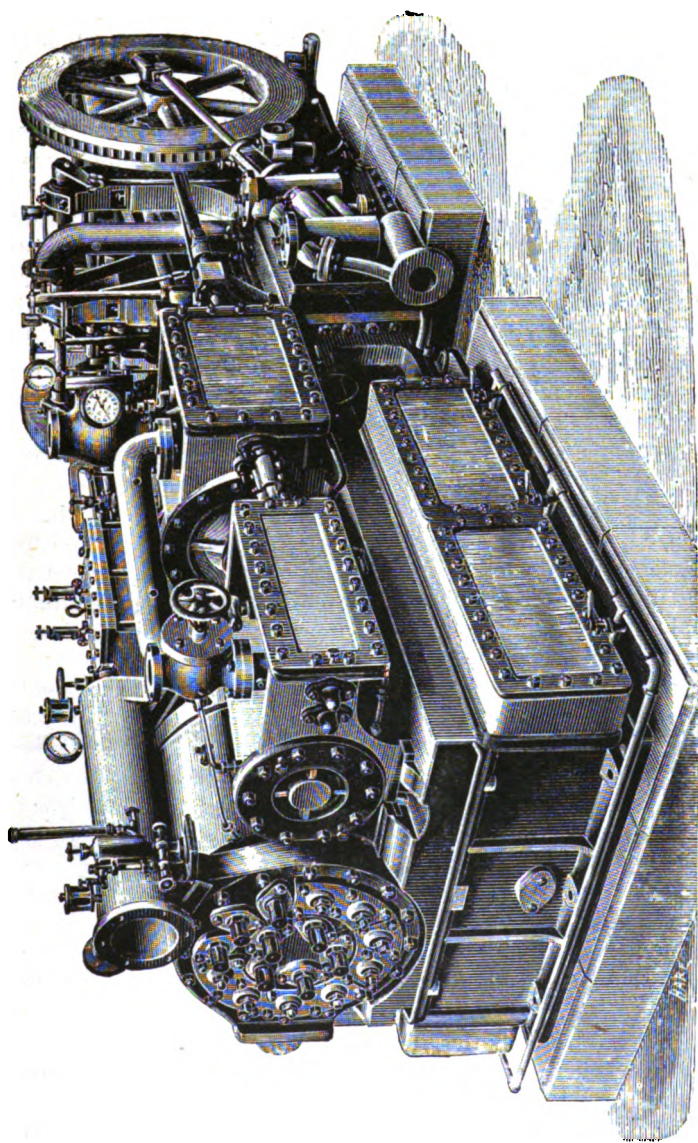


Fig. 108.—Haslam Cold-Air Machine. Horizontal Pattern.

which it flows into the expansion cylinder, in which it is expanded down to the pressure of the atmosphere. Corliss cut-off gear is fitted to the inlet valves of the expansion cylinder. A large snow-box is provided in the air-trunk, fitted with baffle or check-plates for arresting the snow, which, as the air enters the expansion cylinder fully saturated with moisture for its temperature and pressure, becomes rapidly filled with snow, and requires to be frequently cleared out.

Stevenson's cold-air machine is also of the horizontal pattern. The compression, expansion, and steam cylinders having their pistons coupled to a single crank-shaft. The compression and expansion cylinders are single-acting, and are arranged to face each other, their pistons being coupled by means of T-headed rods, which form vertical guide bars, between which is arranged to slide a motion block driven by the crank-shaft, and thus to impart the requisite reciprocating motion. The steam engine is either single-acting and of the trunk type, or of the simple high-pressure, condensing, or compound type.

Sturgeon's horizontal pattern machine is so constructed that the compressed air is delivered into a cooler formed of sets of tubes surrounded by a circulation of cooling water, whereby its temperature is partially reduced, and it is afterwards caused to pass through some absorbent material, such as charcoal, before admission into the expansion cylinder.

In 1880 Haslam (Sir Alfred Seale Haslam) brought out a cold-air machine of the type usually known as dry air refrigerators, which comprises certain very important improvements on the Bell-Coleman type of machine, and which had the effect of rendering it one of, if not the most successful machines of this class hitherto designed.

Figs. 108, 109, 110 are perspective views illustrating three different cold-air machines of the Haslam type.

That shown in Fig. 108 is of the horizontal pattern, and is made in sizes adapted to deliver from 20,000 to 30,000 ft. of air per hour. Compound duplicate horizontal machines of heavier build are, however, also constructed, in sizes adapted to deliver from 35,000 to 300,000 ft. of air per hour. The apparatus is driven by a compound condensing engine, and this, together with the air-compressing and expansion cylinders, and the requisite water-pumps, are all mounted upon a cast-iron bed frame, of box section, cored out to receive the air-cooler, engine, surface condenser, and air-pump. This combination of the condenser casing with the refrigerator forms a foundation for the bed-plate of the steam engine. The feed pumps are bolted on to the

side of the bed, and are driven from an overhead rocking shaft, which

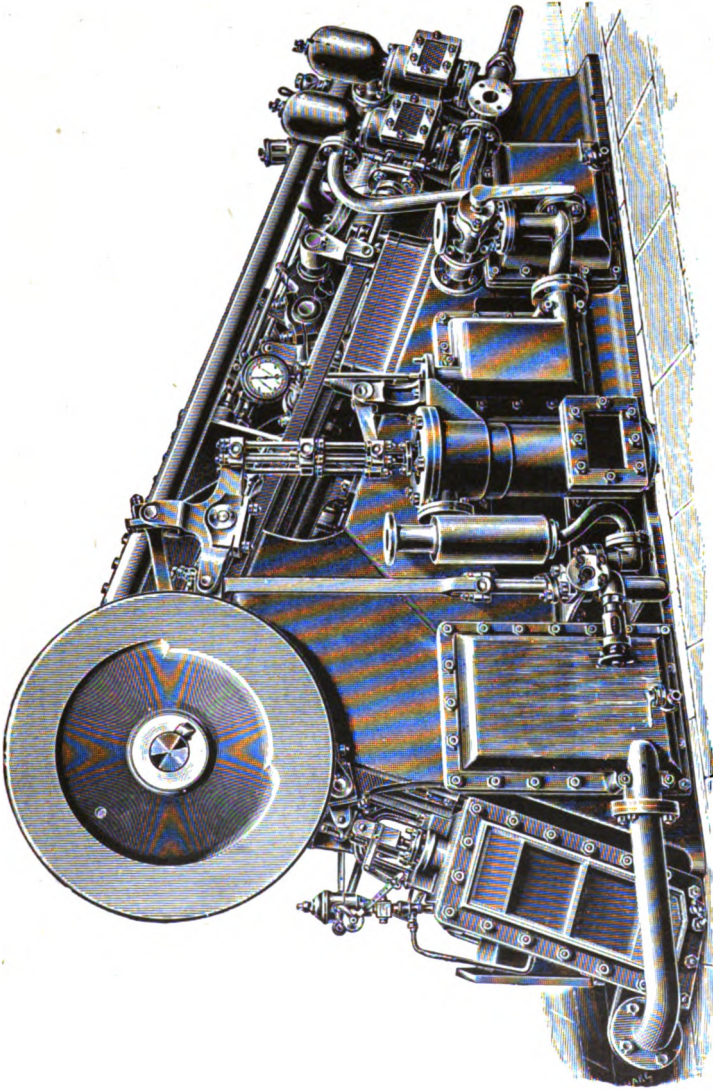


Fig. 109.—Haslam Cold-Air Machine. Diagonal Pattern.

likewise works the air-pump. Variable cut-off gear is fitted to both

the steam cylinder and the air-expansion cylinder, and the pistons of both the compressor and expansion cylinders are directly coupled to tail-rods from the steam cylinder pistons. By locating the inlet and outlet valves in the cylinder covers they are rendered very easy to get at for repairs and other purposes. The height of this machine is such as to admit of its being conveniently placed "between decks" of steamers.

The patent diagonal pattern machine (Fig. 109) is made of smaller sizes, viz., to deliver from 10,000 to 12,000 cubic ft. of air per hour, and where a machine of still smaller capacity is required, one of the vertical pattern, such as that shown in Fig. 110, is preferably used, the latter machines being constructed of sizes to deliver from 2,000 to 6,000 cubic ft. per hour. In the diagonal pattern machine the compound high and low pressure steam cylinders, and the air compressor cylinder, are placed on the top of the bed, the air expansion cylinder is located at the end, and the water, air, and feed pumps are bolted to the side thereof.

The bed is, as will be seen from the illustration, of massive box section, and is suitably cored out to receive the water-cooler tubes, the condenser tubes, and the patent drying pipes, and it likewise supports the main crank-shaft bearings. The condenser tubes are fixed in position by means of screwed ferrules, and the air cooler tubes and drying pipes are secured in tube plates by expanding the ends in the usual manner. The several tube plates are provided with covers having ribs arranged for the proper circulation of air and water. As will be seen, the machine is peculiarly compact and self-contained, and the air-pump is arranged vertically, and is worked through a T-bob from an eccentric on the crank shaft.

The type of machine illustrated in Fig. 110 occupies but little floor-space, and its height allows of its location "between" decks of small steamers and yachts. The steam cylinder, air-compression cylinder, and expansion cylinder, are mounted vertically upon cast-iron standards, which latter are securely bolted to a cast-iron bed of hollow box section, supporting the crank-shaft bearings and containing the air cooler, and the water-pump is bolted to the base-plate and worked vertically from a crosshead-pin.

The crank-shaft, valve-rods, and connecting-rods, are of mild forged steel, and the slides are of the open type, and easily accessible. A portion of one of the cast-iron standards is made loose so as to admit of the crank being readily removed when desired.

The above machines all have double-acting cylinders. The compres-

sors are either of the water injection type, or of the dry type and water-jacketed, discharging into the surface coolers in the beds. When a com-

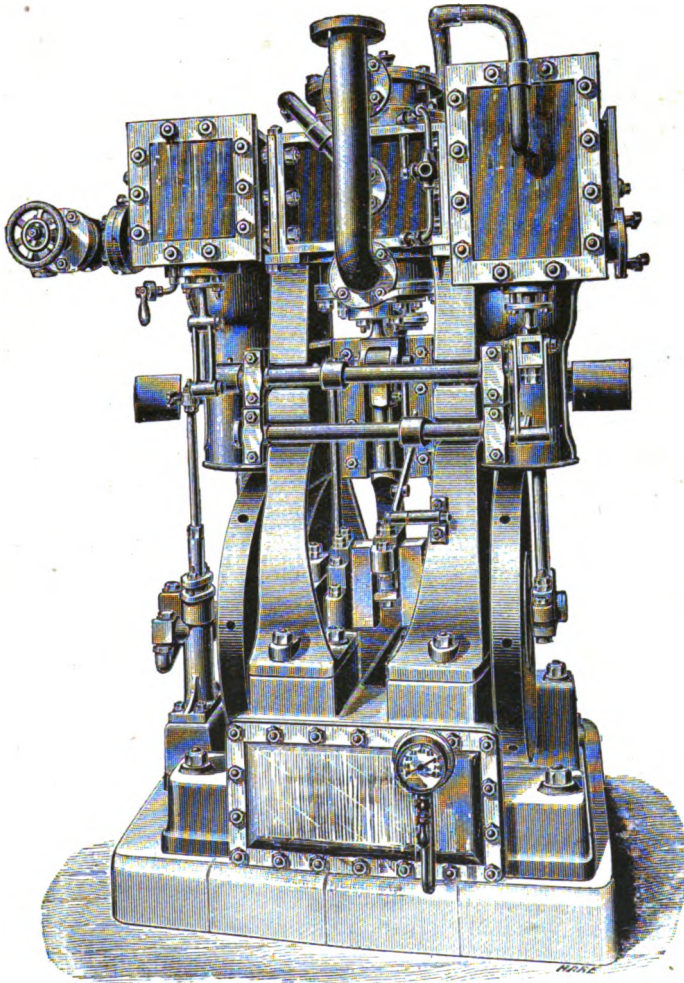


Fig. 110.—Haslam Cold-Air Machine. Vertical Pattern.

pressor of the first, or water injection type is employed, the above-mentioned cooler is dispensed with, and a separate water tower is provided. After being cooled in the ordinary way by water, the temperature of the

compressed air is still further reduced by passing it through an inter-changer, wherein it is subjected to the cooling action of either the spent cold air leaving the enclosed space or chamber where it has been used for cooling purposes, or else of the cold air as it passes out of the expansion cylinder. In the first instance separate boxes containing the drying pipes are provided inside the cold chamber, in the second case the device is fitted in the forepart of the bed of the machine; the advantage derived from both these arrangements is that a further condensation and deposition of moisture are thereby effected. The exhaust valves of the expansion cylinder are separate from the admission valves, and they are so designed as to afford as few obstacles to the free passage of the air there-through as practicable. Marine types of cold-air machines made by this firm will be found described and illustrated in the chapter on Marine Refrigeration.

In the same year (1880) Lightfoot introduced an improved machine, wherein the expansion is performed in two stages. The advantage of this arrangement is that during the first stage of expansion the air can be made to deposit most of its moisture, after which the dry air is further expanded until it attains the required temperature and pressure.

The operation of Lightfoot's machine is as follows:—The compressed air, which is partially cooled, and which when direct atmospheric air is employed is always in a condition of saturation corresponding to its temperature and pressure, is first passed into a small primary expansion cylinder, wherein it is expanded beneath a piston to a pressure that will give a final temperature of about 35° Fahr. By this means almost the whole of the vapour held in suspension in the air is condensed, and in the form of mist is discharged, together with the air, into a separator, upon the surfaces of which the mist is deposited in the form of water, and, falling to the bottom, is drawn off. From this separator the dried air, which is still at a considerable pressure, is conducted to the second expansion cylinder, in which latter it is expanded down to the pressure of the atmosphere, and passed out cold and practically freed from moisture.

The following table* gives the calculated relative amounts of vapour condensed and deposited in the various stages of cooling, with a machine on the Lightfoot system, capable of delivering 15,000 cubic ft. of cooled air per hour, and dealing with air in a tropical climate, having an initial temperature of 90° Fahr., and fully saturated with vapour:—

* "Proceedings, Institution of Mechanical Engineers," 1881.

	Lbs.	Per hour.	Per cent.
Total amount of vapour entering with the air		45·36	100·00
Deposited as water in the cooler	33·61		74·10
Deposited as water after first expansion	9·26		20·40
Discharged as ice in cooled air	0·93		2·05
		43·80	
Balance, being residual vapour still existing in cooled air		1·56	3·45

Fig. 111 is a vertical central section through the air compression and expansion cylinders, and the valves of one of the Lightfoot pattern of cold-air machines, which may be classed amongst those which have afforded satisfactory results, as far at least as the cold-air system is concerned. A is the compressor, which is of the double-acting type; and B is the expansion cylinder, which is of the single-acting type.

The cylinders A and B, which are arranged tandem style or fashion, and have a common piston-rod, are placed close together, sufficient clearance being left, however, to permit of the inspection or examination of the pistons being conveniently effected. An advantage of this arrangement is that the coldest portion of the expansion cylinder is placed at a distance from the hottest end of the compressor.

The air-valves are circular slides formed of phosphor bronze, and are operated by eccentrics in the ordinary manner. The advantages claimed for this type of valve are, that they admit of the parts being formed very short and direct, are perfectly noiseless in action, and allow of a high piston speed being used without any injurious results. They are said to have been found to work very satisfactorily, and to have given no trouble as regards wear, even when in almost constant use for some years.

The coolers consist of a pair of iron vessels fitted with sets or clusters of solid drawn Muntz-metal tubes $\frac{3}{4}$ of an inch external diameter. Through these tubes and the compressor-jacket cold water is constantly circulated for cooling purposes in an opposite direction to that taken by the compressed air, by means of a force-pump driven off the crank-shaft. Any water that may become deposited from the air by condensation in the coolers is blown off through suitable drain cocks.

After passing through both the coolers the compressed air is reduced in temperature to within some 5° or 6° of the initial temperature of the cooling water; the amount of the latter that is required being usually from 30 to 40 gallons for every thousand cubic feet of cold air discharged, or some three to four times the weight of

the air. From the second cooler the cooled compressed air is conducted to the expansion cylinder B, where it performs work upon the piston, and so returns some 60 per cent. of the power that has been

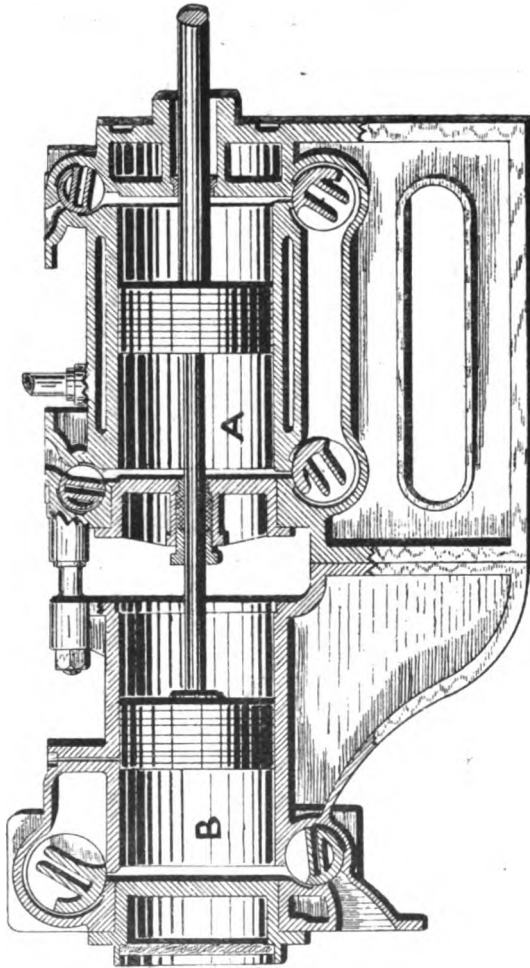


Fig. 111.—Lightfoot Double-Acting Cold-Air Machine, Horizontal Pattern.
Vertical Central Section.

expended in its compression, and is then exhausted at a temperature of from -70° to -90° Fahr., or 102° to 122° of frost.

The steam engine is either of the high pressure or of the condensing type; in the latter case the jet or surface condenser is placed

below the cylinder, which is overhung from strong brackets on the bed-plate, and the air-pump is operated from a continuation of the piston-rod. It will be seen that this arrangement admits of a condensing engine being employed without occupying any additional space, or it allows of the engine being compounded by the addition of a second cylinder tandem fashion, in which case the condenser is preferably located below the high-pressure cylinder, and the air-pump is driven off a crank-pin in the fly-wheel. When a condensing engine is used, the cooling water, after performing its work in the coolers, is passed to the condenser.

Fig. 112 is a side elevation partly in vertical central section, showing the air cylinders of a single-acting Lightfoot cold-air machine.

Lightfoot machines of the vertical pattern, with the exception that

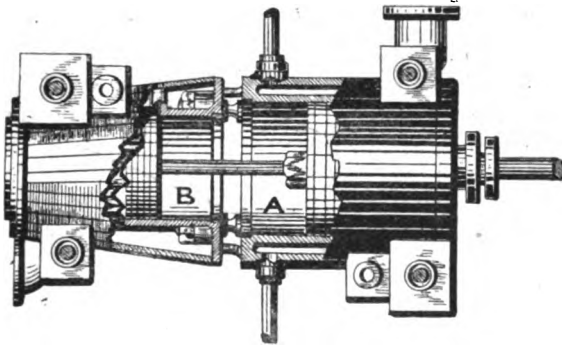


Fig. 112.—Lightfoot Single-acting Cold-Air Machine.
Sectional Elevation.

the coolers are cast in one piece with the frame, do not differ in construction to any material degree from those of the horizontal type.

The Hall cold-air machine, when driven by a steam engine, has three double-acting cylinders located side by side at the end of a suitable bed-plate, one of which is for steam, the second for compression, and the third for expansion of the air. The cylinders have the usual arrangement of moving parts, that for compressing the air being water-jacketed, and the connecting-rods working on cranks on the same shaft. The valves for the compression and expansion cylinders consist of main and expansion slides operated from two weigh-bars. These valves were in some earlier types of machines situated on the under side of the cylinders, but in those of later patterns they are located on the top side of the cylinders, where they are very readily accessible. The

coolers, which are placed below the bed-plate or frame, are arranged for surface cooling and are of the ordinary multitubular type. An interchanger was also sometimes provided with the older types of machines, wherein the air that had done duty in the storage or cold chambers was utilised for further reducing the temperature of the compressed air. In more recent machines, however, a patented form of centrifugal moisture separator has been used for drying the compressed air.

An illustration of one of the most recent and improved types of Hall cold-air machines will be found in the chapter on "Marine Refrigeration."

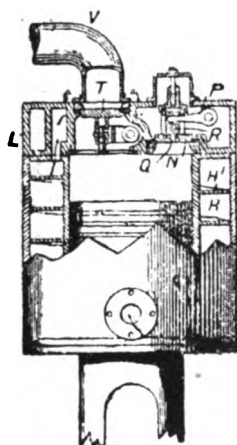


Fig. 113.—Cole's Patent "Arctic" Cold-air Machine, with Auxiliary Cooling Arrangement. First pattern. Sectional Elevation.

The "Arctic" cold-air machine is of an improved type, recently (1899) brought out by T. and W. Cole, Limited, London. Fig. 113 is a sectional elevation, showing one of the first patterns of machine. In this machine the air, after compression in the cylinder and water spray cooling, is further cooled by passing it through a vessel containing glass balls, etc., on trays over which water is sprayed. It then passes through an annular jacket, and the hollow head L of the expansion cylinder for additional cooling. The jacket contains either a spiral partition H^1 , which may be perforated, or spirally-placed baffles. The head L contains positively-worked inlet and exhaust valves. The compressed air in its passage to the expansion cylinder circulates through the circuitous passages of the cylinder jacket, and is thereby

cooled to a temperature of about 32° F. (many degrees lower than the cooling water) before entering the expansion cylinder. This low temperature having the effect of depriving the air of all excess of moisture, prevents the clogging of ports and passages with snow, which for so many years has been the great objection to the more general use of cold-air refrigerating machines (*vide* p. 217). In the case of small cold-air machines, this difficulty has generally been considered insurmountable, but this has been overcome in the small machine of 1,250 cubic feet capacity illustrated in Fig. 114.

A later type of machine is shown in Figs. 114 and 115, and in Figs. 116 and 117, the first two being general views of a small and a large-sized machine, and the others respectively a side elevation, partly in

THE COLD-AIR SYSTEM.

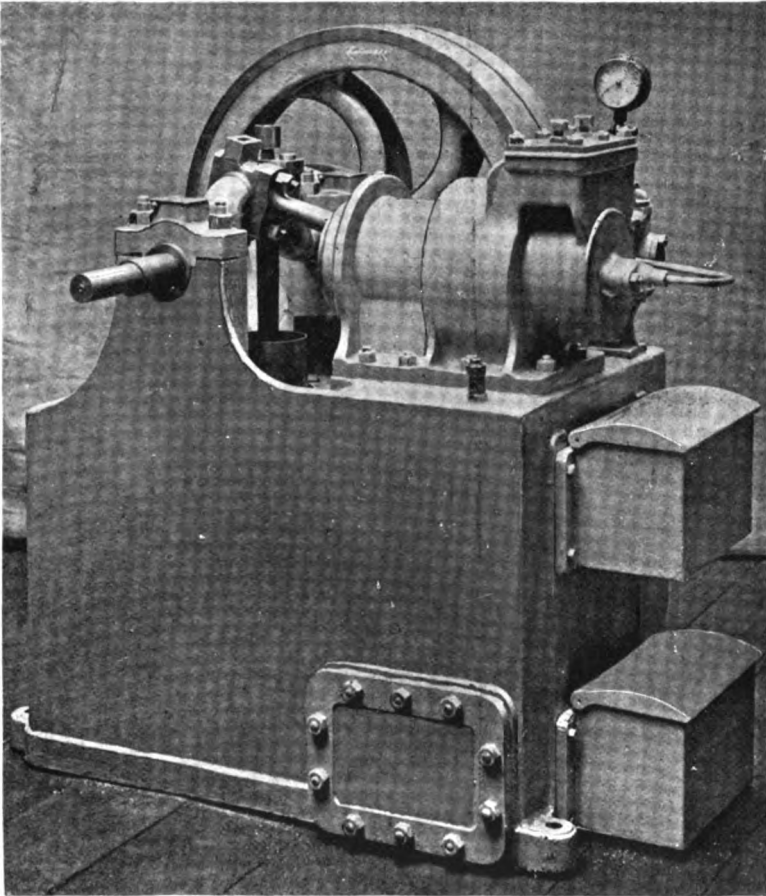


Fig. 114.—Small Size Belt-driven Cole Patent "Arctic" Cold-air Machine, with Air-drying Arrangement.

[To face p. 212.]

THE COLD-AIR SYSTEM.



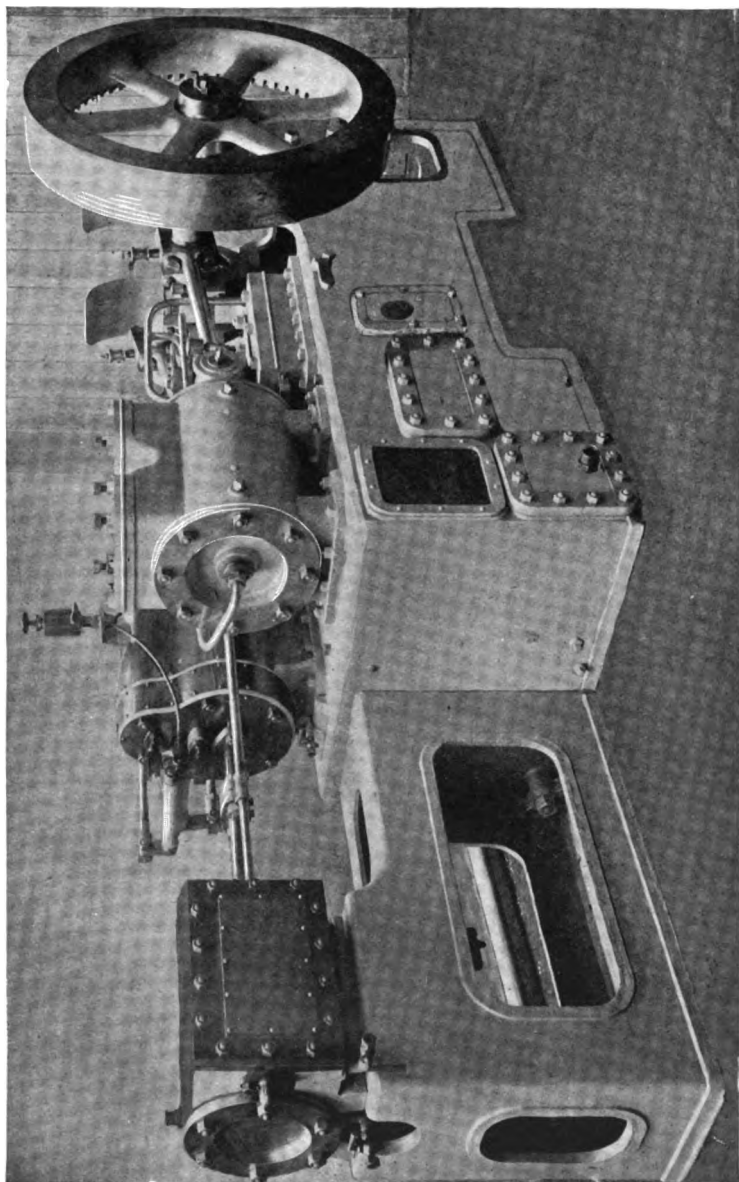


Fig. 115.—Large Size Steam-driven Cole Patent "Arctic" Cold-air Machine, with Air-drying Arrangement.

[To face p. 212, after Fig. 114.

section, and a transverse section of expansion cylinder. In this arrangement also the compressed air is passed round the expansion cylinder, and cooled to some 27° lower than the available cooling water, and thus deprived of most of its moisture. This cylinder B is jacketed at C, and provided with ribs F and partitions G, H, which is arranged to make the air take a circuitous course round the cylinder and its ends to the valve boxes K, and the jacket may be extended to include the pipe D leading the expanded air to the refrigerating chamber. The base or bed I for this cylinder also contains partitions G¹, H¹, for circulating the air, and it has a sloping bottom O with a water seal or valve to remove the condensed moisture. Before passing round the expansion cylinder, the air from the compressor is passed through a chamber containing spheres, etc., over which water trickles, and then through a series of tubes to remove some of the moisture after the preliminary cooling. The illustrations show a double-acting expansion cylinder, as described above, but the invention is applicable to vertical or to single-acting cylinders, and the arrangements of the partitions and ribs, and consequently the course of the air, may be varied. The com-

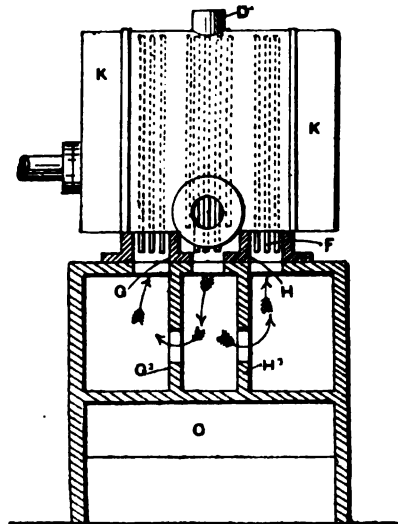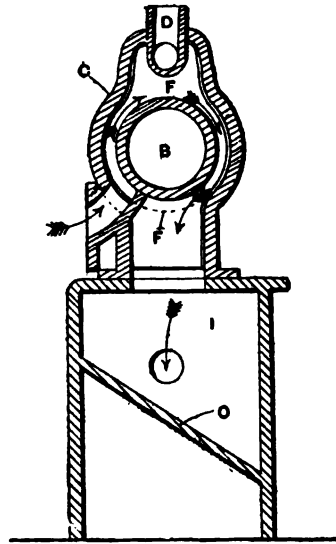

Figs. 116 and 117.—Cole's Patent Cold-air Machine, with Air-drying Arrangement. Side Elevation partly in Section and Transverse Section.

pression and expansion cylinders may be mounted on a bed containing the cooling arrangements.

Figs. 117A and 117B show indicator diagrams taken respectively from a double-acting and a single-acting expander of an "Arctic" cold-air machine. The data connected with this test will be found on page 220.

A cold-air machine, or air compression refrigerating machine, comprising certain novel features, or, to speak more correctly, a novel

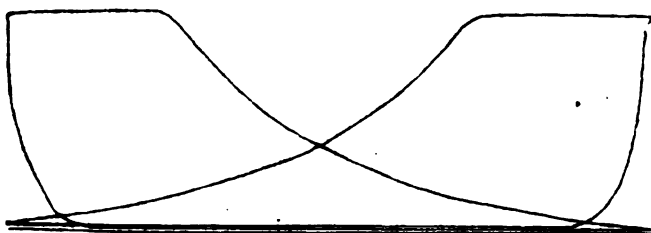


Fig. 117A.—Indicator Diagram from Double-Acting Expander of "Arctic" Dry Cold-Air Machine. (For Data of Test see page 220.)

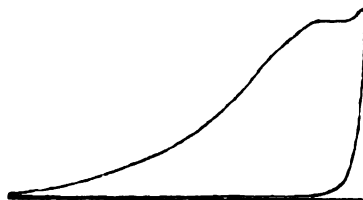


Fig. 117B.—Indicator Diagram from Single-Acting Expander of "Arctic" Dry Cold-Air Machine. (For Data of Test see page 220.)

application, is the Allen machine, which is known as the "Allen Dense-Air Ice Machine," made by Frank Allen, Brooklyn, New York.

The Allen Dense-Air Ice Machine is illustrated diagrammatically in Fig. 118, and briefly it comprises the following parts: A steam cylinder *Q* for driving purposes, a compression cylinder *R*, in which the air is compressed to about three times its primary pressure, which cylinder is water-jacketed to prevent injury to the piston packings from the heat engendered by this compression. A copper coil *S*, immersed in a water bath, into which coil the compressed air is passed and cooled,

or reduced to the temperature of the cooling water. A return air cooler *T*, by means of which the compressed air is further cooled by the cold air returning from the cold storage chamber. An expansion cylinder *V*, wherein the cooled compressed air is allowed to expand to one-third of the tension of compression, that is to say, to its original pressure on entering the compressor cylinder, during which operation it is cooled as much as it was previously heated by the compression, and leaves the cylinder at a very low temperature. This cooled air is then discharged into a well insulated pipe, by means of which it is

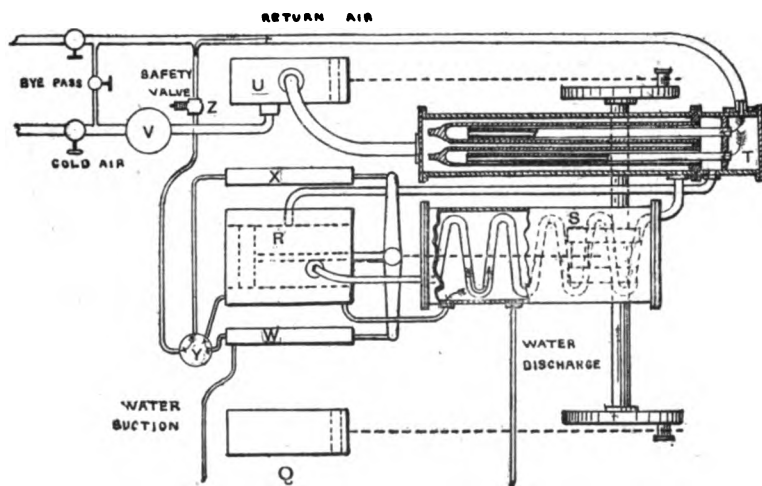


Fig. 118.—Allen Dense-air Machine. Diagrammatical View.

conveyed to the place which it is desired to cool. Here the pipe service is left exposed; that is to say, it is not insulated, and the cold air, after taking up the heat from the surrounding matter, is again returned to the compressor, where it is again subjected to compression, cooled, and expanded as before.

A suitable trap or separator, as indicated at *V*, is also provided for eliminating the lubricating oil used in the cylinder, as well as any snow that may be formed, from the cold air. The deposits are removed from this separator by heating the latter through a suitable steam pipe, and running off the contents through a drain pipe and

cock, the machine being so arranged that any frozen deposits from the expansion cylinder will be at the same time thawed and blown out into the separator. In operation the separator requires blowing out once or twice in every twenty-four hours.

Cooling water for the separator, the copper air-cooling coil bath, and the water-jacket round the compression cylinder, is supplied by an ordinary plunger pump *w*, and a small supplementary air pump *x* is also provided for charging the system, when starting with air up to the necessary pressure, and also for making up any losses that may occur by reason of leakage through stuffing boxes and joints, whilst the machine is running. To extract the moisture from this fresh supply of air to the system it is passed through a drier or separator *v*, by means of which it is dried as far as practicable before entering the machine. *z* is a safety valve.

The operation of the apparatus is as follows: The normal pressure of the air in the system is 60 lbs. per square inch, and this air is compressed in the compressor to 210 lbs. per square inch. Should it be found impossible to keep up these relative pressures of 60 lbs. on the suction side and 210 lbs. on the discharge side it is a sign of leakage. The oil trap or separator being choked by congealed oil or snow, or the closing of valves will likewise cause a disturbance in the pressures.

It will be seen that the air is in this machine used in a closed cycle. The compressed air from the compression cylinder is cooled, expanded, down to its original pressure of 60 lbs. per square inch, whilst doing work, and the resultant cold air at a temperature of about 60° below zero, Fahr., is forced through the refrigerating or cooling pipes, where it takes up the heat from the surrounding objects, and is again returned to the compression cylinder to be compressed, cooled, and expanded, and so on, *ad infinitum*.

It is claimed for this machine that by maintaining the air at a constant pressure of five atmospheres (60 lbs. gauge pressure) it can be conveyed in pipes of comparatively small diameter, and the rise of temperature will be slight. No absorbed water vapour has to be cooled from the vapour to the frozen condition, and the greater efficiency of the dense air or air under pressure, enables a very much smaller machine to be used than would be the case with an ordinary cold-air machine for the same capacity.

The only additional moving part in the Allen dense-air ice machine is the small auxiliary or primer pump which is a simple plunger pump of ordinary construction. There are also the closed refrigerating pipe system, and the two traps by means of which the lubricating oil and

water are removed or eliminated from the air, and the latter is maintained in a pure condition whilst passing through the pipes.

It will be obvious that the refrigerating or cooling pipes will be arranged in the cold storage room or chamber in a similar manner to those of any direct expansion ammonia plant. As no chemical circulating agent or medium is employed, the items of expense comprise only the steam consumed in the driving engine or motor, the necessary lubricating oil, and the labour of attending to the machine, which the makers' state are small.

In a paper* on "Refrigerating Machines," by Arthur Robert Gale, C.E., the author, makes the following observations on refrigerating machines of the cold-air type:—"One of the chief difficulties in cold-air machines is the presence of moisture held in suspension by the atmosphere; this applies especially to the open cycle machines. Moisture in the air occasions loss of efficiency in two ways. If the air enters the expansion cylinder in a saturated condition, when the air is cooled by expansion whilst performing work, a certain amount of vapour is condensed and thrown down—the point of saturation being dependent on the temperature. The vapour, in changing to the liquid state, gives its latent heat of vaporisation to the air; and as the expansion of the air continues, and the temperature is still further diminished, the liquid freezes and accumulates in the form of snow and ice in the valves and passages, giving up its heat of liquefaction to the air. Thus not only does the presence of moisture in the air produce mechanical difficulties, choking the air passages and impeding the action of the valves, but, for the same expenditure of energy, the cold air leaves the machine at a higher temperature than would have been the case if there had not been a superabundance of moisture in the air during expansion.

"As the cold-air machine is the direct reverse of the heat-engine, so also its conditions of greatest efficiency differ from those of the latter. The maximum theoretical efficiency of a refrigerating machine may be expressed by the formula—

$$\frac{H_a}{E} = \frac{T}{T_c - T}$$

where E is the thermal equivalent of the work of compression,

H_a denotes heat-units abstracted by the system,

T_c denotes absolute temperature at which rejection of heat takes place,

* "Minutes of Proceedings, Inst.C.E.," vol. cxviii., Session 1893-4, pp. 421, 422.

T denotes absolute temperature at which absorption of heat takes place.

From the above it follows that—

$$E = Ha \cdot \frac{T_c - T}{T}$$

i.e., in any refrigerating machine the greatest efficiency will be obtained with a small range of temperature; the greater the range the smaller the efficiency will be, other conditions being equal; also the efficiency is increased as the lowest limit of the range of temperature is raised. Thus a machine working between the temperatures of 100° Fahr. and 0° would, other conditions being unaltered, be more efficient than when working between 60° Fahr. and -40° Fahr. These remarks are applicable to any system of refrigeration, and are not peculiar to the cold-air machine."

For some time it was very generally supposed that many kinds of provisions of a perishable nature were liable to receive damage from the snow held in suspension in the cold air from these machines, and it was this fear of injurious effects which prompted inventors to design those forms of special drying apparatus intended to remedy this defect, such as the Bell-Coleman interchanger wherein the air is dried by passing it through a series or set of coils situated in the chamber cooled by the machine; of the improved form of the above designed by Haslam, wherein the interchanger is cooled either by the spent cold air on its leaving the chamber wherein it has been utilised, or by the cold air as it passes out of the expansion cylinder; the Lightfoot machine, wherein the expansion is performed in two stages; or of Hall's centrifugal moisture separator (or the air-drying arrangement of T. and W. Cole). Hence the term "dry-air refrigerator."

This objection to the cold-air machine arose, however, from a fault the evil effects of which, it has now become evident, have been undoubtedly much exaggerated, as in practice no such damaging results to the contents of the stores or chambers are experienced as it was supposed and predicted would ensue, although of course the snow that is formed in the manner above described is an undeniably objectionable product. If a cold-air machine be worked on the principle of exclusion of the aqueous vapour, after a few cycles of operations the air will have become dry, and will thenceforward work like a true gas.

Owing to their compactness and simplicity, to the non-requirement of any chemicals, and to the great facility of application, cold-air

machines are found to be very suitable for marine installations, and for this purpose they are extensively employed. They are also, however, in use to a considerable extent for refrigerating cold stores or chambers for the preservation of provisions of a perishable nature.

An objection, however, to machines of the Bell-Coleman type, wherein the air is partially cooled during compression by the injection of cooling water into the compressor, is experienced at sea, by reason of the corroding action of the salt-water, in addition to the loss of efficiency common to all machines of this class. Considerable difficulty has been experienced in tropical climates, where, with the cooling water at about 90° Fahr., the moisture-laden air would be delivered into the cooling pipes at a temperature of 95° Fahr., or more, and the absolute pressure would be about 65 lbs. per sq. in. Now, as there is, as Mr. Lightfoot observes,* "precisely the same amount of dry cold air circulating outside the cooling tubes in a given time as there is warm compressed air within, it follows that by whatever amount the temperature of the internal air is reduced, by an equal amount must that of the external air be raised. But, in addition, the internal air has vapour mixed with it, which, as the temperature falls, gives off heat, measured not only by the reduction in its sensible temperature, but by the latent heat of vaporisation; and this heat also has to be taken up by the external air. It will be found that, assuming each pound of internal air, with its proportion of vapour, to be reduced to 42° Fahr., the pound of external cold air, which has to take up all the heat due to this reduction, will be raised in temperature by 84° Fahr."

This defect is obviated in machines of T. and W. Cole's "Arctic" type, as the air is cooled by their drying arrangement some 25° lower than the cooling water. Thus in tropical climates, where the cooling water would be about 90°, the compressed air would be cooled down to 65°, and thus be deprived of a great proportion of its suspended moisture before being admitted to the expansion cylinder.

Instead of using the spent air for cooling purposes, the cold air from the expansion cylinder may be applied direct to the cooling apparatus; but in this case difficulty would be experienced from the deposited moisture inside the tubes actually freezing from the intense cold of the external air, a difficulty which, it appears, has often occurred with this apparatus. This, apart from the mere obstruction of the pipes, would involve a further sacrifice of cold, owing to the liberation of the heat of liquefaction.

* "Proceedings, Institute of Mechanical Engineers," 1881.

The following table shows the results of test experiments made with modified Giffard, Haslam, Bell-Coleman, and Cole's "Arctic" machines :—

	Giffard.*	Haslam.†	Bell-Coleman.‡	Cole's "Arctic."§	
				No. 4 Size.	No. 1 Size.
Diameter of compression cylinder, in ins.	27	25½ (a-cy.)	28	11	6½
Stroke of each expansion " "	22	19½ "	21	9	5½
Revolutions per minute	18	36	24	12	8
Air pressure in receiver (absolute), in lbs. per sq. in.	62	72	63.2	96	160
Temperature of air entering compression cylinder (containing vapour up to 88 per cent. of saturation)	65	64	61	65	75
Temperature of air discharged from compression cylinder	52° F.		65½ F.	48	46
Temperature of compressed air admitted to expansion cylinder	267° F.				
Temperature of air after expansion	70° F.			35	
Work done in compression cylinder, from diagram	—82° F.	—85° F.	—52°	—81	—98
Work given off in expansion cylinder, from diagram	43.12 h.p.				
Difference in work done in compression cylinder, and work given off in expansion cylinder	28.05 h.p.				
Diameter of steam cylinders, in ins.	15.07				
Stroke of trunks	12				
Initial steam pressure in cylinders (absolute) per sq. in.	10				
Work given off in steam cylinders, from diagram	15				
Initial temperature of cooling water	55 lbs.				
Final	24.6 h.p.				
Quantity of "cooling water passing per minute in lbs.	57° F.			62	41
Work lost in heat taken off by cooling water	145° F.				
I.h.p. in compression cylinder	9.25				
" in expansion cylinder	19 h.p.				
Per cent. of I.h.p. of compression returned in expander	43.1	346.4	124.5	14.5	3.28
	28.0	176.2	58.5	7.8	1.68
		51	47	54	51

* "Proceedings, Institution of Mechanical Engineers," 1881.

† "Proceedings, Manchester Society of Engineers," 1894.

‡ Professor Schroeter, "Untersuchungen an Kaeltemaschinen verschiedener Systeme," 1881,

§ A. J. Wallis-Taylor, 1902.

CHAPTER XI.

COCKS, VALVES, AND PIPE JOINTS AND UNIONS.

Expansion or Regulating Cocks and Valves.—Stop Cocks and Valves.—Suction and Discharge Valves.—Pipe Joints and Unions.—Means for Increasing the Cooling Surface of pipes.

EXPANSION OR REGULATING COCKS AND VALVES.

A NUMBER of cocks or valves are required on every refrigerating machine, the most important being, however, the expansion or regulating cock or valve, or as it is sometimes called the flash-cock or

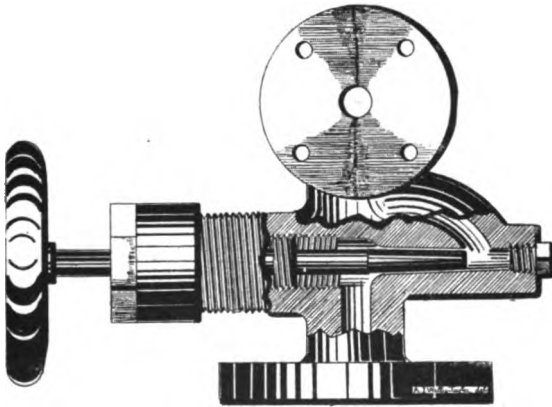


Fig. 119.—Taper Spindle Expansion or Regulating Valve.
View partly in Vertical Section.

valve, which serves to control the connection between the condenser and the refrigerator or evaporator.

Fig. 119 is a view partly in vertical central section, and Fig. 120 is a vertical central section showing two patterns of a very common form of expansion valve of the taper spindle type which are adapted for use with manifolds. The construction of these valves are obvious

from the drawings, the taper spindles and valve boxes or casings are made of hardened steel, and whilst extremely simple in construction the type is, perhaps, all things considered, about the most effective arrangement for general purposes.

Figs. 121 and 122 show in vertical central section the half-inch angle and globe expansion valves employed by the Triumph Ice Machine Company. These valves are made of the best machinery steel,

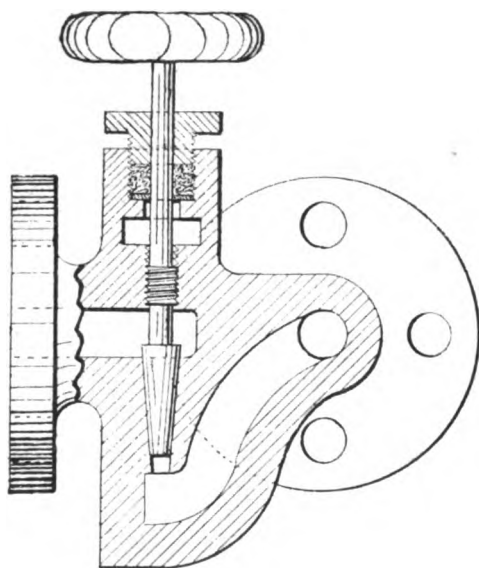


Fig. 120.—Taper Spindle Expansion or Regulating Valve.
Vertical Central Section.

and are so constructed that they can be packed at any time. The drawings are self-explanatory, as is also that shown in Fig. 123, representing a vertical central section through the Frick expansion valve, which is constructed of drop steel forgings.

Fig. 124 is a plan, Fig. 125 is a vertical central section, and Fig. 126 is a view of the plug partly in vertical section through the port or way, showing the De La Vergne improved expansion cock.

The port or passage through the plug (Figs. 122 and 123) is so formed as to admit of the nicest regulation being effected. With this object the round hole is not carried completely through the plug, but only through about three-quarters the thickness thereof, as shown in

Fig. 126, and the remaining thin bridge of metal is perforated in the shape of a very narrow wedge as shown in Fig. 125.

The plug is rotated by means of a worm and worm wheel in the manner which can be clearly seen from the drawing, and whereby very fine or delicate adjustment can be readily imparted thereto. The narrow wedge-shaped passage or aperture allows of the flow of the liquid ammonia being regulated to the minutest possible amount, the point or apex thereof being the first to open.

The stop-cocks or valves described in a patent taken out by Puplett and Rigg in 1887 for regulating, or completely cutting off or arresting,

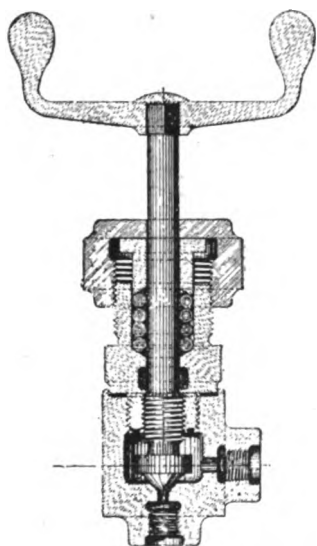


Fig. 121.—Triumph Angle Expansion or Regulating Valve. Vertical Central Section.

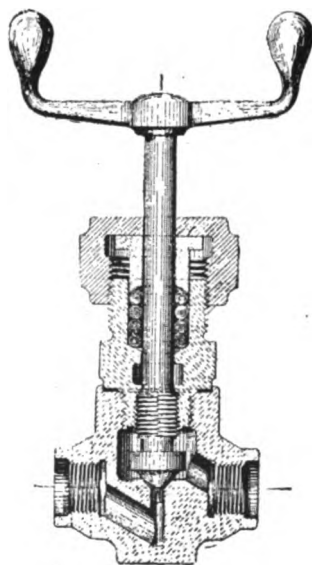


Fig. 122.—Triumph Globe Expansion or Regulating Valve. Vertical Central Section.

the flow of the gas or liquids to the various parts of the apparatus have metal seats. To prevent leakage of the gas or liquid, the stuffing boxes of these valves are provided with screwed glands, which are likewise screwed on to the valve spindles, which latter are screw threaded for their entire length, and are packed with some suitable yielding fibrous or metallic packing, such, for instance, as hemp or lead. This packing

is caused to enter into the screw-threads upon the spindles as the glands are forced or screwed down, thus making gas-tight joints round the latter without causing the valves to set fast. A description of the

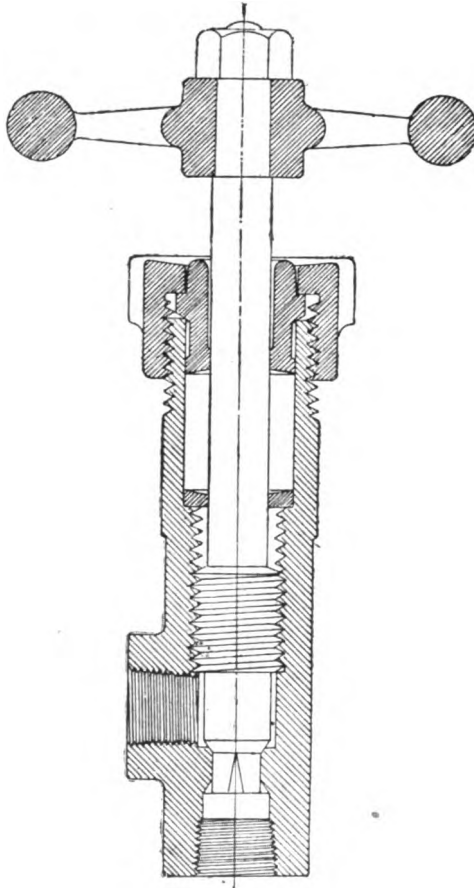


Fig. 123.—Frick Angle Expansion or Regulating Valve. Vertical Central Section.

Pontifex expansion or regulating valve will be found on page 167, being one of the improvements included in his 1887 patent.

A form of expansion valve for use with ammonia or other compression machines has been designed by Suppes and Dortch of Ohio, U.S.A., which, it is claimed, obviates the formation of ice upon the

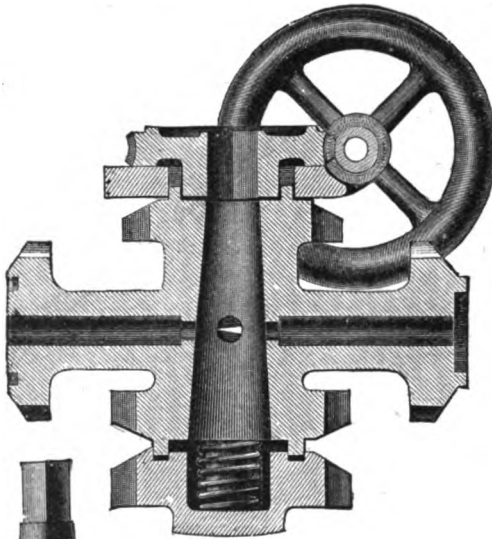


Fig. 125.



Fig. 126.

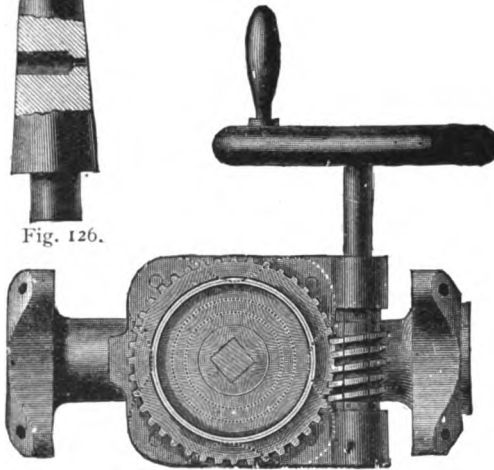


Fig. 124.

- | | |
|--|---------------------------------|
| Fig. 124.—De La Vergne Expansion or Regulating Cock. | Plan. |
| Fig. 125.—Do. | Vertical Central Section. |
| Fig. 126.—Do. | View of Plug partly in Section. |

Q

exterior of the valve owing to the intense cold which is produced at this point by the expansion of the ammonia or other agent. Briefly the expansion valve now under consideration comprises a valve and casing having a pipe member connecting the expansion orifice of the valve

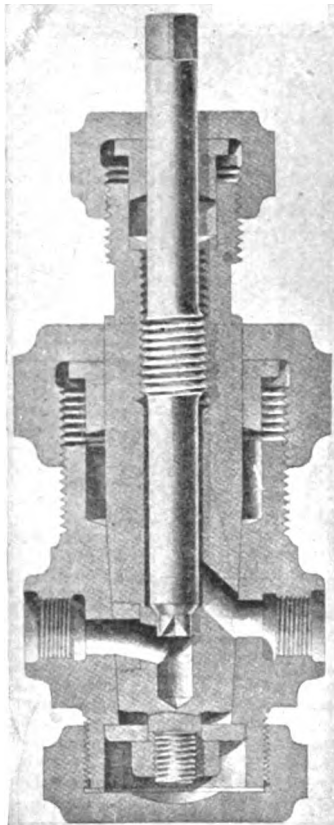


Fig. 127.—Triumph Safety Combination Expansion Valve and Stop-cock. Vertical Central Section.

with the refrigerating coil, which valve is provided with an ice-guard consisting of a member of a comparatively large area secured to the exterior of the valve-casing adjacent to the valve. This ice-guard or member performs the double office of firstly absorbing heat from the atmosphere, and in this manner preventing an undue reduction in the temperature of the valve-casing from taking place; and, secondly, of forming a barrier over which the ice which accumulates on the pipe member must creep before it can reach that portion of the casing surrounding the valve.

In Fig. 127 is illustrated the Triumph safety combination expansion valve and stop-cock. With this valve there is no necessity for pumping out or shutting down the plant, as it can be repaired at any time by shutting off the stop-cock, removing the stem and inserting in its place a short plug which is sent out with each valve. Expansion can then be effected with the stop-cock, which has a V-shaped opening at both ends, so that no mistake can be made as to which direction it is turned. When the

expansion valve is repaired, all that is required is to simply shut off the stop-cock again, remove the short plug, and re-insert the valve-stem, after which work can be resumed as before.

STOP COCKS AND VALVES.

The De La Vergne improved form of stop-cock for ammonia

gas is illustrated in Figs. 128 and 129, which show vertical central sections through the shells or casings of a $2\frac{1}{2}$ -in. and a 1-in. cock, the plugs being left in elevation.

As will be seen from the drawings, the square for operating the plug is, contrary to the usual custom, placed at the small end thereof, the latter being pressed to its seat by a spiral spring inserted between its large end and a cap bolted up to the shell or casing, and having an annular projection adapted to engage in a corresponding groove formed in the latter, and wherein is provided a lead or other washer.

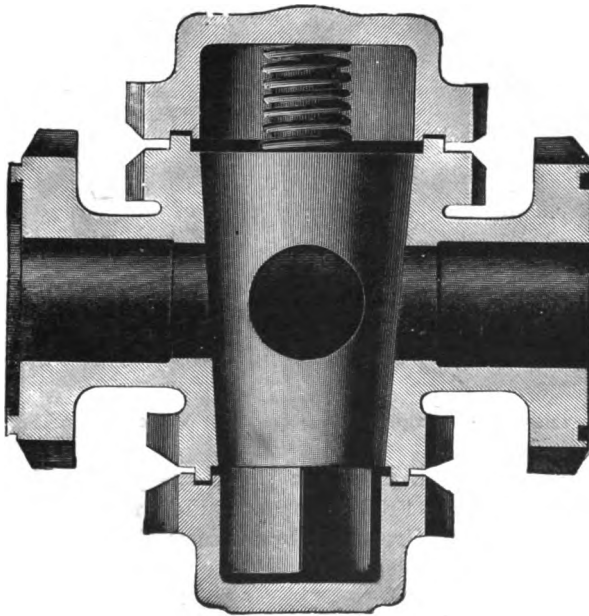


Fig. 128.—De La Vergne $2\frac{1}{2}$ -inch Stop-cock. Vertical Central Section.

Similar means for forming a gas-tight joint are provided at the small end of the plug, and in this manner the escape of any fluid into the chamber that might chance to pass the plug, is prevented. The even and constant pressure of the spiral spring maintains the plug always on its seat, and prevents any grit or other impurities from getting between the surfaces and cutting or abrading them. The shell of the small-sized cock or valve (Fig. 129) is of slightly modified form.

The Kilbourn stop-cock is provided with a cone, gland, nut, or

sleeve, and collar, so constructed and combined that by turning the gland nut in the one direction the cone will be forced into and held in its seating, whilst on the other hand by turning it in the other, or opposite direction, the cone will be started from its seating.

The construction of the Triumph Ice Machine Company's stop-valve is such as to admit of its being packed at any time without running the risk of loss of gas. The valve has double seats, and the valves, when closed, clamp the seats so that it is impossible to have any leakage. The seats are formed of lead, so that should they at any time be injured by foreign matter, by simply removing the damaged seat and inserting a new one a new valve is secured at only the

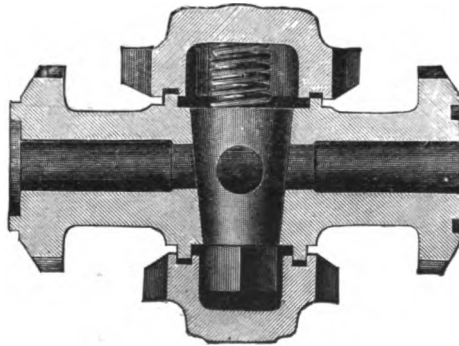


Fig. 129.—De La Vergne 1-inch Stop-cock. Vertical Central Section.

expense of a lead seat. Fig. 130 shows one pattern of shut-off or stop-valve used by the Frick Company. Figs. 131 and 132 are two other patterns of stop-valves made by the same Company.

SUCTION AND DISCHARGE VALVES.

Compressors for ammonia or other volatile refrigerating agents are usually provided, in the case of a vertical single-acting machine, with two valves—a suction and a discharge valve—at one extremity of the cylinder only; and a double-acting horizontal machine has as a general rule four valves—two, viz., a suction and a discharge valve, being located at each end of the cylinder. It is hardly necessary to remark that these valves must, like all other valves in the system, be maintained tight, but, in addition to this, these particular valves are all held against their seats by suitable steel springs; and it is a matter of the greatest importance, as regards the securing of the utmost

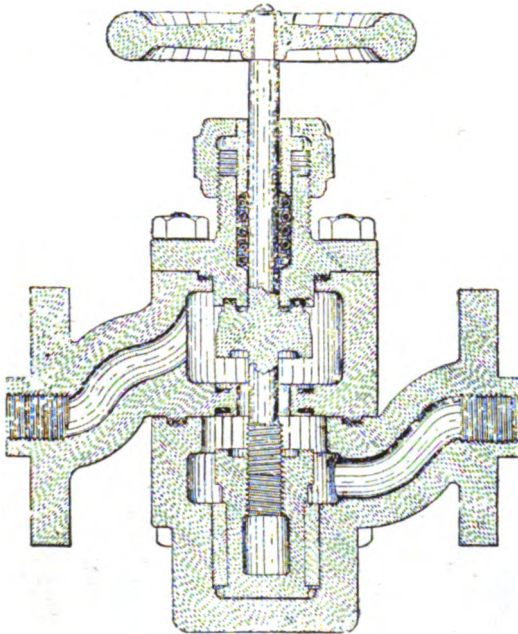


Fig. 130.—Frick Shut-off or Stop Valve. Vertical Central Section.




Fig. 131.—Frick Stop Valve.
Perspective View.




Fig. 132.—Frick Stop Valve.
Perspective View.

economy in working possible, to see that the proper amount of tension is put upon these springs.

Should the spring governing the discharge valve of a compressor

be too strong, then it is evident that an undue amount of pressure will have to be exerted in order to raise it from its seat, and hence a loss will be experienced. Still worse is it if the spring on the suction valve be over powerful, as in this event an excessive amount of suction will have to be produced in order to effect the raising of the valve off its seat, thereby creating a serious interference with the flow of the gas into the cylinder of the compressor. Very sensible losses in efficiency will be experienced when the springs of both valves are exerting an over-pressure. A very small loss in the volume of gas for each single

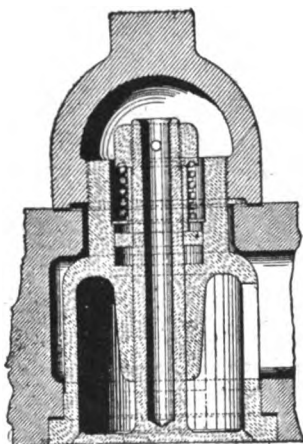


Fig. 133.—Discharge Valve Hercules Compressor. Vertical Central Section.

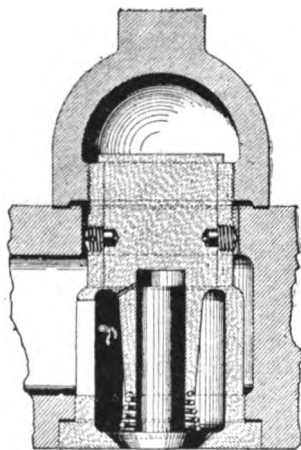


Fig. 134.—Suction Valve Hercules Compressor. Vertical Central Section.

or double stroke of a compressor will in twenty-four hours amount to a serious item.

The most effective method for adjusting the tension of the compressor valve springs to a nicety is by the use of the indicator. In fact, without the use of the latter instrument, it is impossible to insure any degree of accuracy of adjustment, and consequently every compressor should be provided with proper pipes to admit of the attachment of an indicator.

Figs. 133 and 134 show respectively the construction of the discharge and suction valve of the Hercules compressor. An obvious objection to the old form of construction is that on the removal of the cap the whole valve would fall into the cylinder. In the improved pattern made by the Triumph Company, this objection is obviated.

Fig. 135 shows the Triumph suction-valve. This valve is fitted with a guard so constructed as not to reduce the port area, which guard is attached to the lower end of the valve-stem, which is enlarged for this purpose. In case of breakage, or should the stem come loose,

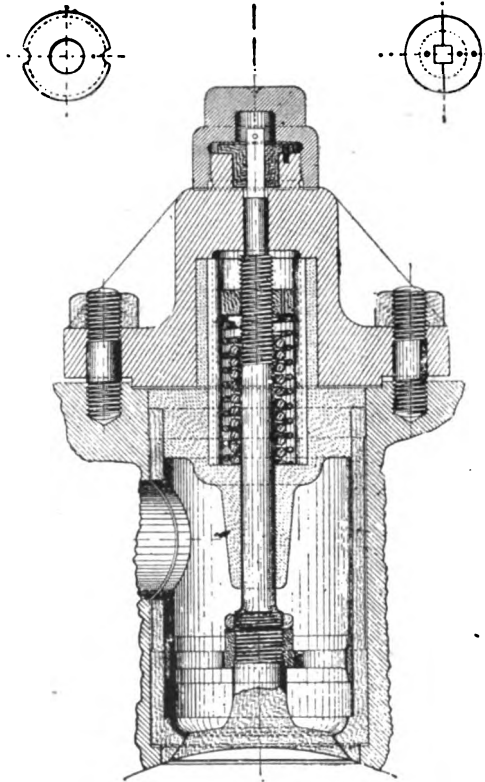


Fig. 135.—Triumph Suction Valve. Vertical Central Section.

this guard will prevent the valve from dropping into the cylinder. By removing the hood or cap on the top of this valve, which may be done whilst the machine is in operation, the movement of the stem may be seen. This enables the person in charge to ascertain whether or not the valve is working properly. Should the suction-valve become tight from some cause, or the spring be too tight, all that is necessary

to do is to remove the cap, take off the locker and turn the valve-stem to the right. If, on the contrary, the spring is too slack or light,




Fig. 136. — Triumph - pattern Suction Valve for Frick Compressor. Vertical Central Section.

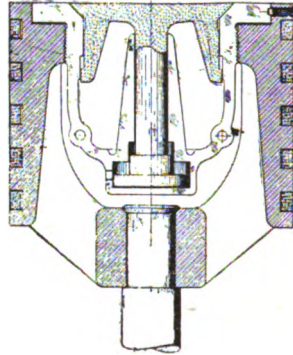


Fig. 137. — Triumph - pattern Suction Valve for Frick Compressor. Vertical Central Section.

and permits the valve to open too much, the stem should be turned to the left. After the required adjustment the locker and cap can be

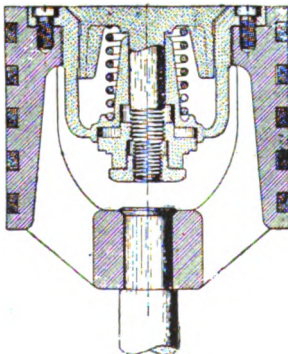


Fig. 138. — Triumph - pattern Suction Valve for De La Vergne Compressor. Vertical Central Section.




Fig. 139. — Triumph - pattern Suction Valve for De La Vergne Compressor. Vertical Central Section.

replaced and the valve will be found to be working properly. The whole of this operation can be effected without shutting down the machine.

Figs. 136 to 139 show the patterns of safety suction-valves constructed by the Triumph Company for the Frick and the De La

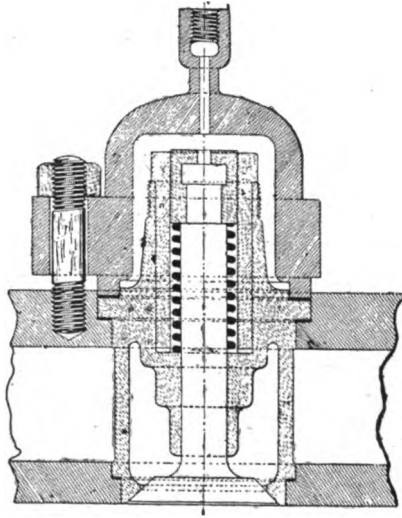


Fig. 140.—Triumph-pattern Valve for Calahan Compressor.
Vertical Central Section.

Vergne types of compressors, and Fig. 140 illustrates the pattern of valve made by the same company for the Calahan type of machine.

PIPE JOINTS AND UNIONS.

An important part of a compression plant is the provision of absolutely gas-tight pipe joints, which, by the way, is by no means an easy matter to effect, at least with the agents working at the higher pressures. It is scarcely necessary to observe that the pipes must be so put up that they will be capable of expanding and contracting freely, for the range of expansion in pipes which are liable to be subjected to extremes of temperatures so widely differing as in the present case, is considerable. The pipes should likewise be fixed in sections, so that any particular portion can be removed for cleaning or repairs and replaced in position without having to interfere with the other ones.

For various reasons it is impracticable to use joints screwed together with white or red lead or varnish, as in the case of steam-pipes, and consequently some other method of forming a gas-tight joint has

to be resorted to. A joint which is frequently employed, is a compound screwed and soldered one, and this kind of joint is found in practice to be a very durable and reliable one, being capable of withstanding the expansion and contraction to which the pipes are constantly liable, as well as the periodical rapping to which they are subjected during cleansing operations. The leading features of all joints of this description is the commencement of the female screw-thread in the socket a short distance from the extremity of the pipe or fitting, the intermediate portion being slightly enlarged so as to form an annular space or clearance, when the spigot end of the pipe is in position, adapted to receive the solder.

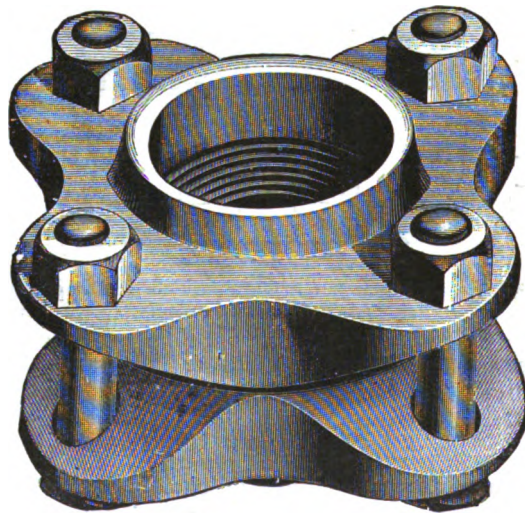


Fig. 141.—De La Vergne Pipe Joint. Perspective View.

Figs. 141 and 142 illustrate, in perspective and vertical central section, the De La Vergne type of pipe-joint. To ensure a tight joint to withstand high pressure the flanges are connected to the pipes both by screw threads and solder, the latter being run into the annular recesses or clearances shown above the threaded portions, the surfaces of which are well tinned. The joint between the flanges is formed by an annular projection upon the one fitting into a corresponding groove formed in the other, which, when the nuts are screwed up upon the bolts for connecting the flanges, is pressed home and bears upon a suitable packing ring inserted into the bottom of the correspond-

ing groove or recess, and thus forms a perfectly gas-tight joint. Similar screwed and soldered joints are likewise employed wherever it is necessary to use a return bend, elbow, tee, cross, or other connecting piece. The fittings are either made of malleable iron or steel.

The result of covering the thread of the pipe with solder, and running the latter into the above-mentioned annular recess or

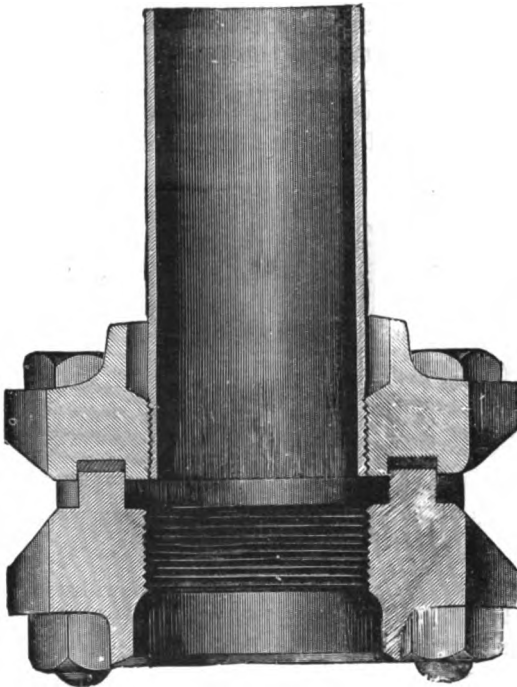


Fig. 142.—De La Vergne Pipe Joint. Vertical Central Section.

clearance, and thus forming a compound screwed and soldered joint, is, that what is otherwise the weakest part of a length of piping becomes the strongest. It is stated by the Company that it has been invariably found that when the usually applied test of 1,000 lbs. hydrostatic pressure to the square inch is overrun, the pipe rips open before the joint gives out.

Fig. 143 is a vertical central section illustrating the Kilbourn joint, which is especially intended for use where it is necessary to set tubes

or pipes in places where an expander cannot be used, or where sweating or soldering is requisite to make a perfect gas-tight joint adapted to withstand very high pressures. As will be seen from the illustration the extremity of the pipe is flanged and secured in a recess in the plate by means of a nut or collar, after which solder is run round it. Where the plate is of insufficient thickness to allow for a depression being left for the solder a rib is formed thereon, as shown. In this manner the inventor claims that the pipe or tube can be so secured to a tube plate or its equivalent that it will be perfectly firm and rigid, and that the solder will retain its hold against all ordinary or usual contingencies, whilst at the same time forming a perfectly gas-tight joint. In Fig. 144 is shown the Kilbourn coupling for connecting together different lengths of pipe, or forming joints between the latter

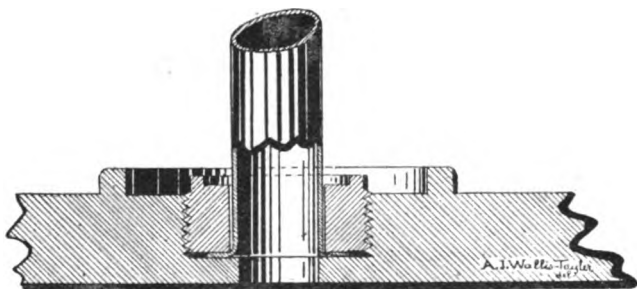


Fig. 143.—Kilbourn Joint for connecting pipes to plates.
Vertical Central Section.

and their connections, where fluid-tight joints to withstand very high pressures are demanded. The usual internally screw-threaded socket is chamfered or bevelled at its extremities, and caps having internally chamfered shoulders and bored to fit over the pipes, and over the socket, are forced against the latter by means of back-nuts, so as to compress the packing rings or jointing materials, placed between the chamfers on the socket and caps, as shown, and thus form a perfectly gas or fluid-tight joint.

In forming a screwed and soldered joint (Figs. 141 and 142) of the type above described, owing to the comparatively small amount of surfaces in actual contact and tending to prevent leakage, it is essential that great care should be taken in order to ensure the lasting qualities of the joint, and if these precautions be observed, and the joint be well made, it will remain gas-tight for a considerable

number of years. Those portions of both the exterior and interior surfaces of the pipes between which the solder is poured should be first carefully tinned, this operation being performed just before the formation of the joint, so as to avoid the injury that might otherwise occur to the thin layers of tin, and thus to ensure as perfect surfaces as possible and admit of as firm as practicable an adherence of solder to both of the surfaces to be united.

All grease having been first carefully removed by scraping and washing over with killed or prepared hydrochloric or muriatic acid, the tinning of the faces can be easily performed by means of a soldering iron in the ordinary manner. The killing of the hydrochloric acid is effected by placing in it pieces of zinc until all ebullition ceases, and after cooling, diluting the acid with water in the proportion of two parts of the latter to one part of the former.

It will, of course, be understood that to disconnect a screwed and soldered joint, a sufficient application of heat must be made to melt or fuse the solder.

Figs. 145 to 158 show a few amongst the numerous other joints that have been brought out and used. Fig. 145 is a very substantial pattern of steel flange union or connection, in which a blue-lead gasket is used which is cast to fit into the square-groove in the face of one of the flanges, the rib or projection on the opposite flange also fitting into this groove so that when the flanges are drawn together by the four bolts, the lead gasket will be pressed firmly into the groove, the latter preserving the form and thickness of the gasket, and so forming a perfectly gas-tight joint. Similar types of unions are also shown in Figs. 146 and 147. The flange union shown in

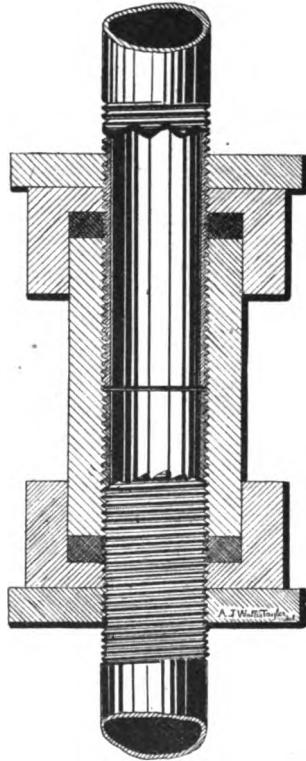


Fig. 144.—Kilbourn Joint for connecting different lengths of pipes. Vertical Central Section through Joint.

Fig. 149 is intended for a joint made with rubber and gasket, or any sheet packing similar to that used for gas, water, and steam, and the flanges are made of steel.

By reason of the larger surfaces that are in contact, flange joints formed in the ordinary manner would remain gas-tight for a longer


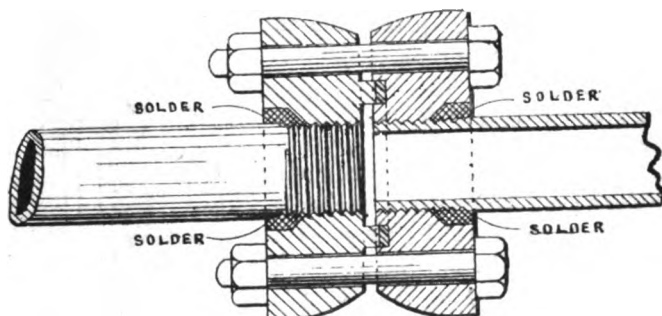


Fig. 145.—Flange Coupling or Union for lead gasket. Vertical Central Section.

time than would be the case with screwed joints. Ammonia-tight flange joints can be made by the insertion of a common gasket, and with flanges adapted for the use of sheet packing of the kinds used for steam and hydraulic joints, but in the latter case it is preferable to

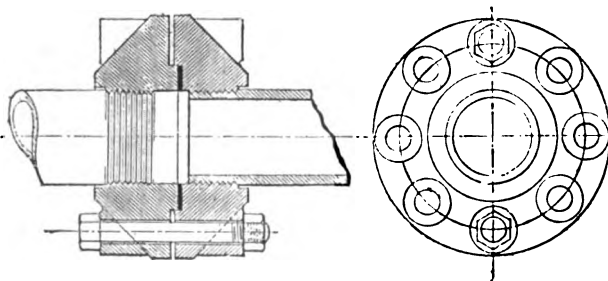

Figs. 146 and 147.—Frick Coupling or Union for Large Pipes. Vertical Central Section and End View.

employ flanges having on one of their faces a circular raised rib or fillet, and in the other face a corresponding groove or recess, as shown in Fig. 149.

Fig. 150 shows a De La Vergne soldered pipe joint-socket bend or elbow for ammonia pipes. Fig. 151 is a return socket bend. Fig. 152

is a flange bend or elbow for gasket joint. Figs. 153 and 154 is a side view, partly in elevation, and an end view of the Frick evaporating




Fig. 148.—Frick Coupling or Union for Small Pipes. Vertical Central Section.

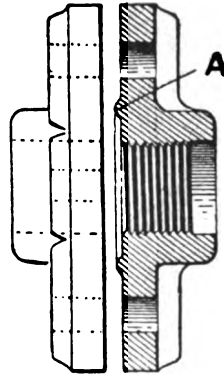


Fig. 149.—Flange Coupling or Union for Sheet Packing. Elevation partly in Central Section.

coil bend. Fig. 155 is an end view, and Fig. 156 is a side view of a flange return bend, and Figs. 157 and 158 show, in side elevation

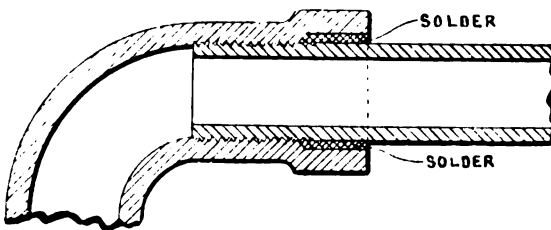


Fig. 150.—De La Vergne Soldered Pipe-joint, Bend, or Elbow. Vertical Central Section.

and vertical central section, a form of return bend or head formed in halves for use in places where it is desired to disconnect any one of the coils of a stack. The pipes are, it will be seen, connected to the

head by screwed and soldered joints, and the two halves of the head are arranged to form an ordinary flange union, a suitable insertion



Fig. 151. — Return Socket-Bend. Vertical Central Section.





Fig. 152. — Flange Bend or Elbow. Vertical Central Section.

being used to form a gas-tight joint, and two long side bolts (one of which only is shown fully in the illustrations) and a shorter bolt at the

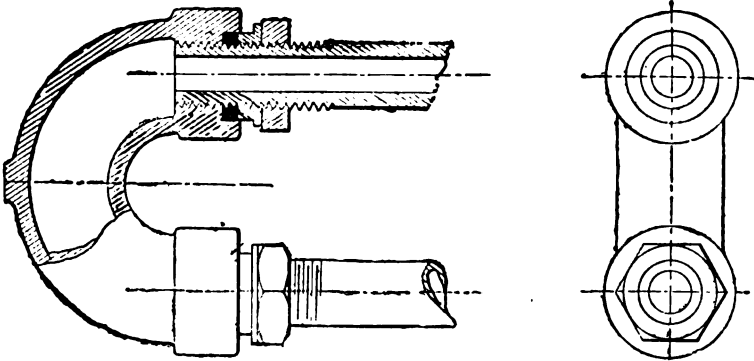

Figs. 153 and 154. — Frick Evaporating Coil-bend. Side view partly in Section and End View.


bend serving to clamp them together. The illustrations are for the most part sufficiently clear, and require but little explanation.

By the use of electric welding makers are now enabled to provide

long continuous coils of pipe and so for the most part dispense with the use of joints in awkward places.

MEANS FOR INCREASING COOLING SURFACES OF PIPES.

Fig. 159 is a perspective view of a disc or gill which is formed in halves, one of which is shown removed in Fig. 160. The two halves or parts of the disc are adapted to be secured together upon the

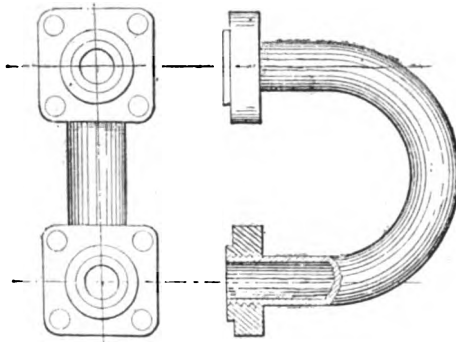

Figs. 155 and 156.—Flange Return-bend. End View and Side View.




Fig. 157.—Return-bend formed in halves. Side Elevation.





Fig. 158.—Return-bend formed in halves. Vertical Central Section.

pipe by means of iron clips which press them against the pipe. These discs are fixed at regular intervals upon the cooling or refrigerating pipes in the cold stores or chambers, after they are all put up, and, according to the inventors, their effect is to increase the

R

cooling surface to such an extent that only one foot of pipe is found requisite where four would be necessary without them. These removable discs or gills are made by Messrs. De La Vergne and Co.

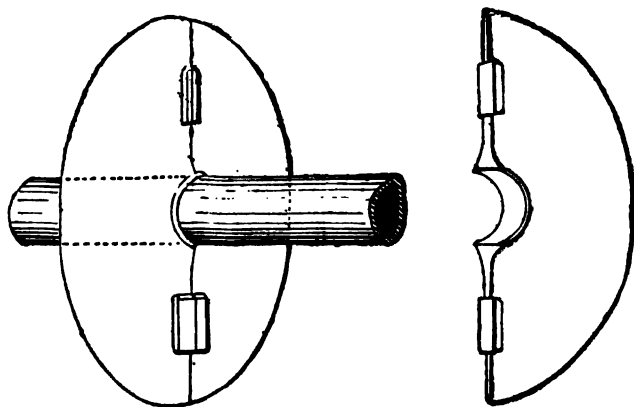

Figs. 159 and 160.—Discs or Gills for Increasing the Surface of Refrigerating Pipes. View showing Gill fixed in position on pipe, and View showing one-half of Gill removed.

Mr. B. Lebrun, of Nimy, Belgium, also makes a pattern of cooling pipe with gills or flanges. These pipes are of cast-iron, and the gills or flanges are formed therewith. Several other arrangements on the same principle have been devised for increasing the surface of cooling or refrigerating pipes.

CHAPTER XII.

REFRIGERATION AND COLD STORAGE.

Refrigeration by means of the Cold-Air Machine.—Refrigeration by means of Compression or Absorption Machines.—The Brine Circulation System.—The Direct Expansion System.—The Cold-Air Blast System.—Piping for Cold Stores.

THE knowledge of the conservative action of cold upon organic substances is probably as old as the existence of human beings, and has been constantly utilised to preserve from putrefaction various alimentary substances.

Attempts have for many years been made to produce a refrigerated atmosphere by means of ice, but the results obtained are far from satisfactory, the atmosphere of the stores or chambers so cooled being as a rule saturated with moisture from the melting ice, and the meat preserved therein assuming a more or less musty and disagreeable flavour. The possibility, however, of successfully keeping meat in artificially cooled stores or chambers dates only from the invention of Charles Tellier's machine and brine circulating system in 1873, by which he was enabled to create a cold dry atmosphere, wherein organic substances could be maintained constantly at that temperature which is found to be preservative. Mechanical refrigeration is therefore, it will be seen, an art of comparatively modern origin.

For the preservation of meat, machines working upon the compression system, the absorption system, and cold-air machines are employed.

In freezing carcasses for transportation, the cold is best applied gradually at first, so as to ensure an even freezing throughout, and prevent damage to the inner portions of the meat by the freezing of the external surfaces thereof before the internal heat is sufficiently lowered. When frozen or congealed a temperature of at least as low as 18° Fahr. should be maintained. For cooling ships' holds, cold stores or chambers, and other similar purposes, temperatures varying from 15° to 55° Fahr. are required, in accordance with the material

being dealt with, an even temperature in every part being absolutely necessary. When freezing carcasses they must be hung at such distance apart as to admit of a ready circulation of the cold air round them taking place; for storage for transportation, however, it is recommended to pack them as tightly together as possible, provided no injury through bruising be caused, and that a sufficient clearance or free space be left for the circulation of the cold air between the carcasses and the inner lining of the storage chamber. The temperature of cold land stores or chambers for storing and preserving unfrozen meat need not be lower than 25° Fahr., but should not rise above 30° Fahr. When the meat is frozen, however, as it must be when it has to be kept for any length of time, it may advantageously be maintained at as low a temperature as 15° Fahr.

The atmosphere of cold stores in some instances should be kept as dry as practicable; whilst in others a certain amount of moisture is desirable, as, for instance, when used for preserving fish, eggs, and cheese, which are injured by the air being too dry. For preserving meat for comparatively short periods the best temperature is from 30° to 40° Fahr., as most descriptions are injured to a greater or less extent if permitted to freeze, by the bursting of the vesicles of which flesh is composed. When, however, it is required to be preserved for a longer period than, say, three weeks it is absolutely essential that the meat should be frozen, otherwise a slight decomposition will take place, and it will become greatly deteriorated.

When a cold-air machine is employed for refrigeration, the cold air is, as a rule, admitted to the freezing room, cold storage chamber, or chill room through ducts placed near the ceiling, and after it has done its duty is conducted back again to the compressor, wherein, after being mixed with a sufficient amount of fresh air, it is again compressed.

The most advantageous method of conveying the cold air from the machine to the chill room or cold store or chamber, is by means of wooden trunks or conduits discharging into the latter through an inlet situated at or near the ceiling at one extremity thereof, the used or spent air being withdrawn through a similarly situated outlet and conduit at the other extremity. All abrupt rises or falls or bends in the air trunks should be avoided, and their length should not be excessive, as the loss experienced through the rise in temperature of the air in the latter case would be very considerable. The extreme limit of distance to which it is advisable to convey the cold air through these conduits is 200 ft.

When carcasses are to be congealed, the temperature of the freezing chamber or room should be maintained at about 10° Fahr.; as has been already stated, however, the cold should on no account be applied too rapidly at starting, but gradually, so that the internal heat may be first sufficiently reduced, to avoid injury to that portion of the meat, before the outer surface becomes frozen.

For after preservation of frozen meat it is sufficient to keep the atmosphere of the chamber or store down to a temperature of about 15° or 18° Fahr.; it should not, however, be allowed to rise above 20° Fahr.

REFRIGERATION BY MEANS OF COLD-AIR MACHINES.

According to Colonel B. H. Martindale, C.B., R.E., the general manager of the London and St. Katherine Dock Company, in 1886 they had 56 refrigerating chambers in two vaults, the smallest of which chambers had a cubic content of 2,273 ft., and the largest thereof of 9,280 ft., the total content of the 56 chambers being something over 183,000 cubic ft. The carcasses of the sheep averaged in weight 56, 60, and 72 lbs. each; and the whole of the chambers completely filled would contain about 59,000 sheep of the first weight, 56,000 of the second, and 44,000 of the third; in practice, however, a space or clearance had to be left for gangways, and for separating different marks, for which a deduction had to be made from the total storage capacity, and taking the shipments as they chanced to arrive, the above space was equal to the storing of the carcasses of about 44,000 sheep.

The cold-air machines employed in connection with the 56 chambers in question comprised four Haslam 60,000 cubic ft. machines, and three Hall 30,000 cubic ft. machines, supplied with steam from three multitubular boilers of the marine type, and four boilers of the locomotive type, the former having been found in practice to be the best. One of the Haslam 60,000 cubic ft. machines worked on 15 chambers, having a total capacity of 48,000 cubic ft., and capable of storing 11,000 carcasses of sheep averaging in weight 72 lbs. each, but which storage capacity was reduced by gangways, &c., to between 8,000 and 9,000. The engine was kept running twenty hours out of every twenty-four, the said stoppage including the time required for clearing the snow from the valves, snow boxes, and air-trunks. The average speed was 80 revolutions per minute, at an air pressure of 44 lbs. per square inch, giving a temperature of -70° in the snow boxes, and keeping the temperature of the chambers down

to from 15° to 18° Fahr., which was found in practice to be about the best temperature to keep the meat at. Better results were obtained in proportion to the fuel consumed, by working at an air pressure of about 44 lbs. per square inch, instead of 50 lbs. and upwards; not giving such a low temperature in the snow boxes, but about -50° Fahr. instead of -60° or -70° , and delivering a larger volume of cold air into the chambers. The proportionate rise in temperature was then much less between the delivery from the expansion cylinder and the distant chambers. Twenty-four chambers, with a capacity of 90,000 cubic ft., were worked by two Haslam 60,000 cubic ft. machines, running at an average of 70 revolutions per minute, with an air pressure of 40 lbs. per square inch, the temperature in the snow box being -55° Fahr.

The atmosphere of the chamber next the machine could, as a rule, be kept at a sufficiently low temperature with but little opening of the delivery ports in the air-trunks, and almost without admitting air at all, as the mere passage of the said air-trunks through it kept it nearly cool enough. The greatest care was taken in regulating the delivery and return air-ports or apertures, gradually increasing the area of both in proportion to the increased distance from the machine; the greatest distance to which the cold air was conveyed being 180 ft.

The practical result of the observations taken, which extended over some time, was that the rise of temperature in travelling was 1° Fahr. for every 18 or 20 ft. travelled; but this, of course, must not be taken for more than the result arrived at from general working under existing conditions. It was likewise found that from 1 to $1\frac{1}{2}$ cubic ft. of cold air per hour would keep cool—say at 18° Fahr.—1 cubic foot of storage at a distance not exceeding 180 ft., or say, at an average distance of 90 ft. from the machine. The first amount named, viz., 1 cubic foot of cold air per hour to each cubic foot of storage, was the result arrived at during temperate weather, and this, it is estimated, would most probably be amply sufficient were the chambers fully stored with carcasses, and left entirely undisturbed; but as this is not possible in practice, an allowance has to be made for the opening of doors for the purpose of deliveries and so on; and the second amount, or $1\frac{1}{2}$ cubic ft. of air per hour for every cubic foot of storage that it was desired to keep down to, say, 18° Fahr., was found to be about correct for general practice.

The coal consumption was stated to be for three machines, giving out nominally 120,000 cubic ft. of air (one 60,000 cubic ft. and two 30,000 cubic ft. machines), $4\frac{1}{2}$ tons of coal in twenty hours; and

two 60,000 cubic ft. machines, working under practically similar conditions, had a like consumption. The coal used was ordinary Welsh coal, costing about 16s. 6d. per ton.

The London and India Docks Co., when the extensions now in progress are completed, will have refrigerated accommodation capable of receiving 550,000 sheep. The extension consists of twelve cold chambers on three floors.

REFRIGERATION BY MEANS OF COMPRESSION OR ABSORPTION MACHINES.

When refrigerating machines wherein the cooling is effected by the evaporation of a volatile liquid are employed, the refrigeration can be conveniently effected in three ways, viz. :—

First—by cooling a non-congealable salt brine, and then pumping it through a system of pipes, or of open troughs in the chambers. Secondly—by causing a current of air, generated by means of a fan or otherwise, to impinge against surfaces reduced to a low temperature by the expansion of the refrigerating agent itself, or by an internal circulation of cooled brine, and conducting the cold air to the refrigerating chambers. And thirdly—by expanding the gas direct through pipes placed in the chambers.

The main advantage claimed for the first of these plans is that it admits of the machine being stopped, and when an independent brine pump is employed, the brine, wherein a large reserve of cold is stored up, can be continued in circulation for a considerable time before any thawing from rise of temperature and consequently dripping will take place from the pipes.

THE BRINE CIRCULATION SYSTEM.

The agent employed in the brine circulating system consists of a solution of chloride of sodium or common salt,* or of chloride of calcium,* chloride of magnesium, or any other suitable solution capable of standing very low temperatures without congealing. To extract or absorb the heat from the brine, the simplest and best method is undoubtedly that most commonly employed, which consists in passing it through a tank of ample dimensions fitted with suitable coils of pipes, through which the chilled liquefied ether, carbonic acid, ammonia, or other volatile refrigerating agent, circulates, vaporises or gasifies, expands, and subsequently returns therefrom in the form of a gas or vapour to the compressor, in one system; and in the other, in the form of a strong solution to the generator. An expansion valve or cock,

* For proportions, &c., of these solutions, see p. 459.

such as one of those illustrated in Figs. 119 to 127 (pages 221 to 226), is fitted to the inlet ends of the submerged coils. The brine, being thus deprived of a large portion of its heat, is then drawn away from this refrigerating or cooling tank or vessel by the brine circulating pump, and is forced through the system of cooling pipes in the refrigerating chamber or cold store.

The arrangement of the cooling pipes in cold stores for preserving provisions of a perishable nature requiring to be kept at various temperatures between 25° and 45° Fahr., in accordance with the description and nature of the provisions, or of those in chambers for freezing or congealing meat and keeping it frozen, which require to be maintained at temperatures of between 10° and 18° Fahr., according to the work demanded, only differ from other installations in the particular disposition and numbers of the pipes, the chambers intended for the latter purpose being, of course, fitted with the greatest number.

THE DIRECT EXPANSION SYSTEM.

When the direct expansion system is in use the pipes should invariably be of wrought-iron, and even where the brine circulating system is employed they should preferably also be of the latter material in the case of freezing chambers, as the heat from the chambers passes more readily through the thinner walls of the smaller wrought-iron pipes. Besides which there is, as has been already mentioned elsewhere, a considerable saving of space.

One advantage of this system is that a more economical and rapid cooling is effected than with the brine circulation; another is the simplification of the apparatus and the reduction in the first cost thereof. To counterbalance which advantages, however, there is the danger to human life, of damage to the contents of the refrigerating chambers, and of fire, should any leakage of the gas or vapour from the cooling pipes take place, and also the impossibility of shutting down the machine even for a few minutes without the cooling pipes commencing to drip.

As regards damage to the contents of the rooms or chambers by reason of an escape of the refrigerating agent, however, carbonic acid is known to be non-injurious, and as regards ammonia the fears of any deterioration in the quality of fresh meat, which is being frozen or preserved, resulting from any accidental leakage of the pipes, would seem to be totally groundless, judging from the results of recent practice, and the opinion of experts.

On this head the following extract from an article published in the *Scientific American*, in 1889, is of interest:—

"Some years ago Dr. B. W. Richardson, in a communication to the Medical Society, called attention to the antiputrescent properties of ammonia, and showed that blood, milk, and other alterable liquids could be preserved for a long time by adding to them certain quantities of solution of ammonia; and solid substances, such as flesh, by keeping them in closed vessels filled with ammonia gas. Some doubts that would appear to have been raised as to the results reported, on the ground that ammonia was itself a product of decomposition, induced Dr. Gottbrecht, of the University of Greifswald, to repeat the experiments with the result of practically confirming all Dr. Richardson's statements. After some preliminary experiments, in which animal matter placed in 5 per cent. of ammonia solution was found free from putrescence after nearly two years, ammonium carbonate was used in place of the free alkali for the sake of convenience. The first experiment made with the washed intestines of freshly killed pigs, showed the power of ammonium carbonate to retard putrefaction to be directly dependent upon the concentration of the solution, a 1 per cent. solution retarding it until the third day, a 10 per cent. solution until about the sixtieth day. When added to gelatine in which putrefaction had already been set up by inoculation, it was found that a 5 per cent. solution so modified the conditions that the putrescence ceased, and a $2\frac{1}{2}$ per cent. solution inhibited the development of bacteria, so that the liquefaction of the gelatine was practically stopped. Other experiments showed that in an atmosphere impregnated with ammonium carbonate meat could be kept for six months, and at the end of that time remain nearly unaltered."

When chambers are refrigerated on the direct expansion system it is nevertheless essential that the system of pipes employed, which can be arranged on any of the plans adopted in the case of brine circulation, should be such as to reduce as far as practicable to a minimum the chance of leakage taking place at the joints, cocks, valves, etc., as, independently altogether of any possible damage to the contents of the stores or chambers, it is highly desirable, for economical reasons, that as little as possible of the circulating agent be lost. Various gas-tight joints have been already briefly described in a previous chapter.

Ammonia, both in a liquid and gaseous condition, has no chemical effect whatever upon iron, consequently the cooling pipes require no protection except upon the exterior, which should receive a coat of paint every year to prevent them from rusting.

So long, however, as the pipes are coated with snow or ice no

corrosion will take place, even externally, as they are thoroughly protected thereby from the oxidizing effect of the atmosphere; when, however, they are subjected to alternate freezing and thawing, as is usually the case during actual work, when the chambers or stores are alternately in and out of use, then they must be protected as above mentioned.

There is not the least doubt but that the direct expansion system is, as has been before mentioned, more economical than the brine circu-

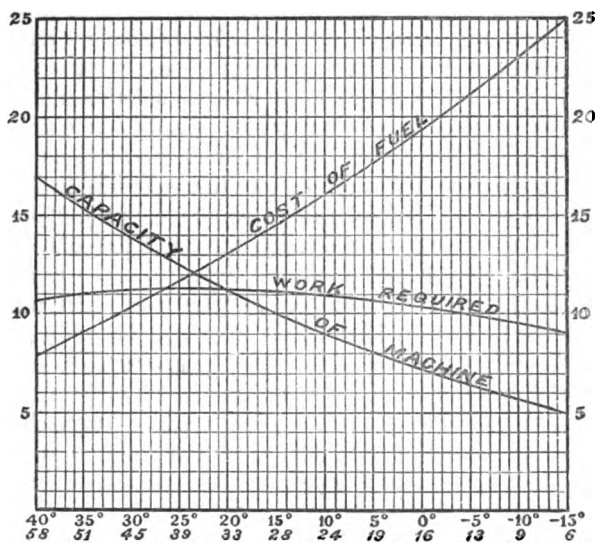


Fig. 161.—Diagram showing the Variation in Capacity, etc., of a Refrigerating Machine.

lation system. This will be obvious when it is remembered that every transmission of heat must of necessity entail a loss of efficiency. A far higher evaporating pressure can be maintained in direct pipes than in evaporating coils in a brine tank, whilst at the same time they have still within them a far lower temperature than in the latter. The result of this is that, in the compression system, the gas is sucked into the compressor at a greater back pressure when direct expansion is employed, and a far larger amount of efficiency is obtained. The cold, moreover, being produced exactly where it is required, there is practically no waste.

The diagram, Fig. 161, and the following table, show the variations

in capacity, etc., of a refrigerating machine, and the economy of direct expansion, as drawn up by the De La Vergne Company.

In the above diagram the line marked "capacity of machine" shows the diminished capacity as the back pressure is reduced. If the machine has a capacity of ten tons at a return pressure of 28 pounds, as shown by the vertical height of the curve, it has a capacity of five tons only with a return pressure of six pounds. Under the same circumstances the cost of fuel per ton is increased in the ratio of the vertical heights to the curve marked "cost of fuel," namely, from 14.5 to 25. In other words the cost per ton is nearly doubled while the capacity is halved. The work as seen by the curve marked "work required" diminishes very slowly.

This shows very plainly the economy of direct expansion. The ammonia in the coils of the brine tank must be cooled below the brine or the directly expanded ammonia. If the difference be 10°, say 5° instead of 15°, then the capacity of the machine is reduced in the ratio of 10 to 8 or 20 per cent., and the cost for fuel increased in the ratio of from 14.5 to 17.5 or 20 per cent.

These are physical facts which cannot be explained away, and the economy of direct expansion in practice over both brine and air circulation is usually greater than the diagram and table illustrates.

CUBIC FEET OF AMMONIA GAS PER MINUTE TO PRODUCE ONE TON OF REFRIGERATION PER DAY.

CONDENSER.

		<i>p</i>	103	115	127	139	153	168	185	200	218
		<i>t</i>	65°	70°	75°	80°	85°	90°	95°	100°	105°
REFRIGERATOR.	4	-20°	5.84	5.9	5.96	6.03	6.06	6.6	6.23	6.30	6.43
	6	-15°	5.35	5.4	5.46	5.52	5.58	5.64	5.70	5.77	5.83
	9	-10°	4.66	4.73	4.76	4.81	4.86	4.91	4.97	5.05	5.08
	13	-5°	4.09	4.12	4.17	4.21	4.25	4.30	4.35	4.40	4.44
	16	0°	3.59	3.63	3.66	3.70	3.74	3.78	3.83	3.87	3.91
	20	5°	3.20	3.24	3.27	3.30	3.34	3.38	3.41	3.45	3.49
	24	10°	2.87	2.9	2.93	2.96	2.99	3.02	3.06	3.09	3.12
	28	15°	2.59	2.61	2.65	2.68	2.71	2.73	2.76	2.80	2.82
	33	20°	2.31	2.34	2.36	2.38	2.41	2.44	2.46	2.49	2.51
	39	25°	2.06	2.08	2.10	2.12	2.15	2.17	2.20	2.22	2.24
	45	30°	1.85	1.87	1.89	1.91	1.93	1.95	1.97	2.00	2.01
	51	35°	1.70	1.72	1.74	1.76	1.77	1.79	1.81	1.83	1.85

In the brine system, on the other hand, the large refrigerating or cooling tank is exposed to the atmosphere, and even when insulated as perfectly as possible, a considerable amount of heat is unavoidably absorbed, which is, of course, a total loss; considerable fuel consumption is moreover required in the brine circulation system, for the power consumed in pumping the large quantities of brine through the system of pipes in the refrigerating chambers or cold stores, which pipes sometimes run to many thousands of feet in length, and thus give rise to a large amount of friction; and besides, after being in use for some time, they may become internally coated with rust, and with a slimy deposit, which not only produces a considerable increase in the amount of the friction to be overcome in driving the brine through them, but furthermore forms a sort of non-conducting coating, and lessens, to an appreciable extent, the heat-absorbing qualities of the system. Altogether it is not improbable that the entire loss through the additional consumption of fuel entailed from all the above causes does not, in many instances, fall far below 25 per cent. of the entire amount.

COLD-AIR BLAST SYSTEM.

Apparatus is also in use which is so arranged that the refrigerating coils or pipes are placed in a separate compartment connected with the refrigerating chambers or cold stores, and air, having been cooled in the first, is passed into the latter, the circulation being kept up by means of a fan or blower. The refrigerated air is sometimes first washed and freed from snow by passing it through a shower of cold brine, and dried by exposing it to the absorbent action of calcium chloride or other hygroscopic material. This arrangement is possessed of one of the advantages derived from the use of cold-air machines, viz., that every part of the apparatus is situated externally to the refrigerating chamber or cold store, and consequently accessible at all times. Dripping from the refrigerating pipes when the machine is stopped for a short time, and the temperature of the chamber or store rises slightly, is also avoided.

On the other hand, however, there is a considerable loss by reason of the absorption of heat by the cold air on its way from one chamber to the other; an increased consumption of fuel, owing to the power required to work the fan or blower for keeping up the air circulation; and finally the loss of possibly valuable space taken up by the chamber required for the purpose of cooling the air.

The plan wherein air, refrigerated by contact with brine-cooled

surfaces, instead of by direct expansion, is passed into the chambers or stores, is evidently still more costly inasmuch as there are not only the losses entailed from the above-mentioned sources, but, furthermore, that caused by another transmission of heat.

PIPING FOR COLD STORES.

AMOUNT OF REFRIGERATION REQUIRED.

The refrigeration required will be governed by the size of the store, the amount of and frequency with which the goods are brought into the store and removed from it, the temperature of the goods, and their specific heat, the mean external temperature, the greater or lesser perfection of the insulation, and various other matters, which render it totally impossible to lay down any hard and fast rules.

A very usual practice is to provide 1 foot run of 2-inch pipe for every seven cubic feet of space contained in the store, but sometimes the proportion used is as much as one to five, whilst again it is occasionally reduced to one to twelve. For refrigerating meat, in which case it is not desirable to cool the exterior too rapidly before the interior has had time to cool to a certain extent, the best proportion to employ is one to ten.

AMOUNT OF REFRIGERATING PIPES NECESSARY FOR CHILLING, STORAGE, AND FREEZING-CHAMBERS.

Chilling-rooms or Chambers, refrigerated on the direct expansion system, 1-ft. run of 2-in. piping for each 14 c. ft. of space; on the brine-circulation system, 1-ft. run of 2-in. piping for each 8 c. ft. of space.

Freezing-rooms or Chambers, refrigerated on the direct expansion system, 1-ft. run of 2-in. piping for each 8 c. ft. of space; on the brine-circulation system, 1-ft. run for each 3 c. ft. of space.

Storage-rooms or Chambers, refrigerated on the direct expansion system, 1-ft. run of 2-in. piping for each 45 c. ft. of space; on the brine-circulation system, 1-ft. run of 2-in. piping for each 15 c. ft. of space.

EXTREME LIMITS OF CUBIC FEET OF SPACE PER RUNNING FOOT OF 2-IN PIPING.

These are given in the following table:—

Breweries—Medium insulation.

Chip and Stock Rooms 1 to 22

Fermenting and Settling Rooms	..	..	..	..	1 to 20
Packing Rooms	..	..	..	..	1 ,, 18
Hop Rooms	..	..	..	..	1 ,, 25
Packing House.					
Chill Rooms for Beef	..	..	..	..	1 ,, 12
Hogs	..	..	..	..	1 ,, 10
Freezing Rooms	..	..	..	..	1 ,, 6 or 7
Cold Storage.					
Cold Storage Rooms	..	..	..	..	1 ,, 25 or 30
Cold Storage House and Freezing Rooms	..	..	..	..	1 ,, 8
For Eggs, brine preferred	..	..	..	..	1 ,, 12
Cold Storage	..	..	..	..	1 ,, 25
Ice Storage	..	..	..	..	1 ,, 20
Fish Freezing (direct expansion)	..	..	..	..	1 ,, 2

The following five tables are given by Prof. Siebel in the "Compend of Mechanical Refrigeration."

LINEAL FEET OF 1-INCH PIPING REQUIRED PER CUBIC FOOT OF
COLD STORAGE SPACE.

Size of Building in Cubic Feet, more or less.	Insulation.	TEMPERATURE, DEGREES FAHR.					
		0°.	10°.	20°.	30°.	40°.	50°.
100	Excellent.	3.0	1.78	0.48	0.36	0.24	0.15
	Poor.	6.0	1.50	0.90	0.66	0.48	0.30
1,000	Excellent.	1.0	0.26	0.16	0.12	0.08	0.05
	Poor.	2.0	0.50	0.30	0.22	0.16	0.10
10,000	Excellent.	0.61	0.16	0.10	0.075	0.055	0.035
	Poor.	1.2	0.33	0.20	0.15	0.11	0.07
30,000	Excellent.	0.5	0.13	0.08	0.06	0.040	0.025
	Poor.	1.0	0.25	0.15	0.11	0.03	0.05
100,000	Excellent.	0.38	0.10	0.06	0.045	0.03	0.009
	Poor.	0.75	0.20	0.12	0.09	0.06	0.018

NOTE.—The above quantities of pipe refer to direct expansion, and should be made one and one-half times to twice the length for brine circulation. To find the corresponding lengths of 1½-inch pipe divide by 1.25 or multiply by 0.8; of 2-inch pipe divide by 1.08 or multiply by 0.55.

PIPING FOR COLD STORES.

255

NUMBER OF CUBIC FEET COVERED BY ONE FOOT OF 1-INCH IRON PIPE.

Size of Building in Cubic Feet more or less.	Insulation.	TEMPERATURE, DEGREES FAHR.					
		0°.	10°.	20°.	30°.	40°.	50°.
100	Excellent.	0.3	1.3	2.1	2.8	4.2	7.0
	Poor.	0.15	0.7	1.1	1.5	2.1	3.5
1,000	Excellent.	1.0	4.0	6.0	8.4	12.4	20.0
	Poor.	0.5	2.0	3.2	4.5	6.2	10.0
10,000	Excellent.	1.7	6.0	10.0	13.0	18.0	28.0
	Poor.	0.85	3.0	5.0	6.5	9.0	14.0
30,000	Excellent.	2.0	8.0	14.0	18.0	25.0	40.0
	Poor.	1.0	4.0	7.0	9.0	13.0	20.0
100,000	Excellent.	2.6	10.0	17.0	22.0	33.0	110.0
	Poor.	1.3	5.0	8.5	11.0	17.0	55.0

NOTE.—The above figures refer to direct expansion, from one-half to two-thirds of the spaces only would be covered by the same amount of pipe in case of brine circulation. To find the corresponding amounts of cubic feet of space which would be covered by one lineal foot of 1-in. pipe, multiply by 1.25 or divide by 0.8; of 2-in. pipe, multiply by 1.08 or divide by 0.55.

NUMBER OF CUBIC FEET COVERED BY 1-TON REFRIGERATING CAPACITY FOR TWENTY-FOUR HOURS.

Size of Building in Cubic Feet, more or less.	Insulation.	TEMPERATURE, DEGREES FAHR.					
		0°.	10°.	20°.	30°.	40°.	50°.
100	Excellent.	150	600	800	1000	1600	3000
	Poor.	70	300	400	600	900	2000
1,000	Excellent.	500	2500	3000	4000	6000	12000
	Poor.	250	1500	1800	2500	5000	10000
10,000	Excellent.	700	3000	4000	6000	9000	18000
	Poor.	300	1800	2500	3500	7000	14000
30,000	Excellent.	1000	5000	6000	8000	13000	25000
	Poor.	500	3000	3500	5000	11000	20000
100,000	Excellent.	1500	7500	9000	14000	20000	40000
	Poor.	800	4500	5000	8000	16000	35000

REFRIGERATING CAPACITY IN B.T.U. REQUIRED PER CUBIC FOOT OF STORAGE ROOM IN TWENTY-FOUR HOURS.

Size of Building in Cubic Feet, more or less.	Insulation.	TEMPERATURE, DEGREES FAHR.					
		0°.	10°.	20°.	30°.	40°.	50°.
100	Excellent.	1,800	480	360	284	180	95
	Poor.	4,000	960	480	470	330	140
1,000	Excellent.	550	110	95	70	47	24
	Poor.	1,100	190	165	110	55	28
10,000	Excellent.	400	95	70	47	30	16
	Poor.	900	160	110	81	40	20
30,000	Excellent.	280	55	47	35	22	11
	Poor.	550	95	81	55	26	14
100,000	Excellent.	190	38	30	20	14	7
	Poor.	350	63	55	35	18	4

TABLE OF REFRIGERATING CAPACITIES.

SIZE OF BUILDING.			Number of Cubic Feet per Ton of Refrigeration at Temperature given.						
Dimensions of Building.	Contents: Cubic feet.	Surface in Square feet.	Ratio: Cubic feet to Square feet.	Temperatures.					
				0°	8°	16°	24°	32°	40° 48°
5 x 4 x 5	100	130	1.3	900	1,100	1,300	1,500	1,700	1,900
8 x 10 x 10	800	520	.65	1,800	2,200	2,600	3,000	3,400	3,800
10 x 10 x 10	1,000	600	.6	1,940	2,376	2,868	3,420	3,970	4,520
25 x 40 x 10	10,000	3,300	.33	3,700	4,400	5,200	6,000	6,700	7,500
20 x 50 x 20	20,000	4,800	.24	4,860	5,940	7,020	8,100	9,180	10,260
30 x 50 x 20	30,000	6,200	.200	5,670	6,930	8,190	9,450	10,710	11,970
40 x 50 x 20	40,000	7,600	.19	6,300	7,700	9,100	10,500	11,900	13,300
50 x 50 x 20	50,000	9,000	.18	6,480	7,920	9,360	10,800	12,240	13,680
60 x 50 x 20	60,000	10,400	.17	6,840	8,360	9,880	11,400	12,920	14,440
80 x 50 x 20	80,000	13,200	.165	7,200	8,800	10,400	12,000	13,600	15,200
100 x 50 x 20	100,000	16,000	.16	7,200	8,800	10,400	12,000	13,600	15,200
100 x 100 x 20	200,000	28,000	.14	8,100	9,900	11,700	13,500	15,300	17,100
100 x 100 x 30	300,000	32,000	.100	11,030	13,486	15,942	18,398	20,854	23,310
100 x 100 x 40	400,000	36,000	.60	13,050	15,660	18,270	20,880	23,490	26,100
100 x 100 x 50	500,000	40,000	.68	14,400	17,280	20,160	23,040	25,920	28,800
100 x 100 x 60	600,000	44,000	.73	16,200	19,800	23,400	27,000	30,600	34,200
100 x 100 x 70	700,000	48,000	.77	16,500	20,350	24,050	27,750	31,450	35,150
100 x 100 x 80	800,000	52,000	.665	18,000	22,000	26,000	30,000	34,000	38,000
100 x 100 x 90	900,000	56,000	.602	18,900	23,100	27,300	31,500	35,700	40,000
100 x 100 x 100	1,000,000	60,000	.66	19,350	23,650	27,950	32,250	36,550	40,850
Lineal feet.	Cubic feet.	Square feet.	Ratio.	Cubic feet.	Cubic feet.	Cubic feet.	Cubic feet.	Cubic feet.	Cubic feet.

CHAPTER XIII.

REFRIGERATION AND COLD STORAGE (*continued*).

The Construction and Arrangement of Cold Stores and of Cold Storage Rooms or Chambers.—Ventilation.—Air Circulation.—Insulation.—Railway Vans.

It is completely beyond the scope of this work to deal with the architectural aspects of the requisite buildings, and, besides, these latter have, as a general rule, to be adapted to the special requirements of each particular case. All that is here contemplated, therefore, is to make a few observations upon the internal arrangement, premising that wherever possible it is advantageous to arrange for the delivery to and from the store being made from the uppermost storey. The reason for this is obvious, cold air, being heavier than warm air, has a tendency to sink to the lowest level, but little or no danger exists, therefore, of its escaping from above, whilst, on the contrary, by reason of its weight, it would naturally be forced out of any open door or window placed at a lower level. The possible penetration of heat from the exterior to the interior of the store is also greatly reduced.

Failing this plan, all the rooms or chambers in a cold store should be arranged to open into a well-insulated corridor, or in the case of a single cold storage room or chamber, into a porch, lobby, or ante-chamber, by which means the penetration of heat from the exterior into the room or chamber when it has to be entered to place provisions therein, or to remove them therefrom, is lessened.

COLD ROOMS OR CHAMBERS.

A most important feature in the internal construction of a cold store is the insulation, and to this subject it is intended to revert at some length later on in a special section of this chapter.

At the Southampton Docks four cold stores or chambers, having a joint capacity of 47,000 cubic ft., are refrigerated on the direct expansion system by a 6 in. by 12 in. double-acting De La Vergne machine, having two compressors driven by a 10 horse-power gas-engine. The proper insulation of the stores or chambers has been very carefully attended to, and a few hours' working out of every twenty-four is stated to maintain the temperatures sufficiently low.

The ducts or inlets for the admission of the cold air into the store or chamber when the refrigeration is effected by means of a cold-air machine, or by air reduced in temperature in a separate chamber as before described, are frequently placed as close to the roof or ceiling of the room, whether land or marine, as can conveniently be done, this having been stated to have been found in practice to be the most advantageous position, and the cold air having performed its work is drawn off at outlets also situated in this position. It is very doubtful, however, whether this is the most advantageous arrangement, and this subject will be further discussed later on.

In packing carcasses in a cold store or chamber, they should be placed as close together as possible, taking care, however, to leave a free space or clearance between them and the inner lining of the room, through which the cold air can freely circulate.

When hanging frozen mutton before cooking, care must be taken that it is so placed that the juice will not run out of the cut-end. For example, hind-quarters, haunches, and legs must be invariably hung with the knuckle-end downwards; and loins and saddles by the flaps, so as to give them a horizontal position. The cut-end, moreover, should always be presented to the fire first when cooking, thereby sealing it and preventing the gravy from escaping from the joint. Frozen lamb does not need any preliminary hanging, but can be cooked as soon as thawed.

As regards the capacity of a machine required for the refrigeration of a cold-store or chamber of any given dimensions, it would be obviously impossible, in view of the constantly varying circumstances of each individual case, to lay down any hard-and-fast rules. It will have to be separately estimated for each particular installation, in accordance with the amount of cooling work which is necessary, and which it is desired to perform upon the material enclosed in the cold-store or chamber, and by the amount of heat that is calculated to pass into the latter from the outside, through the walls, floor, and roof. It will consequently be thus seen that the capacity of the apparatus will depend upon the lowest internal, and the highest external tem-

perature, the area of the walls, floor, and ceiling, and also to a great extent upon their construction being carried out in a manner more or less impervious to heat.

As a general rule, however, it will be found that, owing to the circulation of the air, and the radiation through the floor, walls, and roof of the chamber, the cubical contents of the air in the latter will require to be cooled from eight to fifteen times in every hour, in order to ensure the temperature being assimilated to that of the air or gas passing out of the machine.

The following particulars regarding the radiation through walls, etc., are given by Prof. Siebel:* "If the number of square feet contained in a wall, ceiling, floor, or window f , the number of units of refrigeration, R , that must be supplied in twenty-four hours to offset the radiation of such wall, ceiling, or floor, may be found by the formula:

$$R = f n (t - t_1) \text{ B.T. units,}$$

or expressed in tons of refrigeration--

$$R = \frac{f n (t - t_1)}{284,000} \text{ tons.}$$

In these formulæ t and t_1 are the temperatures on each side of the wall, and n the number of B.T. units of heat transmitted per square foot of such surface for a difference of 1° Fahr. between temperature on each side of the wall in twenty-four hours. The factor n varies with the construction of the wall, ceiling, or flooring, from 1 to 5."

For single windows the factor n may be taken at 12, and for double windows at 7 (*Box*).

For different materials one foot thick the following values are given for n :

For Pine Wood . . .	2.0 B. T. U.	For Sawdust . . .	1.1 B. T. U.
„ Mineral Wool. . .	1.6 „	„ Charcoal, powdered	1.3 „
„ Granulated Cork . .	1.3 „	„ Cotton . . .	0.7 „
„ Wood Ashes . . .	1.0 „	„ Soft Paper Felt . .	0.5 „

For brick walls of different thicknesses the factor n may be taken as follows after *Box*:

* "Compend. of Mechanical Refrigeration." Chicago: H. S. Rich & Co., 1899.

$\frac{1}{2}$ brick	4 $\frac{1}{2}$ ins. thick	.	.	.	.	$n = 5.5$ B. T. Units.
1 "	9 "	.	.	.	.	" = 4.5 "
1 $\frac{1}{2}$ "	14 "	.	.	.	.	" = 3.6 "
2 "	18 "	.	.	.	.	" = 3.0 "
3 "	27 "	.	.	.	.	" = 2.6 "
4 "	36 "	.	.	.	.	" = 2.2 "

For walls of masonry of different thicknesses the factor n may be taken as follows after *Box*:

Stone walls	6 ins. thick	.	.	.	.	$n = 6.2$ B. T. Units.
"	12 "	.	.	.	.	" = 5.5 "
"	18 "	.	.	.	.	" = 5.0 "
"	24 "	.	.	.	.	" = 4.5 "
"	30 "	.	.	.	.	" = 4.3 "
"	36 "	.	.	.	.	" = 4.1 "

German authorities give values for n which are less than one-half of the values here quoted.

For air-tight double floors of wood properly filled underneath so that the atmosphere is excluded, and for ceilings of like construction, n is equal to about 2 B.T.U. An air space sealed off hermetically between two walls has the average temperature of the outside and inside air, hence its great additional insulating capacity. If the air space is hermetically sealed inside and outside, it appears that its thickness is immaterial; half-an-inch is as good as three inches.

If a wall is constructed of different materials having different known values for n , viz., n_1, n_2, n_3 , etc., and the respective thicknesses in feet d_1, d_2, d_3 , the value n for such a compound wall may be found after the formula of Wolpert, viz:—

$$N = \frac{1}{\frac{d_1}{n_1} + \frac{d_2}{n_2} + \frac{d_3}{n_3}}$$


In case of an air space perfectly sealed off the factor n may be determined for that portion of the wall between the air space and the outside, which value is then inserted into the formula—

$$R = f n (t - t_1)$$

But in this case while t_1 stands for the maximum outside temperature, t stands for the temperature of the air space, which may be averaged

from the inside and outside temperature, taking into consideration the conductivity and thickness of the component parts of the wall.

Fig. 162 is a vertical section through the end of a refrigerating

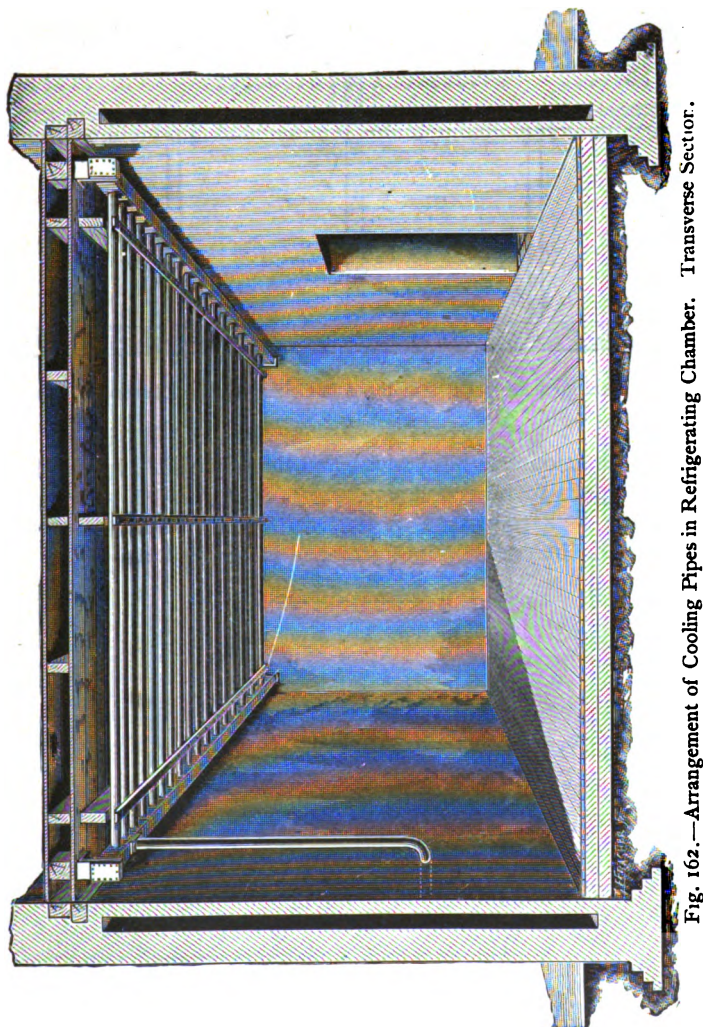

chamber as designed by the Pulsometer Engineering Company, Limited, showing an arrangement of cooling pipes on the brine circu-

lation system. The pipes are of galvanised wrought iron, which, being very much lighter and thinner than those formed of cast iron, ensure

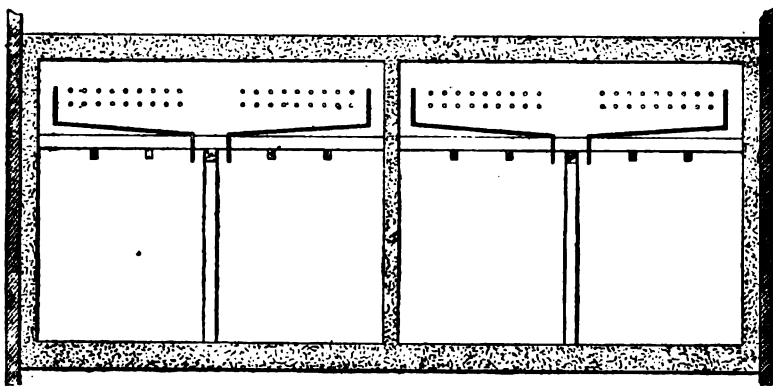


Fig. 163. —Arrangement of Cooling Pipes in Ceiling Lofts. Transverse Section.

the maximum amount of head room, and thereby enable a considerable amount of space to be economised.

Fig. 163 is a transverse section through cold storage-rooms or chambers with the cooling pipes arranged in ceiling lofts.

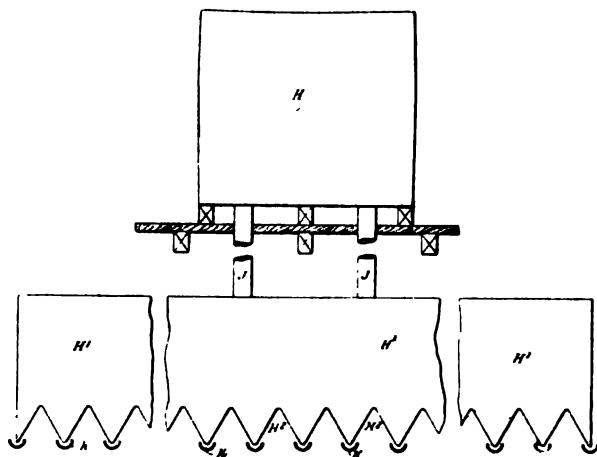


Fig. 164 — Hill's Arrangement for refrigerating Cold Rooms or Chambers. Diagrammatical view.

In the British patent of F. B. Hill, No 16253 of 1889, is described an arrangement in which the refrigerating apparatus, shown in Fig. 164, is located on a floor above the cooling chamber. This arrangement, moreover, permits the circulation of the cooling medium by gravity, so that the use of pumps or other machinery for effecting such circulation can be dispensed with. H is the refrigerator tank;

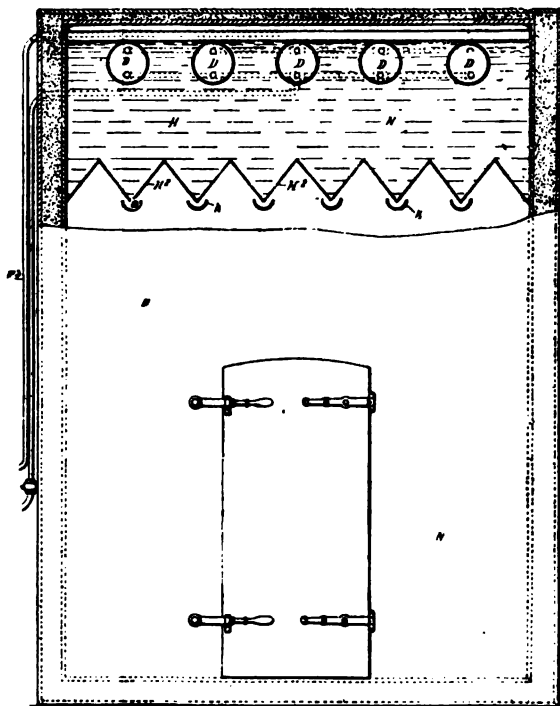


Fig. 165.—Hill's Arrangement for Refrigerating Cold Rooms or Chambers.
Elevation of Chamber partly in Vertical Section.

H' is another tank or vessel which is preferably arranged at a lower level than the refrigerator-tank, and is connected therewith by means of pipes J in such a manner that a constant circulation of the brine or other non-congealable liquid from one tank to the other will be maintained by gravity during the refrigeration of the liquid.

It is stated by the inventor that, by the use of tanks connected in

this manner, the reservoir or store of cold is greatly increased. The bottom of the cooling tank H^1 may, if desired, serve as the top of the chamber to be cooled, as shown in Fig. 165.

The bottom of the tank H^1 is formed with a series of **V**-shaped portions or corrugations H^2 , and suitable gutters or channels K are arranged beneath the tank, so that any moisture collecting on the underside will flow to the lower edges of the corrugations or **V**-shaped portions, and will fall into the gutters or channels, whereby it will be conducted away to any convenient place. The dripping of moisture from the under surface of the tank into the room or chamber to be cooled is thus avoided. This arrangement also increases the area of cooling surface and the strength of the bottom of the tank.

In a later patent, viz., No. 20509 of 1890, the same inventor describes means for removing snow or hoar-frost from the refrigerating surfaces used for cooling air, which consists in the employment of rotating screw-blades or conveyors, or of annular or other suitable scrapers, or brushes arranged to move to and fro, or up or down, in contact with the surfaces to be cleared. These screw conveyors, scrapers, or brushes, are placed within or outside, or both within and outside, the refrigerating tubes or chambers.

F. N. Mackay, No. 16745 of 1886, provides for the combined utilisation of cold air from an air expansion machine and brine cooled by an absorption or compression machine. The rooms or chambers are partly cooled by the cold air, and the brine from the latter machine is circulated through an arrangement of pipes in the cooling chamber, to which brine pipes corrugated metal sheets are attached to increase the refrigerating effect. Or the corrugated metal sheets may be formed into narrow chambers to receive the brine directly.

To increase the effective surface of cooling pipes F. S. Thomas, No. 2568 of 1888, forms them with four concavities, or approximately star-shaped in transverse section, and also employs lugs or ribs.

A plan of chilling and freezing by a circulation of cold brine on the wall system has been patented by Hall. In this arrangement the congealing or freezing room or chamber is fitted with parallel hollow or cellular walls constructed of steel or iron plates, and situated at short intervals apart. The carcasses to be chilled or frozen are hung in the spaces or passages left between these walls, which latter can be maintained at a very low temperature by the cold brine circulating there through. An advantage possessed by this method is, that, owing to the extensive surfaces afforded by these hollow or cellular walls or plates, an intense cold can be rapidly produced, and the heat very

expeditiously abstracted from the carcasses, which are thus quickly frozen or congealed. On this account, as the space taken up by the hollow walls is so trifling as not to necessitate any increase in the dimensions of the freezing chamber for a given number of carcasses, the proportion usually allotted to the latter may be reduced, and a saving of labour and of depreciation through handling is also effected. The carcasses when frozen are at once removed to cold stores or chambers kept at a proper temperature for preserving the contents, by a circulation of brine through a system of pipes arranged near the ceiling; or air, cooled in the machine-room, may be circulated through the chambers for a like purpose.

On the other hand, however, these hollow or cellular walls are apparently open to the objections that they are somewhat more difficult to maintain tight and free from leakage than a system of pipes. The shallow space left between the walls would also seem to be liable to become choked by any foreign matter in the brine, and from deposits from the latter; this, however, is said not to be found to be the case in practice with brine circulation, and the arrangement is not suitable, or intended, for the direct expansion system.

In order to facilitate and hasten the operation of chilling and freezing, and lessen the handling to which it is necessary to subject the carcasses, an arrangement for slowly traversing the latter through the freezing or congealing chamber or room has also been devised by the same inventor, wherein an endless chain provided with hooks at proper intervals for hanging the carcasses, and operated by suitable gearing, is provided.

A patent was taken out in the beginning of the year 1895 by Sir A. S. Haslam for an improved apparatus for cooling air to be circulated through cold storage rooms. The main feature of this invention consists in the provision of an air-cooler or chamber, wherein the air or other gas to be cooled is carried between a number of fixed vertical metal plates, down which cold brine or other uncongealable liquid is constantly caused to flow. These plates or diaphragms are, as shown in the plan, Fig. 166, which illustrates an arrangement for use in connection with a meat chamber, preferably of a corrugated form, and their lower extremities are placed either in or above a receiver for the liquid which trickles down their surfaces.

To maintain the plates or diaphragms at suitable distances apart, and parallel one with the other, distance-pieces or blocks are placed between them at the top and bottom, which distance-pieces have lugs or recesses on their sides to provide passages for the liquid. The

tops of the upper distance-pieces form the bottom of a tank supplied with the cold liquid, and from which it flows down the plates in thin streams; and they have, moreover, vertical projections at each end,

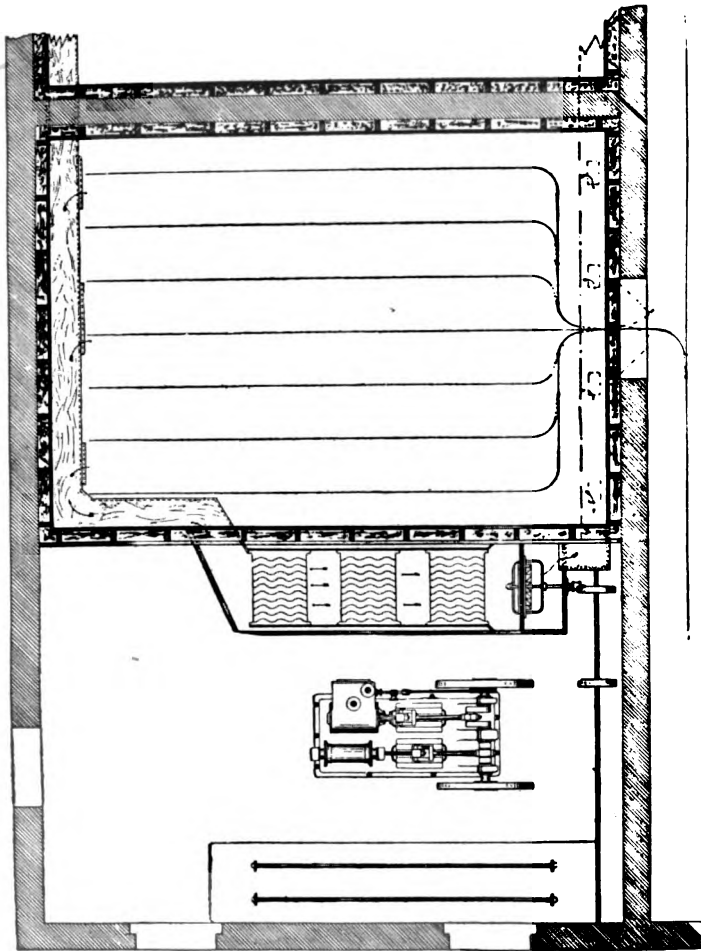


Fig. 166.—Haslam's Patent Brine-cooling Battery, for Cooling Air to be circulated through Cold Storage Rooms. Plan View.

which together form the ends of the tank. Above this tank are situated suitable numbers of troughs or pipes, and a shower of brine at a low temperature, drawn or lifted from the receiver below, in which it is cooled by a pump or otherwise, is distributed over the bottom of the

upper tank, from whence it trickles down the surfaces of the corrugated or other plates, or diaphragms. Through the spaces or clearances provided between these plates a current of air is driven by means of a fan or blower, the blast being divided by the corrugated plates into a number of thin sinuous currents, and being reduced to a very low temperature by impinging against their surfaces and the cold fluid trickling down their sides. It has been found in practice to be preferable to place the above-described plates or diaphragms as close together as can possibly be done without injuriously checking the flow of air.

Flat plates, or plates with horizontal corrugations, are not found to be so advantageous, because the air can pass between them in a straight line, instead of being compelled to wind backwards and forwards between the corrugations and impinge again and again against the cold liquid and the surfaces of the plates; in the case of flat plates, moreover, they have to be much thicker in order to ensure the requisite stiffness.

This cooling battery is said to have given very favourable results under most exhaustive practical tests.

Another arrangement for cooling air for circulation through cold storage rooms, which was patented in the latter end of the year 1900 by Mr. T. Douglas, is shown in vertical central section in Fig. 167. The construction of the apparatus is almost sufficiently apparent from the drawing. It consists briefly of a cylindrical or other tower or receptacle suitably insulated and having a chamber charged or filled with coke broken up into pieces of suitable dimensions. Above this charge of coke is provided a rose spraying apparatus by which cold brine from the evaporator or refrigerator of the machine is distributed over the coke and trickles down over the same to a brine reservoir in the bottom of the tower, from which it is pumped back to the evaporator or refrigerator. The air to be cooled is forced into the bottom of the tower by means of a suitable fan, and up through the coke to a cold-air delivery trunk through which it is conducted to the cold storage chamber.

A series of tests carried out with an air-cooling apparatus of this description at Messrs. Wm. Douglas and Son's, Ltd., Works, Putney, showed a high degree of efficiency, and gave in every case a remarkable approximation between the temperature of the air at the exit from the cooler and that of the brine return to the evaporator. This approximation became closer, when the refrigerating machine was shut down, as the temperatures of both the brine and the air rose, and

proved that the coke was an excellent medium for bringing the air into contact with a very large surface of cold brine and thus extracting the maximum of heat from the air. A suitable spray-trap can be provided in the cold-air delivery trunk, or other means adopted for drying the air.

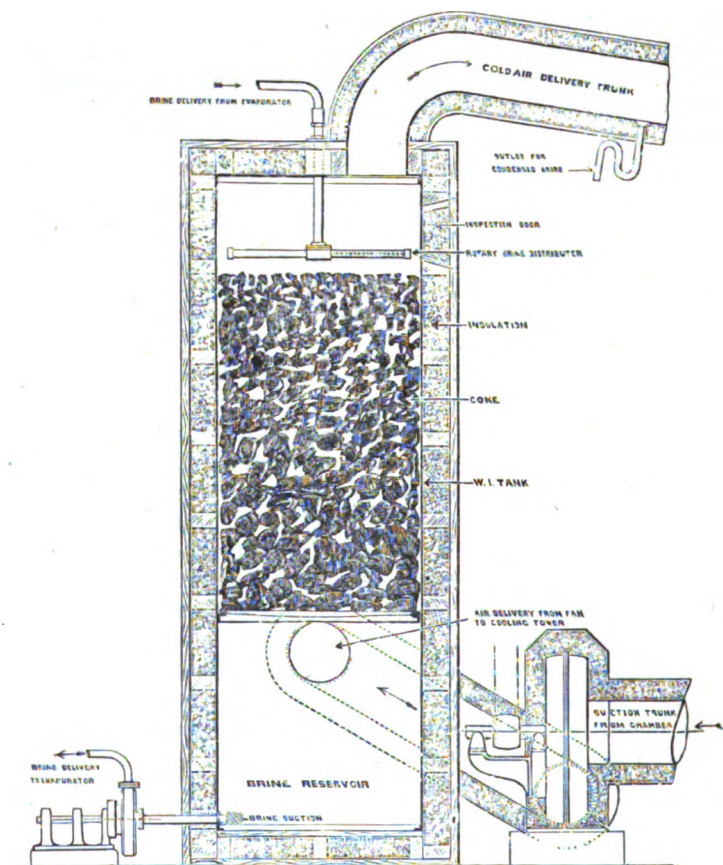


Fig. 167.—Douglas' Patent Apparatus for Cooling Air for use in Cold Storage Rooms or Chambers. Vertical Central Section.

The brine can be kept up to a proper density by either periodical concentration, or by running out the surplus brine and strengthening the remainder.

An advantage possessed by this apparatus is its relative cheapness,

and it can also be readily modified in design to suit different requirements. For instance it may be elevated above the level of the evaporator or refrigerator so that the brine will return to the latter by gravitation, or where this is not possible it may be connected to a brine storage tank, from which the brine can be pumped back to the evaporator, or the foot of the tower may be made into a brine storage tank as shown in the illustration. The evaporating coils may be placed in the lower part of the tower, thus combining air-cooler and evaporator in one apparatus. In cases where height is not

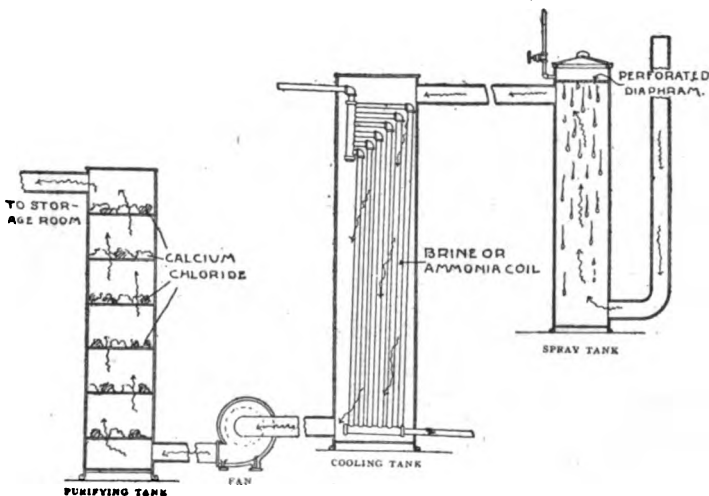


Fig. 168.—Cooper's Apparatus for Washing, Cooling, and Drying Air for use in Cold Storage Rooms or Chambers. Diagrammatical view.

available two or more towers may be placed alongside, or a horizontal tower may be formed with diaphragms dividing the coke.

Other arrangements for cooling air by direct contact with cold brine are the use of rotating discs dipping in the cold brine, sacking or canvas saturated with cold brine, etc. Attempts have also been made to draw or force air through a body of cold brine, but this latter method does not appear to have proved a practical success.

In Fig. 168 is shown in vertical central section an arrangement designed by Mr. Madison Cooper for washing, cooling, and drying air, more especially for use in cold storage rooms for eggs. This apparatus consists of three parts, viz., first, an

air-washing tank, in which the air is caused to flow upwards against a rain of water from a perforated diaphragm above. This not only cools the air to the temperature of the water, say 55° or 60° Fahr., but it also takes out a large portion of the impurities of various kinds. From this washing tank the air is passed on in a comparatively pure and cool state to be still further reduced in temperature. This latter operation is performed in the second part of the apparatus, which consists of a cooling tank having brine-cooled or direct expansion pipes by contact with which the air is reduced to a temperature several degrees lower than that of the storage room or chamber. This cooling removes the greater portion of the moisture which holds in suspension

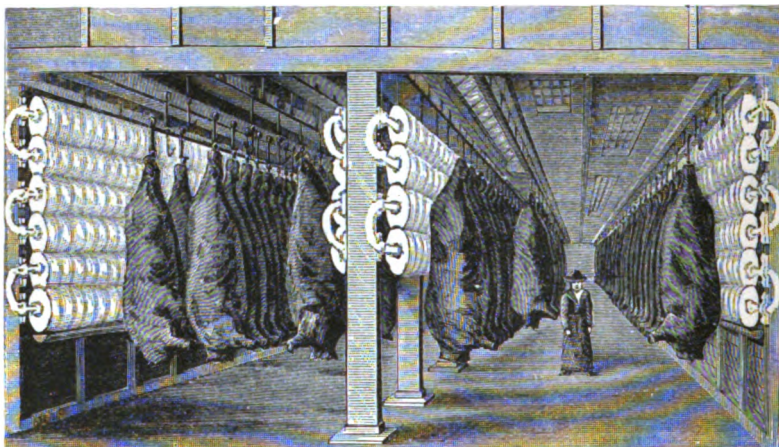


Fig. 169.—Arrangement of Cooling Pipes in a Beef Chill Room, fitted with the De La Vergne Patent Pipe System. Transverse Section.

the few impurities which may have passed the washing tank, the moisture being deposited on the frozen surfaces within the cooler. From the cooler the cold purified air is passed into the third part of the apparatus or drying-box, which contains chloride of calcium. In this drier any moisture that may be carried over from the cooler is taken up or absorbed by the chloride of calcium, which is a well-known hygroscopic or deliquescent substance.

Fig. 169 shows in transverse section a beef chill-room fitted with the De La Vergne patent pipe system, a description of which has been already given in a previous chapter. The pipes are, it will be seen, in this instance arranged at the sides and at the centre of the chill-

room, and drip-trays or troughs are provided to catch and carry off any water falling from the cooling pipes, upon the exterior surfaces of which the moisture present in the atmosphere of the room or chamber becomes condensed, either in the form of water or of hoar frost. In the latter case dripping is liable to commence on any rise of temperature in the room or chamber by reason of the shutting down of the machine or from other cause. This dripping is, as has been already mentioned, more especially liable to occur in cases where the direct expansion system of cooling is in use.

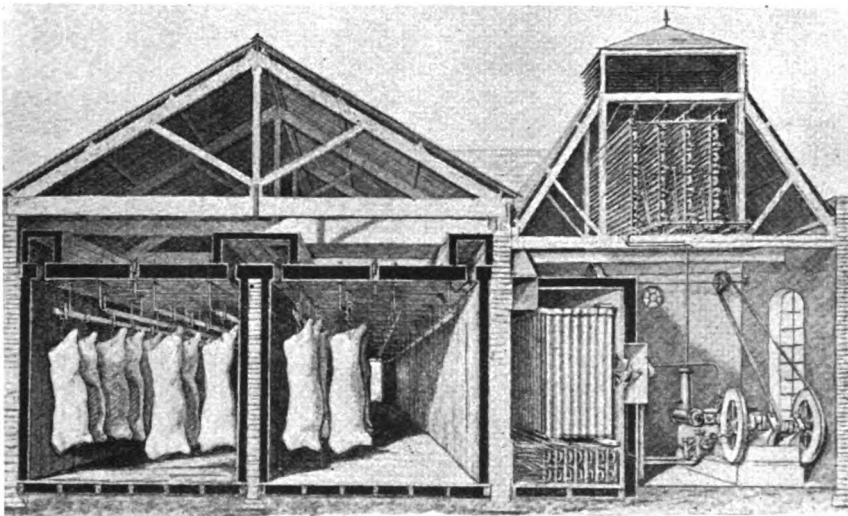


Fig. 170.—Beef Chill Rooms in Cold Store, fitted with Haslam Patent Brine-cooling Battery. Transverse Section.

Fig. 170 is a sectional view showing the arrangement of a cold store with beef chill-rooms cooled or refrigerated by means of a Haslam patent brine air-cooling battery.

The open trough system has been already alluded to, and it is one of great simplicity, and is frequently used for the hog cooling rooms in bacon factories. Two, three, or other suitable number of troughs are usually placed in line, vertically, one above the other, over each hook or hanging rail, and the flow of brine can be regulated by any well-known and convenient means. A large surface of cold brine is in this system advantageously exposed for absorbing heat; on the other

hand, however, the open troughs have the disadvantage of taking up a very considerable amount of valuable space.



Fig. 171.—Hog Chill Room, fitted with the De La Vergne Patent Pipe System. Transverse Section.

The cooling pipes are arranged in the chilling, cooling, and curing rooms of bacon factories in a number of other different ways, the system having frequently to be specially adapted to the existing build-

ings. Sometimes the said pipes are placed in the form of coils in a separate chamber or loft provided in the ceiling of the main room or chamber (as shown in Fig. 171, which shows an installation on the direct expansion system), and air, admitted through suitable apertures from the room beneath, or by means of ventilators, and cooled by passing over the surface of these coils, is allowed to circulate by gravity, or is rapidly circulated by means of fans through the room below. A somewhat similar arrangement of brine or cooling pipes is also often employed in beef and other meat rooms. An advantage of this plan is that it effectually prevents any dripping and moisture in the chill-room.

In an arrangement designed by Mr. Puplett, the refrigerating pipes or coils and circulating fan are fixed in a separate compartment quite distinct from the cold rooms, but connected therewith by trunks or ducts. The cooling is effected by the constant circulation through the chill or meat rooms of a current of air that has first been cooled by passing it over the refrigerator. The air is washed and purified by being passed through a series of sprays of cold brine, and then over the refrigerator, by which it is dried and reduced to any desired temperature. The fan draws the air from the rooms through the suction trunk, and returns it by the delivery trunk after it has passed through the refrigerating chamber and been washed, cooled, and dried; the air thus becomes colder, and is purified each time it passes over the refrigerator.

Another method of arranging the cooling pipes in a chill-room is to provide coils on the sides thereof, or where the chamber is of considerable dimensions, in rows placed vertically at suitable intervals lengthways of the latter, the carcasses being suspended by hooks in the usual manner from meat or hanging rails, situated overhead, between the coils.

When the refrigerating pipes are placed directly in the cold store, suitable drip trays (as shown in Fig. 169) can be provided if required.

Refrigerating machines are likewise very advantageously employed in bacon-curing factories or works, for enabling mildly-cured bacon to be produced in summer, by artificially reducing the temperature of the chill-rooms and curing-cellars.

A usual arrangement is shown in Fig. 172, which comprises rows of cast-iron flanged pipes which are fixed overhead, preferably suspended from the ceiling, over the whole area of the chill-rooms and curing cellars, and through which system of pipes brine cooled in the usual manner is circulated so as to lower the temperature of the

rooms to about 40° Fahr. By means of cocks provided on the different branch mains the speed of the flow of brine through the various circulations, and consequently the temperature of the rooms, can be regulated, and reduced, or increased at pleasure. In factories of moderate size the machine may usually be stopped at night and on Sundays, the cold stored up in the brine in the pipes being enough to keep the temperature of the room sufficiently low; in very hot weather, and in very large establishments, however, the machine will have to be run continuously night and day.

Both the chill or cooling-rooms and the curing-cellars are fitted

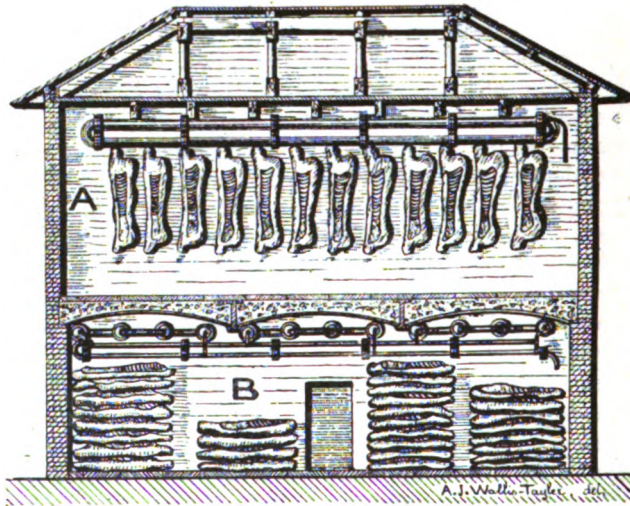


Fig. 172.—Arrangement of Cooling Pipes in Chill Room and Curing Cellar in Bacon Factory. Transverse Section.

up in practically the same manner, the work in the chill or cooling-rooms where the hot meat is cooled down is much greater in proportion to their size, however, and is moreover intermittent, consequently a proportionately larger number of brine pipes are placed therein, and the brine is turned on or off as the rooms are full or empty; on the other hand the work in the curing-cellars is less and regular, and, therefore, a much smaller number of brine pipes are required, the circulation of brine being kept up all the time the machine is running, and a perfectly steady and even temperature maintained.

The reason that artificial refrigeration is now imperatively required in bacon-curing works is on account of the demand that has arisen for mild-cured bacon. Formerly the pigs, after being killed, were cooled simply by exposure to the atmospheric air, being subsequently cured

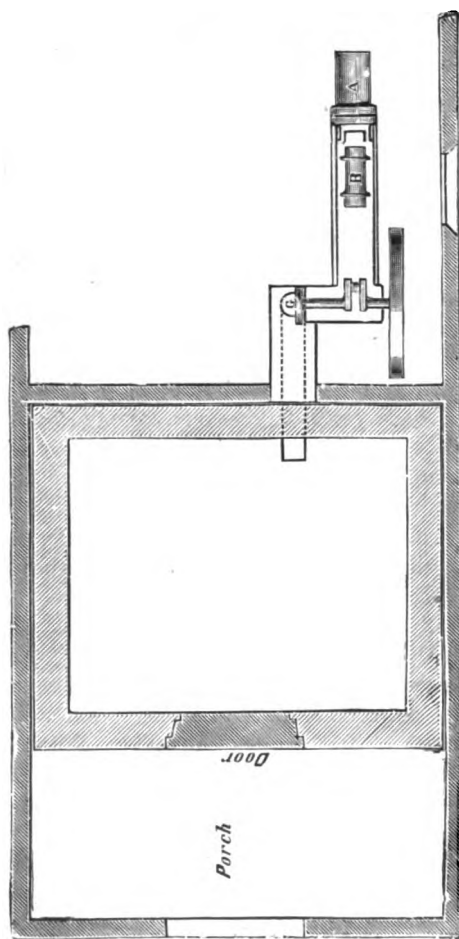


Fig. 173.—Arrangement of small Cold Store for Butchers, etc. Cooled by Cold-Air Machine.
Plan View.

in underground cellars at the temperature of the earth, or from 52° to 55° Fahr. In order to prevent the rapid decomposition, and consequent taint of the bacon which would otherwise inevitably occur at these comparatively high temperatures, the latter was charged with an

excessive amount of salt as a preventative. This excessive salting was indispensable in summer especially, when, indeed, curing was almost prevented, although bacon at that season is in the greatest demand, and the highest prices are obtainable. The modern requirement, however, for more and more mild-cured bacon has rendered absolutely necessary an artificial reduction of the temperature of the chill-rooms and curing-cellars.

The first attempts in this direction were made by constructing the cellars with iron ceilings, on the tops of which were stored large quantities of ice, a system which is found to be, when properly carried out, sufficiently effective, but is very expensive, not only by reason of the first cost of the iron ceilings and the necessary supports, but also by reason of the space occupied by the ceilings and ice chambers, and furthermore on account of the large outlay entailed for the ice itself, and the labour of handling it. There is, besides this, the risk of the supply of ice running short in the hot weather, with, of course, disastrous results.

Fig. 173 is a horizontal section showing a plan of a small cold storage chamber of 1,000 cubic ft. capacity, adapted for such service. The refrigeration is effected by a Haslam cold-air machine, of 6,000 cubic ft. per hour capacity, arranged to be driven direct by means of a gas-engine. A is the gas-engine cylinder, B the air compression cylinder, and C the expansion cylinder. The air compression cylinder B is arranged horizontally in front of, and in line with, the cylinder A of the gas-motor, and the expansion cylinder C is placed vertically, and works a disc secured upon the opposite end of the crank shaft from the fly-wheel.

The advantages of a gas motor for driving the small cold-air machine required for an installation of this description are obvious, and comprise: non-increase of fire insurance premium, and ability to start the machine at any time, without having to wait to get up the necessary steam pressure in a boiler, as must be done in the case of a steam-driven cold-air machine, and, moreover, except where gas is at an abnormally high price, a considerable economy in cost of running.

Fig. 174 is a perspective view, the end wall and a portion of the front wall being removed, showing a small cold store or chamber, refrigerated by means of a Puplett patent ammonia compression machine, which chamber is especially designed for butchers, bacon-curers, dairymen, fish and game dealers, etc. Chambers of this description are constructed with an outer and an inner skin, each of which is composed of two layers, of 1 in. tongued and grooved boards;

put together perfectly air-tight, and having an intervening space or clearance of about 8 in., filled with charcoal, cork, or other good non-conducting material. The dimensions of the chambers, as usually constructed, vary from a storage capacity for frozen meat of 6 to 50 tons or more, and their daily meat-cooling capacity to 32° Fahr., runs from 20 cwt. up to 200 cwt. or more.

In Fig. 175 is shown in vertical section a small cold storage room cooled by a Triumph ammonia compression machine, which would be suitable for an hotel or private residence. A plant of this description

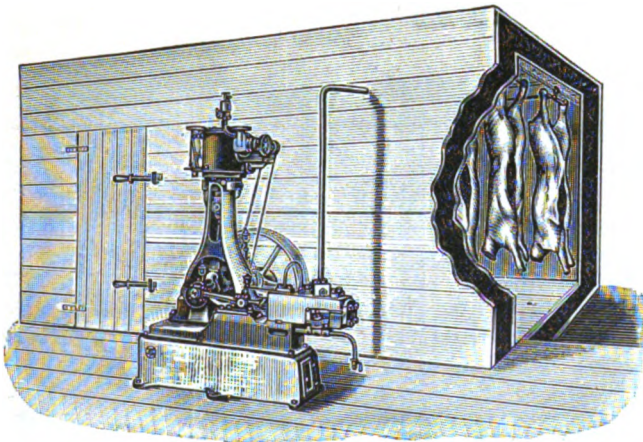


Fig. 174.—Small Cold Store for Butchers, etc. Cooled by an Ammonia Compression Machine.

can be readily operated by an ordinary man without the help of a skilled attendant, and would only require about an hour's attention during the day. The brine tank shown in the drawing keeps the refrigerator or cold storage chamber cold during the night. The compressor, which is of the double-acting horizontal type, is mounted upon a strong tank forming the condenser, and can be operated by any available source of power. A description of the Triumph compressor will be found in the chapter upon "Ammonia Compression Machines."

Fig. 176 depicts the arrangement of a one-ton ice-making and refrigerating plant in an hotel, in which, it will be seen, a number of separate cold storage rooms or chambers for different classes of provisions are provided. This installation is cooled by an ammonia com-

pression machine made by the A. H. Barber Manufacturing Company, Chicago, which type is also described in the chapter mentioned above.

It is usually advisable to provide in the kitchen of an hotel, or adjacent thereto, a short order box, which enables the too frequent opening of the main cold storage room or chamber to be avoided. This box may be cooled by a set of pipes, through which the cold brine, or, when direct expansion is employed, the refrigerating gas or medium, passes on its return to the machine after doing duty in the main cold store or chamber.

Arrangements can also be made for cooling carafes, freezing ice creams, and cooling the bar box.

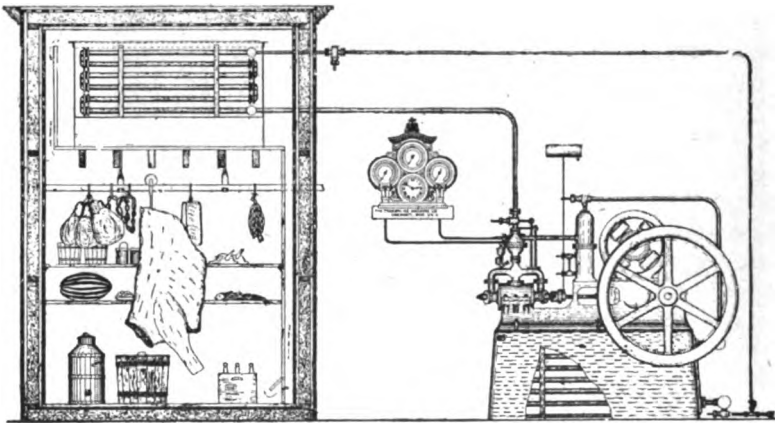


Fig. 175.—Small Cold Storage Room for Hotel or Private Residence.
Vertical Section.

The cold storage room in an hotel does not, of course, differ materially in any respect from any other, but the peculiar requirements of an hotel, and the great difficulty experienced in getting the servants to understand the necessity for judicious and careful management, are frequently very great.

To avoid the undue admission of heat to such cold storage rooms or chambers by careless persons leaving the doors open, and to render it impossible for anyone using the cold storage room to do this under any circumstances, the author has devised the door shown in horizontal section in Fig. 177, and in vertical section in Fig. 178. This door is, it will be seen, of a crescent or semi-cylindrical form, in horizontal sec-

tion, and is mounted upon a central axis, so as to be free to turn or rotate easily thereon in a suitable casing having two apertures, the one opening into the cold storage chamber and the other to the exterior, and between the inner surface of which casing and the outer surface of the door an air-tight joint is made by means of strips of indiarubber, felt, or the like, or by spring-actuated rubber or felt-faced strips, etc.

To use this door the aperture or opening admitting to the interior of the same is brought opposite to the one or other of the apertures or openings in the casing by revolving the door upon its axis, sunk handles admitting of its ready manipulation. The person desiring


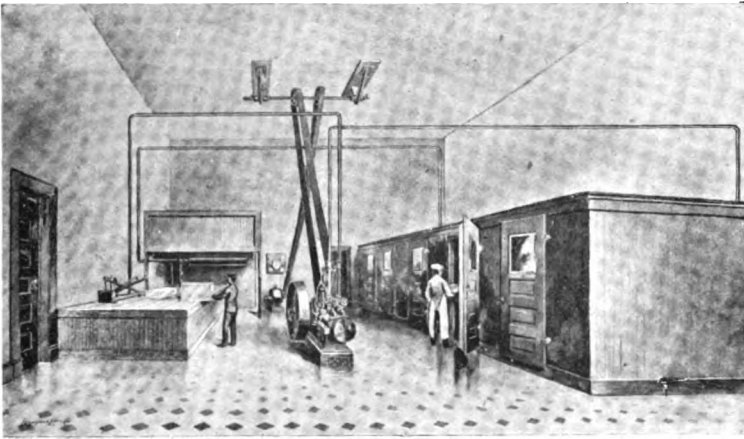


Fig. 176.—Arrangement of Cold Storage Rooms and Ice-Making Plant in Hotel.

to pass through then steps inside the hollow semi-cylindrical door and rotates it until the aperture or opening thereof coincides with the other or second aperture in the casing, when he can pass out through the latter.

Shelves in the interior of the door admit of a number of dishes being placed thereon and moved into the cold storage chamber at one operation, or of being turned so as to communicate with the cold storage chamber, and brought back again when required.

It will be seen that it is impossible to turn this door so as to open a through communication between the interior of the room and the

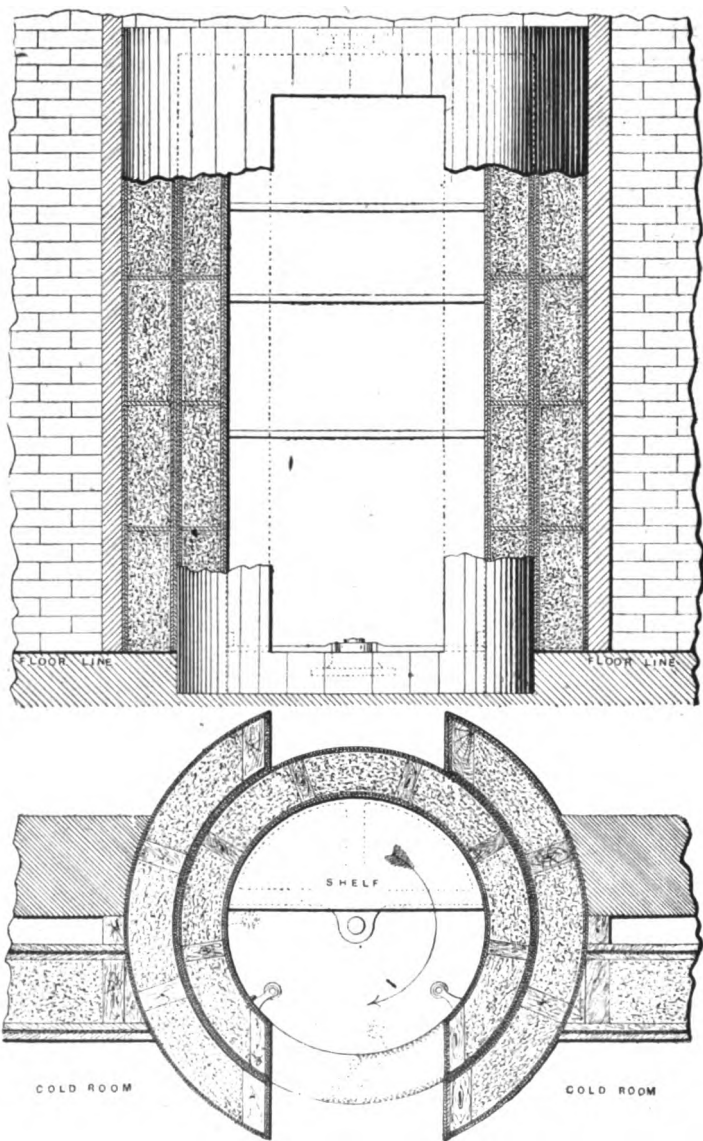

Figs. 177 and 178.—Wallis-Taylor and Whitehead Rotating Air-Lock Door for Cold Storage Rooms in Hotels, etc. Sectional Elevation and Horizontal Section.

exterior, and the interchange of air at each opening of the door is consequently limited to the cubical contents of the hollow or semi-cylindrical door itself.

VENTILATION OF COLD STORAGE CHAMBERS.

The ventilation of cold storage rooms can be effected in a number of different ways, but as a general rule no provision whatever of a special nature is made for the removal of the vitiated air, it being considered that sufficient change of air is brought about by the opening of doors, etc. In fact, as removing any of the cold air entails the necessity of replacing same by more air at the same low temperature, and thereby necessitates additional refrigeration, there is the same dislike to ventilation as exists in the case of a warm room where ventilation demands the admission of the cold external air, and the expenditure of more fuel to heat it.

The various expedients resorted to for the ventilation of cold storage rooms comprise, in addition to the opening of doors above alluded to, the occasional opening of windows, where such exist, the provision of ventilating shafts in the ceilings, and, what is perhaps the most efficient, by artificial means, through an exhaust fan connected through suitable pipes—fitted with doors or valves—with the cold storage room.

When ventilating shafts are provided, and there are a number of cold storage rooms contained in the same store, the ducts or pipes may be placed in the corridors, each room being connected thereto through a pipe with a valve or damper so as to enable the amount of ventilation to be properly regulated, and the various ducts or pipes from the corridors having a common termination in the chimney stack, which latter provides a means for efficiently ventilating the rooms at all times.

It must be remembered that in cold storage rooms or chambers the air being cold sinks to the bottom, and that the tendency is therefore for it to escape through the crevices about the doors, or when the latter are opened, and thereby create a down-draught so as to render any attempt to ventilate by means of a short shaft without artificial means to produce an air current abortive.

Moisture has the property of absorbing gases and impurities, and consequently the moisture in the air of a cold storage room will take up all the emanations from the stored products. It follows therefore

that if this air be subsequently relieved of its moisture it will be practically purified, as most of these gases can be removed.

All atmospheric air contains the germs of fungus or mould, which germs are very rapidly developed under such favourable conditions as the presence of a large amount of moisture in the air, and high temperatures, but are destroyed and removed from air in a dry and cool condition. This moisture can only be removed by insuring a proper circulation of the air of a cold storage room relatively to the articles stored therein and the refrigerating pipes or other cooling surfaces.

CIRCULATION OF AIR IN COLD STORAGE CHAMBERS.

The circulation of air in cold storage rooms or chambers is a matter of primary importance, and one which in too many cases does not receive the attention which it deserves, with the result, more especially in the case of small rooms or chambers, that the condition of the atmosphere is anything but satisfactory, and great difficulty is experienced in keeping provisions in good condition in them.

There are two main systems of air circulation in use, viz., the gravity air circulation and the mechanical or forced air circulation.

The following particulars are extracted from three interesting and instructive articles by Mr. Madison Cooper, a well-known expert upon refrigerating matters in the United States, and which articles appeared in the American journal *Ice and Refrigeration*, for May, June, and August, 1901.

"METHODS OF PIPING THAT HINDER CIRCULATION.

"When mechanical refrigeration first came into the field, the arrangement of cooling surfaces and a provision for air circulation was neglected about as it was by the pioneers in natural ice refrigeration. The cooling pipes were placed almost anywhere, regardless of the laws of gravity which control air circulation. At first the ceiling of the room was a favourite place for locating the coils of pipe for cooling the room. The ceiling was utilised because thus the pipes were out of the way in piling up goods, and also on the theory that "cold would naturally drop." Cold, or, more accurately speaking, cold air, will naturally drop, but placing the pipes on the ceiling of a room will not assist the circulation; it will, in fact, produce practically no circulation at all if the whole ceiling of the room is covered with pipes uniformly. Ceiling pipes have generally been abandoned for the

more rational method of placing the pipes on the side walls of the room.

"Fig. 179 shows ceiling piping, and should make plain why no

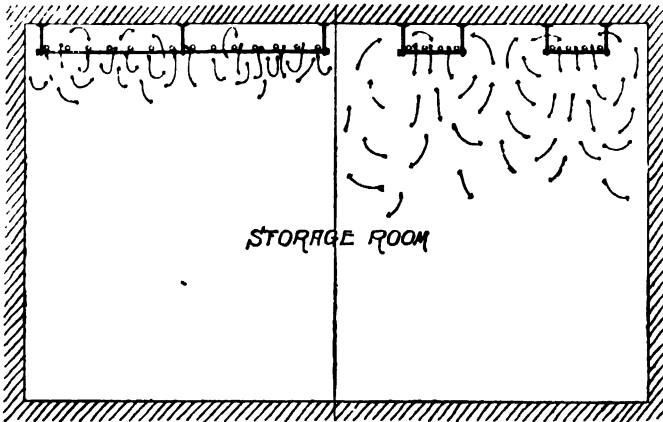


Fig. 179.—Diagram showing Gravity Air Circulation in Cold Storage Room Chamber, with Ceiling Piping.

circulation is created when the pipes cover nearly the whole top of the room. As is well known, cold air is heavier than warm

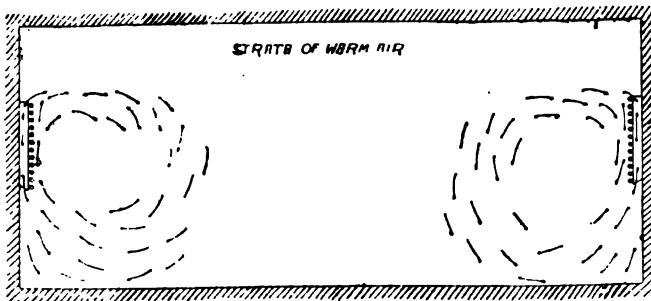


Fig. 180.—Diagram showing Gravity Air Circulation in Cold Storage Room or Chamber, with Side Wall Piping.

air and, if free to move, the cold air will seek a lower level than the warm air. This movement of the cold air downward and the warm air upward is what is known as gravity air circulation. A slight difference

in the temperature will cause a circulation of air if the warm and cold air are separated from each other and not allowed to mix, which would cause counter-currents and retard the circulation. In a cold storage room the air in contact with the cooling coils, as it is cooled, flows

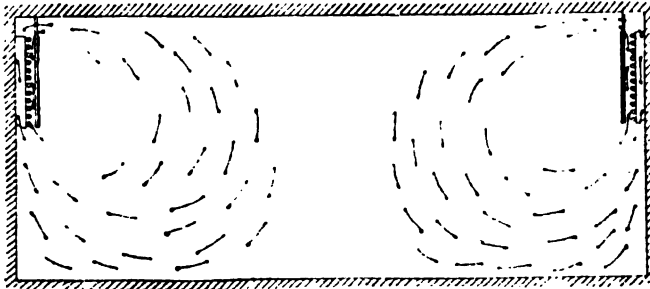


Fig. 181.—Diagram showing Gravity Air Circulation in Cold Storage Room or Chamber, with Screened Wall Piping.

downward towards the floor by reason of its greater specific gravity. The comparatively warm air above is drawn down to the pipes, where it is in turn cooled, and the flow is continuous. If the entire ceiling is covered with pipes, what results? The air in contact with the

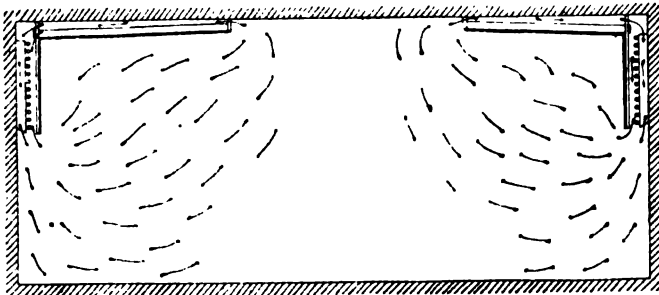


Fig. 182.—Diagram showing Gravity Air Circulation in Cold Storage Room or Chamber, with Screened Side Wall Piping, and Ceiling Extensions.

pipes cannot fall because it cannot be replaced by warm air from above. The result is that practically no circulation of air takes place in such a room. A slight local circulation in the vicinity of the pipes is all that results, except under unusual or accidental conditions. The

goods are cooled for the most part by direct conduction and radiation ; the top tier of goods would be cooled directly from the pipes and each tier under successively from its neighbour above in the same manner.

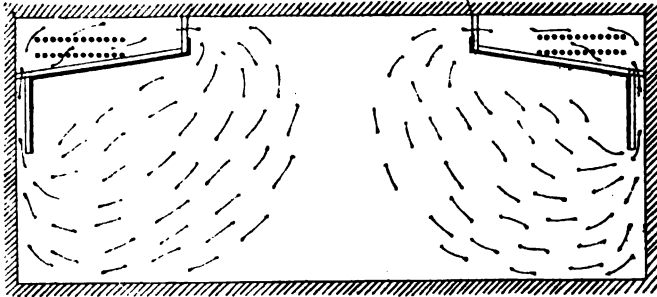


Fig. 183.—Diagram showing Gravity Air Circulation in Cold Storage Room or Chamber, with Gay's arrangement of Piping.

"Goods are cooled by radiation by the passage of heat from the goods directly to some colder object, without the heat being conveyed

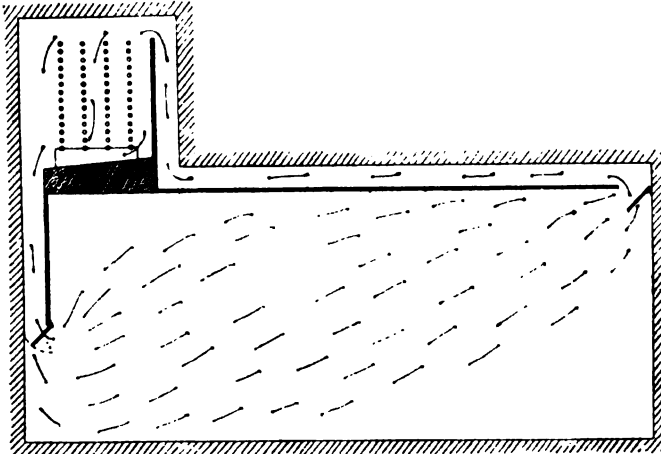


Fig. 184.—Diagram showing Gravity Air Circulation in Cold Storage Room or Chamber, with the St. Clair Pipe Loft System.

by the movement of the air, as it should be, and as it is where a good circulation is present in the room. In a room in which the goods are cooled by radiation mostly, the moisture instead of being deposited

entirely on the cooling pipes, as it should be, is also likely to be deposited on the walls of the room or on the goods themselves. The result of such a condition would be serious. This cooling by radiation, as compared with cooling by a circulation of air, may seem like a very finely spun theory to some, but let the sceptic watch his house for a demonstration. Is there any practical cold storage man now in the business who has not noticed an accumulation of frost or moisture on goods if they were piled too near to the exposed cooling pipes? What causes this result? Radiation, nothing else.

"The bad effects of radiation cannot be altogether overcome by placing the pipes on the sides of the room, but it is counteracted to some extent by the resulting circulation of air. Fig. 180 shows side wall piping and the resulting circulation, which is confined largely to a small space near the coils. The arrows show approximately the path of circulation. If the room is wide, no circulation at all will take place near the centre. In some cases pipes have been carelessly placed two or three feet down from the ceiling. This results in the air of the room becoming stratified—a warm layer of air in the top of the room resting on a cold layer beneath. This may be operative to such an extent as to cause a difference in temperature between floor and ceiling as great as 10° Fahr. A case has come to the writer's notice with exactly these conditions. Another bad arrangement of side wall piping was that of a room more than fifty feet square piped completely around on the side walls from floor to ceiling, with the exception of the doors. No circulation could penetrate to the centre of such a room, and conditions were very poor, in consequence.

"MEANS FOR IMPROVING AIR CIRCULATION.

"The placing of a screen or apron in front of the side wall piping, as illustrated in Fig. 181, marks the first scientific step toward a betterment of air circulation in a room with direct piping. It prevents the action of radiation, and assists the volume, velocity and area of circulation, but does not well take care of the centre of the room, although the increased velocity forces the air to cover a greater area and flow to a greater distance from the coils. The screen or apron should be of wood or any moderately good non-conductor. By separating the warm from the cold currents of air, the velocity is increased on the same principle that a fire burning in a flue creates a greater draught than when burning in the open air. Radiation is prevented in the same way that a fire screen protects one from a too hot fire in a grate, only the radiation, as already explained, is in a reverse direction.

" Shown in Fig. 182 is the same arrangement of screen or apron as in Fig. 181, but added thereto is a false ceiling extending out towards the centre of the room. This addition to the perpendicular apron causes the air, after circulating over the coils, to spread out more towards the centre of the room and cover the cross-sectional area much more uniformly. While it decreases the velocity proportionately, it is considered a superior arrangement to the perpendicular apron alone, placed in front of the coil. The false ceiling should have a slant of about one foot in ten, and the opening on the outer edge near the centre of room need not be over three or four inches in depth in most cases. Without the false ceiling some space must be left for a circulation of air at the top of the room; with it, the goods may be piled close up to the false ceiling, so no space of consequence is wasted in using it.

" The arrangement shown in Fig. 183 was first originated by Mr. C. M. Gay, as was described in the August, 1897, issue of *Ice and Refrigeration*. Barring the space occupied, it is by far the best arrangement of room piping now in use. The following is quoted from Mr. Gay's description: 'Upper pipes of box coils should be about ten inches below ceiling of room, to prevent sweating. When brine or ammonia is turned into these pipes the cold air around the pipes seeks an outlet downward, and passes between the false partition and the side wall of the room, thus displacing or pushing along the air in centre of room, the cold air naturally seeking the lowest point, and the warm air the highest point, each by reason of its relative gravity. Thus, as the cold air falls from the cooling surfaces, it is replaced by the warm air from highest point in centre of room. This secures a natural circulation and a dry room, there being no counter-currents nor tendency to precipitate moisture on walls or ceiling.' Mr. Gay's remarks regarding his system apply with still greater force to the St. Clair system, and to a greater or lesser extent to any system which provides for a removal of the cooling pipes from the room.

" The St. Clair system, illustrated in Fig. 184, is sometimes called the pipe loft system, because the cooling pipes are placed above the storage room in a pipe loft or coil room. This is a favourite arrangement where an overhead ice cold storage house is equipped with the mechanical system. In this case the pipes are placed in a portion of the old ice room, and perhaps the old air ducts used for air circulation. If the storage house consists of several floors of storage, the pipe loft may be placed at the top and the rooms below all cooled from one

pipe loft, but a much better method is to have an independent coil-room for each room, and circulate the air through separate air ducts. This prevents contamination from foreign odours when different products are stored in different rooms.

"The circulation is more vigorous and effective with the St. Clair system than with any pipe-in-the-room system, depending on the law that the higher the column of air the stronger the draught, in the same manner that a tall chimney gives a stronger draught than a short one. The effect of this is to produce a good circulation of air with a comparatively small variation of temperature. The St. Clair system is also better because by suitable trap-doors on the air ducts the pipes may be shut off from the room, when the temperature is such outside as not to require the circulating of the refrigerant. The necessity of keeping the air of a storage room from contact with the frosted pipes when the refrigerant is shut off will be considered in connection with the forced or fan circulation system, to be described further on.

"MECHANICAL OR FORCED AIR CIRCULATION.

"The simplest, and probably the most unscientific, form of mechanical air circulation in cold storage rooms is the small electric fan. These fans are of the four or six-bladed disc type, of from twelve to eighteen inches in diameter, attached directly to the shaft of a $\frac{1}{8}$ or $\frac{1}{4}$ -horse-power electric motor. The electric current for operating is usually obtained from the socket for an incandescent electric lamp. Electric fans are usually placed on the floor in the end of an alleyway, or in an opening in the piled goods, and are used for creating a flow of air from one extremity of the room toward the other. If the circulation is strong enough, these fans tend to create a uniform temperature in the room; but, as the air from the fan will follow a path of least resistance, the circulation resulting from their use is largely confined to the alleyways and openings in the piles of stored goods—it does not penetrate through and behind the goods where it would be most useful.

"The use of this type of fan in cold storage rooms is of doubtful utility, and is liable at times to lead to a positive harm by causing a condensation of moisture on the goods in storage, as a result of the warm upper stratum of air coming in contact with the cold goods in the bottom of the room. In some cases electric fans have been used to propel the air from the cooling pipes, for which purpose they are placed in an opening in a screen or mantle covering the pipes, forcing

the cooled air outwardly into the room. This is a first step toward scientific forced circulation, and is useful as far as it goes. In many

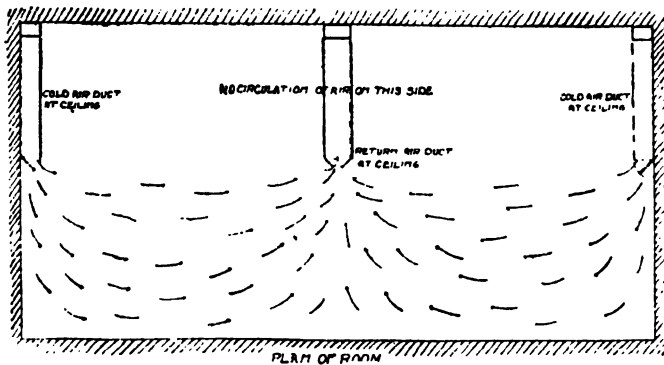


Fig. 185.—Diagram showing Mechanical or Forced Air Circulation, with Air forced into the Room at each end, and drawn out at centre.

cases the electric fan is useful only as a "talking point," as it is likely to impress a person who is not familiar with cold storage work, with

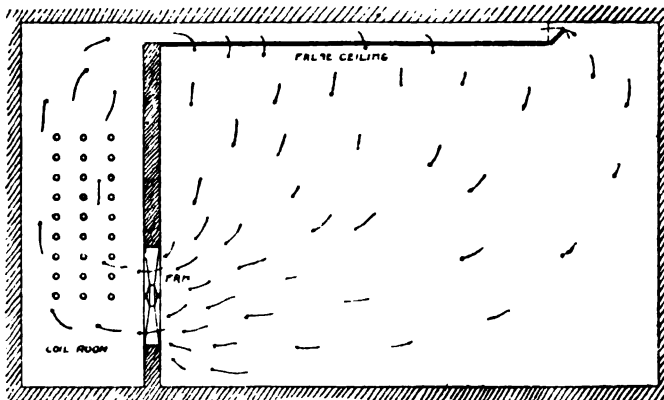


Fig. 186.—Diagram showing Mechanical or Forced Air Circulation, with False Ceiling for distributing Cold Air from the Coil Room.

the cooling power of the refrigerating apparatus, to stand for a few seconds in the breeze created by one of these high-speed fans. Their use has been adopted to an extent not at all warranted by the results

to be obtained, and they will no doubt be gradually discontinued as the fallacy of the idea becomes apparent.

"Those who use electric fans as above described, by so doing admit the superiority of forced circulation over the gravity system, and also admit that their rooms are in bad condition, and that some mechanical means of agitating or circulating the air is necessary. Instead of such a poor makeshift, it seems that they will eventually be forced to install a scientific system of forced circulation.

"A system which has been installed in several large houses in the United States, and to some extent elsewhere, consists in placing the refrigerating pipes outside the storage room, and using a fan to propel the air to and from the room. Fig. 185 shows a floor plan of a room

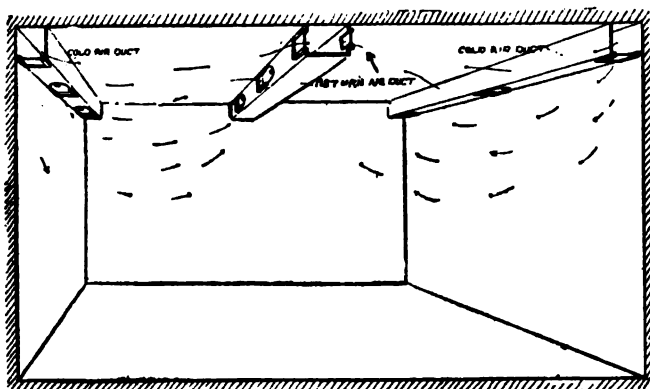


Fig. 187.—Diagram showing Mechanical or Forced Air Circulation, with Air admitted at sides of Ceiling, and drawn out at centre thereof.

so equipped. The air is forced into the room at each end, and the return air to coil room drawn out in the centre as shown. The cold air inlet at ends of room are in some cases placed at the floor and in others at the ceiling of the room, but further than this no distribution of air is attempted other than that resulting from the location of the inlet and outlet. Sometimes the ducts are arranged to force the air into the room at the centre, and the return air to coil room is taken out at the ends, or the cold air is allowed to flow from several openings in a duct running across the centre of the room, but no real distribution results from this method.

"Employing the forced circulation system in this way is very much like the indirect systems of steam-heating as at first installed.

It is noticeable now that the best steam-heating work provides a thorough distribution of the heated air throughout the apartments through a great many small openings rather than forcing a large volume of air into the room at one or two places. It needs no argument or demonstration to show that a room heated or cooled by air forced in at one or two openings must have varying degrees of temperature, humidity and circulation depending on the remoteness or proximity to the direct flow of air from inlet to outlet, for the reason that the air from inlet always seeks the most direct path to the outlet and moves through the area of least resistance, usually through the centre alley of room. This is a positive fact and not a theory. The writer recently visited a large room of the kind above described, and despite the manager's statement that he had tested in every known way and found conditions absolutely uniform, the writer for himself saw a temperature variation of two degrees, and this between two thermometers hung in the centre alley of room at the same height from floor, and without any extraordinary conditions to cause such a variation. The real difference in temperature in this room between the coldest and warmest point could not have been less than five or six degrees.

"The longitudinal section of a room shown in Fig. 186 illustrates a system of forced air circulation which has been installed to a moderate extent, but has not become as well established as the one first described. A false ceiling is provided for distributing the cold air from cooling coils at the top of the room, but as with the system just described, no collecting ducts are provided for the purpose of uniformly removing the air from the room. The air from coil room comes into the room through narrow slit-like openings in the false ceiling, and is returned to the cooling coils through and by the disc fan located in the partition between coil room and storage room. It would seem that this is working counter to the natural laws of gravitation, although it may be looked at in another light also.

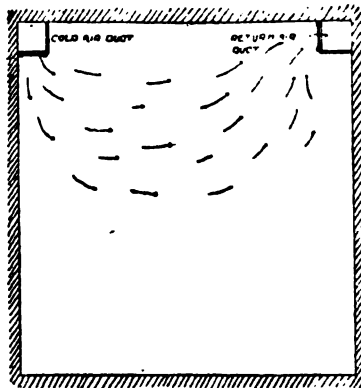


Fig. 188.—Diagram showing Mechanical or Forced Air Circulation, with Air admitted at one side of Ceiling, and drawn out at the other side.

"It is often remarked that 'cold will naturally drop,' but this should not confuse us when studying the means for promoting circulation. If the cold air is admitted to the room at the top, it will of course fall to the floor if allowed to do so; but why admit the cold air at the top of the room if it is wanted at the floor? In a room fitted with direct piping the cold air does not drop through the goods in storage, but down over the cooling coils, and rises through the goods in storage as it is warmed. It would seem, then, that any method of distributing the cold air at the top of the room is wrong in principle, especially as no means of uniformly drawing off the air at the bottom of the room is provided. When warm goods are placed in a room equipped in this way, the moisture given off as the goods are cooled

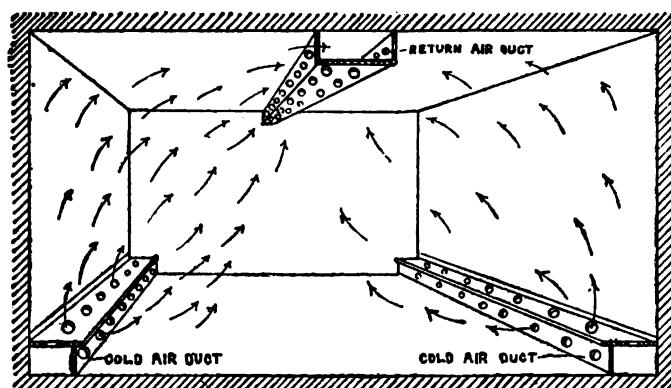


Fig. 189.—Diagram showing Mechanical or Forced Air Circulation, with Air admitted at each side of Floor, and drawn out at centre of Ceiling.

must be very liable to collect on the cold false ceiling. To provide uniform temperatures and humidity with this system it is necessary to provide a very strong blast of air, which is to be avoided, as goods directly in front of the fan may be exposed to too great a drying influence.

"The arrangement of collecting and distributing air ducts shown in the cross section of room, Fig. 187, has been installed in a number of houses in America, and, like some of the others, depends on the 'cold will naturally drop' theory for its operation. The arrows show the natural tendency of the air circulation from the cold air ducts on the sides of the room to the warm air collecting duct in the centre. In some cases the cold air is distributed in the centre and collected at the sides of the room, and where the room is

narrow only two ducts are used, as in Fig. 188, a cold air distributing duct on one side of the room and a warm air collecting duct on the opposite side. In every case the ducts are placed at the ceiling, on the theory that the air from cold air duct will drop and distribute itself along the floor before being drawn back to the coil room through the return duct. The openings provided in the air ducts of this system are usually square openings, fitted with sliding gates to regulate the flow of air into the room and its return to cooler. These gates are placed five or six feet apart, consequently a good distribution of air is not provided, and goods exposed to the rapid flow of air directly in front of the openings will get a much greater volume of circulation than is to be found in any other part of the room. When a room of this kind is filled with goods, preventing the air from falling directly from the cold air duct to the floor, no circulation of consequence will be obtained near the floor, for the reason that air will travel through path of least resistance, almost directly from feeder duct to return duct, about as shown by the arrows.

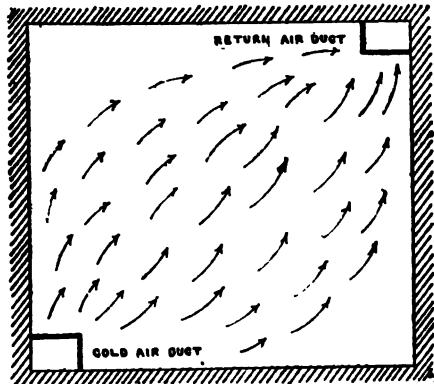


Fig. 190.—Diagram showing Mechanical or Forced Air Circulation, with Air admitted at one side of Floor, and drawn out at other side of Ceiling.

"A method somewhat similar to the one just described is that in which the cold air distributing ducts are placed at the floor and the warm air return duct is placed at the ceiling, as represented by the cross sections of rooms, Figs. 189 and 190. In narrow rooms one distributing duct is used as shown in Fig. 190. In wider rooms two distributing ducts on opposite sides of the room at the floor are used, and one collecting duct at ceiling in centre of room. This arrangement has the merit of operating according to the laws of gravity, but still lacks the thorough distribution of cold air and collection of warm air, as shown in the system described further on. It is, however, considerable of an improvement on any of the preceding methods, and the writer has demonstrated in actual service that it will produce fairly uniform circulation and temperatures with a comparatively gentle

flow of air. This system is to be recommended for goods which do not give off much moisture. It is preferable to use numerous small holes rather than a few large openings in the supply and return ducts.

"The system shown in the cross section of room, Fig. 191, was developed by the writer (Mr. Cooper) after some experiments, and has since been improved by two successive steps. It was the old trouble of sluggish circulation, especially during the fall and winter, which impelled the writer to experiment for its betterment. As an improvement over the small electric fan already mentioned, an exhaust fan was fitted up to take air from the cooling apparatus and deliver it to the rear end of the room through a perforated duct.

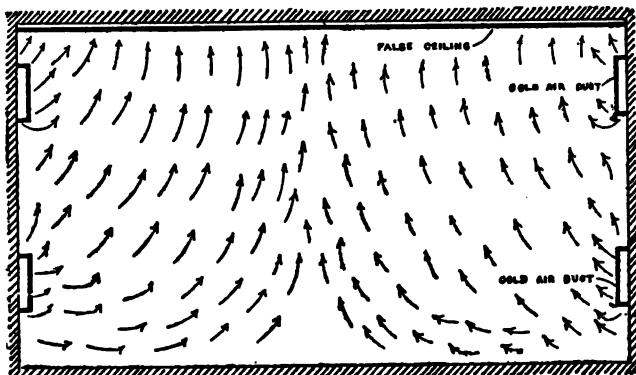


Fig. 191.—Diagram showing Mechanical or Forced Air Circulation, with Air admitted at two Ducts on each side of Wall, and drawn out through Perforated False Ceiling.

The air was allowed to find its way back to the coils as best it could.

"This method was applied to a long narrow room, and certainly was a decided improvement over the sluggish natural circulation which it superseded. Following this, the perforated false ceiling was applied, with distributing cold air ducts on the walls, as shown in Fig. 191. The cold air from coil room was forced into small holes in the top, bottom, and sides, of the cold air ducts. The warm air from the room flowed upwards through the small perforations in the false ceiling and through the space between the ceiling of the room and false ceiling, and thence to the coil room, where the air was cooled, and caused to repeat the same circuit continuously. The first

apparatus was clumsy, and the proportions of the various parts not correct, but the efficiency of a forced circulation of air, and a thorough distribution and collection of the incoming and outgoing air of a cold storage room so plainly proven, that a further development of the idea was undertaken.

"It was demonstrated by above described experiments that a comparatively small amount of air well distributed and uniformly drawn off at the top of the room after flowing upward through the goods in storage, would produce very uniform conditions throughout the entire area of the room. Following up this information the apparatus was

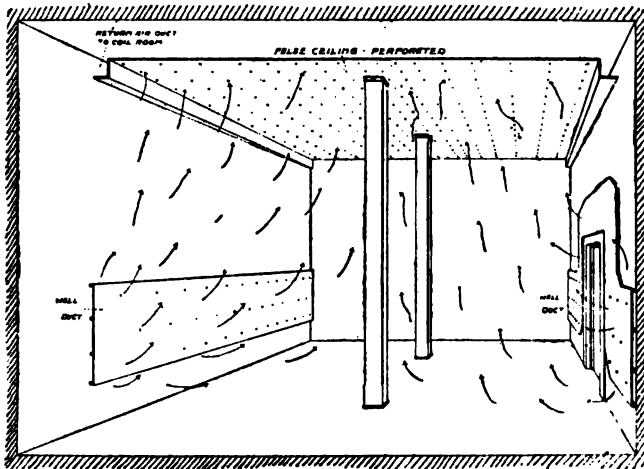


Fig. 192.—Diagram showing Mechanical or Forced Air Circulation, with Air admitted at one broad Duct on each Side Wall, and drawn out through Perforated Ceiling.

reduced to a more practical form by substituting one broad duct near the floor, as in Fig. 192, for distributing the cold air, in place of the two distributing ducts as used in the apparatus shown in Fig. 191.

"The top duct of the two did not accomplish any result of consequence, and was considered objectionable, as the air passing from this duct to the false ceiling did not percolate through the goods to any considerable extent, and resulted practically in a loss of the work done by the air flowing from the top duct. Two ducts also made the apparatus more complicated. Using the broad single distributing

duct near the floor in combination with the false ceiling resulted in very penetrating and uniform circulation of air, and in practical service it has been found to produce superior results.

"No practical objections have been urged against it. As shown by the arrows, the air is caused to cover very uniformly the entire cross-sectional area of the room. This was accomplished by perforating the distributing ducts with small holes, and so proportioning them that a larger part of the flow of air is from the bottom of the ducts. The ducts are also perforated to some extent on sides and top. By piling the goods a few inches off the floor the air from bottom of ducts flows under the goods and out to centre of room. This action is also assisted by having the greater number of the perforations in false

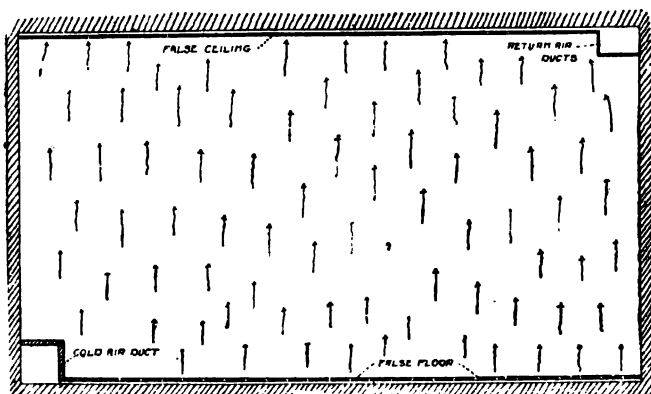


Fig. 193.—Diagram showing Mechanical or Forced Air Circulation, with Air admitted through Perforated Floor, and drawn out through Perforated Ceiling.

ceiling in the middle third or quarter of the room, so as to draw the air out from sides of room. As indicated by the arrows, the air moves up from the distributing duct, is drawn into space above false ceiling, and returned to coil room to be cooled.

"The system described in the foregoing paragraph is nearly theoretically perfect so far as a uniform circulation of air is concerned, and a more thorough method than any of its predecessors, but it still remained to design the perforated false floor and false ceiling combination, Fig. 193, to produce a system which cannot be improved upon theoretically. Not only is the system theoretically perfect, but its practical application is so simple as to be unobjectionable. As shown

clearly by the sketch, the flow of air is directly upward from floor to ceiling, consequently all goods piled in such a room are exposed to exactly the same conditions as to circulation, temperature, humidity, and purity of the air. In a room equipped with this system, with the parts correctly proportioned, it is entirely safe to pile goods closely, only allowing a fraction of an inch between the packages and at sides of room and placing thin strips beneath the goods to allow air to flow from perforations in false floor.

"Where, in rooms fitted with direct piping and some of the fan systems as well, a large space must be left at floor and ceiling for a circulation of air, with this system goods may be piled close up to ceiling leaving only half an inch for the air to flow into perforations in false ceilings. As the space occupied in height by false floor and its space underneath is only one and three-fourths inches and that occupied by false ceiling only one and one-fourth inches, it will be apparent that much space will be saved by using this system. After a room is filled with goods and cooled down to the correct carrying temperature, no difference in temperature can be noticed in different parts of the room. No blast of air can be felt in any place, a gentle flow from perforations only is noticeable, therefore no particular place has more circulation than another to cause a drying out of the goods. The advantages of this system over any of the others may be summed up as follows:

"1. A more equal distribution of air, especially when the room is filled with goods. Goods in centre of room are exposed to the same temperature, circulation, etc., as those at sides.

"2. Saving in space, as it allows the room to be filled full of goods without leaving large spaces at top and bottom for a circulation of air.

"3. Where the air is so perfectly distributed and collected it is not necessary to circulate such a large volume, saving in power and lessening the liability of evaporation of goods."

INSULATION.

Besides being non-conductive, a good insulating material should be non-odorous, non-hygroscopic, or deliquescent, not liable to silt, both vermin and fire-proof, and inexpensive.

The efficient insulation of a freezing-room or of a cold store, or refrigerating chamber, is a matter of very great importance from an

economical point of view. This will be apparent when it is remembered that when once the contents of the said cold store or chamber are reduced to the requisite temperature, the entire work required of the refrigerating machine will be only that which is necessary to neutralise the heat that passes through the walls, floor, and ceiling thereof, from the exterior. Consequently, the more perfect the insulation, the less the machine will be called upon to work, and naturally in a corresponding ratio also will be the saving effected in fuel, wear and tear of the working parts, and in attendance.

The means adopted for insulation consist in lining the room, or, in the case of a marine installation, the hold of the vessel, with some material forming a very bad conductor of heat. The exact method of carrying this out, as also the nature of the non-conducting material employed, must necessarily be considerably varied according to the circumstances of each particular case.

Mr. Lightfoot recommends as a fairly good protection an outer and an inner layer of tongued and grooved boards, 1 in. or $1\frac{1}{2}$ in. thick, with a 9-in. space or clearance between them filled with charcoal, or in some cases preferably with silicate cotton or slag wool.

In France and Germany cork is used with marked success as a non-conductor, and it is evidently a substance exceedingly suitable for the purpose in question, being a material very impervious to heat, and capable of withstanding moisture. Either ordinary cork cut into thin slices, or refuse or waste cork, from other industries, thoroughly ground up or disintegrated into a coarse powder, is employed, the former being the best but the most expensive. In New Zealand and Australia pumice stone is much used.

Various other substances such as asbestos, cotton-wool, sheep's wool, pine-wood, loam, gas works breeze, coal ashes, sawdust, hair felt, lamp black, mica, paper, fine cinders, pitch, etc., are likewise employed for purposes of insulation. A number of different compositions have also been tested and used as heat insulators, amongst which may be mentioned the following:—Composition of fossil meal, composed of 60 per cent. of washed white German kieselguhr, and 40 per cent. of binding material; composition of kieselguhr from German mines, with 10 per cent. of binding matter, such as fibre, and mucilaginous extract of vegetable; cement composed of blue clay mixed with flax; jute, and woollen waste, or cow's hair, in equal proportions; fibrous composition of fine blue clay mixed with flax, hemp, rope, jute, cow-hair, and woollen waste; and a papier maché composition composed of

paper-pulp mixed with clay and carbon, together with hair and fragments of hemp-rope.

In choosing a substance other considerations besides its good insulating powers must be taken into consideration, such, for instance, as its capacity for withstanding moisture. This latter quality is of the utmost importance, inasmuch as at very low temperatures moisture from the air is very readily absorbed by many substances, and fermentation, rotting, and decay, will result therefrom. It is for this reason that cork forms so desirable a material for insulating purposes, although surpassed in non-conductibility by some others. For a like reason pitch, or some form of enamel composed of bitumen and other ingredients, are found to be very valuable. Lamp-black is claimed to be a very good material for insulating purposes in railway and other portable refrigerating chambers by reason of its lightness and elasticity, and more particularly on account of its non-liability to pack from jolting, and complete imperviousness to moisture. This material is the one employed by Henry Carr Godell, in his patent (1884) movable refrigerating chamber. When it is desirable to increase the elasticity and reduce the cost, he sometimes uses a mixture of either short fibre or scales of mica.

Whatever the filling material that may be employed for insulating purposes, however, it should always be borne in mind that the more air that is enclosed with it between the walls or skins the better, for it is a well-known fact that the best non-conductor of heat is dry air, the units of heat transmitted per square foot per hour, through a layer of confined air of 1 in. in thickness, being about '29.

When charcoal is employed it should be well dried, and packed as nearly as possible to a consistency of 11 lbs. per cubic foot. Silicate cotton or slagwool is usually packed to a consistency of about 12 lbs. per cubic foot, one ton equalling about 187 cubic feet. Some engineers prefer, however, to use 13 lbs. per cubic foot.

The following table, from experiments by Peclet, gives the amount of heat in units transmitted per square foot per hour, through various substances, in plates or layers of 1 in. in thickness, many of which are suitable for insulating cold-air or refrigerating chambers. The experiments were made by heating one side of the plates or layers by means of hot water, and cooling the other side by cold water, the difference between the temperature of the two faces being 1° Fahr.

Materials.	Units of heat transmitted.	Materials.	Units of heat transmitted.
Gold	625	Guttapercha	1·37
Platinum	600	India-rubber	1·36
Silver	595	Brickdust, sifted	1·33
Copper	520	Coke, in powder	1·29
Iron	230	Iron filings	1·26
Zinc	225	Cork	1·15
Tin	178	Chalk, in powder	·86
Lead	113	Charcoal (wood) in powder	·63
Marble	24	Straw, chopped	·56
Stone	14	Coal, powder sifted	·54
Glass	6·6	Wood ashes	·53
Terra-cotta	4·8	Mahogany dust	·52
Brickwork	4·8	Canvas, hempen new	·41
Plaster	3·8	Calico, new	·40
Sand	2·1	Writing paper, white	·34
Oak, against the grain or fibre	1·7	Cotton and sheep's wool	·32
Walnut, with the grain or fibre	1·4	Eiderdown	·31
Fir, with the grain or fibre	1·37	Blotting paper, grey	·26

The quantity of heat in units, transmitted through one square foot of plate per hour, may be found thus: subtract the temperature of the cooler side from that of the hotter side of the plate, then multiply the result by the number in the preceding table corresponding to the material used, and divide the product by the thickness of plate. Thus an iron plate 2 in. thick, having a temperature of 60° on one side and 80° on the other, will transmit $80 - 60 = \frac{20 \times 230}{2} = 2,300$ units of heat per square foot per hour.*

A series of five experiments † on radiation at low temperatures were conducted by Raoul Pictet on the rate of heating of a body cooled to - 170° Cent. (- 338° Fahr.), the surrounding atmosphere being at a temperature of + 11° Cent. (+ 51·8° Fahr.).

The refrigerators employed were cooled by a mixture of sulphur dioxide and carbon dioxide (Pictet's special liquid), or by liquid nitrous oxide, their thermal capacity being considered in every case. In the first experiment the surface of the refrigerator was uncovered; in the second it was encased in a sufficient covering of cotton waste to prevent the formation of hoar frost on the metal; whilst in the third, fourth, and

* Hutton. "Works Managers' Handbook." Crosby Lockwood & Son.

† "Comptes Rendus de l'Académie des Sciences," Paris, vol. cxix., p. 1202. 1894.

fifth series protecting layers of 10, 25, and 50 centimetres in thickness were employed.

The results showed that at extremely cold temperatures between -170° Cent. (-338° Fahr.) and -100° Cent. (-212° Fahr.) a thick layer of cotton afforded but a slight protection. It was only between the temperatures of -20° Cent. (-68° Fahr.) and $+10^{\circ}$ Cent. ($+50^{\circ}$ Fahr.) that the effect of the protecting layers became proportional to their thickness.

In the opinion of Mr. Pictet, bad conductors of heat are capable of absorbing, with considerable efficiency, the radiations from bodies at temperatures between -60° Cent. (-140° Fahr.) and $+11^{\circ}$ Cent. ($+51.8^{\circ}$ Fahr.), but are ineffective as regards calorific vibrations at temperatures below -60° Cent. (-140° Fahr.) With other non-conducting substances, such as silk, wool, sawdust, cork, charcoal powder, and peat, the results were identical, and, as a rule, bad conductors appeared to be freely permeable to heat at low temperatures between -100° Cent. (-212° Fahr.), and -170° Cent. (-338° Fahr.).

The table on the next page gives the results of tests* undertaken by Professor Andrew Jamieson, M.Inst.C.E., for the purpose of determining the relative and absolute thermal conductivities of substances used as lagging for steam-boilers, for parts of steam-engines, and for refrigerating machines. The method adopted was to observe the fall of temperature in a known weight of hot water contained in a vessel coated on all sides with a certain thickness of the material under examination, the outer surface of which was maintained at a constant temperature by the continuous flow of cold water through a water-jacket.

The apparatus consisted of three cylindrical tin cases, the innermost of which was fitted with a water-tight lid having a central funnel through which the hot water was inserted. The space or clearance of 1 in. left between the first or innermost vessel, and the second vessel, contained the non-conducting material under test; and the space between the second and third vessel formed the water-jacket. Thermometers were placed in the hot-water chamber and water-jacket, and an arrangement for stirring the water in the said hot-water chamber in the innermost vessel was likewise provided. Each specimen of non-conducting material was placed upon a separate inner case, each of the latter being covered to an uniform thickness of 1 in. in the manner in which the said material would be employed in actual prac-

* "Minutes of Proceedings, Institution of Civil Engineers," vol. cxxi., Session 1894-95, pp. 291, 292, 293, 294, 295.

tice. The non-conducting composition was applied in layers, carefully dried in succession, so as to ensure the dryness necessary to the accuracy of the tests being obtained.

The covered tin cases were tested as follows:—10 lbs. of boiling water was poured through a funnel into the hot-water chamber. Cold water was then allowed to flow uniformly from the main water-pipe, and to circulate freely through the cold-water chamber. During no test was the temperature in this chamber observed to rise as much as 1° Cent. The outer surface was, therefore, kept at a constant temperature throughout each test. In order to prevent the temperature of the hot water from falling too quickly at first, and to bring the non-conductor and the whole apparatus to a condition of constant temperature or heat equilibrium, steam at atmospheric pressure generated in a Florence-flask, was first passed into the inner vessel by means of a glass tube led into it through the funnel. The steam-pipe was then removed, and a paraffined cork fitted tightly into its position. The first reading was always taken when the temperature of the hot water had just fallen to 94° Cent. (201·2° Fahr.). The water in inner chamber was stirred by a perforated piston prior to the readings of the thermometers in the two chambers, which were taken simultaneously, being noted. Successive readings of both thermometers were taken in the same way, and recorded every ten minutes.

RESULTS OF THE TESTS.

Name of Material.	Weight of Sample (including Tin).	Total fall of Temperature in 120 minutes.	Thermal Conductivity in Absolute Measure.	Conductivity as Compared with Dry Still Air.
	lbs. oz.	Deg. Cent.		
Dry air	—	6·0	0·0000558	1·00
Fossil meal composition .	7 2	21·5	0·0002689	4·82
Cement with hair felt* .	5 15	30·0	0·0003613	6·47
Silicate cotton,† or slag wool	—	29·0	0·0003875	6·95
Kieselguhr‡ composition	7 13	29·0	0·0004336	7·77
Papier maché composition§	7 6	35·5	0·0004424	7·93
Fibrous composition (flax, hemp, cow-hair, and clay)	9 9	34·5	0·0004550	7·98
Papier maché composition	8 12	37·5	0·0005019	8·99

* The outside diameter of this sample was about $\frac{1}{4}$ in. smaller than the inside diameter of the middle tin-case or vessel, and it had consequently a slight advantage

The results of tests¶ made by Mr. John G. Dobbie, superintending engineer at Calcutta to the British India Steam Navigation Company, to determine the conductivities of asbestos and Kieselguhr composition were as follows :—

RESULTS OF TESTS.

	Asbestos.	Kieselguhr Composition.
	Water Condensed in Inches.	Water Condensed in Inches.
After 15 minutes . .	4½	2½
„ 30 „ . .	3½	2½
„ 45 „ . .	3½	2½
„ 60 „ . .	3½	2½
Totals in one hour . .	14½	9½

This experiment shows a saving of 36 per cent. in favour of Kieselguhr composition. The tests were made with two boiler-tubes—3½ in. in outside diameter and 7 ft. long, closed at both ends, and covered with a thickness of 2 in. of asbestos and Kieselguhr composition respectively. The tubes were suspended side by side, and steam was admitted at the top, a gauge-glass being fitted at the bottom of each by which the amount of condensation inside the tubes could be accurately observed. Steam at a pressure of 30 lbs. per square inch was used in the tubes. In the first trial, which lasted one hour, 12·375 in. of water were condensed in the tube covered with asbestos, and 8·375 in. in that covered with Kieselguhr composition, showing 33 per cent. less water condensed with Kieselguhr composition. In the second trial, of one hour also, the

over the other samples in having a thin layer of air between its outer surface and the latter.

† The silicate cotton was pressed together tightly, and thus its conductivity appears greater than would have been the case had it been more loosely packed.

‡ The Kieselguhr employed consisted on the average of Silica 83·8, Magnesia 0·7, Lime 0·8, Alumina 1·0, Peroxide of Iron 2·1, Organic Matter 4·5, Moisture and Loss, 7·1. It was employed in conjunction with 10 per cent. of binding material, viz., fibre and mucilaginous extract of several vegetable matters.

§ Papier maché composition, consisting of paper pulp mixed with clay and carbon, together with hair and fragments of hemp rope.

¶ A lighter modification of above.

“Minutes of Proceedings, Institution of Civil Engineers,” vol. cxxi., Session 1894-95, pp. 301, 302.

condensation was noted every fifteen minutes, and gave the results shown in the above table.

From these and other tests the author has been led to the conclusion that hard-pressed asbestos paper or cloth is a better conductor of heat than silicate cotton or slag wool, felt, hair, wool, or some of the Kieseluhr compositions. The main reason for the superior non-conductivities of porous materials is on account of the entrapped and occluded air, hence the looser asbestos and other fibrous materials are laid on the better will they prevent radiation of heat.

In an appendix* to his paper on heat-insulators, Professor Jamieson gives some accounts of previous experiments, of which the following is a brief extract:—

"In 1881, Mr. Charles E. Emery, Ph.D., wrote a paper† on 'Experiments with Non-conductors of Heat,' wherein the results of his tests on fourteen different substances are given. The apparatus used consisted of a boiler, 4 ft. in diameter and 12 ft. long, constructed with three 10-in. tubes. Into these tubes were placed smaller tubes to receive steam, and around the inner tubes were placed the non-conducting substances, water being circulated through the larger shell outside of the outer tubes. The results (see table) were shown by the amount of steam condensed in the inner tubes, the water of condensation being conducted to small cylindrical vessels, each provided with a glass gauge."

In 1884, Professor John M. Ordway, of Boston, Mass., described in a paper‡ on "Experiments upon Non-conducting Coverings for Steam-pipes," tests of a great variety of substances by three methods, viz.: (1) by measuring the temperatures on the outside of the coverings; (2) by measuring the weight of steam condensed in a certain time over a certain length of covered pipe; (3) by a calorimeter.

In 1884, Mr. J. J. Coleman gave§ the results of a series of experiments (see table) on eight substances tested by means of Lavoiser's ice-calorimeter. The object of the experiments was to find the substance which would make the best covering for the "Bell-Coleman Freezing Machines."

* "Minutes of Proceedings, Institution of Civil Engineers," vol. cxi., Session 1894-95, pp. 298-299.

† "Transactions, American Society of Mechanical Engineers," vol. ii., 1881, p. 34.

‡ "Transactions, American Society of Mechanical Engineers," vol. v., 1883-84, p. 73.

§ "Proceedings, Philosophical Society of Glasgow," vol. xv., 1883-84, p. 90.

In 1884, Mr. D. K. Clark, M.Inst.C.E., reported* to the National Smoke Abatement Institution the results of tests carried out at the works of Messrs. Samuel Hodge and Sons, Millwall, of seven substances as compared with a bare pipe.

In 1891, Mr. W. Hepworth Collins read a paper† on "The Comparative Value of Various Substances used as Non-Conducting Coverings for Steam Boilers and Pipes," giving the results of experiments in which a mass of each material to be experimented upon, 1 in. thick, was carefully prepared and placed on a perfectly flat iron plate or tray, which was then maintained at a constant temperature of 310° Fahr. The heat transmitted through each non-conducting mass was calculated in lbs. of water heated 10° Fahr. per hour (see table).

RESULTS OF DIFFERENT EXPERIMENTS ON THE HEAT
CONDUCTIVITIES OF VARIOUS SUBSTANCES.

(Silicate cotton being taken as 100.)

Substance.	C. E. Emery. 1881.	J. J. Coleman. 1884.	W. H. Collins. 1891.	Prof. Jamieson. " "
Fossil meal composition . . .	83	..	..	70
Cement with hair-felt . . .	83	..	..	93
Silicate cotton or slag wool . . .	100	100	100	100
Hair-felt or fibrous composition . . .	..	117	114	112
Papier-maché . . .	..	..	147	111
Kieselguhr composition . . .	..	136	..	112
Sawdust . . .	122	163	142	..
Charcoal . . .	132	140	..	..
Cotton wool . . .	..	122	..	..
Sheeps' wool . . .	..	136	..	..
Pine wood (across the grain) . . .	150	..	..	..
Loam . . .	..	..	..	..
Gasworks breeze or coal ashes . . .	240	230	299	..
Asbestos . . .	229	..	179	..

* "The Engineer," vol. lvii., 1884, p. 65.

† "Report of the British Association for the Advancement of Science," Cardiff, 1891, p. 780.

RESULTS OF TESTS TO DETERMINE THE NON-CONDUCTIVE VALUES OF DIFFERENT MATERIALS.

(H. F. Donaldson, M.I.C.E., *Proceedings, Inst. C.E.*)

EXPERIMENT NO. 1.

—	Thickness of Insulating Material.	Original Weight of Ice.	Weight after		Loss after Seventy- two Hours.
			Twenty- four Hours.	Seventy- two Hours.	
	Inches.	Ozs.	Ozs.	Ozs.	Per cent.
Peat (compressed and set in Fossil Meal)	9	95	81	59	37.89
Charcoal	11	96½	79½	56	41.97
Silicate Cotton ..	4½	92½	73½	40½	56.21
Magnesia and As- bestos Fibre ..	4½	93	73	40½	56.45

NOTE.—The author thought it undesirable to consider further compressed peat set in fossil meal, as he found by experiment its powers of absorption of moisture to be so great as to constitute in his opinion a source of danger.

EXPERIMENT NO. 2.

—	Thickness of Insulating Material.	Original Weight of Ice.	Weight after			Loss after Ninety- six Hours.
			Twenty- four Hours	Forty- eight Hours.	Ninety- six Hours.	
	Inches.	Ozs.	Ozs.	Ozs.	Ozs.	Per cent.
Silicate Cotton	6	104	88½	76½	58½	43.75
Sawdust	9	103½	86½	71	48	52.62
Peat	9	104	77½	56	26½	74.75
Charcoal	9	104	88½	78½	60½	41.82

EXPERIMENT NO. 3.

—	Thickness of Insulating Material.	Original Weight of Ice.	Weight after		Loss after Seventy- two Hours.
			Twenty- four Hours.	Seventy- two Hours.	
	Inches.	Ozs.	Ozs.	Ozs.	Per cent.
Silicate Cotton ..	9	92	83½	72½	21.19
Charcoal	11	92	82½	70½	23.36

EXPERIMENT NO. 4.

	Thickness of Insulating Material.	Original Weight of Ice.	Weight after		Loss after Ninety- six Hours.
			Twenty- four Hours.	Ninety- six Hours.	
	Inches.	Ozs.	Ozs.	Ozs.	Per cent.
Silicate Cotton (loosely packed)	9	110	103	84½	23·41
Silicate Cotton ..	9	110	101½	80½	26·59
Charcoal ..	11	110	100½	79	28·18
Vegetable Silica ..	11	110	101½	76½	30·22
Diatomite ..	11	110	99	73½	32·95

RESULTS OF TESTS TO DETERMINE THE NON-CONDUCTIVE VALUES
OF VARIOUS MATERIALS.

(Dr. Wm. Wallace.)

MATERIALS.	Cubic Centimetres (grammes) of water melted in 12 days.	Average C.C.'s per day.
Silicate Cotton	9,470	789
Flake Charcoal	11,010	917
Felt	11,760	980
Fossil Meal	12,530	1,044
Twig Charcoal	13,590	1,132
Plain Cork Slabs	14,020	1,168
Tarred Cork Slabs	14,610	1,217
Broken Lump Charcoal	15,916	1,326
Ashes	23,316	1,943

Coleman's method was used in making the above tests, with walls 6 in. thick.

RATE OF PASSAGE OF HEAT THROUGH VARIOUS MATERIALS.

(Alex. Marcet.)

British Thermal Units per hour per superficial foot through materials 6 in. thick.						
	T = 60°		T = 50°		T = 40°	
	Dry.	Wet.	Dry.	Wet.	Dry.	Wet.
Silicate Cotton ..	4·11	14·05	2·34	8·57	1·17	6·70
Cow Hair ..	4·11	8·80	2·34	5·30	1·17	3·50
Charcoal ..	4·70	12·30	2·93	7·50	1·76	4·40
Sawdust ..	6·75	15·60	4·40	9·60	2·34	5·50
Infusorial Earth ..	10·00	—	6·18	—	3·57	—
Cork Bricks ..	5·87	—	3·20	—	2·90	—

T = Difference of Temperature (Fahr.) on the two sides of the material.

RESULTS OF TESTS ON THE HEAT CONDUCTIVITY OF DIFFERENT SUBSTANCES.

(Various authorities.)

(Silicate Cotton being taken at 100.)

SUBSTANCE.	C. E. Emery, 1881.	J. J. Cole- man, 1884.	W. H. Collins, 1891.	Prof. Jamieson 1894.
Silicate Cotton or Slag Wool ..	100	100	100	100
Hair-Felt or Fibrous Composition ..	—	117	114	112
Papier-Maché	—	—	147	111
Kieselguhr Composition	—	136	—	112
Sawdust	122	163	142	—
Charcoal	132	140	—	—
Cotton Wool	—	122	—	—
Sheep's Wool	—	136	—	—
Pine Wood (across the grain) ..	150	—	—	—
Loam	—	—	—	—
Gasworks Breeze or Coal Ashes ..	240	230	299	—
Asbestos	229	—	179	—

TABLE GIVING THE RELATIVE HEAT CONDUCTIVITY OF VARIOUS BOILER-COVERING MATERIALS.

(The "American Engineer.")

Silicate Cotton or Mineral Wool	100
Hair Felt	117
Cotton Wool	122
Sheep's Wool	136
Infusorial Earth	136
Charcoal	140
Sawdust	163
Gasworks Breeze	230
Wood and air space	280

RESULTS OF EXPERIMENTS REGARDING NON HEAT-CONDUCTING PROPERTIES OF VARIOUS SUBSTANCES.

(Prof. J. M. Ordway.)

Coverings 1 inch thick.		Pounds of Water heated 10° F. per hour by 1 sq. foot.
1	"Silicate Cotton" or "Slag Wool" ..	13.0
2	Paper	14.0
3	Cork Strips, bound on	14.6
4	Straw Rope, wound spirally	18.0
5	Loose Rice Chaff	18.7
6	Blotting Paper, wound tight	21.0
7	Paste of Fossil Meal and Hair	16.7
8	Loose Bituminous Coal Ashes	21.0
9	Paste of Fossil Meal with Asbestos	22.0
10	Loose Anthracite Coal Ashes	27.0
11	Paste of Clay and Vegetable Fibre	30.9
12	Dry Plaster of Paris	30.9
13	Asbestos Paper, wound tight	21.7
14	Air alone	48.0
15	Fine Asbestos	49.0
16	Sand	62.1

N.B.—The Asbestos of 15 had smooth fibres, which could not prevent the air from moving about. Later trials with an Asbestos of exceedingly fine fibre have made a somewhat better showing, but Asbestos is really one of the poorest non-conductors. By reason of its fibrous character it may be used advantageously to hold together other incombustible substances, but the less the better.

NON HEAT-CONDUCTING PROPERTIES OF VARIOUS SUBSTANCES.

(From "Engineering.")

Prepared Mixtures, for Covering Boilers, Pipes, &c.	Pounds of Water heated 10° Fahr. per hour, per square foot.
Slag Wool (Silicate Cotton) and Hair Paste ..	10.0 lbs.
Fossil Meal and Hair Paste	10.4 "
Paper Pulp alone	14.7 "
Asbestos Fibre, wrapped tightly	17.9 "
Fossil Meal and Asbestos Powder	26.3 "
Coal Ashes and Clay Paste, wrapped with Straw..	29.9 "
Clay, Dung, and Vegetable Fibre Paste	39.6 "
Paper Pulp, Clay and Vegetable Fibre	44.6 "

* These substances are not well suited for covering heated surfaces—owing to their nature they soon become carbonised.

† Hard substances that, with the action of the heat, break, powder, and fall off.

RESULTS OF EXPERIMENTS REGARDING NON HEAT-CONDUCTING PROPERTIES OF VARIOUS SUBSTANCES.

(Walter Jones, "Heating by Hot Water.")

Frame Filled with	Left for	Highest Temp. Registered.
Leroy's Boiler-covering Composition ..	3 hours	94°
Asbestos Powder	4 "	86°
Hair Felt	9 "	77°
Silicate Cotton	9 "	76°

The quantity of heat in units, transmitted through one square foot of plate per hour, may be found thus: Subtract the temperature of the cooler side from that of the hotter side of the plate, then multiply the result by the number in the preceding table corresponding to the material used, and divide the product by the thickness of plate. Thus an iron plate 2 in. thick, having a temperature of 60° on one side and 80° on the other, will transmit $80 - 60 = \frac{20 \times 230}{2} = 2,300$ units of heat per square foot per hour.

HEAT-CONDUCTING POWER OF VARIOUS SUBSTANCES, SLATE

BEING 1,000.

(Molesworth.)

Slate	1,000	Chalk	564
Lead	5,210	Asphalte	451
Flagstone	1,110	Oak	336
Portland stone	750	Lath and plaster	255
Brick	600 to 730	Cement	200
Fire-brick	620		

EXPERIMENTS ON HEAT CONDUCTIVITY OF SLAGWOOL AND CHARCOAL.

(T. B. Lightfoot, M. Inst. C.E., G. A. Becks, A.M. Inst. C.E., in 1885.)

EXPERIMENT NO. I.

Began 11.30 a.m., 2nd June.

Ended 11.30 a.m., 4th June.

Duration of experiment, 48 hours.

Average temperature of room or chamber, 90° F.

A piece of ice 23 lbs. in weight was placed in a zinc box 12 ins. cube, and covered with 2 in. silicate cotton, this latter being provided with an outer cover, also of zinc.

When the ice was taken out it weighed $10\frac{1}{2}$ lbs., showing a loss of $12\frac{1}{2}$ lbs.

$12\frac{1}{2}$ lbs. $\times$ 142 (latent heat of ice) = 1775 thermal units passed through in 48 hours.

48) 1775 (36.9 thermal units passed through in 1 hour.

Difference in temperature between inner box and outer air = 58° F.

$\frac{36.9}{58} = 0.63$ thermal units transmitted per hour, per degree difference in temperature.

Area of zinc boxes:—

Inner box	...	...	...	6 sq. ft.
Outer casing	...	...	...	10.6 „ „
Mean	...	...	...	8.1 „ „

Thermal units transmitted through the 3 areas =

$$\begin{array}{r} 6) \frac{.63}{.105} \qquad 8.1) \frac{.63}{.07} \qquad 10.6) \frac{.63}{.059} \end{array}$$

which being multiplied by 2 for the thickness of cotton, gives thermal units per hour, per degree difference in temperature, per square foot, per inch of thickness, as follows:—

.210 inner tin.
.118 outer tin.
.14 mean between the two.

EXPERIMENT No. 2.

Began 11.30 a.m., 2nd June.

Ended 11.30 a.m., 4th June.

Duration, 48 hours.

Average temperature of room, 90° F.

A piece of ice 26 lbs. in weight, covered with 6 in. of charcoal.

When taken out it weighed $7\frac{1}{2}$ lbs., showing a loss of $18\frac{1}{2}$ lbs.

$18.5 \times 142 = 2627$ thermal units in 48 hours.

$\frac{2627}{48} = 54.72$ thermal units per hour.

$\frac{54.72}{3.7} = 14.79$ thermal units per hour, per degree difference in temperature between inner box and outer air.

Area of tins:—

Inner box	...	...	...	6 sq. ft.
Outer casing	...	...	...	24 „ „
Mean	...	...	...	13.5 „ „

The number of thermal units transmitted per hour, per degree, per square foot=

$$\begin{array}{r} 6) \frac{.94}{.15} \qquad 13.5) \frac{.94}{.069} \qquad 24) \frac{.94}{.039} \end{array}$$

which being multiplied by 6 for the thickness of charcoal=

.90 inner tin	} Thermal units transmitted per hour, per degree, per sq. ft., per inch of thickness.
.234 outer tin	
4.14 mean	

TABLE *

SHOWING TRANSMISSION OF HEAT THROUGH VARIOUS INSULATING STRUCTURES (*Starr*).

Col. I gives B. T. U. per Sq. Ft. per Day per Deg. of Difference of Temperature.
Col. II. gives Meltage of Ice in Pounds per Day by Heat coming through 100 Sq. Ft. at a Difference of 40°.

	Col. I.	Col. II.
$\frac{3}{8}$ in. oak—paper. 1 in. lampblack, $\frac{1}{4}$ in. pine. (This is the ordinary small stock family refrigerator)	5.7	160.7
One $\frac{1}{4}$ in. board, 1 in. pitch, one $\frac{1}{4}$ in. board	4.90	138
Four $\frac{1}{4}$ in. spruce boards, two papers, solid, no air space ..	4.28	120
Two double boards and paper (four $\frac{1}{4}$ in. boards), and one air space	3.71	105
One $\frac{1}{4}$ in. board, 2 in. pitch, one $\frac{1}{4}$ in. board	4.25	119.7
One $\frac{1}{4}$ in. board, 2 $\frac{1}{2}$ in. mineral wool, paper, one $\frac{1}{4}$ in. board ..	3.62	101.9
Two $\frac{1}{4}$ in. double boards and two papers, 1 in. hair felt ..	3.318	93.4
Two $\frac{1}{4}$ in. boards and paper, 1 in. sheet cork, two $\frac{1}{4}$ in. boards and paper	3.30	92.9
One $\frac{1}{4}$ in. board, paper, 2 in. calcined pumice, paper and $\frac{1}{4}$ in. board	3.38	95.2
Four double $\frac{1}{4}$ in. boards with paper between (eight boards) and three 8 in. air spaces	2.7	76
Hair quilt insulator, four boards, four quilts, hair	2.51	70.9
One $\frac{1}{4}$ in. board, 6 in. pat. silicated strawboard, air cell finished inside with thin layer pat. cement	2.48	69.8
One $\frac{1}{4}$ in. board, paper, 3 in. sheet cork, paper, one $\frac{1}{4}$ in. board ..	2.10	60
Two $\frac{1}{4}$ in. boards and paper, 8 in. mill shavings and paper, two $\frac{1}{4}$ in. boards and paper	1.35	38.3
Same slightly moist	1.80	50.7
Same damp	2.10	60
Double boards and paper, 1 in. air, 4 in. sheet cork, paper, one $\frac{1}{4}$ in. board	1.20	33.6
Same, with 5 in. sheet cork	.90	25.3
$\frac{1}{4}$ in. board, paper, 1 in. mineral wool, paper, $\frac{1}{4}$ in. board ..	4.6	130
Double boards and papers, 4 in. granulated cork, double boards and paper	1.7	48

* "Insulation for Cold Storage." Paper read before the Eleventh Annual Convention of the American Warehousemen's Association at Buffalo, N.Y., October, 1901.

WATERPROOF COATINGS FOR BRICK SURFACES.*

"During the summer of 1899 a large variety of paints, oils, varnishes, cements, and so-called waterproof coatings were tested for a cold storage company in the hope of finding some coating that would make waterproof and air-proof the brick walls of its warehouses. The tests were made with quarter bricks with good, fair surfaces, free from large holes, and, as nearly as possible, like those used in the exterior walls. Quarter bricks were used instead of whole bricks, so that sensitive balances could be used for the different weighings. All weighings were made to within one-thousandth of a gram. The results of the more satisfactory tests are tabulated below, and besides these, many other tests were made, but these other tests were either unsatisfactory or the materials tested of no value for the desired use. The quarter bricks to be tested were immersed in water of a temperature of about 70°, the brick being placed on its side, and there being one inch of water over the brick. Weighings were made as follows:

Of the brick before coating.					
Of the brick after coating.					
Of the brick after immersion	.	.	.	24	hours.
" " " "	.	.	.	48	"
" " " "	.	.	.	72	"
" " " "	.	.	.	96	"
" " " "	.	.	.	120	"

"At the end of each twenty-four hour period the quarter bricks were taken from the water, the outer surfaces carefully dried by cloth and blotting paper, and then the bricks were immediately weighed before any evaporation could take place from the pores of the brick. This was repeated in most of the tests until the bricks had been immersed for a period of 120 hours. After this continued immersion the bricks were taken from the water and their surfaces examined in order to see what change, if any, had taken place in the coating. In some cases the coating had softened, in some shrivelled, and in one case the coating, naphtha and a paraffin-like substance, which before immersion was evidently well into the pores of the brick, had gradually worked out into the water.

"The nature of the substances tested varied greatly. Some were in the nature of paints and varnishes, and were retained mostly upon the surfaces of the bricks. To this class belonged the materials used in tests marked A, B, D, G, L, O, P and Q. Other substances were

* Extract from paper by Mr. Stoddard, read before the Eleventh Annual Convention of the American Warehousemen's Association at Buffalo, N.Y., October, 1901.

more in the nature of a paste or coating applied upon the surface of the bricks. In this class may be included the substances used in tests marked C, I, K, N, R, S, T and U. Another class of substances was supposed to soak into the bricks, and by filling the pores exclude moisture. To this class belonged the substances used in tests E, F and J. Other coatings consisted of two substances, which, when combined, were supposed to form an insoluble compound or compounds which would fill up the pores of the brick. The tests of this class are marked H, M and V.

"Some substances which were submitted for test could be applied to the bricks only by soaking, and so were not available. Some bricks offered for test were soaked full of the so-called waterproofing, and of course would not absorb water or anything else while in that condition,

TESTS OF WATERPROOFING BRICK.

1 Sample.	2	3	4	5		
	Weight—Grams.			Compared to Bare Brick.		
	Bare Brick.	Coated Brick.	Coating.	Per Cent. Increase.	Per Cent. Increase by Coating and Water.	Per Cent. Increase by Water.
A	630.32	639.10	8.78	1.39	1.63	0.24
B	556.71	571.11	14.40	2.59	3.11	0.52
C	578.43	581.92	3.49	0.60	1.14	0.89
D	527.80	537.70	9.90	1.88	2.84	0.97
E	616.10	637.60	21.50	3.49	5.61	1.62
F	633.80	706.87	73.07	11.53	13.75	2.23
G	584.40	588.92	4.52	0.77	3.23	2.46
H	499.52	551.00	51.48	10.31	13.36	3.07
I	504.12	523.40	19.28	3.82	6.93	3.10
J	666.94	670.07	3.13	0.47	3.94	3.47
K	607.29	610.90	3.61	0.59	4.19	3.59
L	519.68	527.34	7.66	1.48	5.66	4.18
M	652.50	692.99	40.49	6.21	10.53	4.33
N	510.20	529.10	18.90	3.70	8.35	4.65
O	570.87	586.20	15.33	2.69	7.71	5.03
P	496.20	503.00	6.80	1.37	7.16	5.79
Q	502.87	515.12	12.25	2.44	8.85	6.37
R	—	543.60	—	—	Compared to coated brick.	1.32
S	—	602.20	—	—		1.53
T	—	606.31	—	—		1.68
U	—	581.16	—	—		2.69
V	—	621.85	—	—		5.17
W	—	—	—	—	—	—
X	—	—	—	—	—	—
Y	—	—	—	—	—	—
Bare Brick	—	489.04	—	—	—	8.68

as the pores of the brick were already filled. Many resins, gums, and oils, were tested, but they were of no practical use.

"Pitch, asphaltum, etc., were objectionable, because of their odour and colour. The results of the tests giving the most favourable results are shown in the preceding and following tables.

"In regard to the result of the tests it is worthy of remark that some of the substances that have been considered as among the best waterproof materials proved to be either of little value or very inferior to some of the other substances.

TESTS OF WATERPROOFING BRICK.

Sample.	6	7	8	9	10
	Increased Weight by Absorption of Water.				
	24 Hours.	48 Hours.	72 Hours.	96 Hours.	120 Hours.
A	0.30	—	1.10	—	1.50
B	1.39	—	2.16	2.49	2.89
C	1.15	2.18	3.25	3.49	5.13
D	1.00	—	2.88	4.00	5.10
E	2.10	5.55	7.15	—	9.97
F	4.75	12.13	12.83	—	14.13
G	4.88	7.48	9.68	11.43	14.38
H	7.30	9.70	11.30	13.30	15.32
I	3.73	6.33	—	12.12	15.63
J	20.33	21.13	21.63	23.13	—
K	7.00	8.60	9.30	—	21.83
L	3.73	5.78	—	12.68	21.72
M	24.78	—	27.16	—	28.24
N	23.10	—	23.80	—	23.72
O	26.98	28.00	28.00	—	23.70
P	24.85	—	28.75	28.71	28.72
Q	29.08	36.70	31.28	—	32.03
R	3.72	5.00	6.15	7.15	—
S	3.10	5.55	7.35	9.20	—
T	2.35	4.69	8.07	10.21	—
U	6.46	9.69	12.69	15.64	—
V	21.15	29.60	31.02	—	32.15
W	—	—	—	—	—
X	—	—	—	—	—
Y	—	—	—	—	—
Bare Brick	21.26	—	39.69	39.69	42.43

TESTS OF WATERPROOFING BRICK.

1	2	3	4	5	6	7	8	9	10	11	12
	Weight—Grams.				Increase in Weight by Absorption of Water.					Compared to Bare Brick.	
Sample.	Bare Brick.	Coated Brick.	Coating.	Per Cent. Increase.	24 Hours.	48 Hours.	72 Hours.	96 Hours.	120 Hours.	Per Cent. Inc. by Coating and Water.	Per Cent. Inc. by Water.
A	630.32	639.10	8.78	1.39	0.30	—	1.10	—	1.50	1.63	0.24
B	556.71	571.11	14.40	2.59	1.39	—	2.16	2.49	2.89	3.11	0.52
C	578.43	581.92	3.49	0.60	1.15	2.18	3.25	3.49	5.13	1.14	0.89
D	527.80	537.70	9.90	1.88	1.00	—	2.88	4.00	5.10	2.84	0.97
E	616.10	637.60	21.50	3.49	2.10	5.55	7.15	—	9.99	5.11	1.62
F	633.80	706.87	73.07	11.53	4.75	12.13	12.83	—	14.13	13.75	2.23
G	584.40	588.92	4.52	0.77	4.88	7.48	9.68	11.43	14.38	3.23	2.46
H	499.52	551.00	51.48	10.31	7.30	9.70	11.30	13.30	15.32	13.36	3.07
I	504.12	523.40	19.28	3.82	3.73	6.33	—	12.12	15.63	6.93	3.10
J	666.94	670.07	3.13	0.47	20.33	21.13	21.63	23.13	—	3.94	3.47
K	607.29	610.90	3.61	0.59	7.00	8.60	9.30	—	21.83	4.19	3.59
L	519.68	527.34	7.69	1.48	3.76	5.78	—	12.68	21.72	5.66	4.18
M	652.50	692.99	40.49	6.21	24.78	—	27.16	—	28.24	10.53	4.33
N	510.20	529.10	18.90	3.70	23.10	—	23.80	—	23.72	8.35	4.65
O	570.87	586.20	15.33	2.69	26.98	28.00	28.00	—	28.70	7.71	5.03
P	496.20	503.00	6.80	1.37	24.85	—	28.75	28.71	28.72	7.16	5.79
Q	502.87	515.12	12.25	2.44	29.08	30.70	31.28	—	32.03	8.85	6.37
R	—	543.60	—	—	3.72	5.00	6.15	7.15	—	—	*1.32
S	—	602.20	—	—	3.10	5.55	7.35	9.20	—	—	*1.53
T	—	606.31	—	—	2.35	4.69	8.07	10.21	—	—	*1.68
U	—	581.16	—	—	6.46	9.69	12.69	15.64	—	—	*2.69
V	—	621.85	—	—	21.15	29.60	31.02	—	32.15	—	*5.17
W	—	—	—	—	—	—	—	—	—	—	—
X	—	—	—	—	—	—	—	—	—	—	—
Y	—	—	—	—	—	—	—	—	—	—	—
Bare Brick	489.04	—	—	—	21.26	—	39.69	39.69	42.43	—	*8.68

* Compared to coated brick.

1 gram equals 15.43 grains; 28.35 grams equals 1 ounce avoirdupois.

KEY TO TESTS OF WATERPROOFING BRICK.

A.—Bay State Air and Waterproofing	..	..	..	..	3 coats.
B.—Red Mineral Paint, Ground in Oil	..	..	..	..	2 coats.
C.—Spar Varnish with Plaster of Paris	..	..	..	..	2 coats.
D.—Spar Varnish	..	..	..	..	2 coats.
E.—New York Sample, No. 2	..	..	..	..	Soaked.
F.—New York Sample, No. 1	..	..	..	..	Soaked.
G.—Shellac	..	..	..	..	1 coat.
H.—Portland Cement, 1 coat.	..	..	..	..	..
Soap and Alum, 3 coats	..	..	..	..	4 coats.

I.—White Enamel Paint	..	..	..	..	..	..	3 coats.
J.—Paraffin in Naphtha	..	..	..	..	..	..	3 coats.
K.—Hot Paraffin	..	..	..	..	..	..	3 coats.
L.—Water Paint	..	..	..	..	..	..	3 coats.
M.—Portland Cement mixed with Ca Cl ₂ , 1 coat.							
Water Glass, 3 coats	..	..	..	..	..	..	4 coats.
N.—Portland Cement	..	..	..	..	..	..	2 coats.
O.—Black Varnish, No. 2	..	..	..	..	..	..	3 coats.
P.—Spar Varnish	..	..	..	..	..	..	1 coat.
Q.—Black Varnish, No. 1	..	..	..	..	..	..	3 coats.
R.—Waterproofing, No. 1.							
(A putty-like substance applied to surface of brick.)							
S.—Waterproofing No. 4.	Similar to "R."						
T.—Waterproofing No. 3.	Similar to "R."						
U.—Waterproofing No. 2.	Similar to "R."						
V.—Bi-chromate Potash and Glue—exposed to sunlight.							
Bare Brick	..	..	..	..	..	..	No coating.

"The Sylvester process, H, soap and alum, proved to be of little value, even when applied to a surface made as smooth as possible with Portland cement. This process was also tried without the cement, but was even less effective. Hot paraffin has often been used to waterproof walls; but, under the conditions of these tests, it proved to be very far from waterproof. Portland cement is another substance which did not prove to be as good as its reputation."

WALLS FOR COLD STORES.

The following materials and dimensions have been used and are recommended for walls of cold chambers :—

Walls at the St. Katherine's Dock, London, were formed of up-rights, $5\frac{1}{2}$ in. by 3 in., fixed upon the floor joists or bearers, and having an outer and an inner skin attached thereto; the former consisting of 2 in. boards, and the latter of two thicknesses or layers of $1\frac{1}{4}$ in. boards, with an intermediate layer of specially-prepared brown paper. The $5\frac{1}{2}$ in. clearance or space between the inner and outer skins of the walls and roof was likewise filled with wood-charcoal, carefully dried.

14 in. brick wall, $3\frac{1}{2}$ in. air space, 9 in. brick wall, 1 in. layer of cement, 1 in. layer of pitch, 2 in. by 3 in. studding, layer of tar paper, 1 in. tongued and grooved boarding, 2 in. by 4 in. studding, 1 in. tongued and grooved board, layer of tar paper, and, finally, 1 in. tongued and grooved boarding, the total thickness of these layers or skins being 3 ft. 3 in.

36 in. brick wall, 1 in. layer of pitch, 1 in. sheathing, 4 in. air space, 2 in. by 4 in. studding, 1 in. sheathing, 3 in. layer of mineral

or slag wool, 2 in. by 4 in. studding, and, finally, 1 in. sheathing; total thickness, 4 ft. 7 in.

14 in. brick wall, 4 in. pitch and ashes, 4 in. brick wall, 4 in. air space, 14 in. brick wall; total thickness, 3 ft. 4 in.

14 in. brick wall, 6 in. air space, double thickness of 1 in. tongued and grooved boards, with a layer of waterproof paper between them, 2 in. layer of the best quality hair felt, second double thickness of 1 in. tongued and grooved boards, with a similar layer of paper between them; total thickness, 2 ft. 2 in.

14 in. brick wall, 8 in. layer of sawdust, double thickness of 1 in. tongued and grooved boards, with a layer of tarred waterproof paper between them, 2 in. layer of hair felt, second double thickness of 1 in. tongued and grooved boards, with a similar layer of paper between them; total thickness, 2 ft. 4½ in.

Brick wall, 3 in. scratched hollow tiles, 4 in. silicate cotton or slag-wool, 3 in. scratched hollow tiles, and layer of cement plaster.

Brick wall, 1 in. air spaces between fillets of strips, 1 in. tongued and grooved boarding, 2 layers of insulating paper, 1 in. tongued and grooved boarding, 2 in. by 4 in. studs, 16 in. apart, spaces filled in with silicate cotton, 1 in. tongued and grooved boarding, 2 layers of insulating paper, air spaces between fillets, or strips 1 in. by 2 in. spaced 16 in. apart from centres, 1 in. tongued and grooved boarding, 2 layers of insulating paper, and 1 in. tongued and grooved boarding.

Brick or stone wall, well coated on inside with pitch or asphaltum, 2 in. by 3 in. studding, 24 in. centres, spaces between filled in with silicate cotton, ¾ in. rough tongued and grooved boarding, 2 layers waterproof insulating paper, ¾ in. rough tongued and grooved boarding, 2 in. by 3 in. studding, 24 in. centres, in spaces between, ¾ in. rough tongued and grooved boarding, 2 layers of waterproof insulating paper, ¾ in. rough tongued and grooved boarding, 2 in. by 3 in. studding, 24 in. centres spaces between filled in with silicate cotton, ¾ in. rough tongued and grooved boarding, 2 layers of waterproof insulating paper, and ¾ in. tongued and grooved match-boarding. Paper to be laid one-half lap and cemented at all joints.

Brick wall, 2 in. air space, 2 in. thicknesses of tongued and grooved boards with 3 layers of paper between, 2 in. air space, 2 in. thicknesses of tongued and grooved boards with 3 layers of paper between, 2 in. air space and 2 in. thicknesses of tongued and grooved boards with 3 layers of paper between.

Brick wall, well coated with pitch, 2 in. air space, 2 in. thicknesses

of tongued and grooved boards with 3 layers of paper between, 2 in. space filled with slag-wool or cork, 2 in. thicknesses of tongued and grooved boards, with 3 layers of paper between, 2 in. space filled with slag wool or cork, 2 in. thicknesses of tongued and grooved boards, with 3 layers of paper between. Shelving should be fixed horizontally in the spaces packed with slag wool or cork at about 16 in. apart.

Brick wall, 1 in. air space, $\frac{3}{4}$ in. match-boarding, 9 in. slag wool or silicate cotton, layer of insulating paper and $\frac{3}{4}$ in. match-boarding.

Brick wall, 1 in. air space, 6 in. slag wool or silicate cotton, 1 in. silicate of cotton slab, layer of insulating paper, $\frac{1}{2}$ in. air space, and $\frac{3}{4}$ in. match-boarding.

Brick wall, 1 in. air space, 1 in. silicate of cotton slab, 4 in. silicate of cotton, 1 in. silicate of cotton slab, $\frac{1}{2}$ in. air space, and $\frac{3}{4}$ in. match-boarding.

Brick wall, well coated with pitch, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 4 in. slag wool or silicate cotton, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

Brick wall, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

Brick wall, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 1 layer of paper, 4 in. slag wool or silicate cotton, $\frac{7}{8}$ in. tongued and grooved boarding, 1 layer of paper, 4 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

Brick wall, layer of pitch, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 1 layer of paper, 3 in. cork dust, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

Brick wall, 2 $\frac{1}{2}$ in. air space ventilated by air bricks every five feet in all directions, 1 in. tongued and grooved boarding, layer of Willesden and brown paper, 1 in. tongued and grooved boarding, 12 in. charcoal supported by horizontal shelving 28 in. centres apart, 1 in. tongued and grooved boarding, 2 thicknesses of brown paper, and 1 in. tongued and grooved boarding.

Wall of cold storage room when made of wood : 2 in. thicknesses

of tongued and grooved boarding with 3 layers of paper between, 2 in. air space, 2 in. thicknesses of tongued and grooved boarding with 3 layers of paper between, 2 in. air space, 2 in. thicknesses of tongued and grooved boarding with 3 layers of paper between, 2 in. air space, 2 in. thicknesses of tongued and grooved boarding with 3 layers of paper between, 8 in. slag wool or silicate cotton, and 1 in. tongued and grooved boarding.

2 in. boards, $5\frac{1}{2}$ in. by 3 in. uprights, spaces between filled with carefully dried wood charcoal, $1\frac{1}{4}$ in. boarding, layer of insulating paper, and $1\frac{1}{4}$ in. boarding.

Outside siding, 2 layers of insulating paper, 1 in. tongued and grooved boarding, 2 in. by 6 in. studdings, 16 in. apart from centres, 1 in. tongued and grooved boarding, 2 layers of insulating paper, 1 in. tongued and grooved boarding, 2 in. by 4 in. studding 16 in. apart from centres, spaces filled in with silicate cotton, 1 in. tongued and grooved boarding, 2 layers of insulating paper, 2 in. by 2 in. fillets or strips 16 in. apart from centres, 1 in. tongued and grooved boarding, 2 layers of insulating paper, and 1 in. tongued and grooved boarding.

DIVISIONAL PARTITIONS FOR COLD STORES.

Tongued and grooved match-boarding, wire netting, 6 in. silicate of cotton or slag wool, wire netting, tongued and grooved match-boarding. The object of the netting is to render the partition fire-proof by supporting the silicate of cotton after the match-boarding might have burnt away.

$\frac{3}{4}$ in. match-boarding, $\frac{1}{2}$ in. air space, 1 in. silicate cotton slab, 4 in. of silicate of cotton or slag wool, 1 in. silicate of cotton slab, $\frac{1}{2}$ in. air space, and 1 in. silicate of cotton slab.

2 in. tongued and grooved boarding with 3 layers of paper between, 2 in. silicate of cotton or cork, 2 in. tongued and grooved boarding with 3 layers of paper between, 2 in. silicate of cotton or cork, 2 in. tongued and grooved boarding with 3 layers of paper between.

$\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 4 in. silicate cotton or slag wool, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

$\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 6 in. silicate of cotton or slag wool, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued

and grooved boarding, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

$\frac{7}{8}$ in. tongued and grooved boarding, 2 in. silicate cotton or slag wool, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

$\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

$\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 8 in. silicate cotton or slag wool, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

$\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 4 in. silicate cotton or slag wool, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

$\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. hair felt, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. silicate cotton or slag wool, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

FLOORING FOR COLD STORES.

2 in. flooring, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space between fillets or scantlings, $\frac{7}{8}$ in. tongued and grooved boarding, 12 in. joists, spaces between packed with silicate cotton or slag wool, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space between fillets or scantlings, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, and $\frac{7}{8}$ in. tongued and grooved boarding.

2 in. cement, 3 in. concrete, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, 2 in. flooring, 4 in. silicate cotton between fillets or scantlings, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, 2 in. flooring boards on fillets or scantlings set in concrete.

2 in. asphalte, $\frac{7}{8}$ in. tongued and grooved boarding, 2 layers of paper, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space between scantlings, $\frac{7}{8}$ in. tongued and grooved boarding, 3 in. silicate cotton of slag wool between fillets or scantlings, $\frac{7}{8}$ in. tongued and grooved boarding, 2 in. air space between fillets or scantlings, concrete.

1 in. asphalte, 2 in. concrete, $\frac{1}{2}$ in. pitch, 2 in. concrete, brick arches.

1 $\frac{1}{4}$ in. tongued and grooved flooring boards, layer of insulating paper, 2 in. by 9 in. joists 12 in. centres apart, spaces filled with silicate cotton or slag wool, wire netting, layer of insulating paper, $\frac{3}{4}$ in. match-boarding on 2 in. by 2 in. fillets or scantlings, air spaces between existing wooden or concrete flooring. The wire netting secured to the underside of the joists serves to retain the silicate cotton in case of fire.

1 in. tongued and grooved boarding, 3 layers of insulating paper, 1 in. tongued and grooved boarding, 2 in. by 9 in. joists, spaces between filled with silicate cotton or cork, 1 in. tongued and grooved boarding, 3 layers of insulating paper, and 1 in. tongued and grooved boarding.

1 $\frac{1}{4}$ in. tongued and grooved flooring boards, layer of insulating paper, 2 in. by 9 in. joists, 12 in. centres apart, spaces between filled in with silicate cotton or slag wool, 1 in. silicate cotton slab on $\frac{1}{2}$ in. by 2 in. fillets, air spaces between, and $\frac{3}{4}$ in. match-boarding. The 1 in. silicate of cotton slab is nailed on the underside of joists and is claimed to render the floor fire-proof, and to prevent radiation through the joists.

2 in. matched flooring, 2 layers of insulating paper, 1 in. matched sheathing, 4 in. by 4 in. sleepers 16 in. apart from centres, spaces between filled in with silicate cotton, double 1 in. matched sheathing with 12 layers of paper between, and 4 in. by 4 in. sleepers 16 in. apart from centres imbedded in 12 in. of dry underfilling.

Ground, concrete, layer of asphalte, 1 in. tongued and grooved match-boarding well tarred, 2 layers of stout brown paper, 1 in. tongued and grooved match-boarding, floor joists 3 in. by 11 in. spaced 21 in. apart, binder joists 11 in. by 4 in., bearing edges of floor joists protected by strips of hair felt $\frac{1}{4}$ in. thick and spaces between joists filled in with flake charcoal, and 1 $\frac{1}{4}$ in. tongued and grooved flooring boards.

The floors of the cold storage chambers built at the St. Katherine Dock, London, were constructed as follows:—On the concrete floor of the vault, as it stood originally, a covering of rough boards 1 $\frac{1}{4}$ in. in thickness were laid longitudinally. On this layer of boards were then placed transversely, bearers formed of joists 4 $\frac{1}{2}$ in. in depth by 3 in. in width, and spaced 21 in. apart. These bearers supported the floors of the storage chamber, which consisted of 2 $\frac{1}{2}$ in. battens tongued and grooved. The 4 $\frac{1}{2}$ in. wide space or clearance between this floor and the layer or covering of rough

boards upon the lower concrete floor was filled with well-dried wood-charcoal.

FLOORING FOR ICE HOUSES.

Floor to incline 3 in. towards central drain, and cross channelled fillets or scantlings on $1\frac{1}{4}$ in. flooring, 2 in. cement, 6 in. concrete, ground.

1 in. tongued and grooved match-boarding, 3 layers of paper, 1 in. tongued and grooved match-boarding (to incline 3 in. towards central drain) on fillets or scantlings, air spaces between, 1 in. tongued and grooved match-boarding, 3 layers of paper, 1 in. tongued and grooved match-boarding, 2 in. by 9 in. joists, spaces between filled with 4 in. silicate of cotton or slag wool kept in position by $\frac{3}{4}$ in. boards secured by cleats to joists.

CEILINGS FOR COLD STORES AND ICE HOUSES.

1 in. tongued and grooved match-boarding, 3 layers of insulating paper, 1 in. tongued and grooved match-boarding, 2 in. air spaces between strips or fillets, 1 in. tongued and grooved boarding, 3 layers of insulating paper, 1 in. tongued and grooved boarding, joists, spaces between filled with silicate cotton or cork, 1 in. tongued and grooved match-boarding, 3 layers of insulating paper, and 1 in. tongued and grooved match-boarding.

Insulated flooring, joists, $\frac{7}{8}$ in. tongued and grooved match-boarding, 2 layers of insulating paper, $\frac{7}{8}$ in. tongued and grooved match-boarding, 2 in. spaces between strips or fillets filled in with silicate cotton or cork, $\frac{7}{8}$ in. tongued and grooved match-boarding, 3 layers of insulating paper, and $\frac{7}{8}$ in. tongued and grooved match-boarding.

1 in. tongued and grooved boarding, 2 thicknesses of brown paper, 1 in. tongued and grooved boarding, joists with spaces between packed with silicate cotton, 1 in. tongued and grooved boarding, Willesden and brown paper, 1 in. tongued and grooved boarding.

Concrete floor, 3 in. book tiles, 6 in. dry underfilling, double space hollow tile arches and layer of cement plaster.

Double 1 in. floor with 2 layers of insulating paper between, 2 in. by 2 in. strips or fillets 16 in. apart from centres, spaces filled in with silicate cotton, 2 layers of insulating paper, 1 in. tongued and grooved match-boarding, 2 in. by 2 in. strips 16 in. apart, spaces filled in with silicate cotton, 2 layers of insulating paper, 1 in. tongued and grooved match-boarding, joists and double 1 in. flooring with 2 layers of insulating paper between.

DOOR INSULATION.

A weak point in most cold-storage rooms is the door; these are usually constructed on the wedge principle, and two simple forms are shown in longitudinal and cross section in Figs. 203, 204, 208, and 209. Even when properly designed and carefully made from the best, well-seasoned timber, the doors of cold-storage rooms are very apt to give trouble on account of the extreme temperatures to which they are subjected and from the absorption of moisture from the air. As there can be no doubt that considerable loss is experienced through badly-made and poorly-fitting doors, too much care

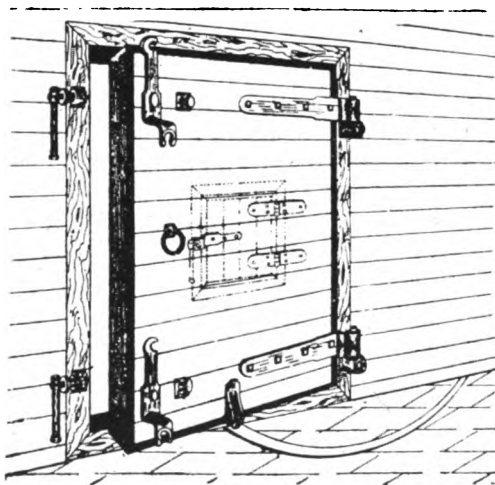


Fig. 194.—Door for Cold Store, with Taylor's Patent Fittings.

cannot be expended in securing the best possible workmanship and efficient and easily manipulated fittings. Fig. 194 shows a type of door fitted with Taylor's patent door-fittings, of which Mr. John Straiton, Liverpool, is the sole maker. A door much used in America is Stevens' patent, which is made up of 5 thicknesses of insulated and water-proofed paper, $\frac{1}{2}$ in. prepared mineral or slag wool, 3 air spaces, and 4 thicknesses of wood. Amongst the advantages claimed for this type of door is that it will not frost through with zero temperature. A canvas cushion on the bottom prevents the cold air from escaping at that point. The door will not stick. It closes quite tight on the hinge edge. The fastening is of a special

pattern and is for both edges of the door. It is claimed to shut as tight as a cross-bar would if it were wedged up, and can be opened


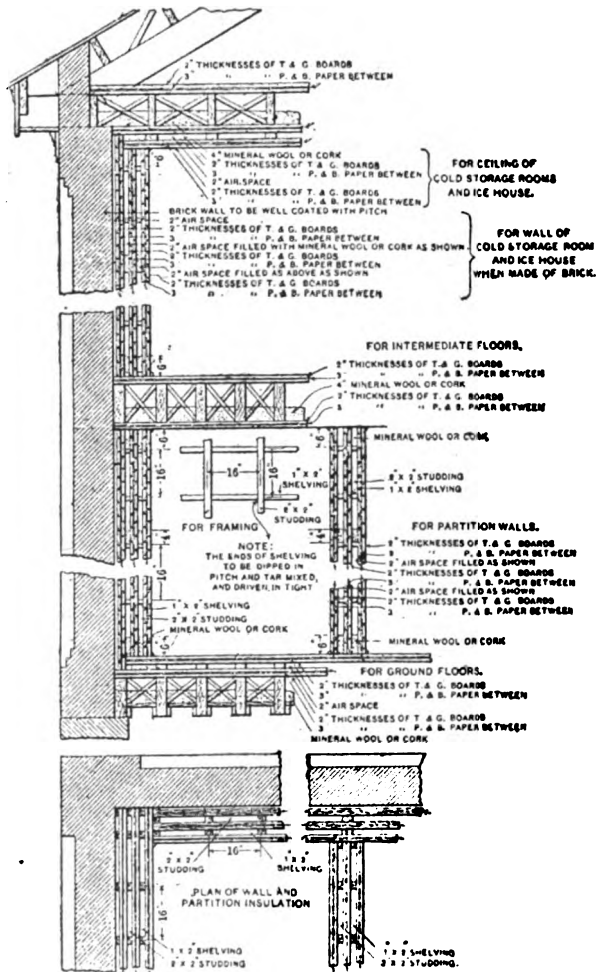


Fig. 195 and 196.—Frick Company Methods of Insulating Cold Stores.
Vertical and Horizontal Sections.

either from the exterior or interior. A special form of door, designed by the author for use in hotels, or elsewhere, where the cold-storage

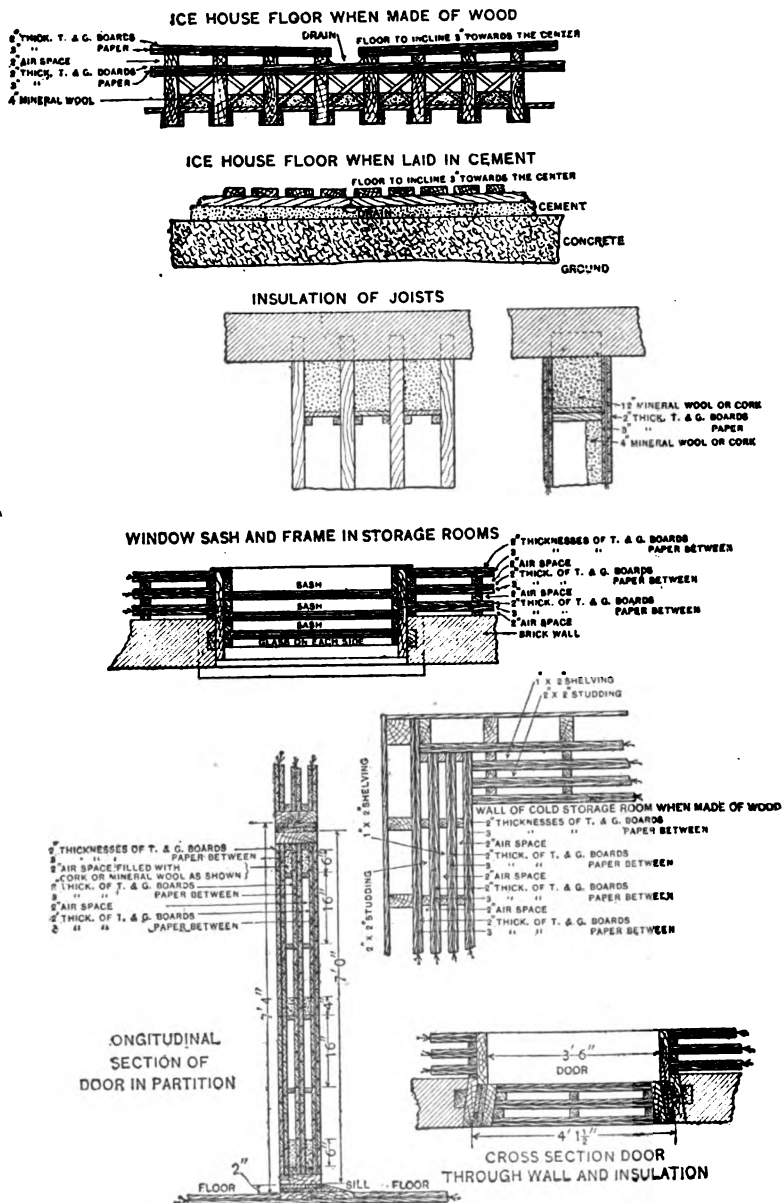

Figs. 197 to 204.—Frick Company Methods of Wall, Floor, Ceiling, Partition, Door, and Window Insulation.

room or chamber has to be frequently entered, has been described in a previous chapter. Other insulations for doors are:

1 in. tongued and grooved match-boarding, 3 layers of insulating paper, 1 in. tongued and grooved match-boarding, 2 in. by 1 in. fillets or strips with spaces between filled in with silicate cotton or cork, 1 in. tongued and grooved match-boarding, 3 layers of insulating paper, 1 in. tongued and grooved match-boarding, 2 in. by 1 in. fillets or strips,

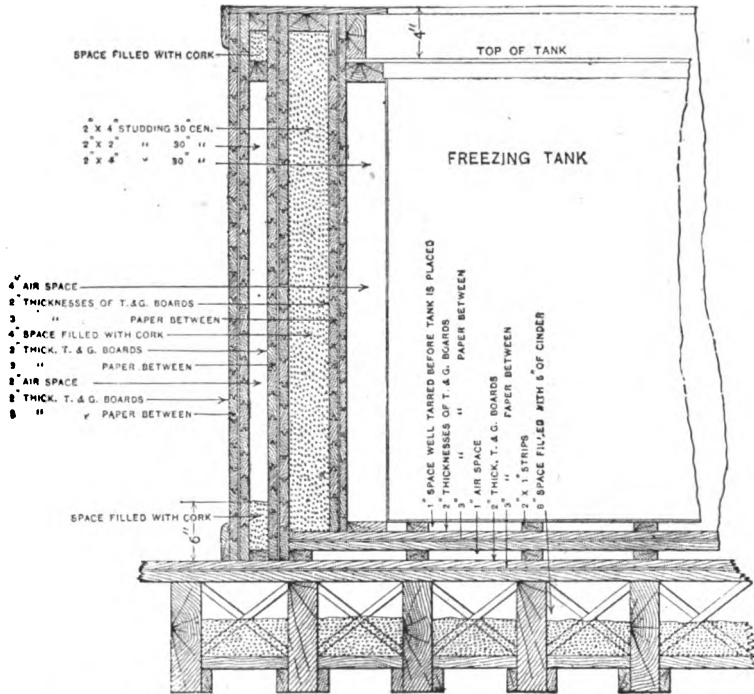


Fig. 205. — Frick Company Method of Tank Insulation. Vertical Section.

spaces between filled in with silicate cotton or cork, 1 in. tongued and grooved match-boarding, 3 layers of insulating paper, and 1 in. tongued and grooved match-boarding.

1 in. tongued and grooved match-boarding, 2 layers of insulating paper, 1 in. tongued and grooved match-boarding, 12 in. space filled in with silicate cotton, 1 in. tongued and grooved match-boarding, 2 layers of insulating paper, and 1 in. tongued and grooved match-boarding.

WINDOW INSULATION.

Windows are better dispensed with in cold stores and artificial light resorted to; where present, three sashes spaced a few inches apart and glazed at both sides should be used.



TANK INSULATION.

Tank sides: 4 in. air space between studding, 1 in. tongued and grooved match-boarding, 3 layers of insulating paper, 1 in. tongued and grooved match-boarding, 4 in. space filled with cork, 1 in. tongued and grooved match-boarding, 3 layers of insulating paper, 1 in. tongued and grooved match-boarding, 2 in. air space, 1 in. tongued and grooved match-boarding, 3 layers of insulating paper, and 1 in. tongued and grooved match-boarding. Bottom, 1 in. space between strips, fillets or studding, well tarred before tank is placed in position, 1 in. tongued and grooved match-boarding, 3 layers of insulating paper, 1 in. tongued and grooved match-boarding, 1 in. air space between strips, fillets or studding, 1 in. tongued and grooved match-boarding, 3 layers of insulating paper, 1 in. tongued and grooved match-boarding, 2 in. by 9 in. joists, spaces between filled with cinders.

Tank, 2 in. air space between fillets, $\frac{7}{8}$ in. tongued and grooved match-boarding, 2 layers of insulating paper, $\frac{7}{8}$ in. tongued and grooved match-boarding, 4 in. silicate cotton or slag wool, $\frac{7}{8}$ in. tongued and grooved match-boarding, 2 layers of insulating paper, and $\frac{7}{8}$ in. tongued and grooved match-boarding.

Tank, 2 in. air space between studding, layer of insulating paper, 2 in. flooring, 2 layers of insulating paper, $\frac{7}{8}$ in. tongued and grooved boarding, joists on concrete or ground, spaces between filled with charcoal for three-quarters depth, $\frac{7}{8}$ in. tongued and grooved match-boarding, 2 layers of insulating paper, $\frac{7}{8}$ in. tongued and grooved match-boarding, ground or concrete.

In Figs. 195 to 234 are depicted various plans for insulation which have been successfully used in the United States. Figs. 195 and 196 illustrate a method of insulating a cold store recommended by the Frick Company; Figs. 197 to 204, various methods of wall, floor, ceiling, partition, door, and window insulation, and Fig. 205 a method of insulating a tank recommended by the same company. Figs. 206 to 215 gives a number of methods of wall, floor, ceiling, door, window, and tank insulation used by the Barber Manufacturing Company, and Figs. 216 to 223 and 224 to 234 show a number of wall, floor, ceiling, and tank insu-

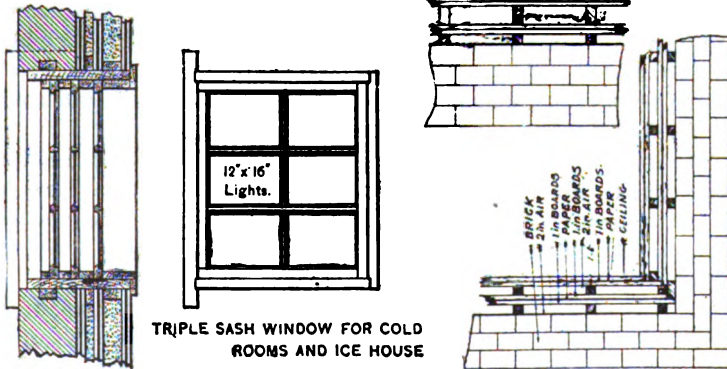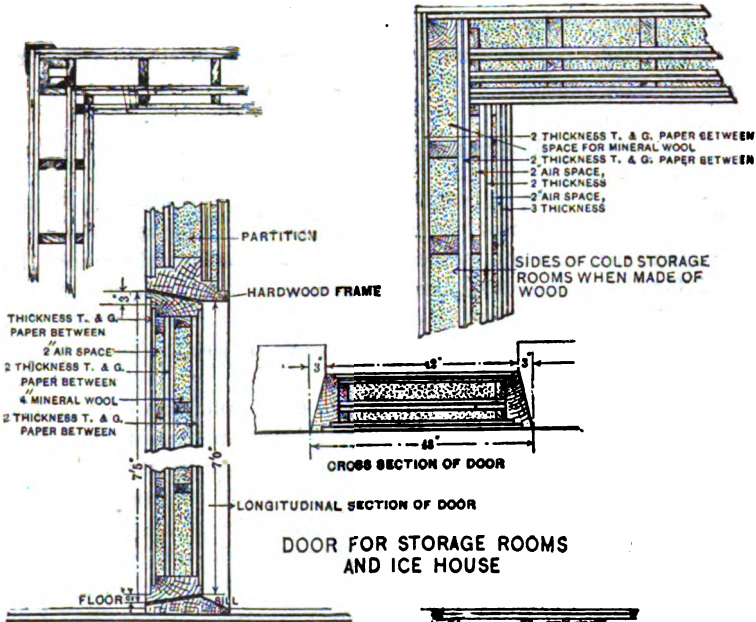

Figs. 206 to 215.—Barber Manufacturing Company Methods of Wall, Floor, Ceiling, and Tank Insulation.

lation as approved by the Triumph Ice Machine Company. The explanatory matter on the drawings sufficiently clearly explains the construction of the above.


REFRIGERATED RAILWAY VANS.

An important type of portable refrigerator is that adapted to meet the requirements of railway vans, trucks, cars, or waggons, which it is desirable to maintain at a low temperature for considerable periods, but which, for obvious reasons, it is undesirable, in doing so, to encumber with machinery, to increase in weight to any considerable extent, or to render in any way necessary the employment of special labour to take charge of same.

The frozen meat, as a rule, arrives in good condition on board the vessels, and deterioration in quality usually takes place during its transference to the cold stores on land, and again during the subsequent delivery thereof to the retailer, when the meat is exposed to temperatures frequently much higher than what is required to preserve it in good condition. The great desideratum for this purpose is a plan which will avoid the necessity of carrying the source of refrigeration upon the conveyance itself, and this the Pulsometer Engineering Company, Limited, claim to have successfully accomplished in their system of refrigeration for railway trucks or cars, and other portable chambers, and they state that they are willing to guarantee to maintain below the freezing point properly fitted portable chambers of all kinds, for ample time for transit between Penzance and Aberdeen.


The method of refrigeration primarily employed in vans and railway trucks, was to effect the production of cold with mixtures of ice and salt. The great objection to this arrangement is the large increment of weight, and the nuisance and damage caused by the moisture due to the melting ice.

As early as the year 1867 a refrigerator car was constructed in the United States having a refrigerating chamber surrounded by an air space. A fan or blower was provided, driven off one of the car axles, and air was forced by this blower through a compartment containing ice into the refrigerating chamber. The water resulting from the liquefaction of the ice in the compartment, which had a capacity of about 2 tons, was drawn off through a suitable trap. In some instances the ice was replaced by a refrigerating mixture passing through a suitable pipe in the ice-box or chamber. The air was drawn in by the fan during the forward motion of the car, and after being passed

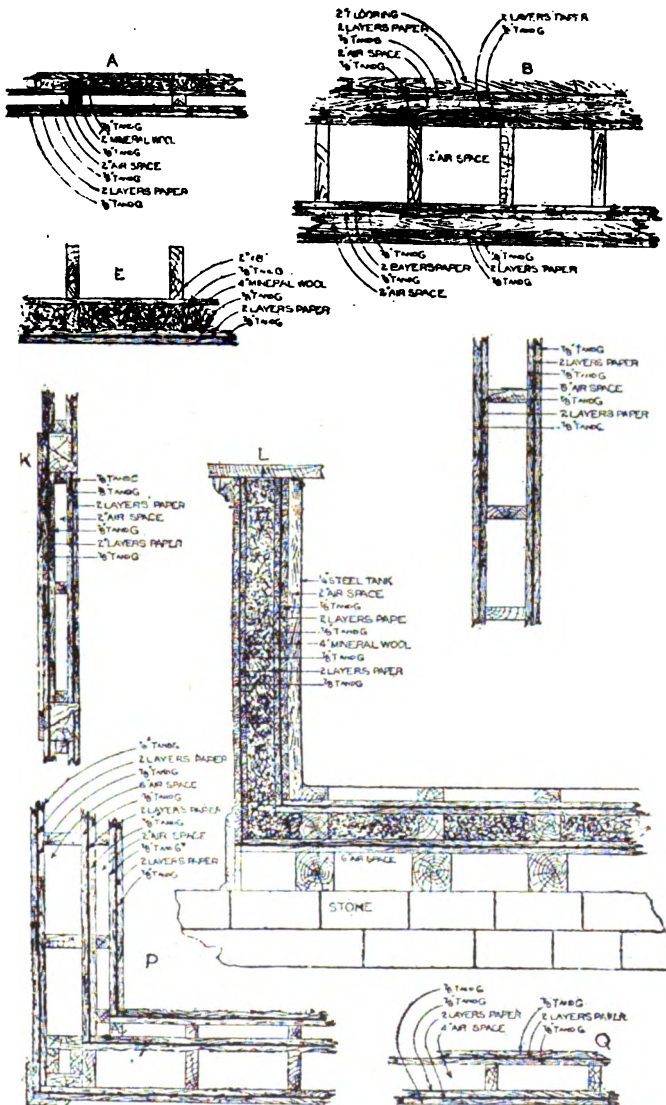

Figs. 216 to 223.—Triumph Ice Machine Company Methods of Wall, Floor, Ceiling, and Tank Insulation.

through the ice-chamber was delivered at the top of the refrigerating chamber. A car of this description is said to have successfully transported meat slaughtered in Illinois to New York, during the hottest part of the summer, no perceptible deterioration in quality having occurred during the ten days' journey.

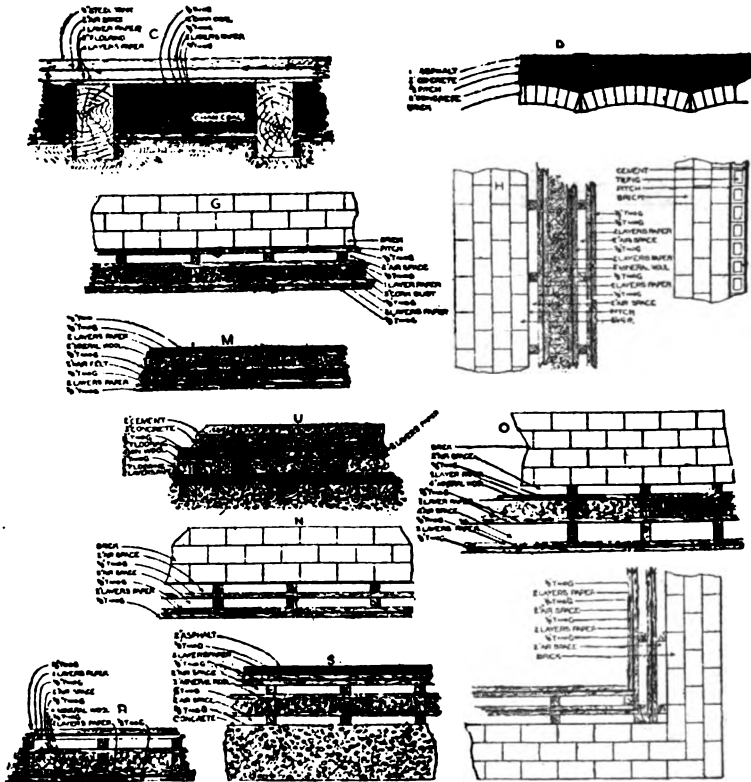

Figs. 224 to 234.—Triumph Ice Machine Company Methods of Wall and Floor Insulation.

Another refrigerator car of somewhat similar construction, having the external appearance of an ordinary freight car, has an ice-box at each extremity wherein the ice is placed upon gratings so arranged that a current of cold air circulates continually through a flue situated near the top of the chamber, over the surface of the ice, down to the floor,

and then up over the surface of the ice, down to the floor, and then up again amongst the meat. The air circulation is maintained by a fan operated in a like manner to that above mentioned. The car was also built double, with inside double doors, filled in with charcoal, and the temperature of the meat was easily kept at about 40° Fahr. even in the hottest weather.

As has been already mentioned Godell uses lampblack, or a mixture of lampblack and mica scales, as non-conducting material for use in refrigerator cars.

In another arrangement, also used in America, the car is cooled by means of some suitable volatile liquid, which is allowed to vaporise

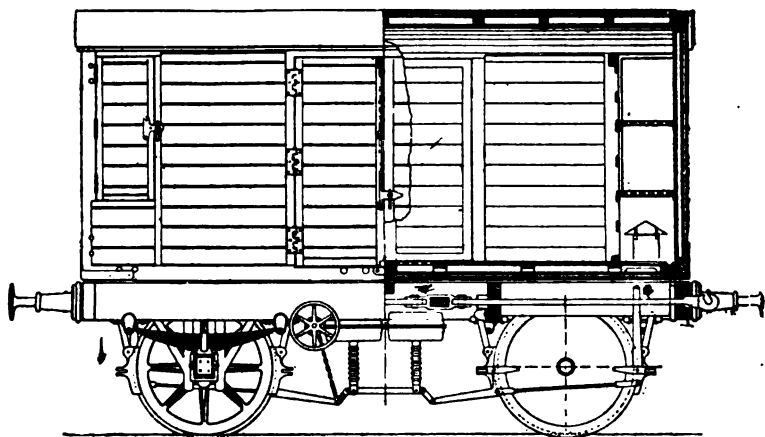


Fig. 235.—Refrigerator Van or Waggon, Great Southern and Western Railway, Ireland. Sectional Side Elevation.

slowly through a system of pipes from one reservoir into another, thus reducing the temperature of the chamber. An objection to this arrangement is the danger of leakage of the volatile liquid taking place into the refrigerating chamber,

Fig. 235 is a side elevation partly in section, Fig. 236 is an end elevation partly in section, and Fig. 237 is a sectional plan showing a refrigerator van or waggon built for the Great Southern and Western Railway of Ireland. These illustrations, which are reproductions on a reduced scale of cuts that appeared in "Ice and Cold Storage," are self-explanatory.

A refrigerator van, car, or waggon, said to be in use upon the Illinois Central Railway, U.S., and which has been designed and patented by

Mr. H. F. Stanley, the foreman of the car department at New Orleans, Louisiana, is shown in Figs. 238 and 239 in sectional side elevation and in plan, and, according to the patent specification, consists essentially of the following features: The car is provided with three floors, viz., a central or main floor A, which slopes in a downward direction from the sides of the van towards a central gutter, which runs through its entire length, and serves as a drain to carry off all internal drippings; a lower or sub-floor B, lined with paper-felt; and lastly a false, or deck floor C, formed of lattice work, and arranged in sections divided on the centre line of the car, each section being hinged or jointed to the sides of the latter, as to admit of its being raised or folded up, and thus allowing of access to the central or main floor and

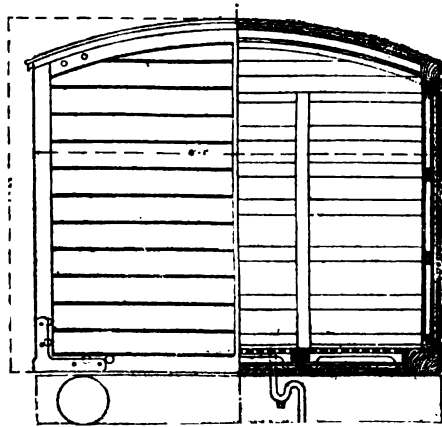


Fig. 236.—Refrigerator Van or Waggon, Great Southern and Western Railway, Ireland. End Elevation partly in Section.

gutter for cleansing purposes. Ventilating doors D are provided at each end of the car, through which a current of air can be admitted which will circulate between the main floor and the latticed upper floor. E are hatches fitted with ventilating hoods, and removable plugs, and auxiliary screens, which admit of filling the ice tanks F.

The ice tanks or boxes are formed by doors or swinging partitions, hinged or jointed to the roof of the car about 3 ft. from each end, so that they can be either fastened up out of the way, as shown at G, or let down until they hang vertically, and reach the floor, as shown at G, forming, when in the latter position, the ice compartment or chamber F. At a height of 1 ft. 6 in. above the upper or deck latticed floor C, in

this ice chamber or compartment *r*, is provided a deck or false floor *H*, which consists of a hinged grating, which can be brought down into the position shown in Fig. 238 or can be folded back against the end of the car when not in use. The side door openings *i* are fitted with cross-bars *j*, which can be fixed firmly in position in such a manner as to be easily removable when desired. The van or waggon is supported upon bogie frames. A special feature in the arrangement is the very great facility with which the van can be converted from an ordinary car or waggon into a refrigerator car, or *vice versa*, the time necessary for effecting the first-mentioned change, or for folding up out of the way the parts forming the ice chambers or compartments, being only about ten minutes. The car is, therefore, available for use as an ordinary freight car or waggon, or as a refrigerator

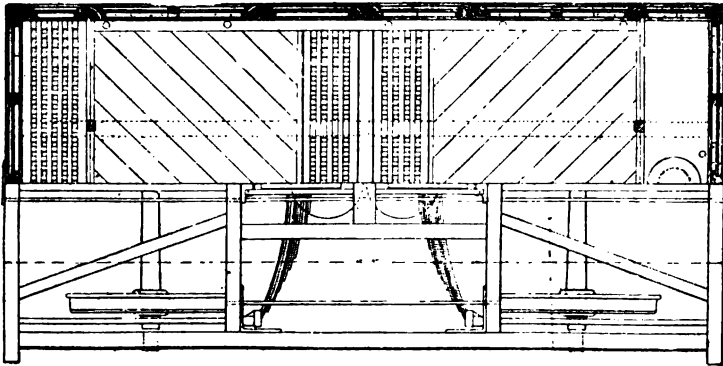


Fig. 237.—Refrigerator Van or Waggon, Great Southern and Western Railway, Ireland. Sectional Plan.

car or van. The principal dimensions of this van or car are as follow: Length of frame, 37 feet; width of frame, 9 feet. Outside length of car body, 36 ft.; width of car body, 9 ft. Inside length of car, 35 ft.; width of car, 7 ft., from wall to wall, without ice chambers or compartments. Height from upper or deck floor to ceiling plate, 8 ft. Clear space in car when ice chambers or tanks are in position, 29 ft.; width of ice chambers or tanks, 3 ft. each; length of do., 7 feet; capacity of do., 108 cubic feet. The false upper or deck flooring is formed of 2 in. by 4 in. battens, and the central or main flooring of $1\frac{1}{4}$ in. by 5 in. battens. The lower or sub-floor has a $\frac{3}{8}$ in. lining. The space or clearance for the circulation of air between the upper or deck floor and the central or main floor is 4 in. The width of the gutter in the central

or main floor is 4 in. The doors or swinging partitions for forming the ice chambers or compartments are constructed of 2 in. by 2½ battens. The width of the side door openings is 5 ft. The timbers supporting the bogie trucks or carriages are 8½ inches, and the centres of the latter are 5 feet from the end of the car or van. The distance between the centres of the wheels in the trucks is 5 ft., and the height of the top of the truck from the wheel base is 29 in.

John Lobrist, of Hanford, California, has designed a refrigerator car, comprising vertical ice tanks or chambers placed at each end, to which chambers access can be had for charging through hatches having hermetically closing doors. These chambers are surrounded by open-work walls with an annular air passage arranged exteriorly, and a second open or net-work wall located outside the air chamber. In a

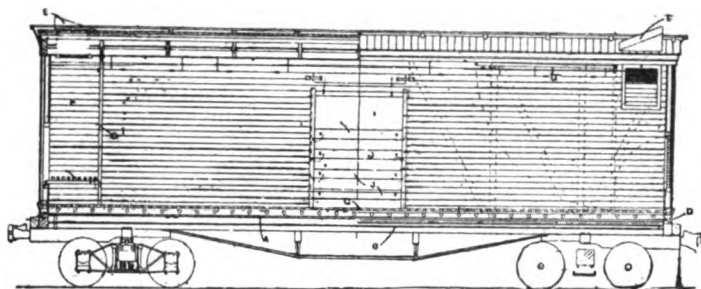


Fig. 238.—Refrigerator Car or Waggon, Illinois Central Railway, U.S.
Side Elevation partly in Section.

space or clearance situated exteriorly to the air chamber, and between the latter and an outer closed casing, is placed a layer or filling of salt. A lining extends right across the top of the car and from end to end thereof, so as to form a passage between it and the roof; and a central opening which communicates with the body of the car, and openings at the extremities which give access to air passages surrounding the ice chamber, are also provided. Centrally along the floor of the car is a passage, around and over which passage the boxes are packed, openings being provided between the opposite ends of the passage in question and the lower ends of the refrigerating air chambers at the ends of the car. Fans mounted in these openings cause a circulation of air to take place through the refrigerating chamber and the body of the car, the air returning through the air passages adjacent to the roof of the latter. The air-circulating mechanism is

driven by an arrangement of gearing from the axles of the car, which operates the pistons or plungers of compressor cylinders connected with compressed air receivers or reservoirs. The air thus compressed is employed to drive motor wheels, which in turn drive the fans. A compressor cylinder fixed to a frame to which the crank-shaft working the compressor pistons or plungers is journaled, and which cylinder is connected through a suitable pipe with the compressed air receiver or reservoir, admits, by allowing air under pressure to enter the cylinder, of so acting upon its piston or plunger as to raise the journal frame and crank-shaft, thereby disengaging the driving gear and stopping the action of the pumps, when desired.

Refrigerator cars have also been designed, fitted with refrigerating machinery. One type of car patented by M. E. Schmidt and T. J. Ryan, of York, U.S., has an installation of refrigerating machinery on the ammonia compression system. A dynamo, driven from one of the

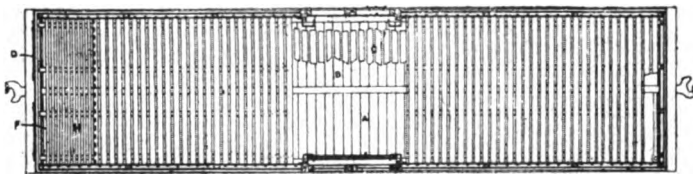


Fig. 239.—Refrigerator Car or Waggon, Illinois Central Railway, U.S.
Sectional Plan.

axles, supplies current to an electro-motor and to a storage battery. The compressor is in this manner driven by electric power, and by means of the storage battery can be continued in operation for a certain time whilst the car is at rest.

An attempt has been recently made in the United States, by the Standard Butter Company, Owego, New York, to refrigerate or cool a car or van for the transport of butter, by the application of liquid air. The refrigerator car used was an ordinary one, and the expense of adapting it for the test was only about £5.

The cooling apparatus is extremely simple, consisting merely of about 200 feet of 2 in. galvanised iron pipe coiled on the ceiling, and running lengthways from end to end of the car. This pipe is connected to a small cylindrical galvanised iron tank some 4 ft. high, and 2 ft. in diameter, which is fixed in one corner of the car, and contains the liquid air. From this iron tank the liquid air is forced at

a pressure of about four pounds to the square inch, to the coil of pipe overhead, an arrangement which, it is claimed, admits of the temperature of the van being raised or lowered at the will of the operator.

According to reports of the test, within an hour from the first application of liquid air to the van, the temperature was reduced to 15 degrees below zero, and held at that point for three hours. The tank used contained sufficient liquid air to keep the temperature down for twenty-four hours without having to be re-charged. The air in the van was found to be perfectly pure, there being no moisture anywhere to be seen, very little frost on the pipes, and no drip whatever. After the test the floor was clean and dry, and the truck itself presented in every way a much more pleasing look than when ice is used, with its waste and continual drip.

CHAPTER XIV.

REFRIGERATION AND COLD STORAGE (*continued*).

Hoisting and Conveying Machinery.

A NUMBER of cranes, and hoists and lifts, are required in a cold store of any size for handling the carcasses. The first-mentioned do not differ materially from those employed in factories, warehouses, etc., the second, however, are usually of special construction. The motive power may be either steam, gas, compressed air, water under pressure, or electricity. The advantages of hydraulic power are: Perfect security in handling the load when raising or lowering it, and being able to stop the load in any position. Great simplicity of construction. Facility of operating enabling skilled operators to be dispensed with. Relatively small cost of construction and operation. Noiselessness in action. The provision of water under pressure on the premises in case of fire. All the above advantages are also applicable to the use of electricity, and the latter power has the further advantage of being unaffected by cold. Space does not admit of more than touching briefly upon this portion of the subject, and of giving illustrations and short descriptions of two or three carcass hoists by way of example. Short descriptions of cranes, hoists, and conveyors for handling ice will be found in the chapter on "Ice-making."

Figs. 240 to 245 show various views of an automatic electric beef hoist, designed by Messrs. J. G. Childs and Co., Ltd., London. The construction of the hoist will be readily understood from the drawing. It consists of any suitable number of cradles, in this instance ten, running in vertical guides, and suspended from two endless chains. Two hinged platforms are provided at each floor, the one for loading and the other for unloading, and these platforms are turned back out of the way at all the floors not in use. In order to load the hoist, the loading platform on any of the floors is turned into position to receive the carcasses, which are then placed one by one upon this platform, the next cradle in rising lifting the quarter of beef and carrying it up over the top of the lift and down on the other side, finally depositing it

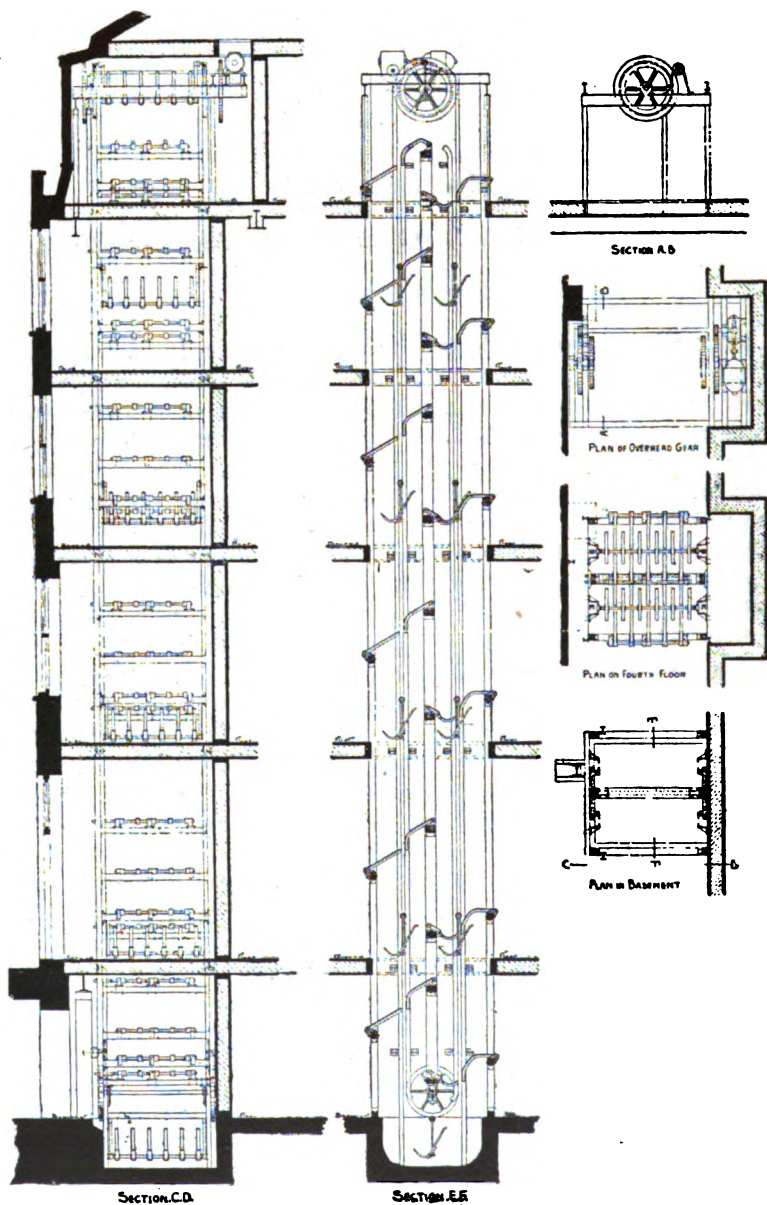


Fig. 240 to 245.—Childs' Patent Automatic Electrically-driven Beef Hoist or Elevator.

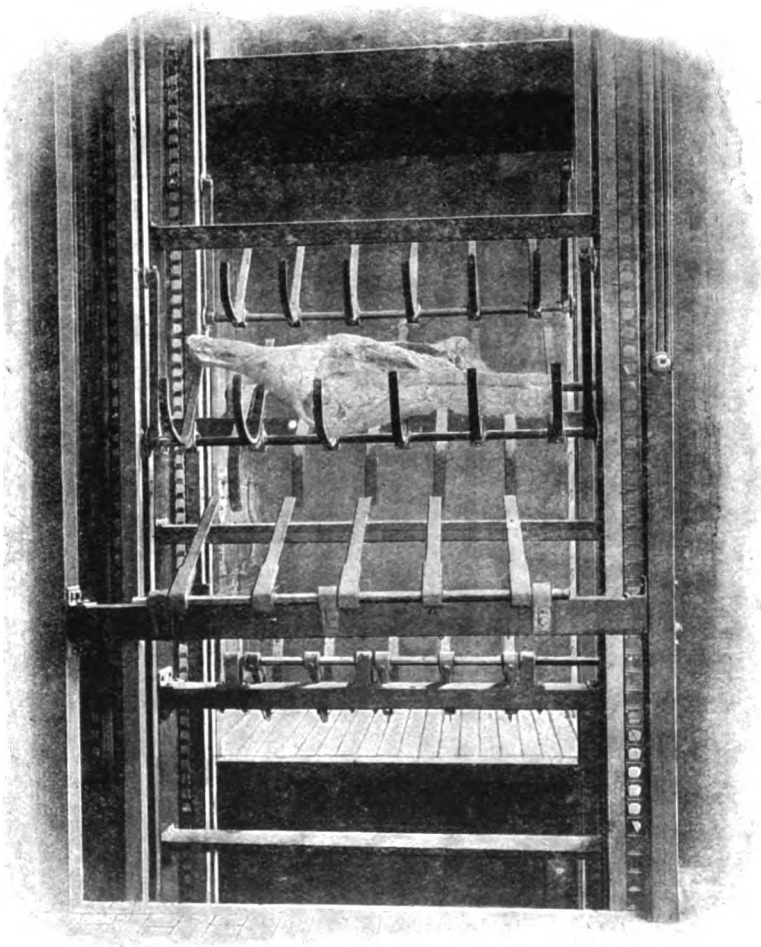


Fig. 246.—Childs' Patent Automatic Electrically-driven Beef Hoist.
View showing a Quarter of Beef in position on one of the cradles.

[To face p. 340.

automatically upon whichever of the hinged receiving platforms or forks that has been adjusted into position to receive it and lift it off the cradle. The cradles are kept in the same position and are prevented from swinging or moving laterally during the rising and descending movement of their vertical travel by means of the vertical arms shown, one of which is provided at each side of the cradle, and is fitted at each extremity with rollers engaging between vertical guides. The upper ends of these arms are connected to the endless carrying chains of the hoist, and the cradle is secured to the lower ends of these arms or levers. When each of the cradles reaches the upper or lower sprocket or chain wheels supporting the endless chains, and is passing round them, the rollers on its arms or levers pass clear of the guides, and it will be seen that the cradles are consequently permitted to swing free from their pivot at the upper end of these levers, and thus to retain a vertical position whilst passing round the upper and lower sprocket or chain wheels. After clearing the sprocket or chain wheels the rollers on the vertical arms or levers once more engage in the vertical guides.

The beef-hoist motor (which is a Westinghouse $3\frac{1}{2}$ horse-power electric motor) is located at the upper extremity of the hoist, and is geared through a worm wheel, the thrust of which is taken up by ball-bearings, which have been found greatly to reduce the friction of the gearing. The switching arrangements enable the above motor to run on either a 530 volt current, or on a 400 volt current.

The motor can only be started from the weigh-bridge room, which latter is situated on the ground floor, but it can be stopped by means of any of the press buttons placed on the various floors.

Fig. 246 shows a portion of one of Childs' patent hoists or elevators erected at the Campania Sansinena's Cold Stores, Long Lane, Smithfield, London, with a quarter of beef in position on one of the cradles.

This beef hoist has a capacity equal to the delivery of about 300 quarters of beef per hour on the uppermost floor of the store, which in the example shown is four storeys in height, at a cost of about two-pence-halfpenny per hundred quarters. A considerable saving of labour can be effected by the use of this lift, inasmuch as by its automatic system of delivery, it enables a number of hands that would be otherwise required for the removal and handling of the heavy quarters of beef to be dispensed with. The carcasses are delivered in close proximity to the chambers, and could, if desired, be easily slid on suitable chutes or inclines to and through the doors of the chambers, and be thus passed entirely automatically into the latter.

The elevators for the Southampton Cold Storage Company have likewise been designed and are being supplied by Messrs. Childs.

These elevators are each intended to take the produce from the ship's side, raise it about 50 feet vertically, and then convey it for about another 50 feet horizontally, finally automatically depositing it at the desired spot. Each elevator will be capable of dealing with about 1,800 carcasses of mutton per hour, or about 600 quarters of beef, barrels, or Continental egg-cases per hour.

It will be seen that these lifts are really combined elevators and conveyors.

Fig. 247 is a view showing a portion of a mutton hoist, also constructed by Messrs. Childs, and working at the Campania Sansinena's Cold Store in London. This hoist, it will be seen, consists of two vertically arranged parallel endless chains, carrying at intervals sheet-iron

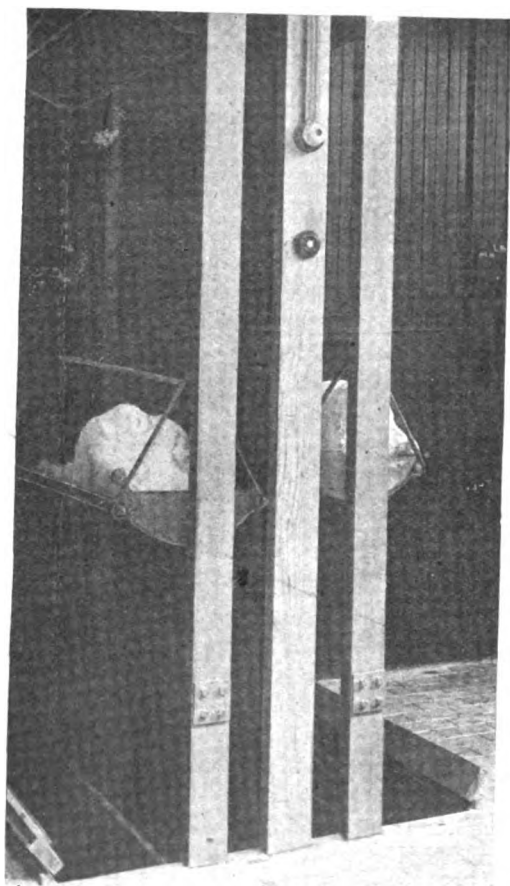


Fig. 247.—Mutton Hoist in London Cold Store.

trough-shaped cradles or carriages, into which the carcasses are placed, and from which they are removed by hand. The hoist is operated by an electric motor located, in this instance, at the bottom.

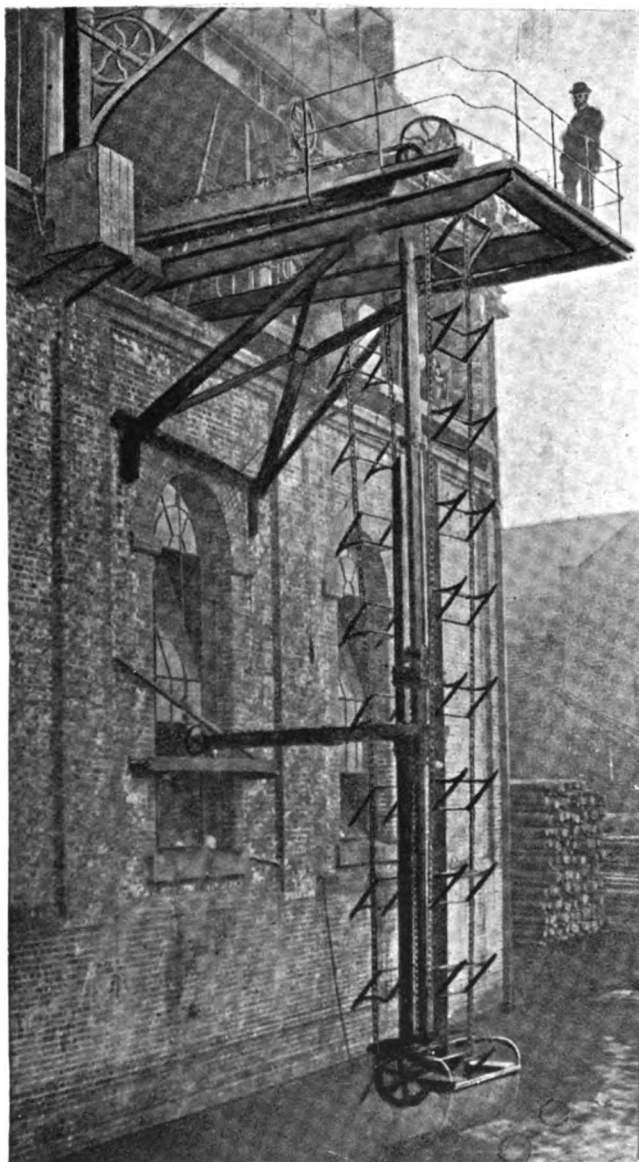


Fig. 248.—External Carcass Hoist at Nelson's Cold Storage Wharf, London.
At Rest.

[To face p. 342.

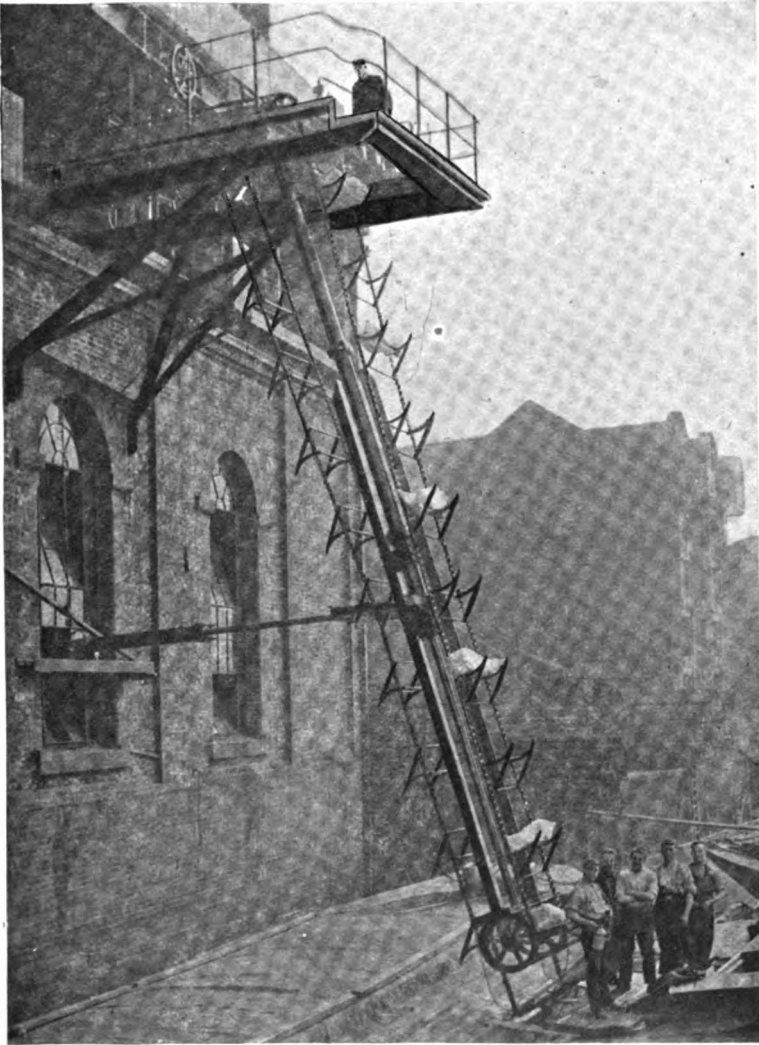


Fig. 249.—External Carcass Hoist at Nelson's Cold Storage Wharf, London.
At Work.

[To face p. 312, after Fig. 248.

This mutton hoist is capable of delivering about 700 carcasses of frozen sheep per hour at the top or fourth floor of the store at a cost of about three farthings per hundred carcasses.

Figs. 248 and 249 are two views showing an external carcass hoist or lift erected at Nelson's Cold Storage Wharf, Lambeth, by Messrs. R. Waygood and Co., Ltd., Falmouth Road, London, for raising frozen carcasses from barges lying in the river, and delivering same to the top of the cold store, from where they are distributed to the various floors by means of internal lifts.

This lift or hoist consists, as will be seen from the cuts, of a number of cradles carried by two parallel endless chains mounted upon sprocket or chain wheels, those at one end being carried upon a long arm or jib pivoted at its upper extremity to a suitable platform, and capable of being swung or moved by hydraulic power into various angles relatively to the platform, so as to enable the carcasses from barges lying at different distances from the wall of the store to be raised, as shown in Fig. 249. The endless chains carrying the cradles pass over sprocket or chain wheels provided upon the platform to other sprocket or chain wheels situated within the building at the point of discharge.

Another large cold store in London, with river frontage, in which the carcasses are also taken in from the top, and conveyed down by lifts to the various floors below, has at the upper part of the building a crane with a very long jib, enabling barges lying at a considerable distance from the wharf to be reached. The carcasses are raised from the barges by means of this crane in a sailcloth, a number at a time, and are delivered to a suitable platform at the top of the store, from whence they can be delivered to the vertical internal lifts, and conveyed thereby to the various floors.

In some stores lifts capable of carrying both passengers and meat in trucks are employed, and also lifts of the ordinary direct-acting type, with arrangements for tipping automatically at the end of the stroke so as to effect the discharge of the loads on to a receiving table, the latter being in use at the Victoria Dock, London. At the West India Dock there are four hydraulic lifts, which are supported on one side only in the form of a bracket, and the greater part of the work of transporting the frozen carcasses is carried out by gravitation.

In the West Smithfield store, besides two lifts by Messrs. R. Waygood and Company, capable of carrying either passengers or goods, there are two other lifts designed by Mr. H. F. Donaldson, M.I.C.E.*

* "Proceedings of the Institution of Civil Engineers," vol. cxxix., Session 1896-97. Part iii.

which are so arranged that carcasses of meat are loaded at the receiving platform, where the attendant in charge is already informed by the tallyman as to the chamber into which the various loads are to go. By levers he throws the points over to the floor on which the carcasses have to be discharged, and starts the lift, after which he need only let the lift run its course, as, when it reaches the point at which the turn-out has been prepared, an automatic cut-off in connection with the lever comes into play, and the machine is stopped at the exact place at which the best result in discharging is to be obtained. In practice, however, the driver generally slackens the speed of travel just before reaching the point of discharge, so as to avoid the jar which results from the automatic cut-off due to the high speed at which these lifts travel. The meat so discharged on to a table overhead, naturally falls away by gravitation, and passes along chutes directly into the chamber for which it is intended; so that from the time the meat is placed upon the lift at the bottom, it only requires to be directed into its proper chute from the receiving-table, and has not, of necessity, to be again lifted until it reaches the chamber in which it has to be stored.

A lowering apparatus of extremely simple and ingenious construction which is much employed in the United States, consists essentially of a cage guided by two supporting angle irons, and somewhat more than balanced by a weighted piston, which latter is fitted with a steel air tube located at the rear. This air tube is perforated in order to admit of the air escaping therefrom when the piston rises during the lowering of the cage, and the perforations near the upper end or top of the tube are regulated in size and made smaller so as to cushion the air as the cage reaches the lower level. In operation, as soon as the cage is loaded it descends very rapidly, and is brought gradually to rest in the last two or three feet of its downward course. As soon as the cage reaches the bottom level it engages with a lever and is automatically upset or tilted so as to turn out its load on the lower platform, and directly it is relieved of its load the cage rises or ascends rapidly under the action of the loaded piston located in the air tube, the piston and cage being brought to rest by air cushioning at the bottom of the tube in a manner practically similar to that already mentioned. It will be seen that this lift or lowering apparatus operates entirely by gravity, and requires no motive power whatever.

This apparatus could be advantageously employed wherever the dimensions of a room or chamber are so limited as to render the use of an ordinary "run way" or "sliding way" inadvisable owing to necessitating too steep a gradient in the latter.

CHAPTER XV.

REFRIGERATION AND COLD STORAGE (*continued*).

Proper Methods of Storing, and Temperatures for the Cold Storage of Various Articles.—Meats and Fish.—Butter.—Cheese.—Milk.—Eggs.—Fruits.—Vegetables.—Table of Temperatures for Cold Storage of Various Articles.

SPEAKING generally, cold storage rooms or chambers are maintained at a temperature of somewhere near 34° Fahr. ; rooms or chambers for chilling at about 30° Fahr. ; and freezing rooms or chambers at anything between 0° Fahr., or lower, and 10° Fahr.

MEATS AND FISH.

The freezing and storing of meat has been already touched upon in the previous chapter. Fish is by no means an easy article to deal with, and it is maintained by many that the best method of preserving it is to pack with ice. Indeed, attempts to employ refrigeration on steam trawlers have not been signalised by remarkably good results, and the old plan of an ice room still holds the leading place. The following is a method of freezing fish, described by a successful firm in the United States: "When the fish are unloaded from the boats they are first sorted and graded as to size and quality. These are placed in galvanised iron pans 22 in. long, 8 in. wide, and 2½ in. deep, covered with loosely-fitting lids, each pan containing about twelve pounds. The pans are then taken to the freezers. These are solidly built vaults, with heavy iron doors, resembling strong rooms, and filled with coils of pipes, so arranged as to form shelves. On these shelves the pans are placed, and as one feature of the fixtures is economy of space, not an inch is lost. The pans are kept here for twenty-four hours in a temperature at times as low as 16° below zero. Each vault or chamber has a capacity of 2½ tons, and there are sixteen of them, giving a total capacity of 40 tons, which is the amount of fish that can be frozen daily if required.

On being taken out of the sharp freezers the pans are sent through

a bath of cold water, and when the fish are removed they are frozen in a solid cake. These cakes are then taken to the cold storage warehouse, which is divided into chambers built in two storeys, almost the same as the sharp freezers. The cakes of fish, as hard as stone, are packed in tiers, and remain in good condition ready for sale. It is possible to preserve them for an indefinite time, but as a rule frozen fish are only kept for a season of from six to eight months. They are frozen in the spring and fall, when there is a surplus of fish, and sold generally in the winter, or in the close season, when fresh fish cannot be obtained."

For shipment, says the same authority, fish may be packed in barrels after the following directions: "Put in a shovelful of ice at the bottom of the barrel, and be always careful to see that auger holes are bored into the bottom of the barrels, to let the water leak out as fast as it is produced by the melting ice. After putting in a shovelful of fine ice, crushed by an ice mill, put in about fifty pounds of fish; then another shovelful of ice on top of the fish, etc., until the barrel is full, always leaving space enough on the top of the barrel to hold about three shovelfuls of ice. By shovels, scoop shovels are meant."

The following is said to be the usual method adopted in salmon freezing works on the Pacific Coast: The choice steel head and oval chinook salmon are received in a large, airy room, where they are washed, thoroughly cleansed, and laid upon large trays, which are ranged in tiers one above the other. When a truck-load of these trays is filled it is wheeled into the freezing room, where it remains about 36 hours. The cars are then wheeled into the packing room. Here the fish are placed upon a large elevator or dipping machine, and submerged in a vat of cold water. They are then let stand for a few minutes, and a thick coating of ice is formed around each fish. The fish are then wrapped separately in paper and packed in boxes, which are put into refrigerator cars and shipped to the markets of the world.

BUTTER.

Butter can be preserved by either keeping it in a chamber at the ordinary cold storage temperature, or by freezing, the latter being said to give the best results as regards the retention of the flavour and other qualities of the butter. For lengthened storage it is recommended to freeze the butter rapidly at a temperature of from 5° to 10° Fahr., and afterwards to keep it at about 20° Fahr.

The thawing can be effected by simply removing it from the freezing chamber, and when selling it is desirable to allow the butter to stand for a short time in order to develop the flavour.

CHEESE.

Cheese should not be placed in cold storage until it is getting on in ripening, so as to prevent unpleasant odours, and it should not be previously subjected to any high temperatures. Cheese is better not frozen, but in case the latter should occur, the thawing must be gradual, and it is advisable to consume it as soon as possible, as it will not keep long after this has occurred. If the atmosphere of the room is too dry the cheese will shrink and crack, and on the other hand, if damp, the cheese will become mouldy.

MILK.

Milk should only be kept in cold storage for limited periods. A method has, however, been proposed, according to Prof. Siebel, for concentrating milk by the freezing process by which part of the water in the milk is converted into ice. The ice is allowed to form on the surface of the pans, which are placed in cold rooms, and the surface of the ice is broken frequently, to present a fresh surface for freezing.

The refrigeration and cold storage of milk will be found further dealt with in the chapter on "Various Other Manufacturing and Industrial Applications," pages 396 to 401.

EGGS.

Eggs can be kept in cold storage for some months, but the difficulties to be overcome in order to ensure success are considerable.

The contents of eggs can be stored in bulk, to effect which the eggs are emptied into tin cans containing about fifty pounds and stored at 30° Fahr. They will keep for any reasonable length of time, but must be used quickly after thawing.

In the United States, where much attention has been given to the cold storage of eggs and where the value of the eggs placed in cold storage annually is estimated at about \$20,000,000 (and it must be remembered that the prices there are low, and consequently this sum represents a very large quantity), many concerns met with financial

disaster, and those which have succeeded have had to instal new systems and make expensive changes.

It is important that eggs for cold storage should be very carefully selected, and that every bad one should be picked out by candling. Considerable attention has been given in Belgium to the cold storage of eggs, and at a large establishment (La Fermiere) in Brussels the following is the process carried out. On arrival the eggs are rapidly inspected by means of an egg-testing machine, which consists briefly of a frame fitted with an endless moving carrier worked by hand, and constructed of bobbins fitted closely together and lined with cloth, thus affording accurate hollows in which the eggs may be placed. Over the central portion of the frame is constructed a dark chamber or room through which the carrier moves, and beneath the carrier in this dark chamber is a powerful electric lamp by which the spots or dark colour of the bad eggs will be shown up. This apparatus admits of an exceedingly rapid inspection, a large-sized one installed at the works in question being capable of dealing with between four and five hundred eggs per minute. The eggs are fed on trays to the testing machine, and after testing are placed in cases of from three to five hundred, the smaller package being found to be the most convenient for handling. These cases are first taken to an outer egg store, where they are reduced to a temperature of about 33° Fahr. From there they are removed to the general store where they are kept at a temperature just below freezing. The cold rooms are provided with large air locks or lobbies.

An important point to be attended to in the cold storage of eggs is the correct relative humidity, too dry a temperature will cause serious evaporation, and too moist a temperature will produce mould, and the exact relative humidity most suitable does not seem to be understood even in the United States, judging from the remark reported to have been made to a refrigerating expert by a prominent commission man who observed, alluding to storage eggs: "You storage men are between the devil and the deep sea. You always shrink 'em or stink 'em," by which he meant that eggs held any length of time in cold storage would show either a considerable evaporation or a radical "musty" flavour.

The above renders it necessary to carefully provide for the ventilation of egg stores, and is the reason why absorbents for drying the air are largely used. An excellent arrangement for this purpose is that which has been already shown in Fig. 168, p. 269, which, as has been already mentioned, has been designed by Mr. Madison Cooper,

of Minneapolis, Minn., U.S., especially for the ventilation of egg stores.

According to the above authority the following is the correct relative humidity for a given temperature in egg rooms :—

Temperature in degrees Fahr.	Relative Humidity per cent.
28	80
29	78
30	76
31	74
32	71
33	69
34	67
35	65
36	62
37	60
38	58
39	56
40	53

It is impossible within the space at command to deal even comparatively fully with the subject of egg storage, and to those interested the author would strongly recommend the perusal of a little work by Mr. Madison Cooper entitled "Eggs in Cold Storage," and published by Messrs. H. S. Rich and Co., Chicago, U.S.

FRUITS.

It may be taken as a general rule that all green fruits should not be allowed to wither.

Citrus fruits (orange, lemon, citron, lime, forbidden fruit, or shaddock, etc.) should be kept dry until the skin has yielded its moisture, upon which the drying process should be arrested.

There is no particular practice for bananas as the ripening will have to be governed according to the demand, and it may be taken that the ripening of this fruit can be manipulated at will.

Tender fruits are better placed in cold storage when just ripe as they then keep better than when brought in before being fully ripe. According to Prof. Siebel sour fruit will not bear as much cold as sweet fruit. Catamba grapes will suffer no harm at 26° Fahr., while 36° Fahr. will be as cold as is safe for a lemon. The spoiling of fruit at temperatures below 40° Fahr. is due to moisture.

Tender fruits, such as pears, must be stored whilst firm, and must be very carefully handled, and they should be wrapped in paper. Once the chemical changes which cause ripening have set in it is too late to place them in cold storage. After being kept in cold storage pears will spoil very quickly on removal.

Lemons as a rule cannot be kept in cold storage for over four months, although it is stated that those stored during January, February, and March will keep good for five months.

Grapes do not keep well in cold storage, and lose most of their flavour and taste. The harder species naturally keep better than the softer ones. Grapes lose more of their flavour when kept at a temperature of, say, 32° Fahr., than they do when kept at 40° Fahr. An important point is to carefully pick, select, and pack the fruit, and it is to be noted that a single rotten grape will taint a whole lot.

Black currants can be kept sound, fresh, and clear for ten days, after which the fruit begins to wrinkle.

Red currants can be kept sound for six weeks. Temperature 26° to 36° Fahr.

Cherries can be preserved for from ten days to a fortnight at a temperature of 36° Fahr.

Strawberries can be preserved in good condition for fifteen days, and even longer if special precautions are taken such as surrounding the fruit with cotton wool, or placing it in sieves covered with the same material. The best temperature is found to be 30° Fahr. Peaches will keep in prime condition for a month or six weeks. The same remarks as regards selection apply equally in these cases, as, indeed, they do more or less to all fruits.

Apples must not be kept in too dry an atmosphere, as if this be done they will be wilted or withered, and their appearance spoilt; this is more especially the case when they are kept at a comparatively high temperature. On the other hand too moist an atmosphere and high a temperature will cause the apples to burst. The storage of apples may be effected either in barrels or boxes, or in bulk, first-rate results being obtainable with all provided proper precautions as to temperature and moisture are taken.

A process for preserving fruit has been lately invented and patented by Mr. A. W. Lawton, which is said to have proved completely satisfactory in an experimental trial of twenty-one days with tomatoes, pine-apples, and grapes.

The process is founded upon the belief that fruit is provided with breathing cells, which breathe air in a similar manner to the human

being, absorbing oxygen and exhaling carbonic acid, or the exact reverse of ordinary plant life. The oxygen, when inhaled, combines with the sugar or carbon which is contained in the fruit, thereby causing self-consumption, or loss of substance. In order to prevent this taking place, the atmosphere supplied to the fruit under this process is deprived of most of its oxygen, by which means it is claimed that the breathing cells of the fruit become partially closed, and thus the further ripening of the fruit is suspended.

The apparatus employed is shown in Fig. 250, and comprises a chimney or flue A, a stove B, an air filter C, and an air-tight storage room D having an hermetically closing door E. As soon as the fruit has been placed in the room D it is sealed up, the atmospheric air driven out, and replaced by a sterilised atmosphere produced and main-

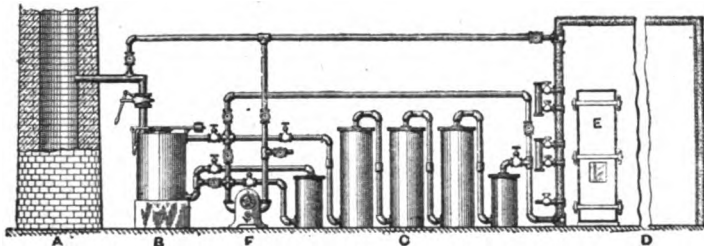


Fig. 250.—Lawton's Apparatus for Preserving Fruit. Diagrammatic View.

tained in the following way:—By means of an ordinary blower or fan F, air is forced through a stove B containing red-hot coke, whereby the oxygen is consumed, and any germs or animalculæ destroyed. The gases thus produced are then filtered by passing through the air filter C and cooled before entering the chamber by passing over refrigerating coils.

Whilst superintending the transportation of a shipment of fruit on board the s.s. *Para*, preserved by this process, Mr. Lawton lost his life through an accidental explosion of a spare store of chemicals, which lamentable accident also resulted in the injury of several other persons, and in considerable damage to the vessel.

Among a few of the claims put forward by the inventor, mention may be made of the following, viz., that fruit can be picked ripe, con-

sequently perfect, and can in that state be conveyed to this country from any part of the world, and stored on arrival here. When finally exposed for sale it will keep for a long period. The inventor also states that the process is simple and comparatively inexpensive, and that it can be applied to existing refrigerating installations in conjunction therewith.

VEGETABLES.

Green vegetables generally should, like green fruit, not be allowed to wither.

Sound onions may be maintained in good condition in cold storage for a number of months (six or seven), but care must be taken that when placed in the store they are as dry as possible, and for this purpose they may advantageously be exposed to a dry cool wind so as to give up most of their moisture. Onions should never be stored in the same room with other goods, and on their removal the room must be thoroughly exposed to the air, well scrubbed out, and when dry the walls, floor, and ceiling should be whitewashed. It is also recommended to give the room a good coat of paint or enamel paint. Some American authorities hold that if a room has been once used for storing onions it should not afterwards be employed for the storage of eggs, butter, or other articles especially susceptible to odours.

Parsnips and salsify can be advantageously kept in cold storage under the same conditions as onions, with the exception, however, that they will stand freezing without injury. Asparagus, cabbage, carrots, celery, can be kept with little humidity.

In the following table will be found the temperatures considered best adapted for the cold storage of various articles, as given in the first and second editions of "Refrigerating and Ice-Making Machinery," and also those recommended by a number of other authorities, arranged in columns for convenience of comparison:—

TEMPERATURES ADAPTED FOR THE COLD STORAGE OF VARIOUS ARTICLES.
Degrees Fahrenheit.

Article.	Wallis-Taylor.	Siebel.	Schmidt.	Getty.	Ice and Refrigeration.	Ice and Cold Storage.	Rane.	Madison Cooper.
Ale ..	—	33—42	—	—	—	—	—	—
Apples ..	32—36	33	32—36	32	32—36	33—36	38—42	31
Apples (Summer)	—	—	—	—	—	—	32—35	—
Apples (Winter)	—	—	—	—	—	—	—	—
Apple and Peach Butter	—	—	—	40	—	—	—	42
Asparagus ..	34	34	34—35	34	34	35	34	33
Bananas..	40—45	34—36	34	35	40—45	40—45	—	36
Beans (dried)	32—40	—	—	32—40	—	32—40	—	40
Beef (fresh)	—	—	—	37—39	—	—	—	35
Beef (dried)	—	—	—	36—45	—	—	—	—
Beer (in casks or barrels)	33—42	33—42	33—35	—	33—42	33—40	—	—
Beer (in bottles)..	45	45	45	—	45	45	—	45
Berries (fresh, for ten days)	36—40	—	—	35	—	36—40	—	40
Buckwheat flour	40	—	—	—	—	40	—	42
Butter ..	32—38	32—35	18—25	32—35	32—38	25—30	—	14
Butter (to freeze)	—	—	—	20	—	—	—	—
Butterine..	35	—	—	—	—	35	—	20
Cabbages ..	34	—	—	33	—	35	—	32
Cantaloupes	40	—	—	—	—	40	—	40
Carrots ..	34	—	—	34	—	35	—	33

TEMPERATURES ADAPTED FOR THE COLD STORAGE OF VARIOUS ARTICLES.—(Continued.)

Article	Wallis-Taylor.	Siebel.	Schmidt.	Getty.	Ice and Refrigeration.	Ice and Cold Storage.	Rane.	Madison Cooper.
Celery ..	32-34	33-35	34-35	34	32-34	35	—	32
Cheese ..	32-33	32-33	28-34	31-32	32-33	32-33	—	35
Chestnuts ..	33	—	—	33	—	33	—	40
Chocolate (to cool)	40	—	—	—	—	—	—	—
Cider ..	30-40	30-40	30-35	—	30-40	35-40	—	32
Cigars ..	35	—	—	35	—	35	—	42
Clarets ..	—	45-50	—	—	—	—	—	42
Corn Meal ..	—	—	—	—	—	—	—	45
Corn (dried)	35	—	—	35	—	35	—	33
Cranberries ..	34-36	—	—	—	—	34-36	—	—
Cream ..	35	—	—	—	—	—	—	38
Cucumbers ..	—	—	—	—	—	—	38-40	32
Currants ..	—	—	—	—	—	—	—	32
Dates ..	55	32-33	31-33	—	32-35	55	—	45
Eggs ..	33-35	—	—	—	—	33-35	—	30
Ferns ..	—	—	—	—	—	—	—	28
Figs ..	55	—	—	35	—	—	—	—
Fish (fresh)	25-30	25-30	20	25	25-30	25-30	—	28
Fish (fresh water, frozen)	—	—	—	—	—	—	—	17
Fish (salt water, frozen)	—	—	—	—	—	—	—	14
Fish (canned)	—	—	—	35	—	—	—	—
Fish (dried)	35	35	35-36	36	35	35	—	40
Fish (to freeze)	—	—	—	40	40	—	—	5
Flour, &c.	—	40	36-40	—	—	—	—	—
Fruits ..	26-55	—	—	38	—	—	—	40
Fruits (dried)	35-40	—	—	35	—	35-40	—	30
Fruits (canned)	35	—	—	—	—	35	—	—

TEMPERATURES FOR COLD STORAGE.

355

TEMPERATURES ADAPTED FOR THE COLD STORAGE OF VARIOUS ARTICLES.—(Continued.)

Article.	Wallis-Taylor.	Siebel.	Schmidt.	Getty.	Ice and Refrigeration.	Ice and Cold Storage.	Rane.	Madison Cooper.
Furs (undressed)	35	35	—	35	35	—	—	35
Furs (dressed)	25-32	25-32	28-35	25-32	25-32	—	—	25
Game (frozen)	25-28	25-28	25-28	27	25-28	35	—	28
Game (to freeze)	15-28	—	—	0-5	—	25-28	—	—
Game (long storage)	—	—	—	—	—	15-28	—	10
Grapes	36-38	32-40	34-36	32-40	36-38	36-38	38-40	34
Ginger ale	36	36	—	—	—	35	—	36
Hams	—	—	—	30-35	—	—	—	20
Hogs	—	—	—	30-33	—	—	—	—
Hops	—	—	—	—	—	—	—	—
Hops (frozen)	33-40	33-36	32-40	35	33-40	35-40	—	35
Honey	—	—	—	—	—	28	—	—
Lard	45	36-40	45	37-40	45	45	—	45
Lemons	36-40	36-45	33-36	34-45	36-40	36-40	—	38
Liver	—	—	—	35-45	—	—	—	20
Maple syrup	—	—	—	30	—	—	—	45
Maple syrup sugar	—	—	—	40-45	—	—	—	—
Margarine	—	35	18-25	—	35	—	—	—
Meat (brined)	—	—	—	—	—	—	—	—
Meat (canned)	—	—	—	35-40	—	—	—	—
Meat (fresh)	35	—	—	35	—	35	—	30
Melons (for 3 or 4 weeks)	34	35	35-40	—	34	35	—	35
Milk	—	—	—	—	—	—	—	—
Mutton (fresh)	—	—	—	32	—	—	—	—
	—	—	—	33-36	—	—	—	—

TEMPERATURES ADAPTED FOR THE COLD STORAGE OF VARIOUS ARTICLES.—(Continued.)

Article.	Wallis-Taylor.	Siebel.	Schmidt.	Getty.	Ice and Refrigeration.	Ice and Cold Storage.	Rane.	Madison Cooper.
Mutton (frozen) ..	25-28	—	35-40	—	—	—	—	—
Nuts (in shells) ..	35	35-38	—	35-38	35	35	—	40
Oatmeal ..	40	—	—	—	40	40	—	42
Oleomargarine ..	35	—	—	—	35	35	—	20
Oil ..	35	—	—	35	—	—	—	45
Onions ..	34-40	32-33	36	32	34-40	35-40	34-40	32
Oranges ..	45-50	36	34-36	35-36	45-50	45-50	—	34
Oysters ..	33-35	—	—	—	—	33-35	—	33
Oysters (in tubs)	25	—	—	35	—	25	—	35
Oysters (in shells)	33	—	—	40	—	30	—	43
Ox tails ..	—	—	—	32	—	—	—	—
Parsnips ..	34	—	—	34	—	35	—	32
Peaches ..	45-55	35-45	34-36	35-45	45-55	45-55	36-38	36
Pears ..	34-36	33-36	34-36	38	34-36	35	33-38	33
Peas (dried)	40	—	—	40	—	40	—	45
Plums ..	—	—	—	—	—	—	38-40	32
Porter ..	—	33-42	—	—	—	—	—	—
Pork ..	34	—	—	—	—	—	—	—
Potatoes ..	36-40	34-36	—	35	36-40	36-40	36-40	34
Poultry (frozen) ..	28-30	28-30	20-28	29	28-30	28-30	—	28
Poultry (to freeze)	18-22	—	—	5-10	—	18-22	—	10
Poultry (long storage)	—	—	—	—	—	—	—	40
Sardines (canned)	35	—	—	—	—	35	—	—

TEMPERATURES ADAPTED FOR THE COLD STORAGE OF VARIOUS ARTICLES.—(Continued.)

Article.	Wallis-Taylor.	Siebel.	Schmidt.	Getty.	Ice and Refrigeration.	Ice and Cold Storage.	Range.	Madison Cooper.
Sauerkraut ..	35—38	—	—	36—38	—	35—38	—	38
Sausage casings ..	—	—	—	30—35	—	—	—	20
Sugar, &c. ..	40—45	—	—	—	—	40—45	—	45
Sweet corn ..	—	—	—	35	—	—	—	—
Syrup ..	35	—	—	35	—	35	—	45
Tenderloin, butts, ribs ..	—	—	—	30—35	—	—	—	—
Tomatoes ..	—	34—35	38—42	35	—	35	38—42	42
Tobacco ..	35	—	—	35	—	35	—	42
Veal ..	—	—	—	32—36	—	—	—	—
Vegetables ..	34—40	—	—	—	—	—	—	—
Watermelons ..	34	—	—	—	—	35	—	40
Wheatflour ..	40	—	—	—	—	40	—	42
Wines ..	40—45	40—45	40—45	—	40—45	45—50	—	42
Woolens, &c. ..	25—32	25—32	28—35	25—32	25—32	25—30	—	—

CHAPTER XVI.

MARINE REFRIGERATION.

Carbonic Acid Machines.—Ammonia Machines.—Cold-Air Machines.—Arrangement of Cargo Holds and Stores.—Ice-Making on Board Ship.—Barges.

MARINE refrigeration offers considerably more difficulties, both as regards the machinery, and likewise with respect to the insulation of the cold chambers, than is the case with land installations.

As regards the machinery, in the first place, the space at command is necessarily limited, and consequently it is absolutely necessary that the design should be such as to occupy the minimum of room, whilst affording the maximum of efficiency.

The agent or medium employed should likewise be one of a non-inflammable nature, and also one having no deleterious action on copper, which metal has to be employed in the condenser in order to enable sea water to be used for cooling purposes.

With reference to the insulation, the settlement or shaking down due to the continuous vibration experienced on ship-board has to be contended with. For this reason an excellent material to use for insulating purposes in marine installations is what is known as "Non-pareil" cork, which is largely employed in the American Navy. This material consists of granulated cork made by compressing cork chips under hydraulic pressure in iron moulds, and then heating the mass while in the mould to a temperature of about 500° Fahr. This treatment has the effect of liquefying the natural gum of the cork, and forming the interstices between the granules into small closed air spaces. On the cooling of the moulds the gum hardens, and the mass becomes, as it were, a solid sheet of cork. The weight of "Non-pareil" cork is only one pound per square foot, and it is consequently about the lightest insulating material in use. It is said to be 13 per cent. superior, as a non-conductor of heat, to hair felt, and 40 per cent. superior to sawdust. Slag, or mineral wool, or silicate cotton, is also used very extensively, and with great success for marine work.

As regards the most suitable system of refrigerating machine for use on board ship, a wide diversity of opinion still exists. In spite of comparing unfavourably, as regards efficiency, with machines using agents possessed of greater latent heat, cold-air machines might still

be advantageously used for short voyages, and where coal could be obtained cheap. There are no chemicals to be carried, no danger from bursting of pipes or joints giving out, and the machine is comparatively simple and easily managed.

Of machines working on the compression system, and employing a refrigerating agent of a more or less volatile nature, carbonic acid machines offer advantages which have caused them to be very largely employed for marine purposes, a fact which has been proved in a practical manner by Messrs. J. and E. Hall, Ltd., alone having fitted over 800 machines working on this system on board ship.

The qualities which render CO₂ particularly suitable for use on shipboard are: First, that this agent admits of a much smaller compressor being employed relatively to the refrigerating power produced; second, that having no corrosive action on any of the metals, it thereby allows, as above mentioned, of copper being used in the condenser; and third and lastly, but not least, it is not only non-inflammable, but has the power to extinguish fire, and is therefore perfectly free from danger in this respect. As regards the danger to life through an escape of this gas, its specific gravity being greater than that of air (CO₂ spec. grav. 1.529 air = 1) causes it to fall to the lowest level, and in practice it is found that no danger is to be apprehended from the escape of a moderate quantity of CO₂ if the space be not unduly confined, and is fairly well ventilated. For this reason the Board of Trade's instructions to surveyors, issued in June, 1901, *re* refrigerating machines, contains the following: "The surveyors are therefore informed that, unless they are aware of any special reasons to the contrary, refrigerating machines in which carbonic anhydride is employed as the working agent may be placed in the engine rooms of steam ships, provided the weight of the charge which would be released by a breakdown of the machine, or of one portion of a duplex machine, does not exceed 200 lbs.

"When it is proposed to fit a machine using a greater charge than this is an engine room, full particulars of the case, including size, and method of ventilating the compartment, and weight of charge proposed, should be submitted for consideration."

The principles upon which the marine types of refrigerating machines work are naturally precisely the same as those employed for service on land, and therefore the differences are merely of a structural nature, adapted to render them more especially suitable to the construction of vessels. It is purposed, therefore, in this chapter, to merely give a few examples of machines especially designed for marine

purposes, referring readers for further particulars as to the special distinctive details of construction adopted by the various makers to the more lengthy and complete descriptions given of their land types of machines.

Fig. 251 shows one of J. and E. Hall's carbonic acid machines of the horizontal duplex marine type, which has been especially designed for large installations on board ship. This machine is fitted with triple expansion steam cylinders, the high and intermediate cylinders being on one side, and the low pressure cylinder on the other, and it has a surface steam condenser located in the front part of the machine. The two machines are so arranged that either both sides can be worked together, or, if desired, one-half; that is to say, one compressor, with its condenser and evaporator, can be disconnected, when the other half can be worked by itself, it being seen that the full advantage and economy of the triple expansion engine is thus retained. The duplex machine is claimed to give all the security of two independent machines whilst at the same time creating a great saving of space.

This type of machine is also built in pairs mounted upon the same base or bed-plate, with compound steam cylinders, the high pressure cylinder being located on the one side, and the low pressure cylinder on the other. The two compressors are, in this type, driven by tail-rods from the steam cylinders, and the cranks are placed at right angles, an arrangement which tends to ensure an even turning movement. Each compressor delivers the compressed carbonic acid to an independent condenser, which is usually placed in the base of the machine, and in which sea water is circulated round the condenser pipes through which the carbonic acid passes. In connection with each side of the machine a separate evaporator or refrigerator is provided, which consists, as in the land type, of coils of pipes, in which the liquid carbonic anhydride evaporates or gasifies, and which coils are enclosed in a steel casing, in which the brine is circulated by means of pumps. The brine thus cooled is, in one arrangement, circulated through electrically-welded grids of piping, each containing about 200 feet of pipe, which grids are divided into sections, each section having a separate flow and return from the evaporator or refrigerator, and valves being provided for regulating the quantity of cold brine in each section as required by the temperature in the holds. The grids are placed on the under side of the decks over the holds to be refrigerated, preferably between the deck beams, so as to occupy no valuable space, and to be protected from damage.

In another arrangement the brine is passed through a suitable

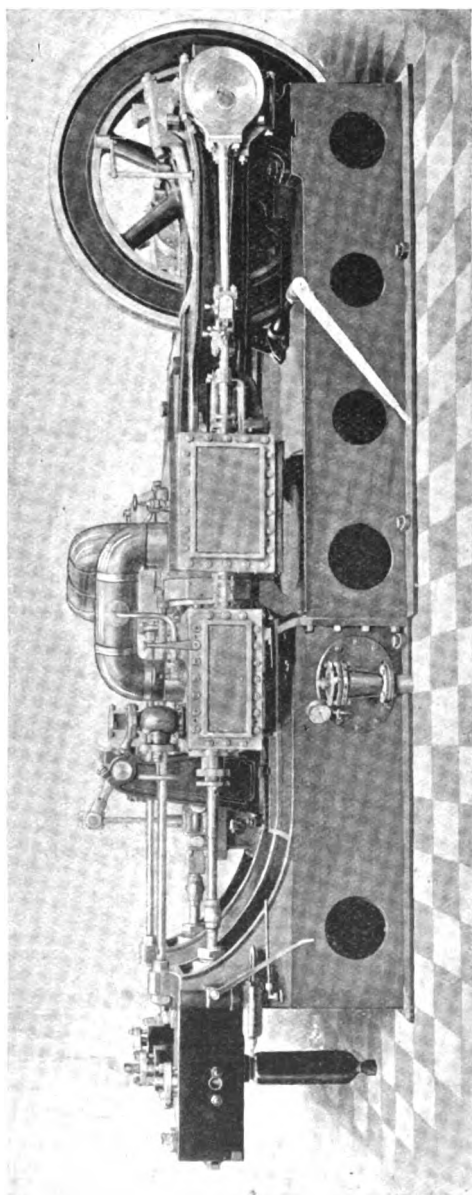


Fig. 251.—Hall Horizontal Duplex Marine Type of Steam-driven Carbonic Acid Compression Machine.

[To face p. 360.]

battery of pipes, over which air is drawn by fans, and is passed through the holds to be cooled.

In Fig. 252 is illustrated one of the vertical duplex marine types of machines built by the same firm. This pattern of machine is speci-

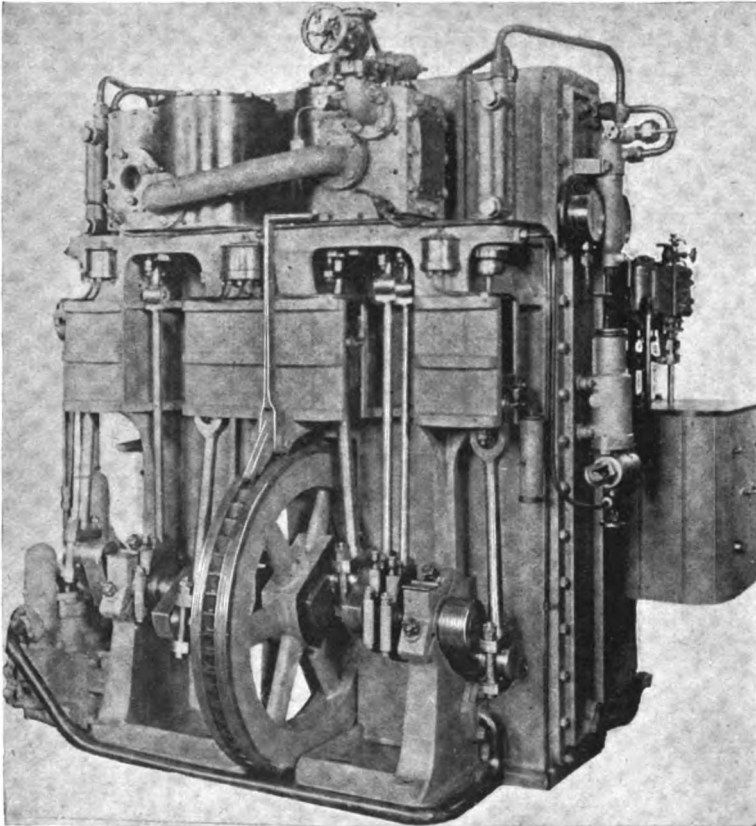


Fig. 252.—Hall Vertical Marine Type of Steam-driven Carbonic Acid Compression Machine.

ally designed for preserving provisions on passenger steamers and on steam yachts, and for making ice. The machine is fitted with compound steam cylinders and two compressors, in connection with each of which latter is a condenser and an evaporator or refrigerator, there being thus two entirely independent complete carbonic acid machines,

either of which can be disconnected, and the remaining machine run with the compound engine.

Smaller marine-type machines (Fig. 252*) are also made by this firm, having a single vertical steam cylinder, and the compressor arranged alongside of it, both being fixed to a casting containing the condenser coils, which latter are made of copper, and behind which casting is another secured to it, and containing the evaporator or refrigerator coils.

Turning to machines working on the ammonia compression system, Fig. 253 shows a marine type of the De La Vergne machine. It is

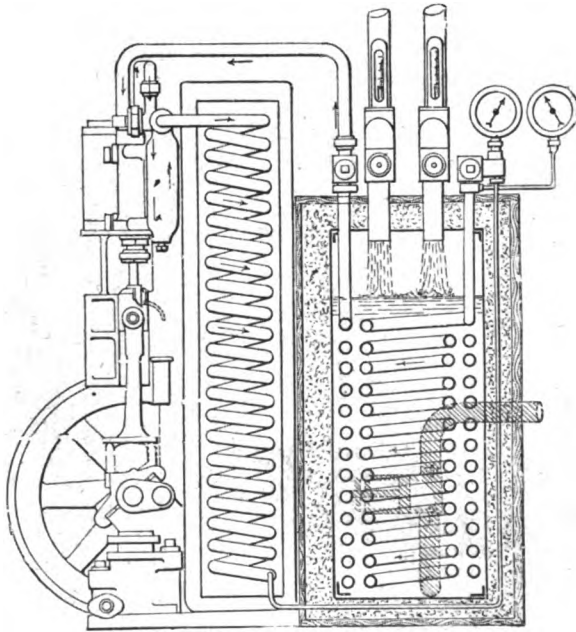


Fig. 252*.—Hall small Marine Type of Steam-driven Carbonic Acid Compression Machine. Vertical Central Section.

a vertical single-acting compressor, actuated by a high pressure horizontal steam engine, fitted with a special governor, which admits of the steam supply being determined for wide ranges of speeds when required, say for any speed between 30 and 300 revolutions per minute, without interfering with the running, or stopping the machine. The construction of the compressor cylinder is identical with that illustrated in the enlarged sectional view, Fig. 17.

In the marine type of Linde machine a single compound ammonia compressor is employed, which, as in the case of the land type of

machine, is also driven by means of a tandem compound engine. The ammonia condenser is situated below the compressor, and is fitted with sets of endless coils or worms. By the use of a compound compressor, that is to say, one wherein the compression of the ammonia gas is effected in two stages, the loss from re-expansion of gas left in the clearances is completely got rid of, as such loss is experienced in the

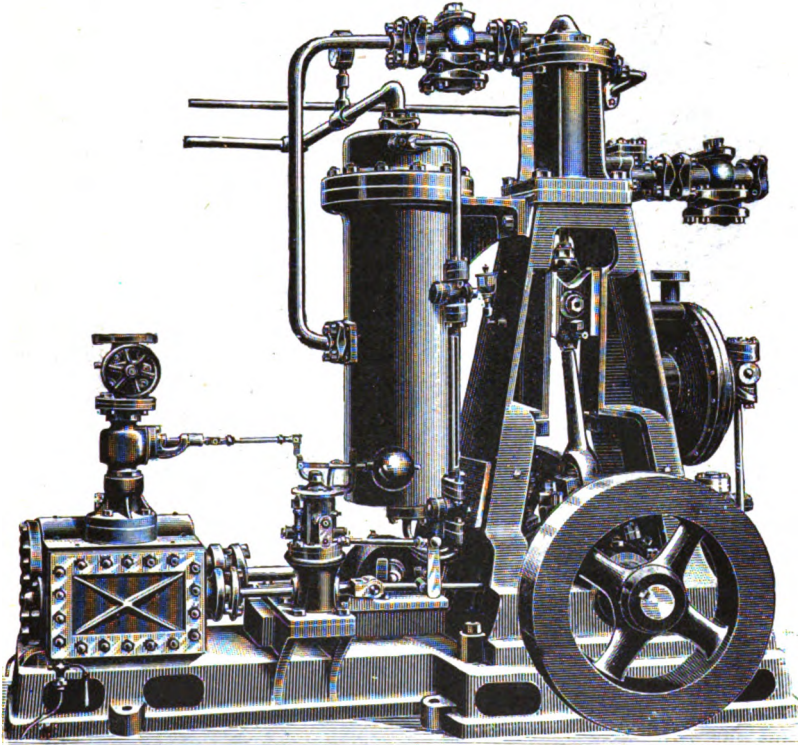


Fig. 253.—De La Vergne Vertical Single-acting Marine Type of Ammonia Compression Machine.

low pressure compressor cylinder only, none taking place in the high pressure compressor cylinder.

Figs. 254 and 255 show two ammonia machines of the horizontal marine type, designed by Mr. S. Puplett, the first being a horizontal ammonia compressor connected with a vertical engine, all mounted upon the same bed-plate, and the second a compact form of horizontal belt-driven ammonia compressor, especially designed for marine work.

Fig. 256 shows a vertical self-contained marine type of ammonia compression machine made by the Haslam Foundry and Engineering Company, Limited, Derby. As will be seen from the illustration the ammonia compressor, steam engine, separator, condenser, receiver, and

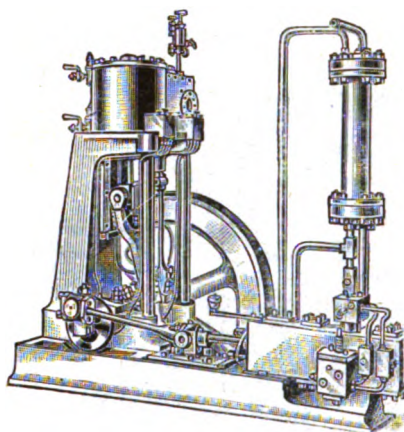


Fig. 254.—Puplett Horizontal Marine Type of Steam-driven Ammonia Compression Machine.

water pump are all mounted on the same bed or base-plate, and the design is such that they occupy as small an amount of space as possible, and form a completely self-contained apparatus. The bed-plate is of cast-iron, circular in form, contains the ammonia condensing coils, and is made in two parts; the back part being readily removable for giving access to the condensing coils for cleaning and examination. The front part is strongly constructed and provided with ribs, facings, and brackets to receive the steam cylinder, ammonia compressor, crank-shaft, and other working parts of the machine.

A water pump, shown on the right-hand side of the illustration, and worked by a disc crank on the end of the crank-shaft, is provided for circulating water through the condenser, and when desired a brine pump is also fitted.

This machine is made in sizes from half-ton ice-making capacity per day, up to three tons ice-making capacity per day. The three-ton machine will maintain from 16,000 to 32,000 cubic ft. at 32° Fahr. in ordinary storage,

and requires 9 I.H.P. in a temperate climate and 10½ I.H.P. in a hot climate. Three hundred gallons of condensing water are required per hour, 55° on and 80° off. The weight of the machine is 103 cwts.,

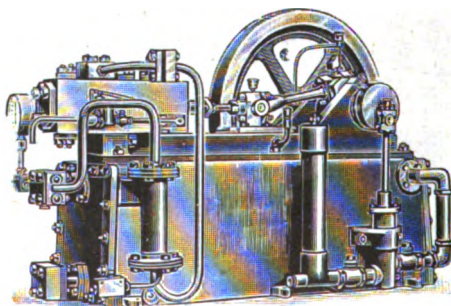


Fig. 255.—Puplett Horizontal Marine Type of Belt-driven Ammonia Compression Machine.

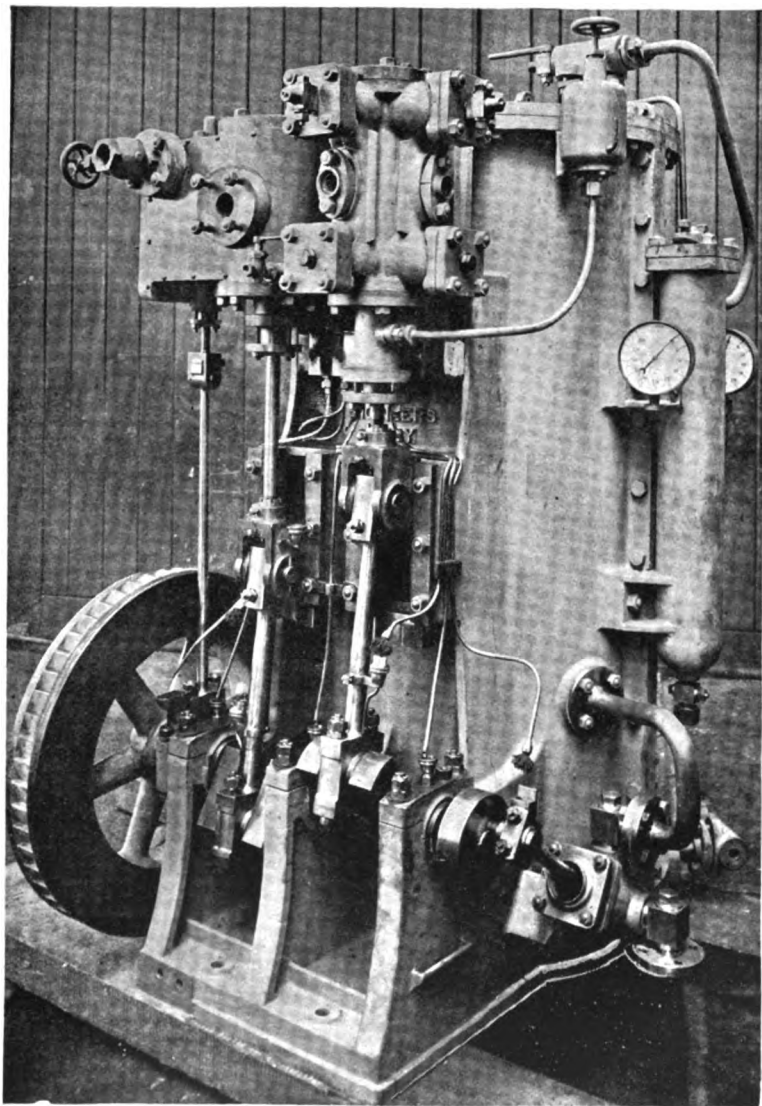


Fig. 256.—Haslam Vertical Self-contained Marine Type of Steam-driven Ammonia Compression Machine.

[To face p. 364.


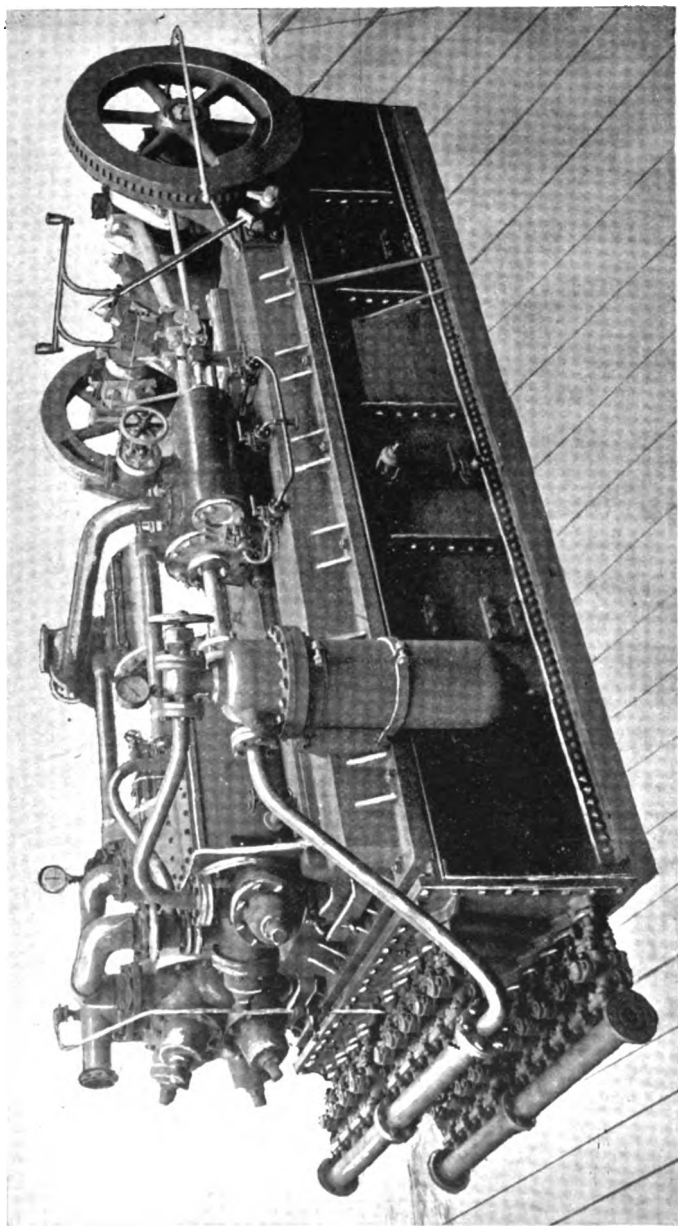


Fig. 237.—Haslam Horizontal Marine Type of Steam-driven Compound Ammonia Compressor.

[To face p. 364.

and the dimensions 6 ft. 8 in. in depth, 6 ft. in width, and 7 ft. 8 in. in height.

Fig. 257 is an illustration showing the latest horizontal marine type of Haslam compound ammonia compressor. This machine consists of a compound engine, and compound ammonia compressors, the gas being thus compressed in two stages. The whole is mounted upon a

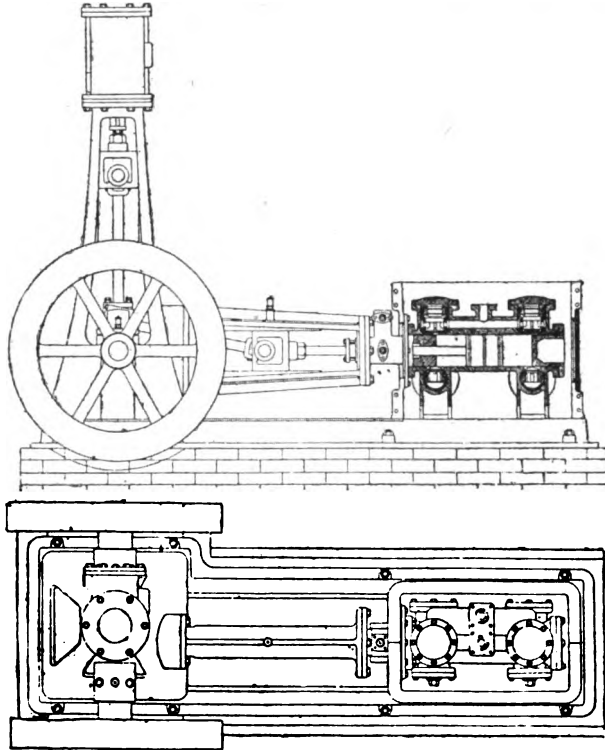

Figs. 258 and 259.—Kilbourn Horizontal Self-contained Marine Type of Steam-driven Double-acting Ammonia Compressor. Plan and Elevation partly in Section.

cast-iron bed plate which in turn is mounted upon a wrought-iron tank, which latter contains the ammonia condenser coils.

The system of cooling employed with this machine is either brine pipes placed in the holds, or the air-blast system; an installation on the latter plan, which has been recently put into the New Zealand Shipping Co.'s steamer *Ruapehu*, consists of a series of direct expansion cooling pipes or coils, placed in nests, over which the air is circulated

by means of a powerful fan. The air is cooled in passing through the coils to any desired temperature, is then circulated through the holds, and then returned again to the fan.

Figs. 258 and 259 show in plan and in elevation, partly in vertical section, a self-contained marine type of horizontal double-acting ammonia compressor and vertical steam engine, on the Kilbourn system, which is extensively used on American steamers. Fig. 260 shows a belt-driven Kilbourn marine type ammonia compression machine.

This double-acting horizontal ammonia compression machine is driven by a vertical engine, which is fixed upon the same base or bed-plate in such a manner as to render the complete machine very

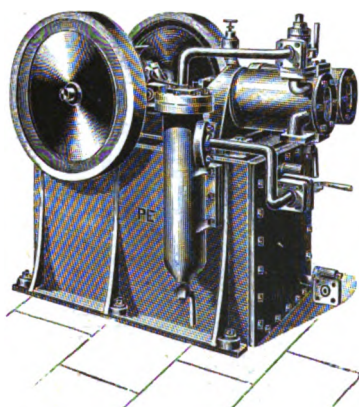


Fig. 260.—Kilbourn Horizontal Double-acting Marine Type of Belt-driven Ammonia Compressor.

compact in design, one of sufficient power to keep a storage capacity of 22,000 to 26,000 cubic ft. at a suitable temperature for chilled beef, 40,000 to 44,000 ft. for frozen mutton, or of making about 6 tons of ice per day of twenty-four hours, requiring only a floor space of 10 ft. by 10 ft., including that required for both the refrigerator and the condenser.

The compression cylinders are inclosed in water-jackets, and are fitted with Webb's patent arrangement of suction valves. The stuffing boxes and glands are of the Kilbourn double

pattern, that is, each box is formed with a chamber placed centrally therein, and into which oil is injected constantly for sealing purposes by a small force-pump fixed on the side of the bed-plate, and worked from a lever connected to the compression pump cross-head. The steam cylinder piston-rods are coupled by means of forked connecting-rods to the same crank-pins as those of the compression pumps.


Improved forms of gas-tight joints and of a stop-cock or valve, which will be found described on pages 227, 235, and 236, have been also devised, and were patented in 1882 by the same inventor.

The arrangement of the machine illustrated in Fig. 260 is very compact, having been designed with that end more especially in view, and for which purpose the ammonia condenser is placed underneath the compressor.

Figs. 261 and 262 show, in plan and sectional elevation, the marine type of condenser used in conjunction with these machines.

The cargo holds of the steamships *Campania* and *Lucania* are refrigerated with machines of the Kilbourn type. The meat-carrying chambers in each of these vessels consists of three chambers situated forward on the orlop or lower deck, and having a total capacity of 20,000 cubic ft., which renders them able to carry 2,700 quarters of beef. The chambers are very carefully insulated, the walls consisting, as shown in Fig. 263, first of a double thickness of tongued and grooved boards, A, A, having a layer of waterproof paper B between them, next a 2 in. layer of good quality hair felt, C, and another double thickness of tongued and grooved boards, D, D, with a similar layer of paper, E, between them, and finally an inch air space, F, between the latter and the inner or iron deck, the whole being well varnished. The brine cooling pipes, which are of heavy 2-in. galvanised tube with malleable cast return bends, are placed on the ceiling between the deck beams, thus economising head room, and the rails for the meat-hooks are of $1\frac{1}{8}$ in. galvanised round iron, firmly clipped to the beams supporting the decks. The meat hooks which are placed upon the latter, for carrying the quarters of beef, are of steel galvanised. Thermometer tubes from the upper deck are provided to each chamber, so that the temperature may be ascertained in any part of the chamber, when desired.

Fig. 264 is a plan showing the general arrangement of the machine

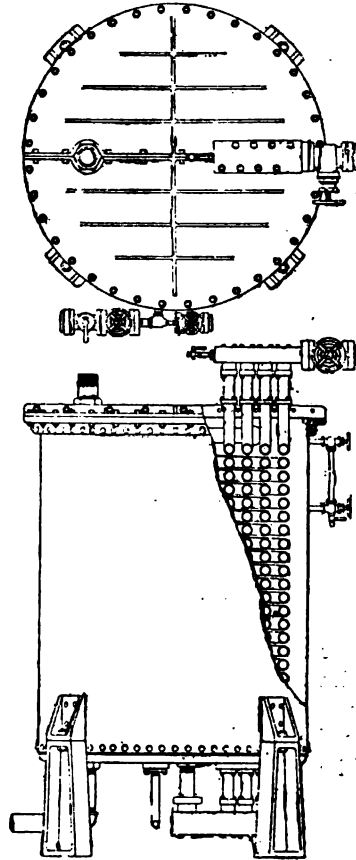

Figs. 261 and 262.—Marine Type of Ammonia Condenser. Plan and Elevation, partly in Section.

room. A pair of compressors are employed. A, A, are the steam engine cylinders; B, B, the compression cylinders; C, C, the ammonia condensers; D, D, the liquid ammonia reservoirs; E, E, the refrigerators; F is a brine circulating pump of the duplex pattern; G is a manifold or distributing pipe to the different cooling pipes in the chambers; H is the collecting pipe at the top of the refrigerator. It will be seen that the cold parts of the machine are enclosed in a separate chamber having walls insulated in a similar manner to those of the meat-carrying stores or chambers, thereby preventing as far as practicable loss through absorption of heat.

The compressors are of an ice-producing capacity of 12 tons a day, the compression cylinders being 6 in. in diameter by 12 in. stroke, and the steam cylinders 8 in. diameter by 12 in. stroke.

The ammonia condensers C, which are more clearly shown in Figs. 261 and 262, are constructed of a cylindrical form, the shells being made of wrought-iron, and the covers of cast-iron, and they are fitted with concentric coils of $1\frac{1}{2}$ in. galvanised iron pipe, connected together




Fig. 263.—Insulation of Cargo Holds on board ss. *Campania* and *Lucania*.
Transverse Section.

at their extremities by means of tee-pieces made of malleable castings. The ammonia condensers are in this case, moreover, carefully lagged with teak wood. The water for use in the ammonia condensers C is supplied and circulated by means of a duplex steam pump (not shown in the drawing), located in the forward boiler-room of the steamship. The ammonia gas after compression in the compressors B, and liquefaction in the condensers C, under the combined pressure of the pumps or compressors B, and the cooling action of the condensing water circulating on the exterior of the coils or worms in the condensers, is delivered to the reservoirs D for the liquefied ammonia, through small bore pipes. From these reservoirs the liquid ammonia is admitted through suitable graduated expansion or regulating valves to the lower ends of the expansion coils in the refrigerators E, wherein the liquid ammonia again vaporises or gasifies, abstracting the heat required for this process from the brine surrounding the expansion coils, and being again returned to the compressors, and so on *ad infinitum* in the

manner already described. The absolute working pressure in the refrigerators is about 30 lbs. per square inch.

The brine having been reduced to the desired temperature in the refrigerators, passes into the system of brine circulating pipes, and maintains the atmosphere of the cold stores or chambers at a temperature suitable for the proper preservation of the meat. The circulation of the brine is effected by the brine pump *F*, which draws the cooled brine from the bottom of the refrigerators *E*, and discharges


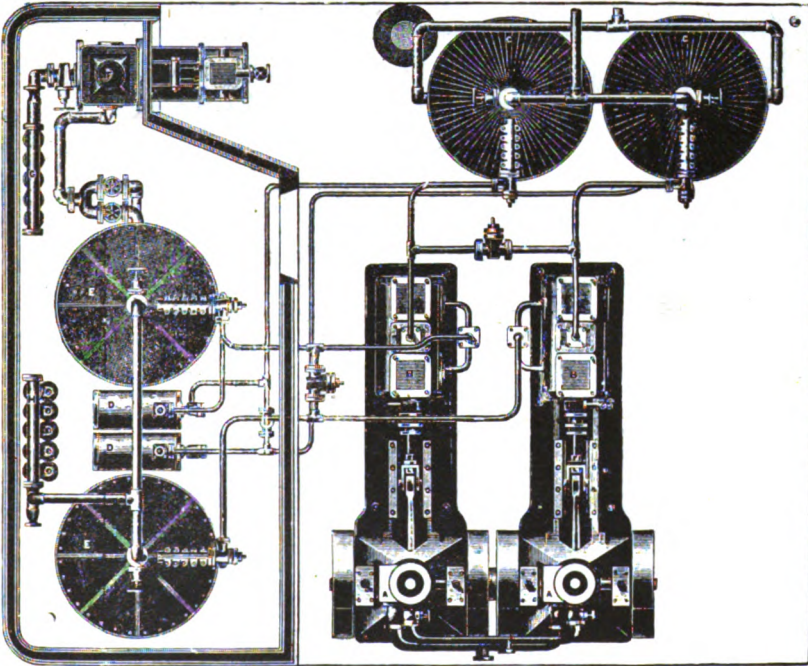


Fig. 264.—Plan of Refrigerating Machine Room on Cunard Steamers.

it through the distributing tee-piece and valves, or manifold *G*, to the different sections of the cooling pipes in the chambers, and returns it through a similar tee-piece, manifold or distributor *H* to the top of the refrigerator to be again cooled. The return brine pipes are each fitted with a regulating valve and a thermometer.

The cold air or provision stores or chambers on board of the *Campania* and *Lucania* are fitted up with refrigerating plants, on the De La Vergne ammonia compression system.

B B



The refrigeration is effected on the brine circulation, and not upon the direct expansion system, a solution of calcium chloride being the agent or medium employed, and this solution is reduced to a very low temperature in the usual manner, by the expansion of the ammonia gas or vapour, in coils or pipes submerged therein, and is circulated by a special pump through the system of cooling or refrigerating pipes,

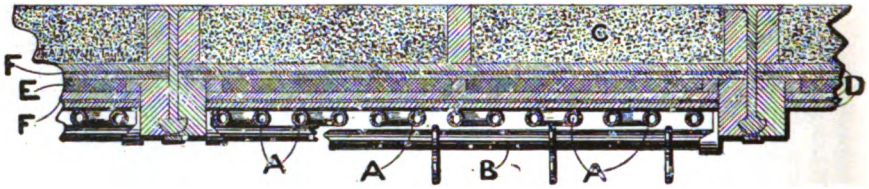


Fig. 265.—Insulation of Provision Stores on board ss. *Campania* and *Lucania*.
Transverse Section through Ceiling.

which latter are fixed to the underside of the roof or ceiling of the cold store or chamber.

The method employed for the insulation of the store or chamber is shown in Figs. 265 and 266, which are vertical sections through the roof or ceiling thereof. A, A, are the refrigerating pipes; B, B, the meat rails; C is a filling of sawdust; D, D, are layers

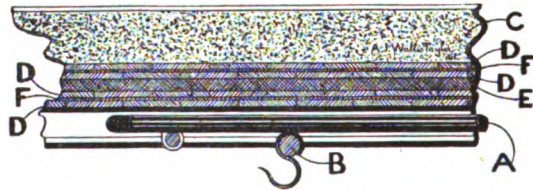


Fig. 266.—Insulation of Provision Stores on board ss. *Campania* and *Lucania*.
Vertical Longitudinal Section through ceiling.

or skins of tongued and grooved boarding; E is a layer of hair felt; and F, F, are layers of tarred water-proof paper. The brine pipes are divided into two sections or sets, thereby admitting of any necessary repairs being effected in one section, without in any way interfering with the circulation of the cold brine through the other section, and special means are also provided for withdrawing the brine from one set or section without interfering with the working of the other.

The ammonia compressor is of the vertical single-acting type, and is actuated by a high pressure horizontal steam engine. The com-

pressor cylinder is $4\frac{1}{2}$ in. in diameter, by 9 in. stroke, and the steam engine is of $2\frac{1}{2}$ horse-power, and is fitted with a special governing arrangement, by means of which the steam supply is determined, the speed being capable of variation within a wide range (say between 30 to 300 revolutions) without interfering with the running of the machine. The construction of the compressor is substantially similar to that described with reference to Fig. 253, and the oil separator and other parts only differ from the arrangement shown in the general view of a complete installation shown in Fig. 19, in that the ammonia compressor is of the single-acting type, and by reason of the smaller capacity of the present plant, and the absolute necessity on shipboard for economising every cubic inch of room possible. The operation of the apparatus is, however, in every way identical, and the description of the complete installation will apply equally well in this case.

The machine is capable of making 5 cwt. of ice daily, in addition to the performance of the refrigeration required in the cold storage or provision chamber.

As has been already mentioned, in spite of their inferior efficiency, in certain cases cold-air machines can be used to some advantage, on board men-of-war for instance, which vessels remain at sea for some years, and a difficulty might be experienced in obtaining carbonic acid, or other volatile agent.

Fig. 267 illustrates a Hall vertical marine type of steam-driven cold-air machine, fitted with compound steam cylinders, which is the pattern of machine supplied by Messrs. J. and E. Hall, Limited, to H.M. Admiralty, and to other navies. Another marine type of air compression refrigerating machine, made by the above firm, is of a horizontal pattern, also fitted with compound steam cylinders.

Figs. 268 and 269 show two recently-designed marine types of Haslam cold-air machine. That shown in Fig. 268 is from a photograph of one of two similar machines recently supplied to His Majesty's yacht. Fig. 269 is a pattern which has been supplied to the British Admiralty for the manufacture of 85 lbs. of ice per day of twelve hours on warships.

In a marine installation the pipe or trunk for admitting the cold air is usually fixed along one side of the cold store or chamber in the hold, as near the top or ceiling as possible, the return pipe or trunk being placed at the opposite side of the chamber. As in land installation, the inlet trunk or pipe is fitted with a number of apertures governed by sliding doors; these are only opened to a very slight extent at the end nearest the machine, and gradually more and more

as they approach the end furthest therefrom, thus equalising the temperature in the chamber.

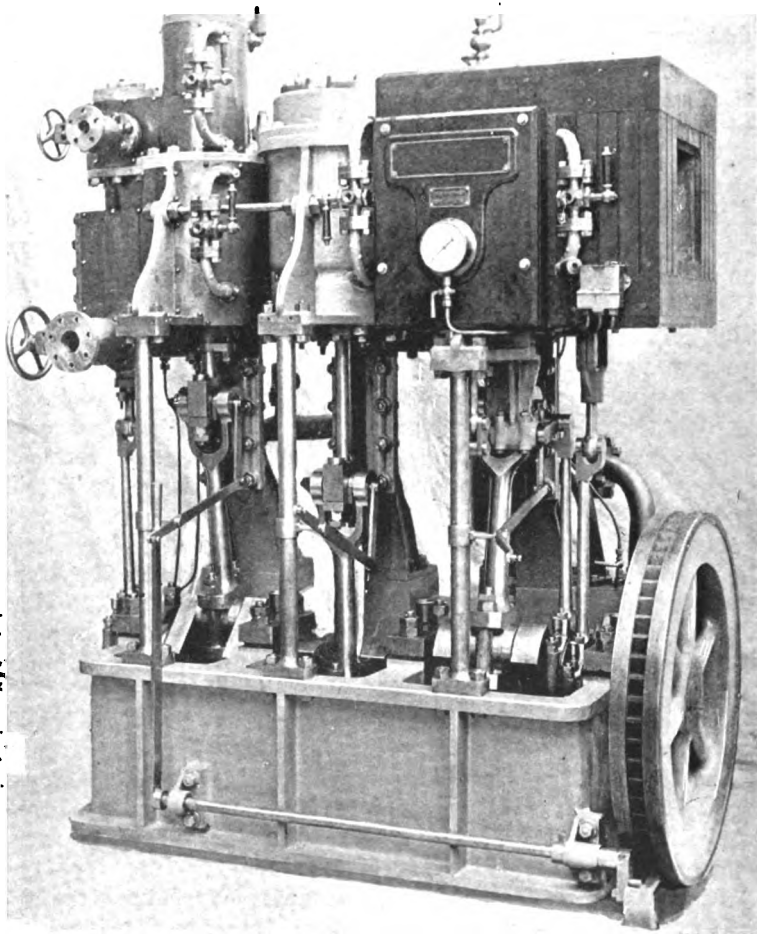


Fig. 267.—Hall Vertical Marine Type of Steam-driven Cold-air Machine.

The most important point is to ensure the cold air being thoroughly

circulated, and penetrating every portion of the chamber, and thermometers should be hung in different positions therein to form a check

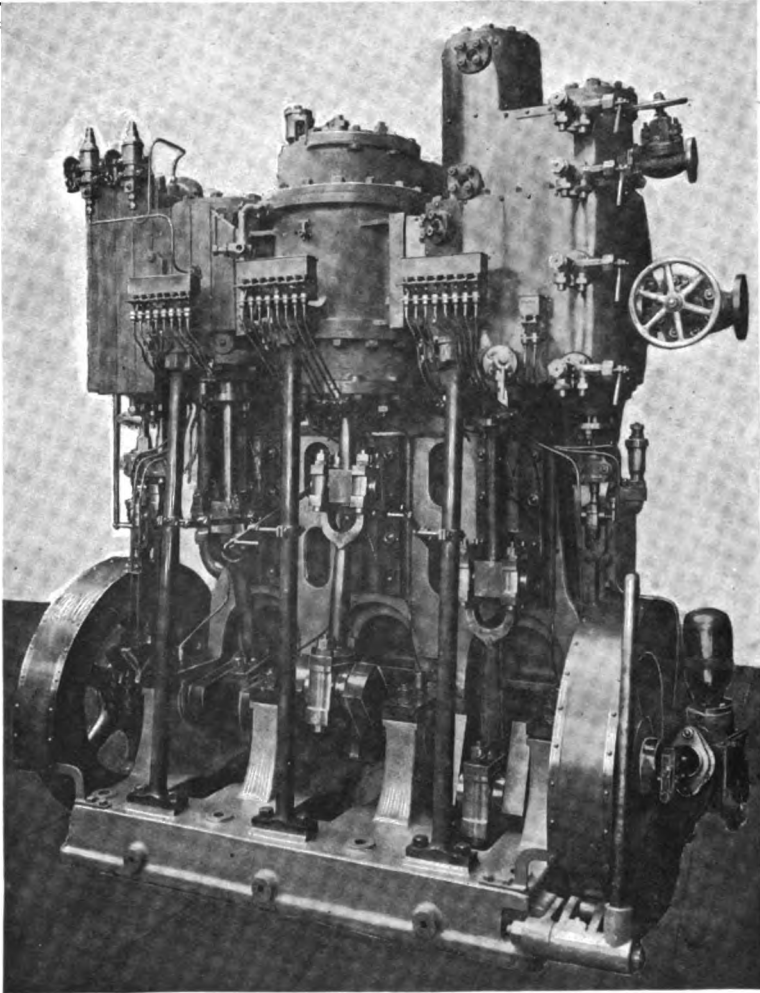


Fig. 268.—Haslam Vertical Marine Type of Steam-driven Cold-air Machine.

to the deck pipe ones. Where a cold-air machine, unprovided with a special arrangement for drying the air, is used, the snow box must be

cleared out repeatedly, to prevent the passages, and also the slide valve ports, from becoming blocked up, and the trunk or inlet pipe must be cleared once a day or oftener.

For marine purposes the cold-air refrigerating machine was first in the field, and is still preferred before other systems by many engineers,

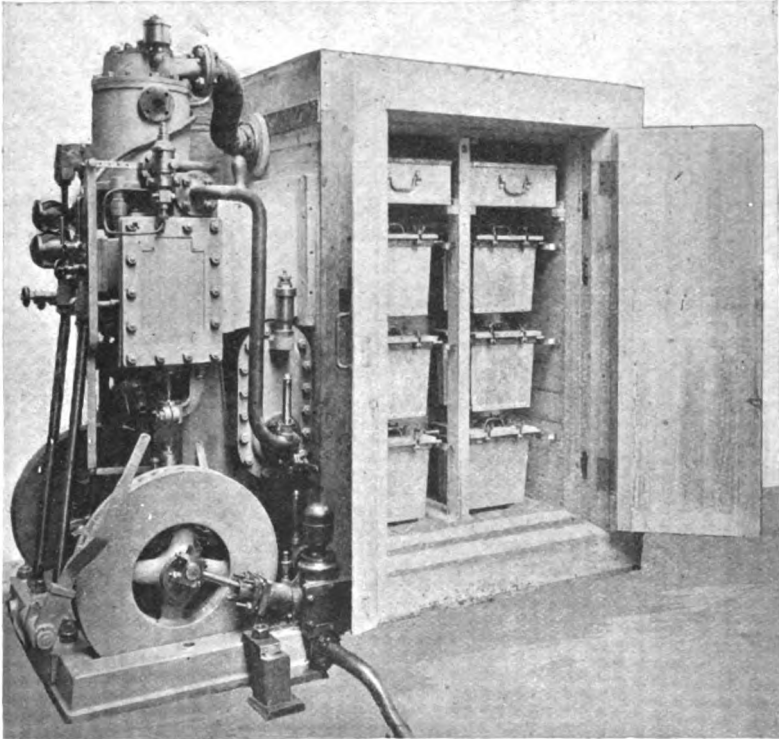


Fig. 269.—Haslam Vertical Marine Type of Steam-driven Cold-air Machine and Ice-making Apparatus.

and by the Admiralty; but owing to certain defects in the earlier machines, other systems have been tried. The difficulty with any new system is the necessity for carrying a considerable store of chemicals, and serious accidents have resulted from the use of these machines on ship board.* There is also the danger of running short of these

* *Vide* leading article in "The Engineer," 3rd January, 1902.

chemicals by any accident to the vessels in which they are stored. Now, with cold-air machines no chemicals are required, the pressures adopted are low, and possibility of accident to the machine is even more remote than accident to the main propelling engines.

A new cold-air machine has recently been designed by Messrs. T. and W. Cole, Ltd., to overcome the defects of the earlier machines of this type, in which each defect has been combated with marked success, as described in previous chapters.

Previous to storing the carcasses in the cold storage space, a thorough inspection thereof should be made, and any damage to the

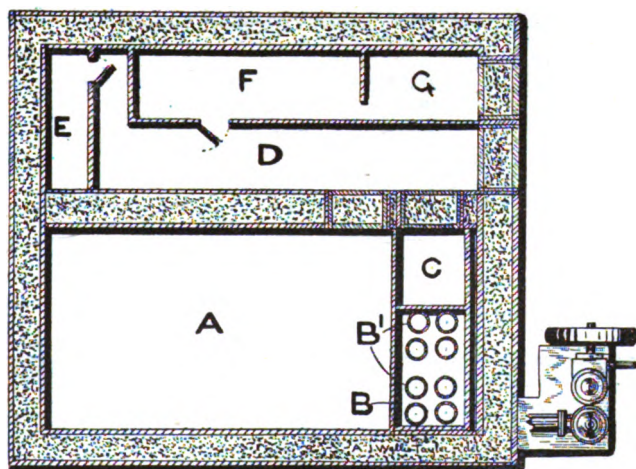


Fig. 270.—Arrangement of Cold Storage Chamber on board large Passenger Steamer. Sectional Plan.

walls made good. When the cold storage space is filled, the hatches should be made tight by caulking with oakum, or, preferably, they should be fitted with indiarubber insertions, which afford a greater certainty of air-tight joints being made.

An arrangement of a small cold storage chamber, such as is very frequently constructed on board a large passenger steamer, is shown in sectional plan in Fig. 270. The refrigeration is effected by means of a Lightfoot, Haslam, or other cold-air machine of the vertical type.

The arrangement of this cold storage chamber, which is practically similar to that of those used on the passenger steamers of the Peninsular and Oriental Company, will be very readily understood from

the drawing, wherein A is the meat room, the temperature of which is kept down to about 20° Fahr., and wherein are situated the ice-making or freezing tank B, the ice cans or cases B' B', and the ice store C. D is the vegetable room, which is maintained at a temperature of about 40° Fahr., and in which are placed the water-cooler E, wine closet or cooler F, and hanging room G.

It is, of course, obvious that the ice-making or congealing tanks or boxes, employed on shipboard, must be considerably modified in order to provide for the motion of the vessel. In Fig. 271 is shown in plan, and in longitudinal and transverse section, a type of marine ice-making box or tank designed by Mr. Kilbourn, and installed by him on the International Navigation Company's vessels *St. Louis* and

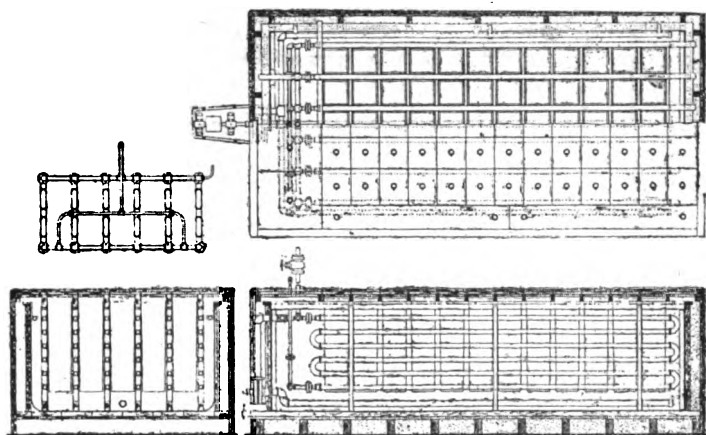


Fig. 271.—Ice-making or Congealing Tanks or Boxes for use on Shipboard.

St. Paul. In the left-hand top corner of the illustration is shown an end view of the refrigerating coils.

Carcasses should be packed as close together as possible, consistent with safety, a space being left round the sides for the circulation of the cold air.

The proper stowage of a fruit cargo in the cold store or chamber is likewise a matter that must be carefully attended to, in order to ensure its arrival at its destination in good condition. The essential point to be insisted upon is that clear spaces or clearances of at least $\frac{1}{2}$ in. be left between each tier of cases, and between the said cases and the bottom, sides, and ceiling, of the chamber. These clearances

can be managed by the insertion of laths of a suitable thickness between the cases. Passages should be also provided for admitting of inspections of the state of the fruit being made during the voyage.

The best temperature to maintain for fruit is one of from 45° to 55° Fahr., and this should be evenly kept up throughout the entire cargo. It must be borne in mind that the slightest degree of frost will destroy a whole cargo of fruit. It will generally be found sufficient to run the refrigerating machine about twelve hours per day in hot latitudes and six hours per day in cooler ones.

It is most important that the temperature should not be permitted to vary to any great extent during the voyage, and as considerable difficulty is experienced in attaining this end, it is desirable to provide a check upon those in charge. For this purpose a thermograph, or self-registering thermometer* is, or ought to be, provided in connection with each chamber fitted for the carriage of fruit, so that an accurate record may be kept of the actual changes of temperature that have taken place during the voyage, and it can be seen at a glance on arrival whether the fruit has been carried under proper conditions or otherwise.

BARGES.

An important type of portable refrigerator is that adapted to meet the requirements of barges which it is desirable to maintain at a low temperature without encumbering them with machinery, or rendering in any way necessary the employment of special labour to take charge of the same.

The frozen meat, as a rule, arrives in good condition on board the vessels, and deterioration in quality usually takes place, as has been already mentioned, during its transference to the cold stores on land, and again during the subsequent delivery thereof to the retailer, when the meat is exposed to temperatures frequently much higher than what is required to preserve it in good condition. The Pulsometer Engineering Company, Limited, claim to have devised a successful system of refrigeration for barges.

Since the beginning of 1888, moreover, the London and Tilbury Lighterage Company, Limited, have had barges fitted with special refrigerating apparatus successfully plying upon the Thames, the meat landed by them being invariably in good condition, and not infrequently at a lower temperature than when first discharged from the vessel.

* For description of thermograph or self-registering thermometer see page 496.

CHAPTER XVII.

VARIOUS MANUFACTURING, INDUSTRIAL, AND CONSTRUCTIONAL APPLICATIONS.

Chocolate Manufacture.—Breweries.—Paraffin Works.—Artificial Butter Manufactories.—Dairies.—Dynamite Factories.—Manufactories of Photographic Accessories.—Wine Growers' and Wine Merchants' Establishments.—Distilleries.—Sugar Factories and Refineries.—Chemical Works.—India-Rubber Works.—Glue Works.—Tea Factories.—Various Other Manufacturing and Industrial Applications.—Tunnelling, Sinking Shafts, Laying Foundations, etc.

INDUSTRIAL AND MANUFACTURING APPLICATIONS.

USES are now made of refrigeration in many manufactures and industries, besides that of its more legitimate and important application to the preservation of various provisions of a perishable nature, which latter has been already dealt with, so far as space would allow, in preceding chapters. All the systems hereinbefore described, with the exception of the first, or that wherein the abstraction of heat is effected by the more or less rapid dissolution or liquefaction of a solid, are, to a greater or less degree, advantageously applicable for this purpose.

Although the preservation of organic substances was the first known and the most obvious use, the successful application of artificial refrigeration to a process of manufacture is somewhat older than that to the preservation of provisions, a Harrison ether machine having been erected at Truman, Hanbury, and Co.'s brewery about 1856, which machine was stated, at a meeting of the Institution of Mechanical Engineers, held in 1886,* to be still at work and acting efficiently. A machine of the same type was also said to have been put up by A. C. Kirk in 1861,† who employed it for the extraction of solid paraffin from shale oil.

The application of a refrigerating machine to the cooling of chocolate during the process of manufacture was first made by J. S. Fry in 1882,‡ in which year he employed one of Lightfoot's double expansion horizontal cold-air machines, and was enabled to proceed without interruption throughout the whole year with work that had previously

* "Proceedings, Institution of Mechanical Engineers," 1886, p. 246.

† *Ibid.*, p. 231.

‡ "Proceedings, Institution of Mechanical Engineers," 1886, p. 236.

to be suspended during the hot weather. Since that time the use of refrigerating machines in chocolate works has become almost universal. A great saving in chocolate manufacture is likewise effected by the rapid solidification which is rendered possible, and the waste thus avoided; and furthermore, as the chocolate leaves the moulds readily and intact, a considerably fewer number of the latter are required to do the same amount of work.

Another important application of refrigerating machinery is to constructional work, such as the formation of tunnels, the sinking of shafts, wells, laying of foundations, etc.

CHOCOLATE MANUFACTURE.

The cold-air machine is well adapted for chocolate-cooling, provided only that the air be dry, an achievement claimed by the inventors for the "Arctic" machine, and Messrs. Cole have applied it to several chocolate factories with complete success. An advantage of this system is that whilst some forms of refrigerating machines only very partially dry the air, and that inside the room, by deposition of frost on brine pipes, or producing a current of air over brine-wetted surfaces, the "Arctic" cold-air machine acts upon the air before delivering it to the cold-room, or other apparatus, and thus the moisture is deposited outside of, and away from, the cold-room. There is also the further advantage of there being no brine pipes on which to deposit frost, which may drop on to the chocolate trays, etc., and requires the provision of special draining gutters, all of which apparatus are frequently more or less imperfect in their action.

A rotary chocolate cooler of very ingenious construction has been lately devised by Mr. J. C. Broadbent and Mr. J. McRae, by means of which it is claimed that the chocolate during the process of becoming solid is preserved from any moisture, a difficulty which the inventors state has not been overcome in any of the apparatus hitherto designed.

Broadbent and McRae's apparatus consists of a series of chambers revolving on a central pivot. The cooler is cylindrical, with a diameter of about 10 ft. and a height of 8 ft. The outside, that is, the case, is constructed of wood, and insulation is secured by the use of silicate cotton. The circular basis of the apparatus is, of course, furnished with a like insulating substance. The upright steel axle is $2\frac{1}{2}$ in. in diameter, and round this revolve the sets of shelves. Every set of shelves is fitted with wooden sides, so that these form in the outer shell six perfectly isolated and refrigerating compartments, the whole being furnished with a toothed revolving gear connected by a

hand wheel situated at the front of the machine. The chambers are provided with an arrangement of spaces for cooling by brine. These have to be put in position when the cooler is to be used, so that none of their number can coincide with the door space of the cooler itself. The shelves of each compartment in the cooler run 2 ft. 9 in. long by 1 ft. 9 in. wide. Of these compartments there are six, with a space of 5 in. between each. The special trays on each shelf are adjusted to carry from 10 to 15 lbs., but where it is required, by a simple change, blocks of any size can be cooled.

The ordinary capacity of an apparatus of the above dimensions is 30 cwt. a day, but a much greater capacity can be had when desired. One of the advantages claimed for this apparatus is that no fastenings are needed. It is constructed on the wedge principle, and hence all the doors close automatically tight. The apparatus is so ingeniously arranged, that when the compartments revolve, and one of them arrives at the door space, and the door is opened, elliptical shutters are automatically operated so as to cause the sides of the compartment to fit so perfectly, that the rest of the cooler remains completely isolated from the air. In point of fact the door may be left open at any time without there being the slightest change in the temperature of any of the other compartments. Then again the top and bottom shutters of each division are absolutely self-acting—automatic, in fact—and thus render the compartment entirely air-tight. Another ingenious point is that the upper and lower ends of the several compartments are so made that, as the shelves rotate, the upper and lower divisions open on the parallel lever system, and directly rotation ceases they shut. A Steinle's thermometer keeps a record of the temperature inside the cooler and is read on the outside. There is also an ingenious plan by which the contents of the cooler is indicated. The circular top is graduated by six marks numbered from one to six, corresponding to the six compartments. In order to charge and uncharge, the wheel beside the door of the cooler is simply turned until the required number coincides with a fixed pointer in the front. A convenient arrangement is provided for marking the time at which the different compartments are charged, and a timepiece is fixed in the middle of a plate having six dials furnished with movable hands. To facilitate occasional cleaning, the top of the cooler is equipped with a vapour valve, through which an air current can be passed for that purpose.

In another apparatus for treating chocolate an endless travelling band or apron is provided by means of which the chocolate is traversed through a refrigerated compartment.

REFRIGERATION IN BREWERIES.

One of the, if not the, most important of the industrial applications of refrigerating machines is that of cooling water to be used for refrigerating and attemperating purposes in breweries. This is more especially required when the supply of water is derived from a river or other source exposed to the heat of the sun, or from the water mains in large towns, the water from both of these sources usually rising, during the summer months, to from 65° to 70° Fahr.

Where a plentiful supply of well water at a temperature of from 50° to 54° Fahr. can be obtained, the provision of means for artificial cooling becomes of minor importance for this special purpose, and can be dispensed with.

When, however, the water supply is at a comparatively high temperature, such as that above indicated, it would of course be totally impossible to cool the worts down to the ordinary pitching temperatures of from 57° to 59° Fahr., or to control the fermentation in the tuns or squares with water at such a temperature passing through the attemperators, and, moreover, on the completion of the fermentations it would be likewise quite impracticable to cool the finished beers down to the temperature desirable for racking.

One of the first operations is the refrigerating of the hot beer wort.

The usual practice is to first slightly reduce the temperature of the hot wort by exposing it in the large tank known as the cool-bed or cool-ship, which is generally located on the top of a building and roofed over, the sides being only enclosed by lattice work, so as to allow a free circulation of air, and then permit it to flow slowly down over the tubes or coils of a "Baudelot Cooler."

The Pontifex-Wood brine refrigerator is also successfully employed for cooling beer worts. This apparatus consists essentially of sets or rows of copper or brass tubes arranged horizontally, and secured at their extremities in return heads. Through these tubes and heads the cold brine from the refrigerator is caused to flow, and the beer worts to be cooled is allowed to trickle over their exterior surfaces.

An ordinary refrigerator for cooling hot beer wort consists of a shallow vat wherein is mounted a continuous tube or pipe, through which the cooling water is forced in a direction opposite to that taken by the wort. The object of thus running the wort in one direction and the water in another is to ensure the delivery end of the wort being exposed to the coldest portion of the stream of water. In another form the wort passes through a coil of pipe arranged in a vat, through which

a circulation of cooling water is kept up. A more complicated arrangement is that wherein boxes are arranged to project alternately from opposite sides of a double walled vertical case; through the latter, and which boxes, the wort is caused to take a zig-zag course by suitable check-plates extending centrally into the boxes. The cooling water takes a like sinuous or zig-zag course on the exterior of these boxes. A wort or beer-cooler, employed in many large breweries, is a large shallow, covered vat, fitted with a volute formed by a wide strip of metal set on edge between the upper and lower plates or heads, to which it is attached, in such a manner as to form a helix with two distinct spaces. Through one of these spaces the refrigerating liquid, or medium, is circulated, suitable inlet and outlet passages being provided, and through the other the wort or beer to be cooled.

Brotherhood's refrigerator consists of a number of long boxes placed

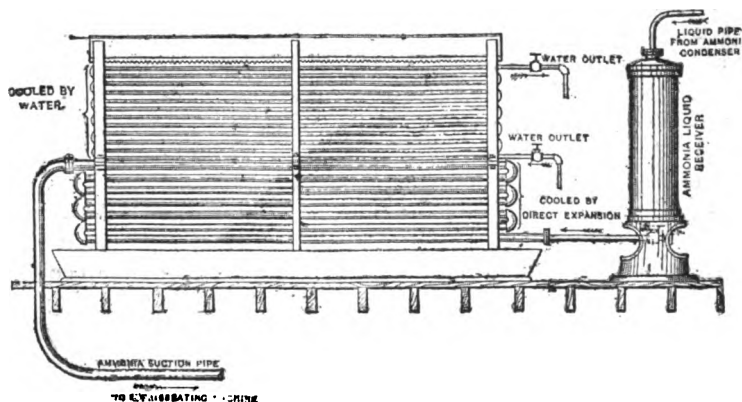


Fig. 272.—“Baudelot Cooler,” with Direct Expansion for Cooling Hot Beer Wort.

side by side or otherwise, each box having a flow and return passage for the cooling water, and copper tubes through which the wort passes. Hollow covers at the ends of the boxes afford communication between one tier of tubes and another.

Mash tuns are likewise constructed in which the vertical shaft carrying the rake or stirrer is formed hollow, as also the arms of the side rake, which latter are perforated with a number of small holes. Through the above-mentioned hollow shaft and perforated arm steam is first passed to boil the wort, and subsequently air, reduced to a low temperature in order to cool or refrigerate it. In a refrigerating or cooling apparatus on a somewhat similar principle, air, previously reduced to a low temperature, is forced into the perforated false bot-

tom of a vat, from whence it escapes, through these holes or perforations, and passes up through the wort or beer contained therein.

Numerous other arrangements are also in use in this country and abroad. One of which, of American origin, is as follows:—First the hot wort is delivered into a trough of V shape in transverse section, from the bottom of which it trickles over a series of horizontal pipes arranged in line vertically, and through which the cooling water is passed, the cooled wort being finally collected in an U shaped trough for delivery to the fermenting tun.

An apparatus which is extensively used in America for cooling or refrigerating hot beer wort, is that known as the "Baudelot Cooler."

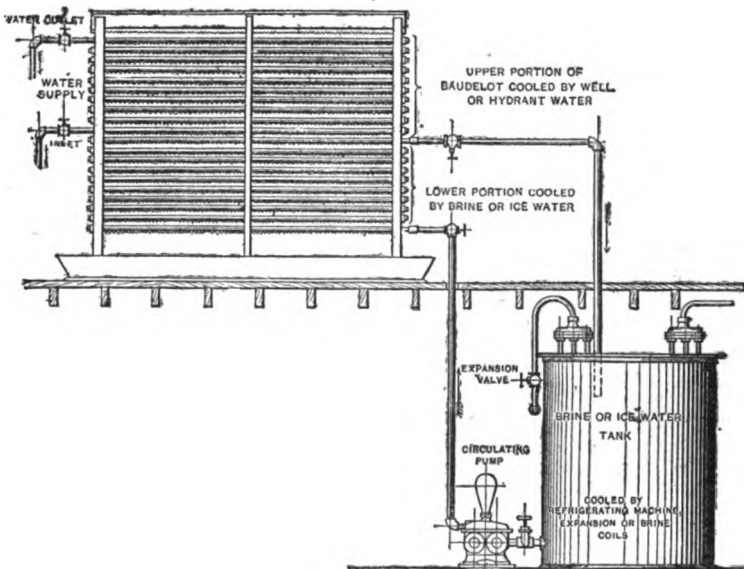


Fig. 273.—"Baudelot Cooler," with Brine Circulation for Cooling Beer Wort.

This apparatus is constructed for use both with a brine circulation and direct expansion. In the first arrangement, shown in Fig. 272, the upper portion, or half of a set of tubes or coils, arranged horizontally, is cooled by the ordinary well or main water, and the lower part or half thereof by mechanical refrigeration on the direct expansion system. In the second arrangement, shown in Fig. 273, the upper part or half of the pipes or coils is similarly cooled, but the lower portion or half is cooled by brine circulation.

The above Baudelot cooling apparatus is made by the Frick Co., U.S.

Another, and also a very important, use for a refrigerating machine in breweries is that of cooling the air in the fermenting and yeast rooms, an arrangement for which purpose, on the brine circulation systems, is shown in Fig. 274. This cooling is necessary during hot weather, even in cases where an unlimited supply of cold water for refrigerating and attemperating is obtainable, inasmuch as the water can only be applied to the cooling of the beer itself in the fermenting vessels, and not to the head of yeast above. The result of this is that, although the fermenting beers can be kept well under control by the use of the attemperators, the yeast above is frequently found to be

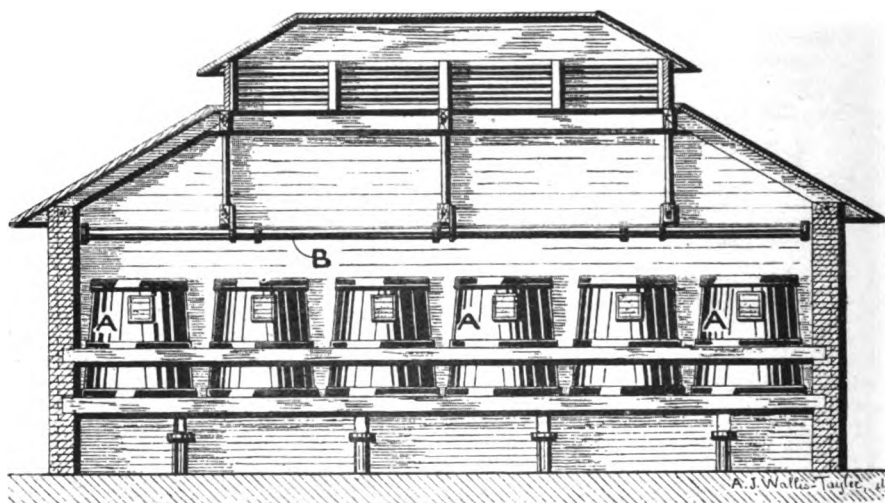


Fig. 274. —Arrangement for Cooling Fermenting and Yeast Rooms in Brewery on the Brine Circulation System.

going wrong by reason of the excessive temperature of the atmosphere of the room.

In employing a refrigerating machine for this purpose, in connection with the arrangement shown in Fig. 227, brine reduced in the cooler or refrigerator to about the temperature of the latter, that is from 10° to 20° Fahr., or very much lower if desired, is circulated through rows of pipes B fixed over the tuns A, or the squares, to be cooled in the fermenting rooms, and also in the yeast rooms, the said system of pipes being reduced by the brine to below freezing point, and the atmosphere of the rooms from contact with the latter to 45° or 50° Fahr., or any other desired point. By this means an October temperature, that is

to say, one of 50° Fahr. or less, can be obtained during the hottest summer weather.

Fig. 275 shows an arrangement for cooling a fermenting room on the direct expansion principle, fitted with the De la Vergne patented pipe system, a detailed description of which will be found in a previous chapter.

The speed of the flow of brine in the first arrangement, shown in Fig. 274, through the various circulations, can be regulated at will by means of stop-cocks or valves provided on the several branch mains, and that of the gas or vapour in the second arrangement, shown in

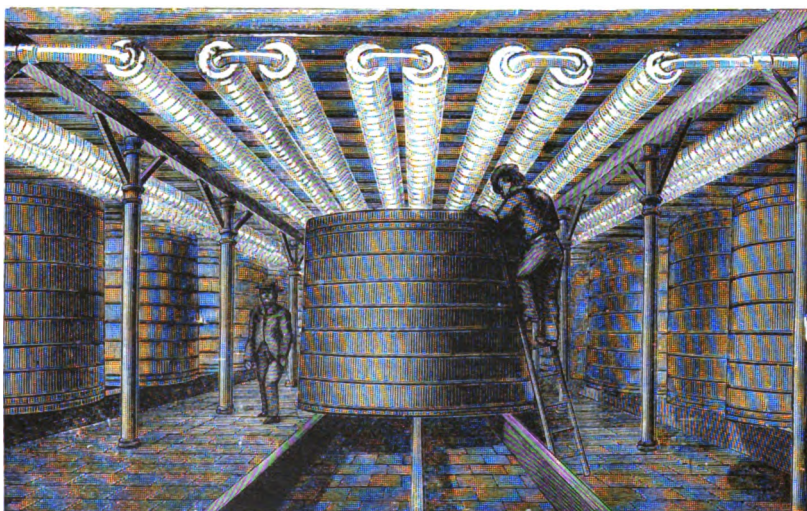


Fig. 275.—Arrangement for Cooling Fermenting Room on Direct Expansion Principle, on the De La Vergne System.

Fig. 275, by the expansion valve, and consequently, the temperature of the fermenting rooms can be regulated at will. In simple arrangements, such as the foregoing, the brine mains B, and the direct expansion pipes respectively, cool the entire area of the fermenting room; that is to say, a separate brine circulation (Fig. 274) or coil of vapour pipes (Fig. 275) is run over each row of rounds or tuns, and all are cooled at once. Where a number of large squares have to be cooled, however, a more elaborate arrangement is preferably employed, and the sides and tops of the squares are boxed in or enclosed with partitions formed of light boarding, under which a separate

c c

circulation of brine or vapour pipes to each square is fixed. The latter plan enables the temperature of the air over each square to be regulated separately and independently of the others, and the brine or vapour to be shut off completely from empty squares, thereby lessening the work of the refrigerating machine. It also further economises the work of the latter, inasmuch as only the air directly over each vessel has to be cooled.

In working a refrigerating machine on the brine circulation principle, for these cooling purposes, in a brewery of moderate dimensions, it is usually run during the daytime, and when it is shut off at night, and the fermenting rooms are closed up, the large amount of cold stored up in the brine in the pipes over the fermenting vessels, is, as a rule, found to be sufficient to keep the atmosphere of the rooms down to the desired temperature during the night; except, however, in very hot weather, when the machine has usually to be run continuously. In very large breweries also it has generally to be kept working day and night.

In some instances, a refrigerating machine is employed for the combined purposes of cooling water for use in refrigerating and attemperating, and of cooling the air in the fermenting and yeast rooms. In an arrangement of this description, at the top of the brewery building, or at a sufficient elevation to command the refrigerators and attemperators, is fixed a suitable ice-water tank, and above this tank a brine refrigerator, which latter may consist of horizontal rows of brass or copper pipes, through which a branch circulation of cold brine from the mains is run, whilst over them the supply water at 60° or 65° Fahr. or other temperature, is allowed to trickle or flow slowly. This water is thus reduced by the cold brine within the pipes to about 33° Fahr., or to any other desired temperature, after which it is passed into the ice or cold water tank, from which it is drawn through pipes as required for refrigerating and attemperating. This arrangement admits, by the simple opening, closing, or regulating of the stop-cocks or valves, of the whole or any desired proportion of the power of the machine being applied to the cooling of air, or to the cooling of water, or to both operations at the same time.

Lager beer fermenting rooms, and store cellars, can be cooled by a plan substantially similar to that shown in Fig. 274, for cooling the air in fermenting and yeast rooms in ordinary breweries. In the case of lager beer, however, where the whole of the fermenting rooms are kept at a temperature of about 42° Fahr., and the stores at about 38° Fahr., a proportionately larger number of brine cooling pipes are required.

Figs. 276 and 277 and 278 illustrate a method of cooling a fermenting room, which, as well as the pipe arrangement for vaults shown in Fig. 279,


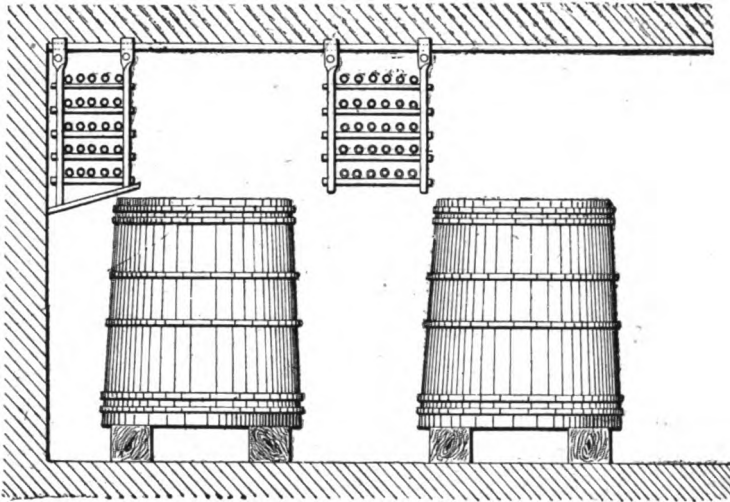


Fig. 276. —Frick Company's method of Cooling a Fermenting Room in Brewery.

are constructed by the Frick Company, U.S. In the arrangement shown in Fig. 276 the coils are suspended from iron floor-beams, and are located in passage-ways and at the sides of the rooms, by which

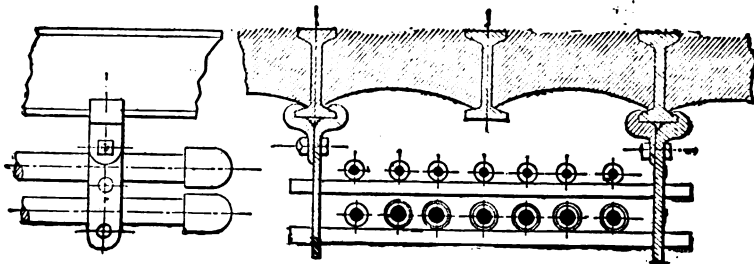

Figs. 277 and 278.—Arrangement for Suspending Flat Pipe Coils from Ceiling on the Iron Floor Beams. Side Elevation and Transverse Section.

means any drip into the tubs is avoided, and free access to each tub is admitted of. Figs. 277 and 278 show in side elevation and transverse

section the arrangement adopted for suspending flat pipe coils from ceiling on the iron floor-beams.

In Figs. 280 and 281 is shown, in side elevation and plan, an automatic attemperation system with a cooling arrangement sup-


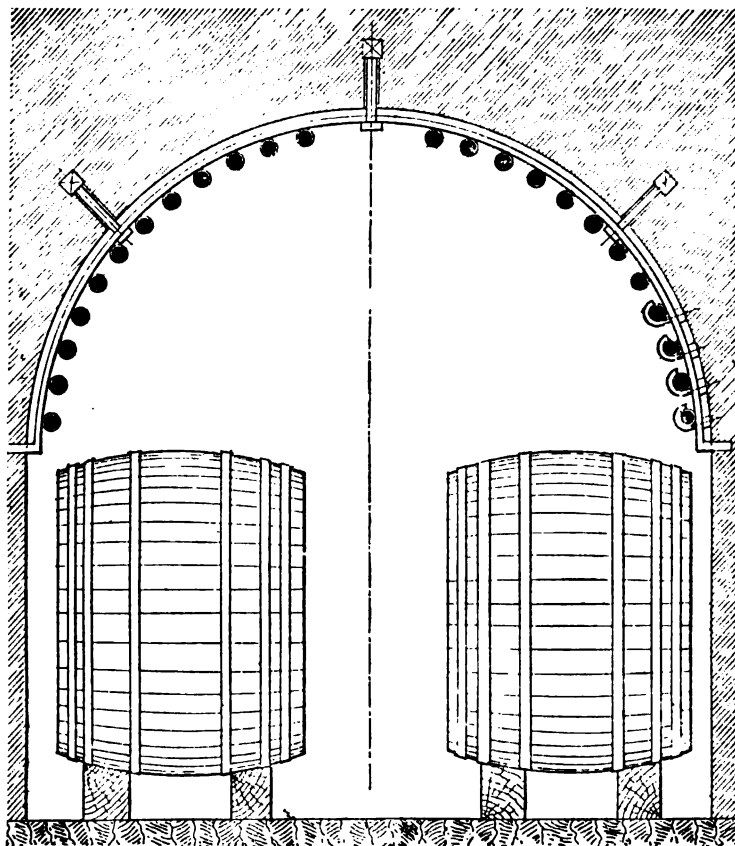


Fig. 279. —Pipe Arrangement for Vault in Brewery. Transverse Section.

plied by the same firm. In this system the ice-water for pumping through the attemperators and regulating the temperature of fermentation, is cooled in a cistern or suitable tank, provided with either a direct ammonia expansion or brine coil, supplied by the refrigerating machine which is on the ammonia compression

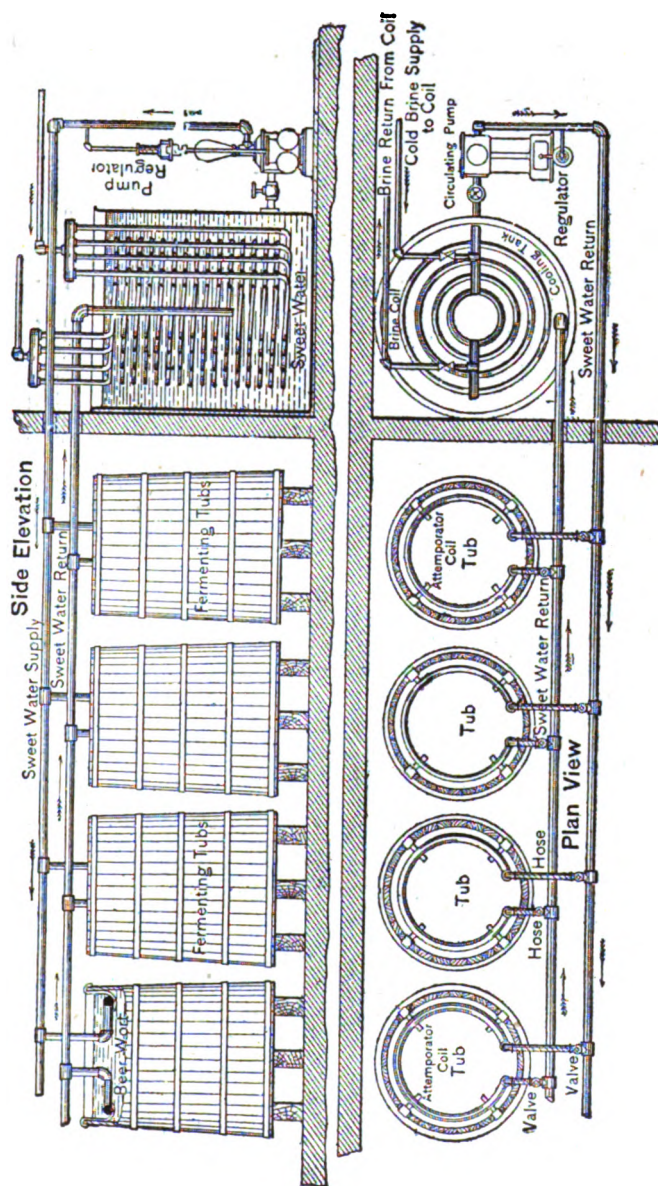

Figs. 280 and 281.—Automatic Attenuator System and Cooling Arrangement, Frick Company. Side Elevation and Plan.

principle, the sweet or ice-water thus made being forced through the attemperators in the tubs, each or any of which can be shut off or regulated at will, the pressure and amount of cooling-water being under automatic control of a self-acting pump and regulator which supplies the attemperators and needs no attention, whether one tub or many be in use.

In Fig. 282 is shown the arrangement of an apparatus for cooling water for refrigerating and attemperating purposes in a brewery, by means of an ammonia absorption machine of the Pontifex-Wood type.

In the illustration H is the water-service pipe from the company's main, or from other source of supply; I is the cooled water-pipe leading from the cooler D up to the ice-water tank J, in which the cooled or refrigerated water is stored to be drawn off as may be required for refrigerating or attemperating. A thermometer is fitted on the pipe I at the outlet from the cooler, and a regulating cock or valve on the pipe H, by which the supply can be so adjusted as to admit of the cooled water being delivered at any predetermined temperature. The water from the supply pipe H is run direct through the coil of the cooler D of the machine (which is placed on the ground floor of the brewery, and sufficiently near the steam boilers to admit of a supply of steam being obtained for use in the generator), from whence it passes reduced to a temperature of 45° or 50° Fahr., or to any other desired lower temperature, to the tank J, which is at a sufficient elevation to command the refrigerators and attemperators, and from which, as above-mentioned, it can be drawn off as wanted. The tank J is fitted with a suitable lid or cover, and is preferably constructed of wood, or of iron lagged with wood and sawdust.

A is the condenser, B the separator, C the condenser, D the refrigerator, E is the absorber, and G is the economiser. A full description of the Pontifex-Wood ammonia absorption machine has been already given in a previous chapter.

In working an arrangement of this description the machine is started in the morning sufficiently early to admit of the ice-water tank J being filled up by the time the refrigerators are set to work. The machine is kept in operation until the refrigerating is done, and for a sufficient length of time after to admit of the tank J being filled up again, so as to provide a sufficient supply of ice-water for the use of the attemperators during the night and until the machine is again started next day. It is stated by the makers that when the tank J is properly constructed as regards insulation, it has been constantly found in practice that the rise in temperature of the water is not more than 1° Fahr. during

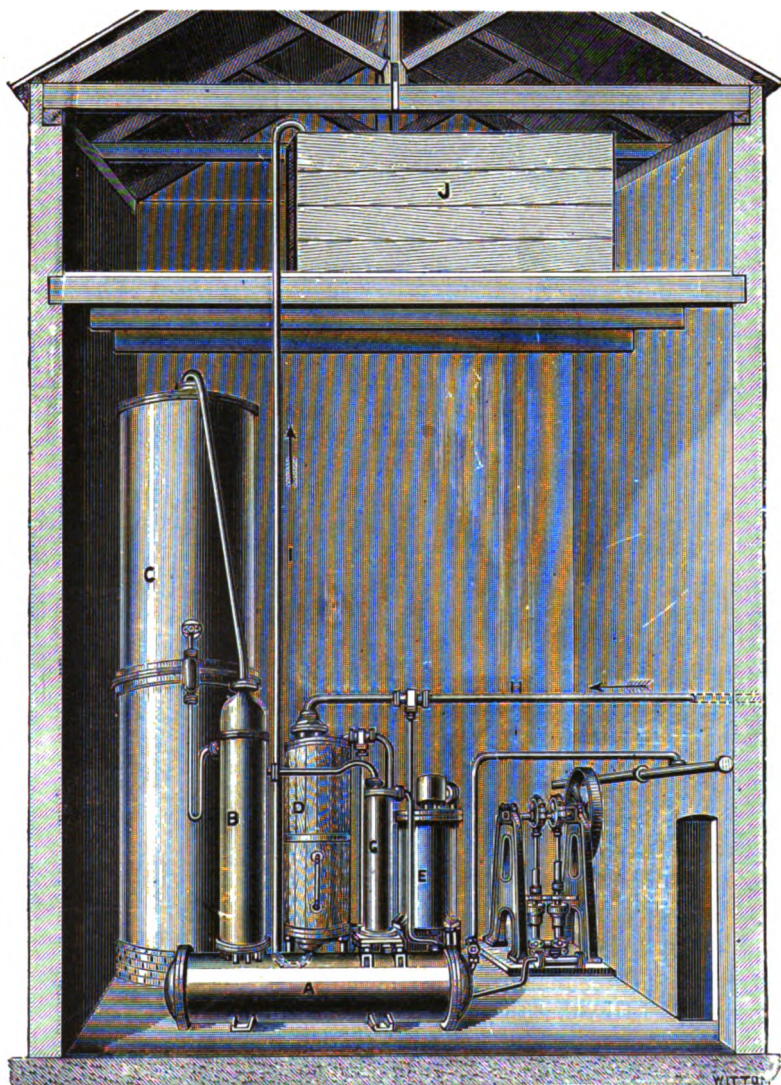


Fig. 282. —Arrangement for Cooling Water for Attemperating Purposes in Breweries with Ammonia Absorption Machine.

a stoppage of from twelve to twenty-four hours. The ice-water from the tank *j* is forced through the attemperators, due provision being made for enabling the supply to each of them being suitably regulated, or cut off altogether if desired, independently of the others. The pump for circulating the ice-water through the attemperators should be self-acting and provided with an automatic regulating device, thereby enabling it to act efficiently whether one or all the attemperators be at work.

The results obtained by the use of an arrangement of the description described are, in addition to a marked improvement in the quality of the beer, that there is a complete control over the refrigera-

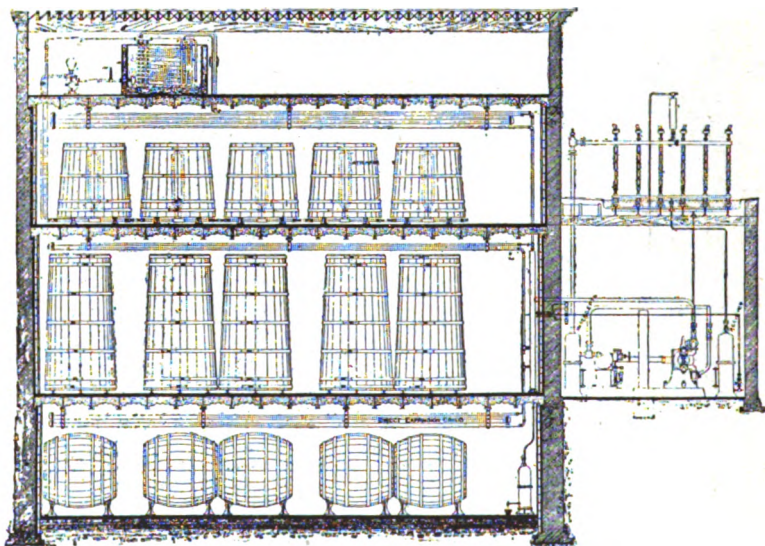


Fig. 283.—Triumph Ice Machine Company. Small Brewery with Refrigerating Machinery working on the Direct Expansion System. Sectional Elevation.

tion and fermentation, the beer refrigeration can be performed in a very much shorter time, and, consequently, the day's work completed sooner, and lastly, that the waste occasioned by the necessity for passing the greatest possible quantity of the comparatively hot water through the refrigerators and attemperators is obviated. This latter item alone is by no means insignificant, the saving where water companies' water is employed for refrigerating and attemperating being generally more than half. In large breweries where several machines are employed, they are kept running continuously day and night.

Refrigeration has been found to be an excellent means for keeping hops from degenerating, and to effect this purpose a dry, dark room, thoroughly well insulated, and maintained at a temperature of from 23° to 34° is found to be the best. Either artificial or mechanical refrigeration, or ice, may be employed for cooling purposes, the first-mentioned being far superior. Before being placed in the cold storage room or chamber the hops should be thoroughly dried, sulphurised, and properly packed.

Another obvious application of refrigerating machines in breweries, though one of secondary importance, is that of making small quantities of ice, either for use in keeping yeast cool, or to send out to public-houses, or for private use. This can be very easily accomplished with machines having a brine circulation. If only opaque ice be required, all that is necessary is to place galvanised iron pails, moulds, or cans of the shape of which the blocks of ice are desired, and filled with water, in the brine tank, and the water will be frozen in a few hours into solid blocks of ice, which can then be loosened by dipping in warm water, and turned out of the cans, the latter having a slight taper, to admit of this being more readily performed. When, however, clear, transparent crystal ice is desired, it is necessary to use de-aerated water, or to keep the water in motion whilst freezing, and some special apparatus is consequently required, such as will be found described in the chapter on ice-making.

In Fig. 283 is illustrated in sectional elevation a complete small brewery fitted with refrigerating machinery on the direct expansion system as designed by the Triumph Ice Machine Company, U.S. This cut gives a good idea of the general arrangement of the plant in such a brewery, for large breweries it will of course differ to a greater or lesser extent, depending upon the size, capacity, etc.

REFRIGERATION IN CANDLE AND PARAFFIN OIL WORKS.

Further important applications of refrigerating machinery to manufacturing purposes are:—In candle works, for the extraction of the solid stearine and paraffin. And in paraffin oil works, for enabling refiners to extract in an economical manner in the presses a greater quantity of paraffin than is obtainable in any other manner, and also to obtain a product of a superior quality.

The first type of refrigerating machinery used for the extraction of solid paraffin was, as has been before mentioned, a Harrison ether machine, and the mode of application is described by Dr. A. C. Kirk as follows:—

"In 1861, when I applied an ether machine to the cooling of paraffin oil, in order to extract the solid paraffin, it was, as far as I know, the first application of a refrigerating machine to manufacturing purposes.

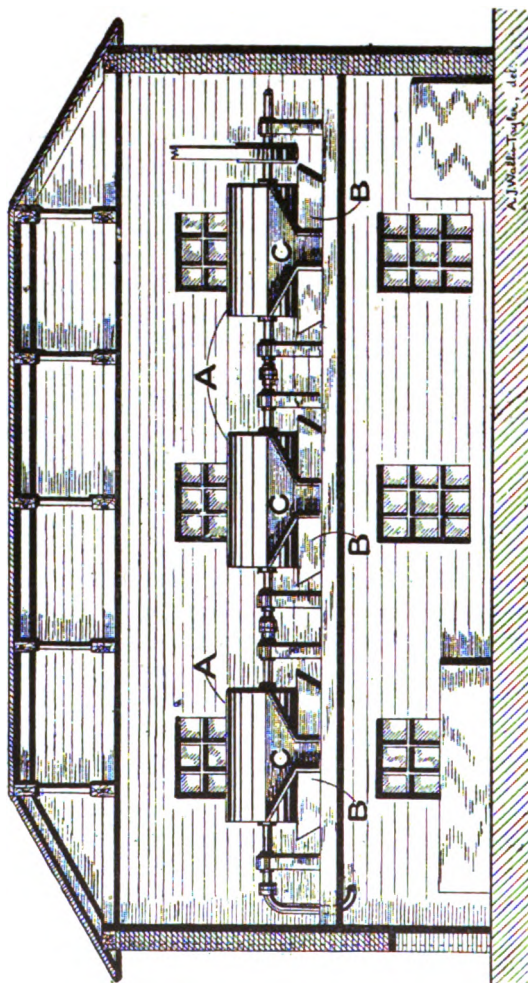


Fig. 284.—Arrangement for the Extraction of Solid Paraffin from Shale Oil. Sectional Elevation.

"Paraffin oil consists of a mixture of many oils of various specific gravities, and contains in solution many solid paraffins of different melting points, some crystallising from the oil at a low temperature, and

some at a comparatively high one. This crystallisable paraffin has to be extracted from the oil, as much to render the oil fluid at all ordinary temperatures as to secure the valuable solid paraffin, which is so largely used for candle-making.

"As paraffin and paraffin oil are very bad conductors of heat, it was from the first evident that in cooling it artificially the heat to be removed could not pass through a layer of any considerable thickness but at a very slow rate. In my earlier arrangements, pipes, closed at the bottom and open at top depended vertically from an iron tube plate, and, by suitable arrangements, a current of cold brine was maintained through these pipes. The pipes hung down into a wooden box, which was filled with paraffin oil, and, after standing a certain time, the oil was cooled and the paraffin was crystallised from its solution in the oil, the whole forming a pretty firm pasty mass. An iron scraper plate fitted these tubes, and being attached to the box and drawn down with it as the box was lowered, forced this frozen paraffin down from between the tubes, and it fell into the bottom of the box.

"This arrangement worked until it was entirely burned down. When it came to be reconstructed, I adopted a more speedy plan. I used a drum, with cold water circulating in it, or it might be cold brine, and as this drum revolved, the lower part of its circumference dipped into a small pan containing the paraffin solution. A coating adhered to the drum, was cooled as the drum revolved, on the opposite side was scraped off continuously and fell into a tank below. By this means a continuous process was substituted for an intermittent one."

An ordinary arrangement for the extraction of solid paraffin from shale oil is shown in Fig. 284, wherein A A are the cooling drums or cylinders, B B the troughs or receptacles intended to contain the oil to be treated, and C C scrapers for removing the partly solidified oil from the drums or cylinders A.

The operation of the apparatus is exceedingly simple, a circulation of brine, first reduced to about 10° or 12° Fahr., or other desired temperature, in the usual manner is afterwards passed through the set of cooling drums or cylinders A, entering each of the latter at one hollow trunnion or gudgeons, and leaving at the other. The lower portions of the drums or cylinders A dip, as shown in the drawing, into the open shallow troughs B, one of which is placed below each drum, and in which the oil to be cooled and treated is placed. The surfaces of the drums or cylinders A during their revolutions are immersed in this oil, and become coated with a thin film of it, which is cooled by the circulation of the cold brine from the machine, and reduced in tempera-

ture during the continuance of the revolution, until it is finally removed in a pasty condition by the scrapers C, one of which is arranged to press against the periphery of each of the drums or cylinders. The remaining oil is then drawn away by plunger pumps, and forced through filter presses, which separate the paraffin wax crystals or scales from the oil.

The employment of a refrigerating machine of one type or another in a works engaged in the production of paraffin is, and indeed has been for some years past, deemed indispensable, and but few manufacturers now endeavour to do without it. Indeed, the development of the paraffin industry dates from the time when an ether machine of the Harrison type was first used for this purpose, which, as already mentioned, was in 1861.*

REFRIGERATION IN BUTTER MANUFACTORIES AND DAIRIES.

In manufactories of artificial butter, as also in other butter and cheese factories and dairies, but more especially in the former, refrigerating machines play an important part, both for ensuring an ample supply of cold water, and for cooling stores or chambers, the former being an essential for successful manufacture in hot weather, and the latter enabling butter and margarine to be kept in prime condition until a favourable opportunity for disposing of it presents itself.

In the manufacture of artificial butter a variety of ingredients are first melted and amalgamated together at about blood heat in churns, and the resultant mass is then mixed with and run out into ice-cold water contained in open troughs. This sudden application of intense cold crystallises and granulates the artificial butter, which is then skimmed off, and at the same time it also washes out the butter milk, which otherwise, by its rapid decomposition, would taint the butter.

Primarily, and indeed still to a considerable extent, the means adopted for reducing this water to the requisite temperature is the application of natural ice, which is placed in tanks partially filled with water, and by melting imparts its cold to the latter. This plan, however, is open to several serious objections, amongst which may be mentioned :—The excessive cost of the ice and of the necessary labour for handling it; the impossibility of thus obtaining as low a temperature as is desirable, the best result being the mean of the two temperatures of the ice and the water; the non-attainment of a regular temperature

* For further information regarding the practice in paraffin cooling, see "Journal of the Society of Chemical Industry," of 29th May and 30th November 1885.

continuously; and finally that the natural ice is always more or less dirty, and renders the cooled water so also, and consequently soils and spoils the colour and appearance of the artificial butter.

Figs. 285 and 286 illustrate a refrigerating arrangement in an artificial butter factory, and Fig. 287 that in a dairy.

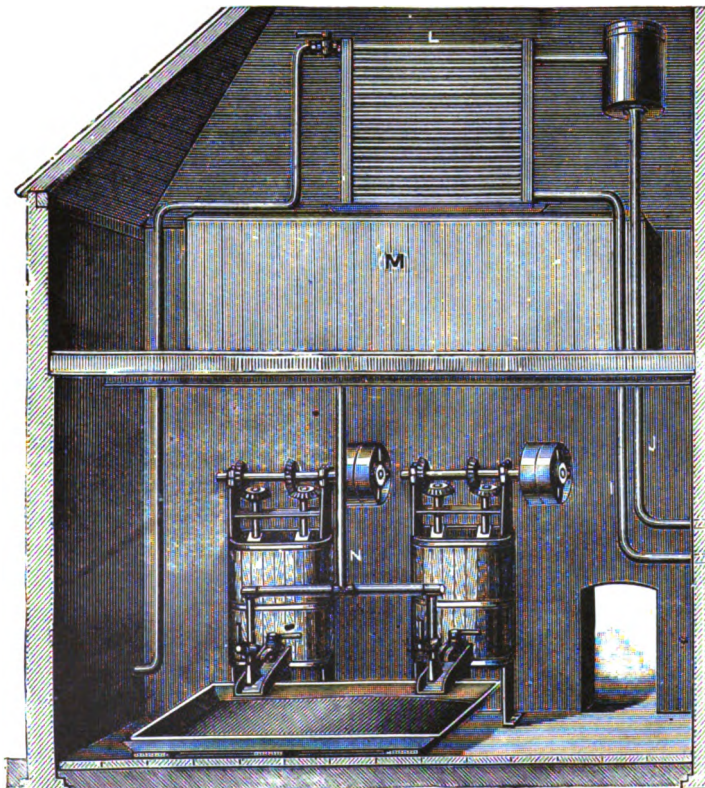


Fig. 285.—Refrigerating Arrangement in an Artificial Butter Factory.
Sectional Elevation.

In the first of these arrangements (Fig. 285), a circulation of brine, reduced to a low temperature (about 20° Fahr.), in the evaporator or refrigerator of a Pontifex-Wood absorption machine, or of a compression machine, is forced by a brine pump through the pipe 1 to the bottom of the refrigerator L, the construction of which latter is more

clearly shown in the enlarged view thereof, Fig. 286. It consists of sets or rows of horizontally arranged copper or brass tubes, secured at

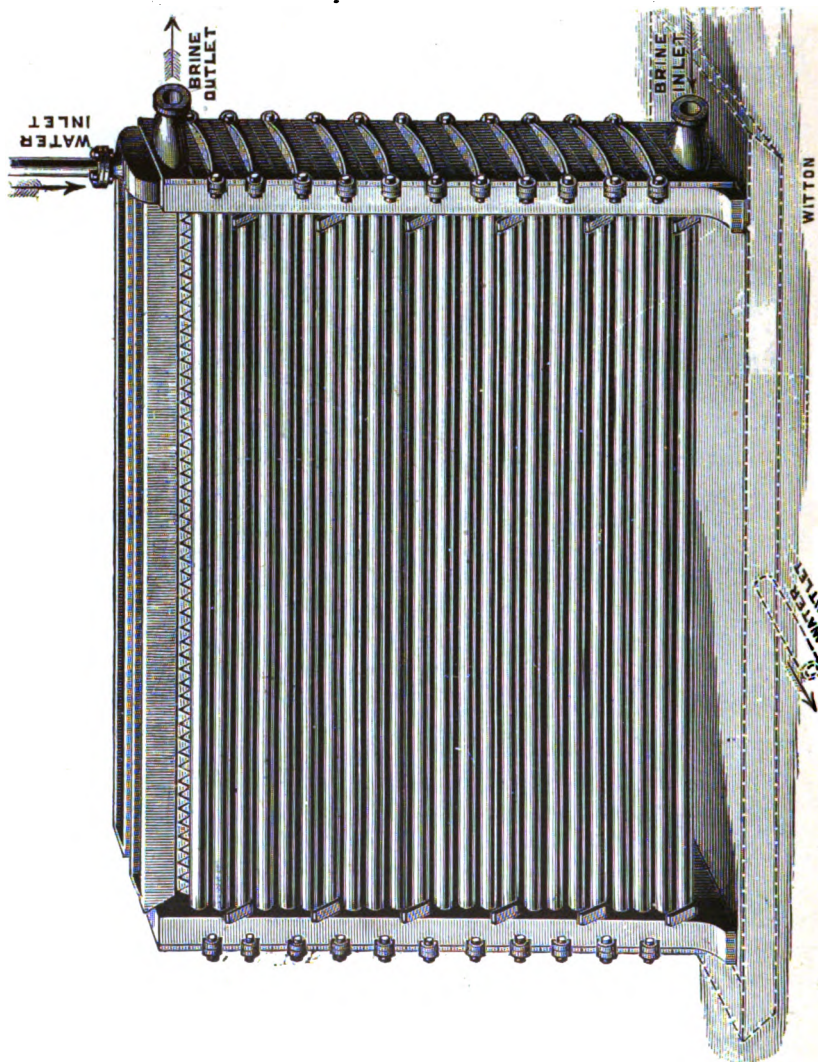


Fig. 286.—Pontifex-Wood Brine Refrigerator.

their extremities in return heads, and through which the cold brine from the cooler passes. Over these tubes the supply water is allowed

to trickle into the cooled or ice-water tank M, from which it is drawn off as required for the use of the churns through the pipes N. In this manner a steady and constant supply of clean cooling water at a temperature as low as 32.5° Fahr. is ensured. The brine returns to the pump from the top of the refrigerator L through the pipe J.

In factories where the practice of using water cooled down only to 39° or 40° Fahr. prevails, the brine refrigerator L can be dispensed with, and the water to be cooled may be simply run through the pipes in the cooler as in the arrangement in a brewery for cooling water for refrigerating and attemperating, shown in Fig. 282.

In the second arrangement (Fig. 287) an ammonia compression machine of the Kilbourn improved type, driven by means of belt gearing from a gas engine is used. This cream-cooler is fixed against the wall of the cold store or chamber, a portion of which latter only is shown in the drawing. The cream-cooler is constructed of tinned copper, and is fitted with small wrought-iron coils without internal joints, similar coils being likewise provided in the water-cooling tank, a portion of which is shown on the top of the cold store or chamber. The refrigeration is effected on the direct system, the ammonia gas or vapour being permitted to expand into the coils of pipe in the cold store or chamber and of the cream and water-coolers.

It was formerly held that the freezing of butter by causing a rupture of the fat globules produced a deterioration in the quality of the butter after thawing, but this idea has been now abandoned, and was never borne out by the practical experience of butter merchants. In fact, for the storage of butter for any lengthened period of time freezing is usually advisable, as it has been found that butter so treated is far superior to that which has been chilled or kept in ordinary cold storage. Frozen butter both retains its flavour and body better than the other, and what is of considerable importance, is less easily affected by bad odours or other contamination. It may here be impressed on those concerned in the storage of butter that the greatest precautions should be taken to protect that commodity from contact with the gases due to decomposition, or with the minute particles that may be contained in the air of the cold storage room or chamber, and which the butter will absorb very freely.

An ordinary form of milk or cream-cooler consists simply in a pan fitted with a false bottom, through the space or clearance between which and the real bottom, a circulation of cold or refrigerated water is maintained.

Figs. 288 and 289 show in plan and elevation the Sandbach

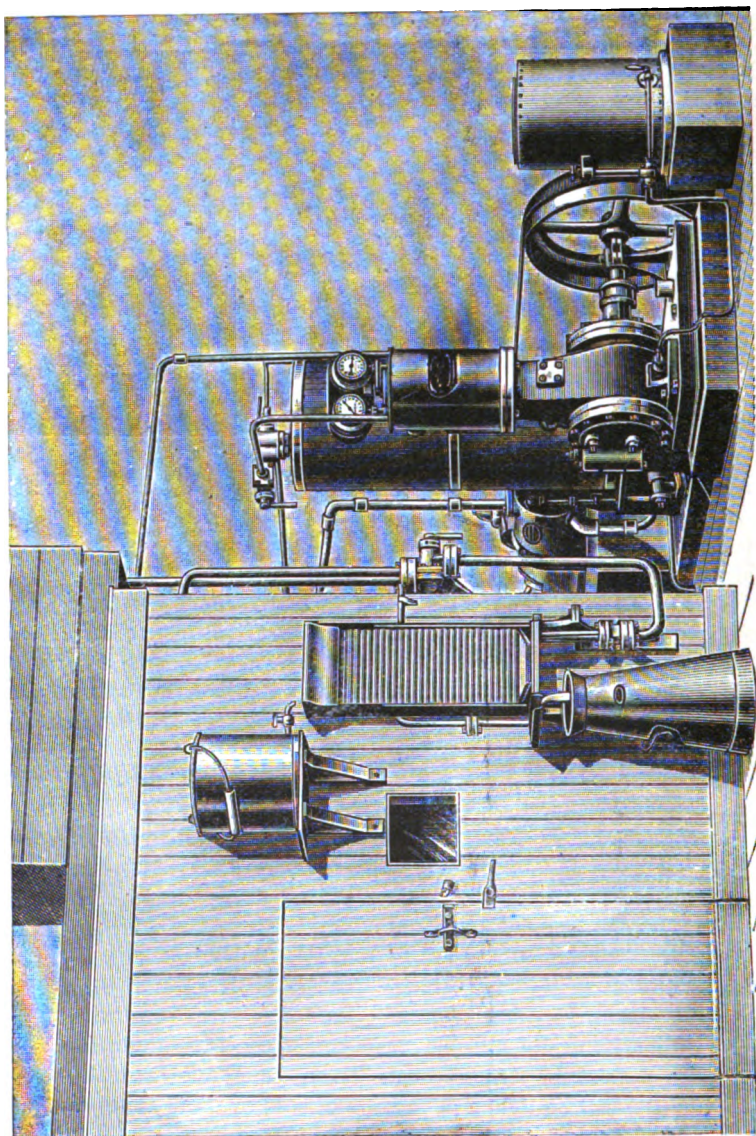


Fig. 287.—Installation of Ammonia Compression Machine in a Dairy.

combined cream-cooler and heater, which is said to be a very good system for the rapid refrigeration of cream.

The apparatus consists essentially of the following parts:—A ripening vat and combined cooler and heater, and a mechanical agitator driven off the main shafting. The cooling or heating apparatus is so designed that it presents a large cooling or heating surface in a comparatively small space, and when employed for the former purpose can be used in conjunction with any description of refrigerating machine, either for cooling cream or for the production of iced water.

Fig. 290 is a circular capillary cream-cooler. This type of cooler, which is much used in Belgian dairies and creameries, is made in various sizes, the largest having a cooling capacity of about 200 gallons per hour from 65° to 52° Fahr. It can be used with any refrigerating machine, and the cold brine is pumped through the cooler, the cream passing over the exterior.

In all large dairies the pasteurisation of milk is now become part of the ordinary routine, and this process creates a demand for additional refrigerating machinery, it being absolutely essential to reduce the temperature after pasteurisation as rapidly as it can possibly be effected.




Fig. 288.—Sandbach Combined Cream Cooler and Heater. Plan.

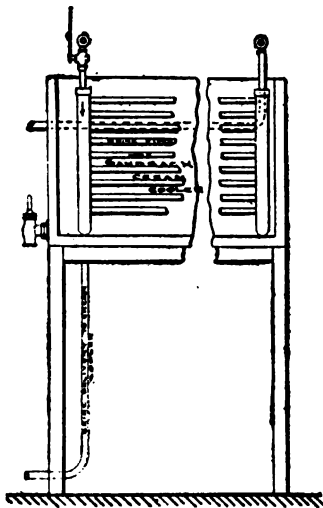


Fig. 289.—Sandbach Combined Cream Cooler and Heater. Elevation.

REFRIGERATION IN TEA FACTORIES FOR REGULATING THE TEMPERATURE OF THE OXIDISING OR FERMENTATION OF TEA.

It is found desirable to maintain the atmosphere of the fermenting rooms in tea factories situated in the low countries or plains at the same temperature as those of factories situated in the hills, and this can be advantageously carried out by means of mechanical refrigera-

tion. A patent for an arrangement of this description has been obtained by Mr. H. T. Armitage of Halton. By means of this process water tanks, cold cloths, fans, etc., can be dispensed with, and the oxidation or fermentation carried on instead in a cold room, the temperature of which need not be reduced below 45° , at which point it has been found that fermentation ceases. A plant erected by Mr. Armitage, for the above purpose, consisting of a Schou's patent ammonia compression machine, made by Tuxen and Hammerich, having a cooling capacity sufficient to maintain a room of about 3,800 cubic feet at 40° , with the temperature outside at about 70° Fahr., and requiring about $2\frac{1}{2}$ horse-power for driving purposes, is found capable of cooling about 250,000 lbs. of made tea per annum.

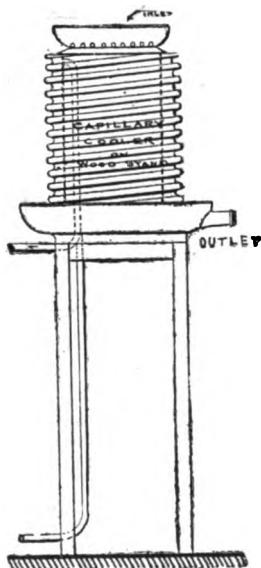


Fig. 290.—Capillary Cream Cooler. Elevation.

VARIOUS OTHER MANUFACTURING AND INDUSTRIAL APPLICATIONS.

Amongst the numerous other manufacturing and industrial applications of refrigerating machinery, mention may be made of the following:—

In dynamite factories, for maintaining the dynamite at a low temperature during the process of nitrating.

In manufactories of photographic accessories, for cooling the gelatine dry plates.

In the establishments of wine-growers and merchants, for reducing the temperature of the must or unfermented wine, and for the obtainment of an equable temperature in the cellars, etc.

In soda water works for cooling soda or mineral waters before bottling.

In sugar factories and refineries, for the concentration of saccharine juices and solutions by freezing or congealing the watery particles, which are then removed, leaving the residuum of a greater strength.

In chemical works, for the reduction of mother liquors at low temperatures, thus hastening crystallisation, and augmenting the amount of crystals produced, as well as reducing the cost of production. In addi-

tion, however, to substances the crystallisation whereof is facilitated by cold, it can be also advantageously employed for the congelation of various chemicals, and for other purposes.

In indiarubber works, for the curing and hardening of blocks of indiarubber, thereby facilitating the cutting of same into sheets for the manufacture of various elastic articles, the material in that state admitting of its being worked up in a much superior manner, and, moreover, at a far lower cost. In glue works for drying the gelatine, and so admitting of the use of less concentrated solutions. And also in numerous other industries, in which it would be impracticable to carry out many of the manufacturing processes in the summer months without the employment of some artificial means for cooling.

For the purification of gas intended for the inflation of balloons by the removal of tarry matter, etc., therefrom, and also for drying the gas by the elimination of the greater portion of the aqueous vapour present in ordinary coal gas as usually commercially manufactured, and in this manner greatly increasing its efficiency for the purpose in question. This method has been proposed by Mr. C. Lambert.

Refrigerating machinery is also used in tropical and other warm climates for cooling the atmosphere of hospitals and public buildings.

For the regulation of plant growth by retarding the growth of bulbs and flowering plants to produce blossoms at any time of the year desired, and to fruit trees, so as to enable fruit to be obtained at any season.

In laundries for effecting the white bleaching of clothes, and for drying them, the latter operation being performed by means of a condensing plate.

For the preservation of dead bodies awaiting identification in public morgues.

For the preservation of furs, and various fabrics such as carpets, rugs, silks, tapestries, and upholstered furniture, from the ravages of moths and beetles, and in the case of silks to prevent it from losing weight, and to preserve its gloss or lustre.

For cooling the holds of vessels carrying live cattle, in which manner an uniform temperature of about 70° Fahr. can be maintained throughout the entire voyage (instead of its rising to over 100° as it otherwise would), thus entirely obviating the heavy losses of cattle usually experienced from the high temperature and bad ventilation. It might also be advantageously applied, on large passenger steamers, to cool and ventilate the saloons and state-rooms, as also the engine rooms, etc., when in hot latitudes.

And finally, for producing artificial surfaces of ice in enclosed places, so as to provide skating rinks upon which this pastime may be enjoyed during the mildest winters, or at any season of the year. Such an application may be now seen at the Niagara Hall, London, of which the following is a brief description :—

The plant consists of ammonia compression machines of the De La Vergne type, the ice-making capacity of which are of 12 tons per day each. The rink itself, when in every-day use, requires the expenditure of a refrigerating power equal to that consumed in the manufacture of 8 tons of ice per day, and the balance of power, which is considerable, is employed in the manufacture of block ice, and in maintaining the cold storage chambers in connection with the rink at the required temperature.

The congelation or freezing of the water to form the ice surface of the rink is effected by a network of pipes which are laid upon the floor of the rink, and through which brine, reduced to a sufficiently low temperature in the refrigerator of the machine, is kept in constant circulation by means of a suitable brine pump. The non-congealable liquid or brine employed in this instance is a strong solution of calcium chloride.

The operation of the ammonia compression machines employed for this purpose differs in no way from the description already given when dealing with that type of machine.

CONSTRUCTIONAL APPLICATIONS.

For the freezing of loose ground in quicksand soils, in order to facilitate sinking colliery shafts, well-sinking, tunnelling, or putting in foundations, wherever the amount of water is too great to be pumped, or in cases where the removal thereof would damage existing foundations, to avoid the necessity for expensive underpinning, etc. This may be effected either by means of ammonia or cold-air machines.

In the case of a quicksand in a well, a coil of pipes, of a somewhat larger diameter than the lining of the well, is usually sunk into the quicksand, and the latter frozen by a circulation of cold brine through the coil. The necessary excavation can then be proceeded with, and as soon as the lining is put in, the circulation of brine is stopped and the coil withdrawn.

TUNNELLING.

During the construction of a tunnel for foot-passengers through a hill in Stockholm, this method was employed for driving the tunnel through about 80 ft. of loose ground, consisting of gravel mixed with

clay and water, which possessed so little cohesion as to render the ordinary method of excavation impossible. The refrigerator employed was a cold-air machine of the Lightfoot type, capable of delivering 25,000 cubic ft. of air per hour, and the arrangement consisted in forming the innermost end of the tunnel into a freezing chamber by means of a partition wall made of a double layer of wood filled in between with charcoal. After the refrigerator was run continuously for sixty hours the gravel was frozen into a hard mass to a depth varying from 5 ft. near the bottom of the tunnel to 1 ft. near the top. The work was proceeded with in 5 ft. lengths, the excavation commencing at the top, and a temporary iron wall of plates 12 in. square was built up against the face from the top downwards as the cutting away of the gravel was proceeded with; the arching of the tunnel was completed as quickly as possible close up to this temporary iron wall while the ground was still frozen. After being fairly started it was found sufficient to run the cold-air machine on the average from ten to twelve hours every night, except after heavy rains, when much water percolated through the gravel. After two 5 ft. lengths had been excavated the partition was moved forward. The daily progress whilst employing the freezing process was on an average about 1 ft.

A full description of the construction of this tunnel is given in the *Engineer* of 9th April, 1886. And in the issue of 30th November, 1883, of the same journal, will be found an interesting account of the Poetsch method of sinking colliery shafts by freezing the soil by means of an arrangement consisting of a series of vertical iron pipes placed in a circle.

SINKING SHAFTS.

A very interesting account of the more recent applications of the Poetsch process in France has also been given in a paper upon the use of freezing machinery for sinking through water-bearing strata by F. Schmidt,* of which an abstract is subjoined.

The Poetsch process was first employed in the Houssu coalfields of Hainault in 1885, having been introduced into France at a later date, viz., 1890, and since extensively employed for sinking pits through the tertiary and cretaceous strata above the coal measures at Vendin-Sens, Dourges, Courrières, Vicq-Anzin, and Flines lez Raches, the pits being respectively 82 and 84, 47, 45, 102 and 102, and 70 metres in depth.

The latter was the most difficult undertaking. The permeable strata to be got through was 70 metres, blue marls affording a bearing

* "Bulletin de la Société de l'Industrie Minérale," vol. ix., 1895, pp. 273-416.

for tubing at 72 to 79 metres; the tertiary sands and clays were 25 metres and the chalk about 50 metres in thickness. At the junction of these formations a heavy sheet of water was encountered, which gave from a single bore-hole a flow of 1,200 cubic metres, which rose to 2 metres above the surface; a second one in the lower portion of the chalk between 65 and 70 metres also overflowed. Two brick towers were constructed round the mouth of the pit, viz., an inner one of 6 metres and an outer one of 11 metres in diameter, and rising the one 1·6 metre and the other 2·6 metres above the level of the surface, with the object of arresting these feeders, but were found to be ineffectual and incapable of maintaining the water level constant by reason of a lateral flow joined to subsidence which was set up in the overlying strata of sand, the arresting of which necessitated the sinking of a special bore-hole so as to trap the spring at a distance of 25 metres eastward from the pit, by which means a steady head of 1·6 metre of water was got in the towers, and the freezing operation could be commenced.

The freezing circuits were twenty-two in number, contained in bore-holes 75 metres deep, one of which was located in the centre of the pit, which was 4·2 metres in diameter, the remaining twenty-one being arranged in a ring 6 metres in diameter. An ammonia-compression machine of the Fixary type was used for the production of the necessary cold; it was driven by a 500 × 900 millimetre single-cylinder engine, making 80 revolutions per minute, and capable of producing cold equal to 1 ton of ice made per hour.

In thirty-eight days from the 1st September, 1894, upon which date the freezing machine was started, the ice-wall was completed, and the sinking commenced on the 25th October, the relief or special bore-hole being stopped for good on the 5th November. At the upper strata the ground was broken up by means of picks and wedges, but at a lower level blasting by means of compressed powder was employed. The central tube was disused and removed as the sinking progressed. When a depth of 14·8 metres was reached two oak seating rings, the one 22 by 24 centimetres and the other 22 centimetres square, were secured in position for the first line of tubing, which was composed of segments of oak 16 centimetres to a height of 2·6 metres above the surface level, with a 16 centimetre backing of concrete increased to 70 centimetres near the surface. A second seating with curbs of 22 by 24 centimetres and 22 by 20 centimetres was fixed at 25·93 metres, and a third at 43·82 metres, which latter had three seating rings respectively of 22 by 28 centimetres, 22 by 24 centimetres, and 22 by 22 cen-

timetres in section, the tubbing rings being of 18 centimetres, with the same thickness of concrete behind. By April, 1895, the pit was sunk to a depth of 70 metres, and on the 1st May the building of the tubbing was completed. Light was provided by incandescent electric lamps supplied with electricity from a dynamo situated in the same building as the freezing machine.

The cost of sinking in frozen ground per metre was as follows :—

	Francs.
Freezing	1,550
Sinking	150
Tubbing	650
Concreting and sundries	50
	2,400 per metre.

The Poetsch method of sinking has been also lately successfully employed at the coal-field of Ligny-les-Aire in a sinking through a permeable covering of about 86 metres, and in the repair of the cylinder pits of the Fontinette Canal lift. These pits, which were of 4 metres in diameter, were sunk by compressed air and tubbed with cast-iron between 1883 and 1887. In 1893, however, owing to an irregular subsidence of the ground, they became leaky, and it was decided to replace the iron lining by one of brickwork of 80 centimetres in thickness, thus reducing the diameter from the original 4 metres to 3·7 metres, with a considerable increase in the bottom bearing of the press, which was to consist of a cylindrical block of brickwork 5·307 metres in diameter and 2 metres in height. In the carrying out of these repairs it was decided to adopt the freezing process in preference to using compressed air, so as to avoid any chance of disturbing the ground, and thus causing damage to the neighbouring buildings.

The work was commenced at the right-hand press, the boat-cradle being secured at its highest level by means of two supporting girders of 40 metres in depth; the piston was disconnected; and twenty bore-holes arranged on a circle of 6·307 metres in diameter, or 99 centimetres apart, and one placed centrally, were provided for freezing. These bore-holes were about 2 metres deeper than the bottom of the new foundation, and lined with tubes of 150 millimetres in bore and of 5 millimetres in thickness, formed of steel. The freezing tubes were likewise of steel and 125 millimetres in diameter, and the inside brine supply pipes of iron and 33 millimetres in diameter; the collecting rings were of 100 millimetres bore by 5·050 metres diameter on the admission, and 5·7 metres diameter on the return circuit.

Mr. Schmidt does not think that the methods of working proposed

by Mr. Gobert and Mr. Koch are likely to afford as favourable results as are obtainable by the original method. The first of these gentlemen proposes to volatilise the liquefied ammonia in the freezing circuits; and the latter depends entirely upon gaseous expansion.

The paper also contains descriptions of the combined method of freezing and fire-setting in frozen ground used for prospecting for gold in the alluvial deposits of the Siberian rivers during the winter.

The following extracts are taken from an account of Mr. Gobert's system* given in "The Colliery Manager's Handbook":—

This is a modification of the Poetsch congelation method, and is specially applicable to the sinking of shafts through shifting sands and water-bearing strata.

Fig. 291 is a vertical section and Fig. 292 a plan showing the refrigerating plant and the shaft to be sunk, the two being as near each other as possible, and the shaft being lightly roofed over as a protection from the weather. The power of the steam engine required varies with the diameter and depth of the shaft to be sunk, and need not exceed 40 horse-power unless the shaft is deep. The steam engine and compressor are placed horizontally side by side, and connected to the same shaft, with a fly-wheel and pulley for belting between them.

Liquid ammonia is forced by the compressor through the series of wrought-iron tubes of the condenser, first to the reservoir, which acts as a kind of governor, and then by the lower of the two pipes seen in the vertical section to the system of congelation tubes round the shaft. Great heat results from compressing the gaseous into liquid ammonia, and in order to abstract it, the condensers have a relatively large surface, and cold water is caused to circulate freely round them. This water is kept in a state of agitation by means of the small water wheels with floats, shown in the drawings, driven by belts off the pulley on the main shaft.

The machinery, by means of the upper of the two pipes seen in the vertical section, exhausts gaseous ammonia from the congelation tubes, sunk vertically beneath the surface of the earth round the site of the shaft, and forces it, condensed into a liquid form, first through the apparatus for separating the oil (see Fig. 292), and then into the condenser.

The compressor piston is freely lubricated with mineral oil, and some of the ammonia comes into contact with and is absorbed by

* For further description and illustration of the system see "The Colliery Manager's Handbook," by Caleb Pamely, M.E., published by Crosby Lockwood and Son, London.

it. The mixture might choke the tubes of the condensers, and possibly even reach the congealing tubes, if the two substances were not

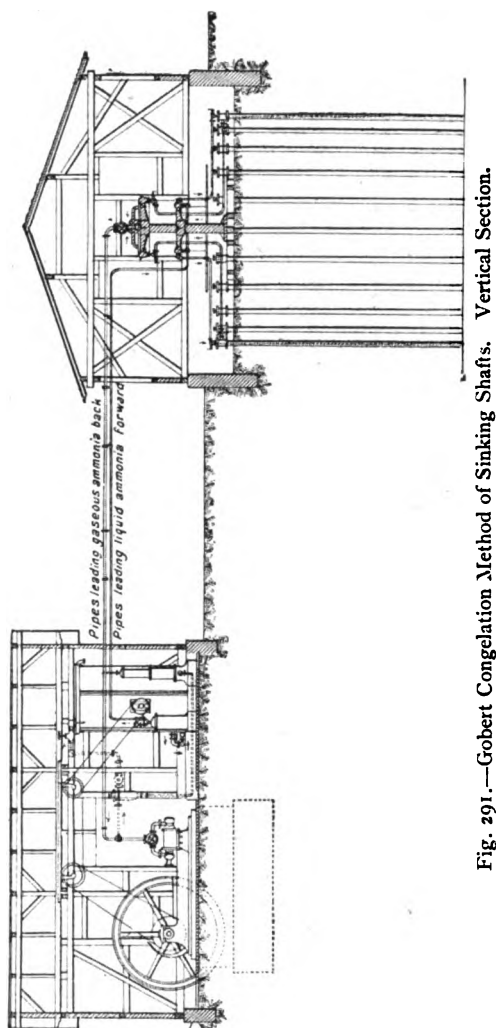


Fig. 291.—Gobert Congelation Method of Sinking Shafts. Vertical Section.

separated. This is effected chiefly by the oil-separator, but, as an additional precaution, a space is provided at the bottom of each congelation tube for the reception of any oil that may be carried

there. The oil retained in the separator is not effectually separated from the ammonia, but is slightly mixed with it; this ammonia, however, is recovered in the purifier, where it is driven off by distillation.

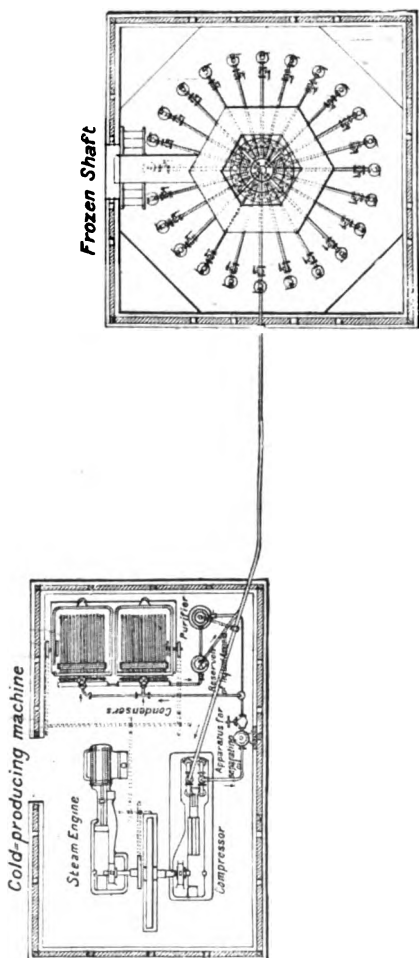


Fig. 292.—Gobert Congelation Method of Sinking Shafts. Plan.

The distillation is effected by means of a worm through which steam from the boiler circulates; the ammonia vapour is led by a small curved pipe, seen in Fig. 291, into the main pipe, leading the gaseous ammonia from the shaft to the compressor.

Over the centre of the area forming the intended shaft are two pipe-rings, the lower of which is in connection with the ingoing pipe, and receives the liquid ammonia, and afterwards distributes it by the radial pipes to the vertical congelation pipes sunk in a circle below the surface of the earth. The upper ring is in connection with the return pipe, and forms a receiver for the collection of the gaseous ammonia from separate orifices in the same congelation tubes after it has by evaporation in these tubes produced the desired refrigerating effect. The gaseous ammonia is drawn from the upper ring pipe to the condenser through the return pipe.

The liquid ammonia is not allowed to fall to the bottom of the tube and collect in a mass, but in order to cause the evaporation of the greatest possible amount of liquid in a given space of time, the small pipe for leading the freezing liquid through the tube is made to assume either a wavy or a spiral form, as shown in Figs. 293 and 294, in which A represents the congealing tube, B the pipe for leading the freezing liquid, and C small holes for allowing the liquid to escape into the tube, at points more or less frequent, as may be desired. The injecting pipe is led down nearly but not quite to the bottom of the congealing tube, and both pipe and tube are closed at the bottom. The entrance of the congealing liquid into the injecting pipe is carefully regulated, and descends slowly in a thin stream, the flow being retarded by the waves or spirals, and giving up a part of itself at intervals.

The source of heat necessary for evaporating the liquid is the higher temperature of the surrounding strata, and this heat passes not only through the thickness of the congealing tube, but also across the frozen wall which soon surrounds it. By this arrangement the liquid to be evaporated escapes into the congealing tube at all depths simultaneously, and the whole source of heat available is thus utilised at the same time for evaporating the freezing liquid. In other words, the refrigeration is effected simultaneously at all points.

The diameter, number, and arrangement of the holes in the injecting pipe, and also the pitch of the spirals or undulations, are varied in accordance with the depth in order to produce a greater freezing effect at special points, or a uniform freezing, in accordance with the requirements. A congelation may therefore be arranged to have the frozen column of larger diameter at the bottom than at the top, on the supposition that the measures are of uniform consistency, in order that its stability may be maintained while the shaft is being sunk through it.

The arrows in Figs. 291 and 292 show the course of the ammonia

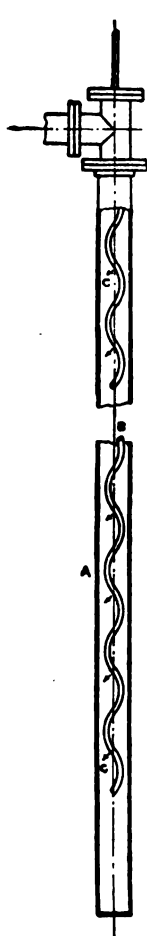


Fig. 293.




Fig. 294.

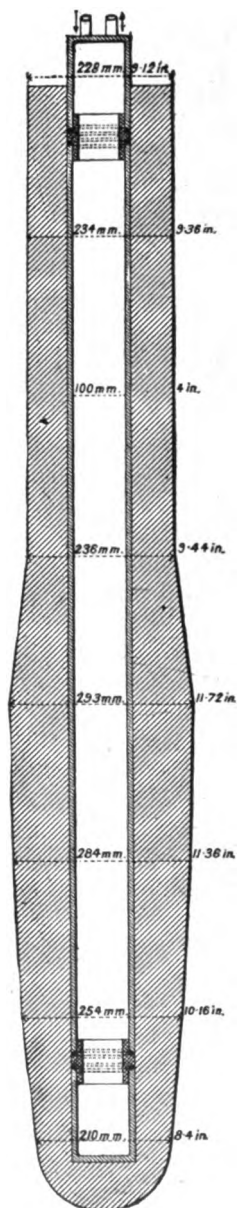


Fig. 295.

Gobert Congelation Method of Sinking Shafts. Details of Construction.

in its passage, as a liquid, from the compressor to the condensers, and then on to the congelation tubes, and also its return, in a gaseous state, from the congelation tubes to the compressor, to be again liquefied, and so on. The same ammonia serves indefinitely, with the addition of a small quantity to compensate for waste.

The process requires a large quantity of cold water for use at the condensers, but this must not be drawn from any point so near the site of the shaft as to create a current, which might oppose and retard the congelation by licking or washing the congelation tubes, thus depriving them of their refrigerating effect, which would be carried away instead of going into the surrounding sand.

When the wet sand or loose material has been frozen round the tubes, sinking may be commenced with a small windlass placed between the collecting and distributing rings and the circumference of the circle of congelation tubes. The men enter, and the excavated material is removed, laterally, near the surface, between two congelation tubes, where also access is obtained for the segments of tubing.

More important winding apparatus must of course replace the windlass when the sinking has reached a depth of two or three fathoms; then, if the arrangements have been made judiciously and due precautions taken, the frozen mass will be so large as to require slighter refrigerating power to maintain it than that required for its production. This allows of the removal of one or two radial pipes for distributing the ammonia in order to allow of more space for the working of a winding engine.

A great advantage claimed for the Gobert modification is that if the congelation tube be surrounded with water and there be a defective joint, the water will simply enter the tube, on account of the pressure therein being less than that outside. If such an accident occurs at all it is usually after congelation has proceeded for some time and the tube is already surrounded with ice; there will then be no interruption in the work. The liquid ammonia always enters the tubes at a temperature above freezing point, and in practice varies from between 20° and 35° Cent. (68° to 95° Fahr.). The cold produced is due to the liquid ammonia becoming volatilised in the tubes.

It is of course impossible to entirely guard against leaky joints. The thrust of the superincumbent measures severely tries them, but special attention has been given to the design of the joints in order to increase their power to resist the strains to which they may be subjected. The method of connecting the ends of congelation tubes has been by screwing one end into another without internal sockets.

The thinning of these tubes at the joints frequently causes them to break in being withdrawn from the ground.

The form of joint used by Mr. Gobert is shown in Fig. 295. Its chief feature is an internal collar, or ring, shown by crossed hatchings in the section. This collar has an outside flange of the same outside diameter as that of the tubes which it serves to connect. The flange is undercut on both sides so as to be of dovetailed section. Each end of a tube is also bevelled or curved off so as to afford with the collar flange a groove wider inside than out, holding and compressing the lead ring or washer instead of forcing it outwards, thus affording an absolutely tight joint when the ends of the tubes are screwed on to the collar. In some cases, especially for joining the smaller size of tubes, the internal collar is made without a flange, and then only one lead washer is used placed between the ends of the tubes, which must be bevelled and curved just the same as when the collar is flanged. On the tubes being screwed up, they squeeze the washer between them, just as the gland of a stuffing box compresses the packing. The outer lines of the section, Fig 295, shows the form and extent to which a tube was covered with ice after having been immersed for 32 hours in a tank filled with water; the ice weighed 62 kilogs. (137 lbs.) at the end of the operation. If the tube had been immersed in wet sand instead of clear water, the congelation would have been more rapid. One of the two smaller tubes shown at the top of the congelation tube serves to introduce the liquid ammonia, while the other carries off the gas to the upper ring-pipe.

Instead of ammonia, any other liquid susceptible of easily assuming the gaseous state, such as liquid carbonic acid or liquid anhydrous sulphurous acid, may be employed with a suitable modification of the engine.

CHAPTER XVIII.

ICE-MAKING.

Various Methods of Ice-Making.—The Can System.—The Wall or Plate System.—The Stationary Cell System.—Miscellaneous Arrangements for Making Clear or Crystal Ice by Agitation.—Holden System of Ice-Making.—Water De-aerating or Distilling Apparatus.—Vacuum System of Ice-Making.—Imitation of Natural System.—Ice Factories.—Ice Elevating and Conveying Machinery.—Ice-Making, General.—Brine.—Storing Ice.—Ice-Crushing or Breaking Machinery.

THE specific gravity of ice made from de-aerated water is, according to De Mairan, '926; its specific heat is '504; at a temperature of 32° Fahr. 1 cubic in. = '033449 lb., 1 cubic foot = 57'789872 lbs.; 1 lb. = 29'896259 cubic in., or '0174 cubic ft. The equivalent of a ton of ice is 318,080 thermal units,* that is to say, that this is the amount of heat that would be required to convert 1 ton of ice at a temperature of 32° Fahr. into a ton of water at a temperature of 32° Fahr.; or, on the other hand, it is the amount of heat that it is necessary to extract from 1 ton of water at a temperature of 32° Fahr. in order to convert it into a ton of ice at a temperature of 32° Fahr. The amount of heat that would have to be abstracted from a ton of water at 60° Fahr. to form a ton of ice at 32° is 382,144 units.

When the manufacture of artificial ice first assumed the proportions of an industry no great thought was given to the quality of the product, and consequently all, or the greater part, of the ice so made was opaque.

Soon, however, a demand for a superior article arose, and it became necessary to introduce means for the production of clear, transparent, crystal ice; the result being numerous inventions and patented devices of more or less efficacy.

* A thermal unit is that amount of heat necessary to raise the temperature of 1 lb. of water 1° by the Fahrenheit scale when at $35^{\circ}4'$. Mech. eq. 778 pounds.

The reason why the blocks of ordinary artificial ice are formed opaque is that the rapidity of the freezing process prevents the air contained in solution in the water from escaping, and this opacity increases towards the centres of the blocks, and is less in hot climates than in colder ones because the quantity of air held in the water decreases as its temperature is raised. Not only is this opacity objectionable by reason of the less pleasing appearance of the ice, but also on account of the far inferior keeping qualities of the article.

VARIOUS METHODS OF ICE-MAKING.

Five methods may be employed for preventing this opacity and forming clear, transparent, crystal ice, viz., by freezing the water slowly at comparatively high temperatures; by agitating the water in cans, moulds, or cases during the process of freezing, so as to admit of the escape of the contained or imprisoned air; by forming thin slabs of ice on what is known as the wall or plate system; by freezing water in shallow stationary cells; and finally by de-aerating or depriving the water of its air before placing it in the moulds or cells.

The first of these plans, besides, at best, only producing blocks of ice partially clear, was so extremely slow, and required the use of such a large number of cans or moulds, and correspondingly large tanks, as to thereby render the first cost of the apparatus ruinously high, and it was consequently soon abandoned altogether; a modification of the same method wherein the temperature of the liquid or medium used for abstracting the heat from, and freezing the water, was gradually decreased, having likewise experienced the same fate.

The second method, or agitation, can be more or less successfully carried out in a number of different ways, but has, likewise, certain drawbacks; for instance, complication of mechanism, increased first cost of plant, etc.

The third and fourth methods, or the wall or plate and shallow stationary cell systems, are also objectionable, by reason of the extent of the plant required and the slowness of the process.

The fifth method or that wherein the water is first de-aerated, that is to say, the air is expelled from the water before it is placed in the cans, moulds, or cases, is, all things considered, perhaps the most satisfactory, and is in extensive use in many works where large quantities of ice are made.

As the refrigeration of cold stores or chambers, so also the manufacture of ice with modern machines may be divided into two main

systems, that is to say, the one wherein brine previously reduced in temperature in the cooler or refrigerator of the machine is used for freezing the water, and the other wherein the said freezing or congelation is effected by the direct expansion of the refrigerating agent.

It will be readily seen that the latter system enables a very considerable amount of apparatus, essential in the first, to be entirely dispensed with; prevents the loss of efficiency due to a second transmission of heat; and, moreover, avoids the mess and inconvenience so frequently occasioned by a careless or unskilful use of the brine solution.

Much greater difficulties, however, have to be surmounted before the direct expansion system can be successfully applied to ice-making, than is the case with the cooling or refrigerating of cold stores or chambers. In the latter, indeed, all that is required to ensure complete success is a perfectly gas-tight system of pipes, and as a pipe of no very great diameter forms the safest, surest, and least expensive method of imprisoning or confining a gas of a searching nature, it consequently follows that no insurmountable difficulty is here experienced. But the freezing or congelation of water is quite another matter, and requires straight surfaces, as it is not only very difficult to remove the ice that becomes formed round pipes, but a very considerable portion of it is also wasted in so doing. Hitherto attempts to construct straight surfaces with sufficiently gas-tight joints have proved more or less a failure.

Amongst the numerous different methods devised for agitating the water whilst it is freezing, mention may be made of the following:—The insertion into the can or case of a metal or other bar which has imparted to it a vertical reciprocating motion through a revolving shaft and cam or wiper, or by a crank on the shaft, or the placing in the can or case of a wooden or other paddle which is moved to and fro, or of an endless screw or spiral which is rotated by any suitable mechanism. The introduction into the can or case of a pipe extending to within a short distance of the bottom thereof, and through which a current of cold air is forced, which rising in bubbles through the water, produces a circulation in the latter. The imparting of a rocking or oscillating motion to the can or case itself during the freezing operation.

The main objection to those arrangements wherein some form of agitator, or the above-mentioned air tube, is inserted into the can or case, is the necessity for withdrawing them, at or near the termination of the freezing operation, to prevent them from being frozen into the blocks of ice.

In the last-named method, the gear for imparting motion to a large number of cans or cases is found to be exceedingly cumbersome, and has besides to be disconnected, to allow of their being lifted from the ice-making tank or cistern to remove the finished blocks of ice therefrom.

THE CAN SYSTEM.

Fig. 296 shows a patented arrangement of Pontifex and Wood's for making clear or transparent pyramids of ice suitable for table decoration, etc. The ice-making box or tank *A* is formed of iron, wood lagged, and the intervening space is filled with sawdust. The




Fig. 296.—Pyramid Ice-Making Box or Tank. Vertical Section.

ice-moulds or cases *B* are made of galvanised wrought-iron, and are of a suitable pyramidal form; and the agitators *C* consist of spirals or endless screws, which are kept constantly revolving, during the freezing of the block, by gut or other bands *D*, gearing on pulleys *E*, fixed upon the vertical spindles carrying the said spirals or endless screws, and upon a horizontal shaft *F*, supported in bearings in brackets secured to the side of the tank, to which latter shaft rotary motion is imparted through belt gearing from any available source of power, as is very clearly shown in the drawing. When the block is nearly frozen solid the agitators must be withdrawn, for which purpose the brackets carrying the

spiral, or endless screws, are so secured to the tank as to be readily removable therefrom.

By arresting the freezing action before the block is frozen quite solid the central hollow can be filled up with fruit, flowers, or other objects, and afterwards the congelation completed, thus producing very beautiful effects.

Fig. 297 is a perspective view showing a can ice-box with agitators, which is the oldest and simplest method of making clear or crystal ice. The construction of the apparatus, which is of the Pontifex-Wood improved type, will be very readily apparent from the drawing. The agitators *C*, which are very readily removable, are operated through rods running upon rollers, to which rods a reciprocating motion is imparted from a rocking shaft *G*, mounted at one end of the tank, through suitable

connecting-rods. The ice-making tank A is similar in construction to that shown in Fig. 296, but is of larger dimensions, and is filled with brine, a circulation of which is kept up from the coils of pipes in the cooler of the refrigerating machine by a brine-pump, in the usual manner. The ice-cans or moulds B are formed of galvanised iron, and the blades of the agitators C are of wood. To remove the finished blocks of ice from the moulds or cans they are dipped for a few seconds in a tank containing warm water, which may be derived from that running to waste from any convenient source. The sizes of the blocks of ice made, vary from 2 ft. $\times$ 2 ft. $\times$ 6 in. in thickness up to 3 ft. 6 in. $\times$ 3 ft. 6 in. $\times$ 12 in. in thickness, and in weight from 1 cwt. up to 6 cwt., according to the dimensions of the cans employed.

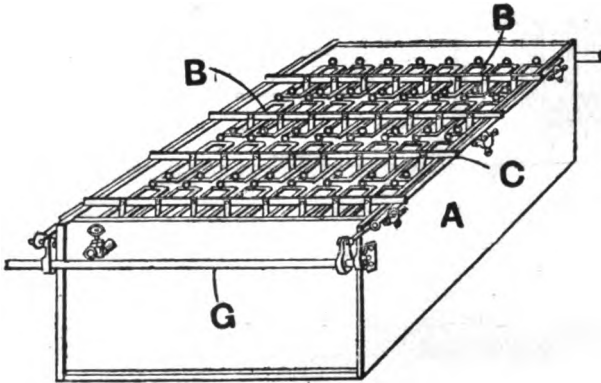


Fig. 297.—Box or Tank for making Ice on the Can System.

Fig. 298 is a vertical longitudinal section showing the "Eclipse" can ice-box, made by the Frick Co. The interior arrangement of the trunk and ammonia evaporating pipes or coils, ice-moulds or cans, frame work for holding the cans in position, with the wooden covers, are all clearly shown in the engraving.

Puplett's agitators for liberating the air from the water during freezing are also reciprocated by crank mechanism. They are, moreover, so arranged that as the ice grows, and it becomes necessary or desirable to reduce the width of the paddles or agitator-blades, the latter can be feathered by giving them a quarter-turn in $\perp$ shaped slots.

This system of making clear, crystal, transparent ice has, as already

stated, several objectionable features, which may shortly be summed up as follows :—

The blades of the agitators occupying the centres of the cans or moulds whilst the blocks are freezing, have to be withdrawn at the finish, in order to prevent their becoming frozen into the blocks, consequently the spaces occupied by them during their traverse have to be congealed without agitation, with the result that each block has a narrow core of semi-transparent or almost opaque ice in the centre, which, to a slight degree, spoils its appearance, although the keeping qualities of the ice are not affected thereby. If, however, any

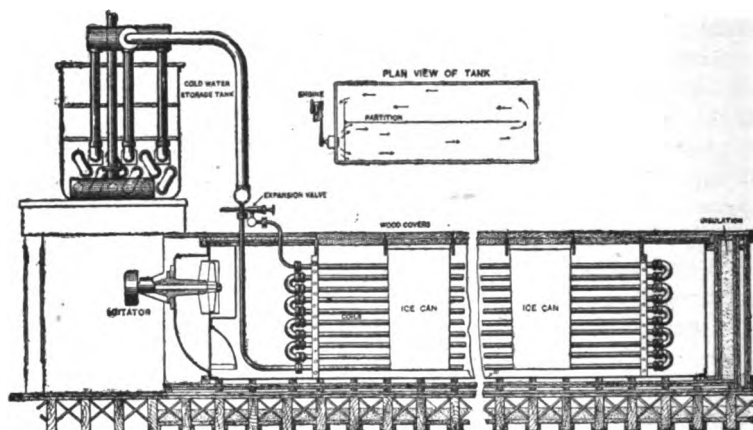


Fig. 298.—“Eclipse” Can Ice-making Box. Vertical Longitudinal Section.

impurities are contained in the water they become frozen up in the blocks and show through them, to the considerable detriment of their appearance.

The unavoidable freezing of the blocks at different speeds frequently results, with careless watching, in some of the agitator blades or paddles getting frozen in prematurely, and broken off. The cans or moulds are sometimes filled too full of water, which, in consequence of the expansion due to freezing, runs over into the brine solution and dilutes it, in some cases to such an extent as to cause it to freeze or congeal at the ordinary working temperature of the machine.

The additional weight of the cans or moulds which have to be lifted with the blocks of ice entails an extra expenditure of labour, and

the constant handling thereof renders their lives short, and necessitates a large stock, and frequent repairs and renewals.

To obviate the first of these objections, wooden frames have been sometimes placed in the centres of the moulds or cans, inside which the agitators are adapted to work, a block of ice being frozen up at each end. This however, gives rise to further serious objections, the wooden frames having to be removed from the moulds or cans with the ice blocks, detached therefrom by means of chisels, and again replaced in the moulds, and a certain quantity of dirty water has moreover to be pumped out of each of the latter before the withdrawal of the ice block and frame therefrom, both of which operations entail much additional labour. The unequal rate of freezing of the blocks causes some of them to come out of an uneven shape and under their proper weight, owing to the large holes in their centres.

Every apparatus for making ice on this system should be fitted with an arrangement for automatically supplying to each can or mould a sufficient predetermined charge, and no more. In the absence of this, however, a gauge should be used, and the greatest care in filling the cans should be exercised. The moulds or cans should not be filled to more than within 6 in. of the top.

On the other hand, again, the can system has several well-defined advantages which certainly deserve full consideration. For instance, the first cost of the simple apparatus is low as compared to many others; the blocks of ice produced being, as a rule, of an uniform given size and weight, the necessity for weighing them is dispensed with, and they are very convenient to load and pack; should a can become leaky it can be placed on one side for repairs and a spare one inserted in its place without delay; and, lastly, the construction of every part of the apparatus is so simple that it can be made or repaired by any ordinary engineer without special knowledge of ice-making machinery.

The cold brine in the ice-making tank or box is circulated or agitated by means of a duplex, centrifugal, or other suitable pump, or by means of a propeller. The latter, one form of which, made by the "Triumph" Machine Company, is shown in Fig. 299, is the cheapest arrangement, and is sufficiently effective. The shaft of the above propeller is made of the best bronze metal, with three bearings fitted with ring oilers. The bearings are of double-brace make. This propeller may be operated by belt-gearing from a small engine, or by an electric motor, or any other available source of power.

Fig. 300 is a brine strainer of a pattern made by the Frick Company, and the construction of which is obvious from the drawing, which shows it in vertical central section.

Many ingenious, but mostly complicated and expensive, mechanical arrangements have been also devised for facilitating the handling of the cans or moulds, and so lessening the labour of moving them, a brief

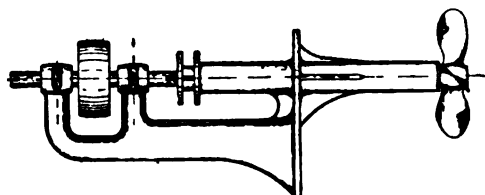


Fig. 299.—Propeller for Circulating or Agitating Brine in Ice-making Tank or Box. Side Elevation.

description of some of the best and simplest of which will be found at the end of this chapter.

In 1885 Carl Linde patented an invention designed to overcome the objection to having to remove the agitators when the freezing of the blocks of ice is nearly completed, by providing suitable means whereby

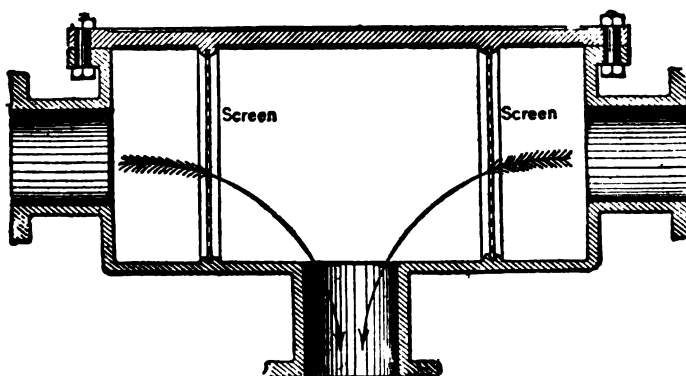


Fig. 300.—Brine Strainer, Frick Pattern. Vertical Central Section.

a horizontal flow of water is determined throughout the whole depth of the mould from one end to the other during congelation, by external mechanism.

THE WALL OR PLATE SYSTEM.

In the plate or wall system, which was invented by Twining and Harrison, in 1850—1856, one or more hollow or cellular plates, or

walls, of sheet or cast-iron are fixed in a properly insulated tank, which contains the fresh water to be frozen, and a circulation of cold brine is kept up through these hollow plates or walls. The brine is either cooled in a brine-cooler or refrigerator by evaporating coils connected to the gas-pump or compressor, in the case of an ammonia compression machine, or to the absorber in an ammonia absorption machine, in the usual or ordinary manner; or the refrigerating coils may be placed within the hollow or cellular walls or plates themselves. In a short time ice will begin to form on both sides of the plate, and layers of ice become gradually built up thereon. To remove these layers or slabs of ice, the cold brine is withdrawn, and warm or tepid brine passed into

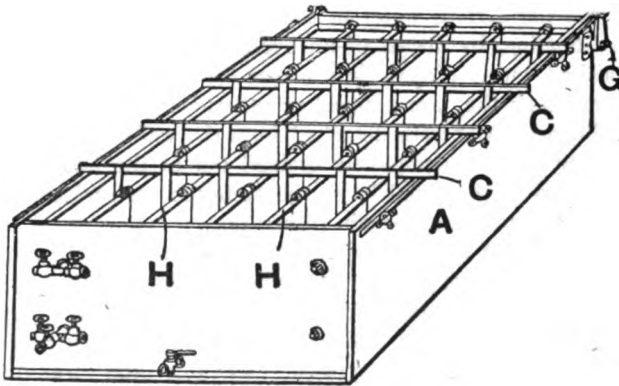


Fig. 301.—Box or Tank for Making Ice on the Plate or Wall System.

the hollow or cellular plates or walls, when the slabs are melted or thawed off and detached therefrom.

In Fig. 301 is illustrated an improved ice-making tank or box on the wall or plate system, also designed by Pontifex and Wood. The construction and operation of an apparatus of this type has been already briefly described at the commencement of this chapter. The hollow or cellular walls *H*, which are formed of galvanised iron, are, as will be seen from the drawing, fixed vertically to the hollow cast-iron ends of the tank *A*. The agitators *C* are similar in construction to those shown in Fig. 246, and are reciprocated in a like manner. The cold brine is circulated through the hollow ends and hollow or cellular walls, and suitable cocks and connections are provided which admit, when the freezing is finished, of the cold brine being completely drained out of the hollow or cellular walls into the cold brine tank, and warm

brine being introduced, by a small pump, from a warm brine tank heated by a coil of pipes, so as to melt or thaw the ice slabs off the walls or plates, and leave them ready for removal.

The hollow or cellular walls are, moreover, so constructed as not to reach quite to the bottom of the ice-making tank, and in this space all the impurities voided by the water settle. The freezing is generally continued until the slabs of ice extend to within a quarter of an inch of the blades of the agitators, when the cold brine is shut off and turned on to another tank from which the ice has been just removed.

The agitators are lifted out, and the slabs of ice, which when melted off the walls or plates are generally 14 ft. in length, 3 ft. in depth, and from 6 to 10 in. in thickness, are sawn into convenient lengths, and raised from the surplus water in the ice-making tank, in which they remained floating, by means of an overhead traveller, by which they are deposited, either directly into a cart for removal, or upon a platform from which they are dragged or otherwise delivered into the ice store. When the slabs are detached from the walls or plates, the hot brine is shut off and completely drained out of the latter, the water again filled up to the usual level, the agitators are replaced, and the circulation of cold brine is again turned on.

The water must be entirely run out of the tank about once every week, and the sediment and dirt at the bottom thoroughly cleared out.

The most recent method adopted by the Pulsometer Engineering Company, Limited, is an arrangement for the production of ice on the direct expansion system. In this the freezing coils are covered by two plates immersed in the water to be frozen, the liquid ammonia is allowed to expand in the freezing coils, and the ice is formed on the surfaces of the plates. The releasing or thawing-off of the ice is effected by allowing the hot gas from the condenser to flow into the coils. The ice produced by this system is generally 8 in. thick and 8 ft. by 6 ft., but can easily be made up to blocks 17 ins. by 8 ft. by 6 ft.

The quality of the ice produced by this latter method is said by the makers to more nearly resemble the finest quality of Norway ice than anything else yet produced, and owing to there only being one transfer of heat the economy is increased.

The system of pipes, valves, and receivers are made of wrought-iron or wrought-steel, no cast-iron or cast-steel being employed on account of the danger involved by the use of these materials. The pipe joints are of an improved type, being remarkably simple and perfectly gas-tight. With the object of getting over the trouble caused by coil

condensers and refrigerators becoming blocked with oil, an arrangement is provided whereby the oil can easily and certainly be withdrawn from the machine, thus keeping the coils clean.

The ice generally made by this class of apparatus is of very superior quality, being of great purity, and of a most attractive, brilliant, clear appearance, and it is in great demand for use in restaurants, clubs, etc., fetching a higher price than other makes.

There are, however, certain drawbacks to its use, the principal one of which is, that the ice cannot be obtained in blocks of uniform size and weight without an expenditure of considerable labour in cutting them into shape. In case of any necessity for repairs arising, moreover, the whole of one of the ice-making tanks or boxes has to be shut off, and is thrown out of use.

The plate or wall system, besides, is necessarily very slow, from the fact of the freezing process going on on one side only, instead of from four opposite sides conjointly, as in the can system, wherein the four surfaces growing gradually together in the centre finally unite into a solid block of ice the width of the can. If, therefore, a slab or block of ice of an equal thickness is to be formed on a plate or wall congealing only from one side, the time occupied in freezing it will be quadrupled.

The advantages over the can system may be enumerated as follows:—The ice made is, as above mentioned, of a very superior quality. The liability of any of the agitator blades becoming frozen in, and broken off, is very slight. Only the ice itself having to be handled the weight to be manipulated is considerably reduced. The ice-making tanks can be shut off when the ice is finished, and left until it is convenient to remove the ice, thus admitting of night shifts of labourers being dispensed with. Owing to there being no parts, like the movable cans or moulds, liable to rapid deterioration, less expenditure on repairs is required. No possibility exists of the brine solution being weakened by the accidental spilling of water into it, as in the former system.

THE STATIONARY CELL SYSTEM.

Transparent ice is also formed in deep cells provided with agitators. In the latter case a number of cellular or hollow walls of wrought or cast-iron are fixed in a suitably insulated tank or cistern, the water to be frozen being placed between these walls, and the refrigerated brine circulated through the hollow walls of the cells therein. The ice

gradually forms on the outside, and increases in thickness until the two opposite layers meet and join, but the freezing may be stopped at any time and the ice removed; this latter operation can be very conveniently effected by passing brine at a higher temperature through the cells.

The stationary cell system, when employed to make clear or transparent ice without agitation, or using water that has been deprived of its air, consists of a number of shallow pan-shaped cells having hollow walls, through which a circulation of cold brine is kept up. The ice is removed therefrom as in the plate or wall system.

The plan wherein stationary cells are employed consists in the provision of fixed or stationary shallow pans, or moulds, having hollow walls, the intervening spaces being open at the top. These cells or moulds are filled with water, and a circulation of cold brine is passed through the hollow walls, and the water frozen, after which the cold brine is stopped off and completely drained out of the hollow walls, and warm brine is caused to circulate therethrough, melting or thawing off and loosening the blocks, which can then be easily removed from the cells or moulds, which are then refilled and the operation repeated. In this system an entire tank has to be emptied at once, as in the plate or wall system; therefore, in order to make the operation continuous, at least two tanks must be provided.

If the cells are constructed deep in proportion to their width, that is to say, substantially similar in form to the moulds or cases used in the can system, then the freezing or congealing of the water will be as rapid as in the latter, but agitation, de-aerated water, or other means, will have to be used if crystal ice is required. If, however, they are made shallow, and pan-shaped, then the freezing being almost entirely done from the bottom will be extremely slow, as it is in the plate or wall system, where the formation of ice is also effected upon one side only.

The advantage of forming the cells shallow is that clear transparent crystal ice can be made in them without agitation, or using water for freezing that has been de-aerated or deprived of its air. The slowness of freezing is, however, on the other hand, a great drawback, and is the chief objection to the use of the shallow stationary cell system, as the congelation of a block of ice on this plan, of equal thickness to one formed in a deep can or mould, or in a deep stationary cell, takes about four times as long, it is evident that the apparatus requisite for an equal output must become cumbersome and expensive.

Fig. 302 is a perspective view showing a Pontifex-Wood patent cell ice-making tank or box, the main novel feature in which is the arrange-

ment of the agitators externally to the spaces where the blocks or slabs of ice are formed. The apparatus consists in a tank A, with a galvanised wrought-iron hollow or double-bottom, two galvanised cast-iron hollow cross walls or partitions I, and a number of short galvanised cast-iron longitudinal hollow walls J, fixed at right angles to the cross walls, and so that there is a space or clearance left between their adjacent ends in the middle of the tank, and between the other ends, and the extremities of the tank, in which open spaces are placed the agitators C. The movements of the latter give an impulse to the water, causing it to rush in waves between the longitudinal walls, and wash out all the impurities thrown off or voided by the water during the freezing process, which impurities settle at the bottom of the open

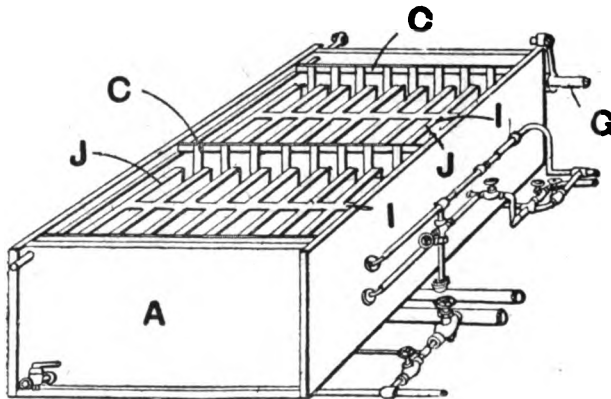


Fig. 302.—Pontifex-Wood Cell Ice-making Tank or Box.

spaces. In this arrangement the two layers of ice gradually growing in thickness between each two longitudinal walls, at last meet and freeze together, so as to form a solid block or slab of ice of a given size and weight.

To remove the blocks of ice they are first loosened or melted off in a similar manner to that employed in the ordinary plate or wall system, after which they are gently started away from the cross walls to enable the ice-grips to grasp each end, or have loops frozen in, and are then lifted out by an overhead traveller in the usual way.

The only ones of the hereinbefore-mentioned objections to which this arrangement seems open are, that, when an ice-making tank or box is in need of any repairs it has to be completely shut off, and the capa-

city of the apparatus is thus reduced for the time being; and, owing to the space occupied by the agitators being lost for ice-making purposes, the size of the apparatus required for a given output has naturally to be somewhat increased.

The advantages claimed by the inventors are as follows:—The blocks of ice are produced of an uniform size and weight, and are convenient to manipulate, load, and pack. The ice is of superior purity and appearance, and the slabs are of great thickness and durability. There is no liability to breakage of any of the blades of the agitators. There are no cans or moulds to handle or repair. The walls are fixed, and the general arrangement is of very great strength and practically indestructible. Only the actual ice itself has to be handled, therefore

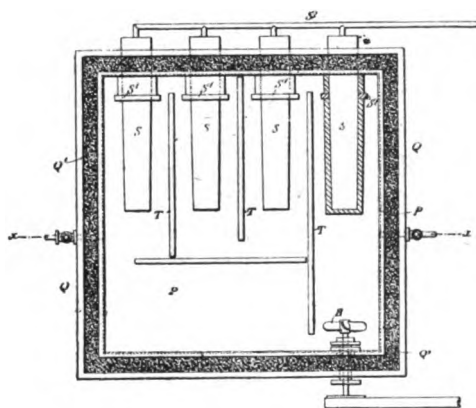


Fig. 303.—Hill's Method of Making Clear or Crystal Ice. Plan of Box or Tank.

less weight has to be moved in comparison with the can system. No cutting up and consequent waste, or weighing of the ice is required, as in the wall or plate system. When an ice tank or box is finished, it can be shut off by simply turning the cocks, and left till it is convenient to remove the ice. Thus all the tanks or boxes can be set so as to be completed during the day, and no night shift of labourers is required. And, finally, the water cannot spill into the brine and weaken it, as it does in the can system, unless considerable care be exercised.

The sizes of the blocks of ice made in these boxes run from 3 ft. 6 in. by 3 ft. 6 in. in thickness up to 3 ft. 6 in. by 3 ft. 6 in. by 1 ft. 9 in. in thickness, and the weight likewise varies in a corre-

sponding ratio from about $4\frac{1}{2}$ cwts. up to $10\frac{1}{2}$ cwts. each. Very thick blocks are not, however, found to be commercially successful, inasmuch as they take too long a time to freeze or congeal.

Where clear ice is required in blocks of, say, 5 cwts., the Pulsometer Engineering Company, Limited, use a special form of tank, composed of hollow cells forming squares the size of the blocks required, the water in which is agitated during freezing; the result is a block of ice almost perfectly clear, and weighing about 5 cwts.

As in the ordinary wall or plate system every plant working with the above described ice-making tanks or boxes, in order to render the process continuous, must have a set comprising two or more of the



Fig. 304.—Hill's Method of Making Clear or Crystal Ice. Transverse Section on line $x x$, Fig. 303.

latter. Thus a 4-ton plant has two boxes, a 6-ton three boxes, a 9-ton three boxes, a 15-ton either three or four boxes, and a 24-ton either six or eight boxes.

MISCELLANEOUS ARRANGEMENTS FOR MAKING CLEAR OR CRYSTAL ICE BY AGITATION.

Hill's method of making clear or crystal ice (British Patent No. 16253 of 1889) is shown in Figs. 303 and 304, which represent respectively a plan of the ice-making tank or box partly in horizontal section and with the lid or cover removed, and a vertical section on the line $x x$ of the previous figure. The apparatus comprises a vessel or tank P , which is provided with a lid or cover (Fig. 304), and with a jacket or casing Q , the intervening space between the said jacket or casing and the tank P being filled with any suitable non-conducting material as at Q' . When clear ice is to be made, the liquid to be frozen is continuously circulated in the vessel or tank P by means of a rotating screw R , or other suitable device. Into the vessel or tank P project freezing vessels or chambers S , so that the water in the vessel or tank P will be frozen on the exterior of the chambers S , and the hollow blocks of ice thus formed can be very readily removed therefrom. For

this latter purpose the chambers *s* are made slightly conical or taper from their outer to their inner ends, and rings *s*¹ are fitted loosely thereon to further facilitate the removal of the hollow blocks of ice. Either the direct expansion or brine circulation may be used for freezing purposes. In the first case the liquid ammonia is forced into the chambers *s* through a pipe *s*², and is then allowed to expand and return to the absorber of an absorption machine, the weak liquor, which cannot be vaporised without the application of heat, being allowed to return to the ammonia boiler through a pipe *s*³. In the second case brine reduced to a very low temperature by any suitable process is

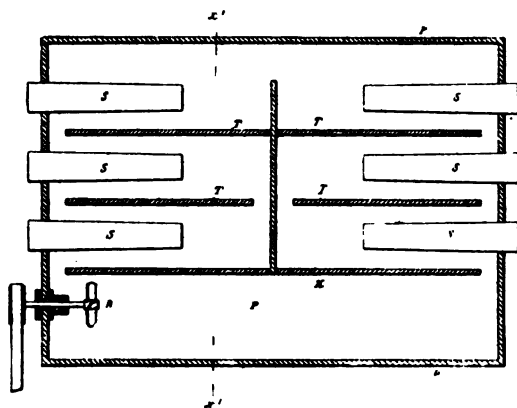


Fig. 305.—Modified arrangement of Hill's Method of Making Clear or Crystal Ice. Horizontal Section.

caused to circulate through the chambers *s*, for the further purpose of freezing the water on the exterior thereof.

To ensure the proper circulation of the water to be frozen in the vessel or tank *P*, partitions *r* are provided in the latter, which are so arranged that they can be readily removed to permit the withdrawal of the hollow blocks of ice from the chambers *s*.

In another arrangement, shown in horizontal section in Fig. 305, and in vertical transverse section on the line *x' x'* of the latter in Fig. 306, a series of the freezing chambers *s* at each side of the tank *P* are provided, leaving a space between them of slightly greater length than the blocks of ice to be produced, so that the blocks from one series of chambers can be first removed and then those from the other series, and space in the ice box or tank is thus economised. Several rows or

series of the freezing chambers *s* placed one above another in the freezing or ice vessel or tank may be employed, as shown in Fig. 306.

In Figs. 307 to 313 are shown a few amongst the many other arrangements for the manufacture of clear or crystal ice by agitation which have been devised.

An arrangement for ensuring the production of clear or crystal ice by the imparting of an oscillating movement to the tank or box *A*, in which the ice moulds or cans are suspended is shown in Fig. 307, which depicts an end view of the apparatus. The tank is suspended, as will be seen from the illustration, upon trunnions *K*, supported in bearings in standards *K'*, and an oscillating or rocking motion is imparted to it by means of an eccentric *L*, upon a rotating shaft *M*. The cold brine or other freezing medium is admitted through the trunnions *K*, which are formed hollow for that purpose, to the bottom of the tank *A*.

The finished ice can be removed by the substitution of warm for the cold brine to thaw off the blocks, and by inclining the tank sufficiently to admit of their sliding out.

In another type of apparatus of this class, each of the cans or moulds is supported in the freezing tank on central pins or trunnions resting in fixed bearings. An oscillating movement is imparted to each can by forks on a rocking shaft engaging other pins placed near its upper end.




Fig. 307.—Oscillating Ice-making Tank or Box.

Numerous arrangements for agitation by means of a piston or pump of some description have been designed, some few of which are shown in Figs. 308 to 313, by way of examples.

The first of these, or that shown in Fig. 308, consists of a partially-submerged plunger pump *N*, the ports of which are inclined as shown in the drawing, so as to set up currents in the necessary directions, shields or guards, *O*, being fixed above the water level to prevent the latter from splashing out of the can or mould, *B*.




Fig. 306.—Modified arrangement of Hill's Method of Making Clear or Crystal Ice. Transverse Section on line *x' x'*.

In the illustration the pump *N* is shown arranged vertically, but it can also be fixed to work horizontally.

The second arrangement of pump agitator illustrated in Fig. 309 has the refrigerating tanks placed in series in such a manner that the brine can pass from one to the other through the passages provided for that purpose. The pump *N* is shown at the right-hand side of the figure, and consists of a barrel and plunger or piston worked off a crank. The water is forced by this pump at each downward stroke of the plunger, along a channel or passage beneath the moulds or cans *B*, and passes up the latter through holes or apertures *B*, provided in their bottoms.

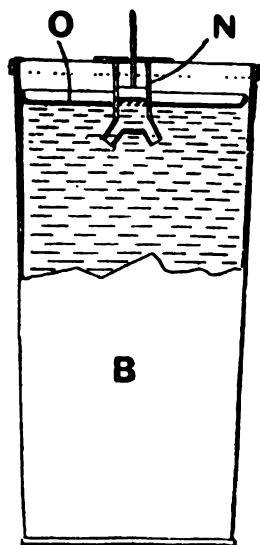


Fig. 308.— Arrangement for Agitation of Water in Ice Cans by means of partially submerged Double - ported Plunger Pump. Sectional Elevation.

On the completion of the congelation of the water in the moulds, the cold brine is drawn off from the tank, and warm water or air is introduced through suitable pipes, so as to thaw off the blocks of ice, and admit of their withdrawal. The moulds or cans are connected together by tie-bars, and a number of them are arranged in one frame.

In another arrangement shown in Fig. 310, in which the water in removable moulds or cans is agitated by the action of pumps, the moulds *B*, which are of thin sheet metal, and arranged transversely in a brine tank *A*, are each divided by a non-conducting partition into two compartments communicating through suitable openings. The larger of these compartments is that in which the water is frozen, the smaller one forms a pump barrel *N*, and in it a piston or plunger *N*¹ is reciprocated.

The plunger rods are coupled to a bar arranged longitudinally, its ends working between suitable guides, and an up and down motion is imparted to it from a rocking shaft *Q*.

Figs. 311, 312, and 313 illustrate types of pump or piston agitators, in which the water in the tanks themselves is intended to be frozen, no separate ice cans or moulds being employed. In the first arrangement (Fig. 311) the tank *A*, containing the water to be frozen, is fitted with a second bottom as broad as the tank, but with a clearance, as shown

in the illustration, which represents a longitudinal vertical section through it at each end. In the clearance between the two bottoms of the tank is mounted an agitator R, as broad as the tank A, and to which reciprocating motion is imparted by connecting-rods from cranks

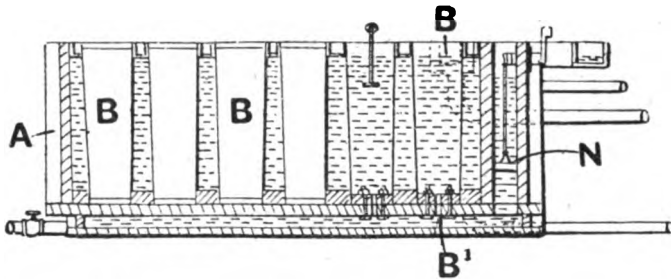


Fig. 309.—Arrangement for Agitation of Water in fixed Ice Cans by means of a Plunger or Piston Pump. Vertical Longitudinal Section.

on a rocking shaft Q. The freezing is effected by narrow longitudinal brine cells j^1 suspended from the edges of the tank at their upper ends, and resting on the second or false bottom at their lower ends. These brine cells are alternately connected at the ends through unions,




Fig. 310.—Arrangement for Agitation of Water in Removable Ice Cans or Moulds by means of Plunger Pumps. Transverse Section.

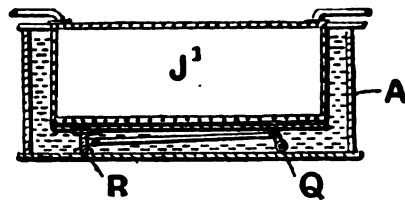


Fig. 311.—Arrangement for Agitation of Water to be frozen in Ice-making Tank or Box by long Horizontal Agitator. Transverse Section.

or tubes, in such a manner as to admit of the brine being passed through the whole series, a four-way cock supplying or withdrawing it in either direction to other tanks or to the refrigerator.

Steam can be passed through the cells to admit of their removal after freezing is completed.

In the arrangements shown in Figs. 312 and 313, pump chambers N , and plungers or pistons N' , are employed, that in the first being arranged vertically at the side, and that in the second horizontally beneath the tank A . The plunger, or piston-rod, is so mounted as to have a certain movement in the plunger or piston, so that, on the up or backward stroke of the latter, it will operate to open a valve and admit of the water passing through, whilst, on the downward or forward stroke, it will, on the contrary, close the valve so that the water will be driven through the openings. In this arrangement it will be seen that the water is only driven in a downward or one direction, but it can be also so arranged as to drive it in an upward or in both directions. The




Fig. 312.—Arrangement for Agitation of Water to be frozen in Ice-making Tank or Box by means of Vertical Plunger Pump. Transverse Section.




Fig. 313.—Arrangement for Agitation of Water to be frozen in Ice-making Tank or Box by means of Horizontal Plunger Pump. Transverse Section.

piston or plunger-rods in both arrangements are operated by bell crank levers s . Several of the above cuts are reproduced from articles by the author which appeared in "Modern Machinery," of Chicago.

Mr. T. B. Lightfoot designed and patented in 1885 a combined refrigerating and ice tank, in which the cans or moulds are arranged between coils or pipes, through which a vaporised freezing medium is caused to circulate, the moulds or cans, and pipes, being surrounded by brine or other uncongealable fluid, not mechanically circulated.

THE HOLDEN SYSTEM OF ICE-MAKING.

A system of ice-making which is said to be coming into considerable use in the United States, is that invented by Mr. D. L. Holden (who may be said to be the pioneer of the ice-making industry in that country), which he terms the "regealed ice machine." The method of procedure is substantially as follows:—The cold is obtained by the ex-

pansion of the liquid ammonia. Centrally, in a water tank or reservoir, is located a horizontal metal cylinder, the extremities of which form hollow gudgeons extending to the outside of this tank, and are provided with suitable means through which rotary motion can be imparted to the cylinder. The liquid ammonia anhydride is delivered into the above-mentioned cylinder at one of its ends, and forms a thin layer upon the inner wall of the revolving cylinder, in which it expands, vaporises, and is carried off from the other end. Upon the exterior of the cylinder a thin coating of ice is formed, which is constantly removed by a set of scrapers; and this ice, floating in the water, is conducted by a worm or other conveyor to two cylinders, in which a piston operates, to subject it to a pressure of 50 lbs. per square inch for the purpose of expelling all excess of water and air bubbles.

An installation on this system requires a far simpler apparatus than that which has to be provided for carrying out the process of ice-making by means of any of the systems usually employed; and it has, moreover, according to the inventor, the further advantage of enabling work to be started with comparatively little delay as compared with that entailed by other plants, which in some cases require one or more days' preparation. As the thin layer or coating of ice is constantly and rapidly formed on the external surface of the internally cooled metal cylinder, the process is more expeditious than is the case when the freezing or congelation of the water takes place in a mould or can, where the formation of ice at the sides considerably retards the process and renders it very slow.

WATER DE-AERATING OR DISTILLING APPARATUS.

The last of the plans mentioned for making clear or transparent ice, or that wherein the water to be frozen is first de-aerated or deprived of its air, is usually carried out in an apparatus working on the can system, but the water so treated may be used in the cell or any other system with equally favourable results.

The process of de-aerating the water is one of the utmost simplicity, and the product is found to answer admirably, the ice produced being of prime quality.

The methods used for extracting the air from the water are either by subjecting it to a long-continued boiling; by exposing it to a high vacuum; or by distilling it under exclusion of the atmosphere.

In order, however, to economise fuel, it is a not unusual practice to utilise the exhaust steam from the engine for the purpose of ice-making, as has been already mentioned; and as this exhaust steam con-

tains an admixture of more or less of the lubricating oil from the engine cylinder, it must be deprived of this before being thus used. This is very easily accomplished by passing the exhaust steam through steam-filters of very simple construction, and after the steam has been thus filtered it is condensed, and the resultant water is again thoroughly

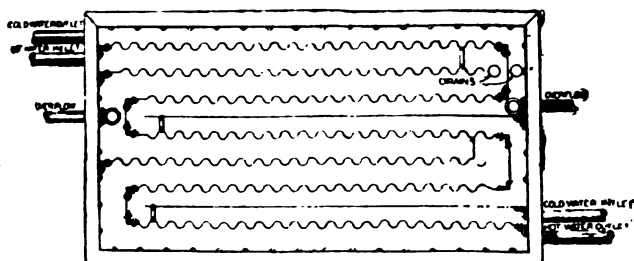


Fig. 314.—Oil Separator and Condensed Water Cooler, Triumph Ice Machine Company. Plan.

filtered so as to, as completely as possible, deodorise it. The can ice produced from this de-aerated or air-freed water still contains a very thin stratum or core of porous ice in the centre, but it is insignificant, and not sufficient to injure the appearance of the blocks to any appreciable extent.

The Klein oil separator or collector consists of a number of dished

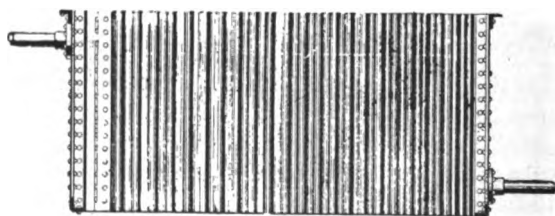


Fig. 315.—Oil Separator and Condensed Water Cooler, Triumph Ice Machine Company. Vertical Section.

perforated plates set zig-zag fashion in a cylindrical or a rectangular casing. The Triumph Ice Machine Co.'s oil separator and condenser water cooler is shown in plan and vertical section in Figs. 314 and 315. The distilled water runs round one channel, formed with corrugated walls, whilst the cool water passes in the opposite direction. This

corrugated construction gives a very large amount of cooling surface, whilst occupying a comparatively small casing.

Fig. 316 is a diagrammatical view showing an apparatus employed

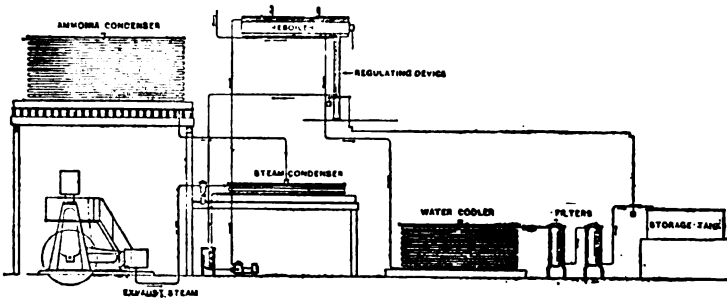


Fig. 316.—Apparatus for Making Distilled Water from Exhaust Steam. Frick Company. Diagrammatical View.

by the Frick Company for making distilled water from the exhaust steam from the driving engine.

Another method of utilising the exhaust or waste steam for de-

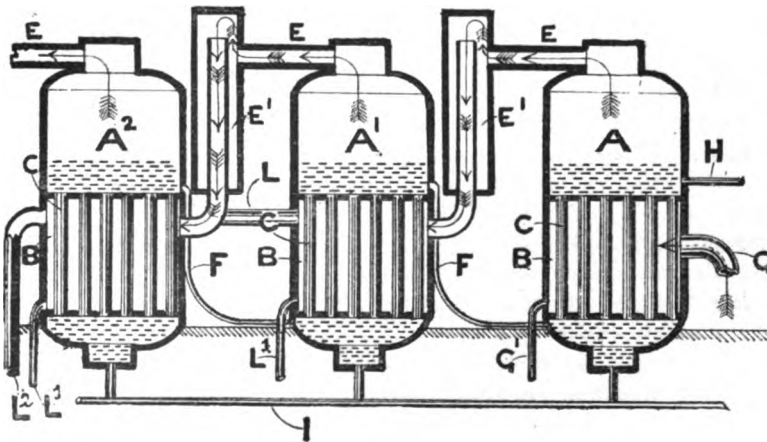


Fig. 317.—Diagram Illustrating Operation of Triple-Effect Evaporating Apparatus.

aerating or producing water freed of its air, is by employing it for the evaporation or distillation of other water in a suitable still or apparatus,

as, for example, a triple effect distilling apparatus, or in a single effect, or, for very large plants, a multiple effect, evaporator of the Yaryan type.

The operation of the ordinary type of triple effect is shown in the diagram Fig. 317.

The triple effect, which is a modification of a vacuum pan, or rather a modified arrangement of vacuum pans, is the invention of Mr. Rilleux, a French gentleman, and was primarily intended for use in factories making beetroot sugar. Double effect apparatus of this type is also constructed, and in some instances the number of effects is increased to four, which is the usual limit in this system.

In the diagram, A , A^1 , A^2 indicate the three pans or vessels forming the effects, in the upper parts of which are spaces to receive the steam or vapour evaporated, and the lower part of each pan or vessel being fitted with two tube plates or diaphragms, which are set with suitable tubes C to allow the water to be evaporated, to obtain access, and to circulate below the lower tube plate, and above the upper tube plate; and the space between these tube plates and round the exterior of the tubes constitutes the calandria or heating chamber B .

The upper portion of the pan or vessel A is connected with the heating space or calandria of the pan or vessel A^1 , and the upper portion of the latter is connected with the heating space or calandria of the pan or vessel A^2 by means of pipes E fitted with safes or traps E^1 , and the upper portion of the pan or vessel A^2 is connected through the pipe E with a condenser.

The lower or water spaces of the pans or effects are connected together by pipes F .

The calandria of the pan or vessel A is heated by either waste steam or of live steam delivered through the pipe G , whilst the steam or vapour evaporated from the water in the pan or vessel A is employed to heat the calandria of the pan or vessel A^1 , and that from the latter the calandria of the pan or vessel A^2 , the steam or vapour evaporated from the water in the latter passing to the condenser through the pipe E .

It will thus be seen that the second effect or pan forms a condenser to the first, and the third a condenser to the second, the third being in connection with a surface condenser, which may be employed to heat the feed-water, and thus form a heat interchanger.

The condensation water from the calandria of the first pan or effect A is delivered by the steam-pressure into a hot well, that from the calandrias of the second and third pans, as well as that from the surface condenser, connected with the latter, is delivered by suitable

pumps into the distilled water-receiver. *H* is a pipe for charging the apparatus with the water to be distilled or evaporated. *I* is a pipe connected by branches to a well in the bottom of each pan. *L* is a pipe connecting the upper part of the heating space of the calandria *B* of the second pan *A*¹, with that of the third pan *A*². *G*¹ is a pipe by which the water resulting from condensation in the calandria *B* of the first pan *A* is discharged into a hot well; and *L*¹ are pipes by which the condensation water from the calandrias *B* of the pans *A*¹ and *A*² is delivered to the distilled water receiver. *L*² is a pipe for removing the excess of vapour from the calandria *B* of the third pan *A*².

The vacuums maintained in the three vessels or effects *A*, *A*¹, *A*², will be respectively about 4 inches, 14 inches, and 24 inches, and the temperatures, taking the vessels or effects in the like order, will be about 200°, 180°, and 130° Fahrenheit.

It will be seen that the economy of the triple effect apparatus is due to the fact of its being largely self-heating, as the calandria of the first vessel or effect is the only one heated by extraneous means, the calandria of the second effect being heated by the latent heat of the steam or vapour from the boiling water in the first effect, and the third effect being heated from that of the second effect. Thus, neglecting the loss of heat due to radiation, a double effect is twice, and a tripe effect is three times as economical in steam consumption for heating purposes as a single effect.

The Haslam distilling apparatus is constructed upon the triple-effect principle, and comprises a first boiling pan, a second boiling pan, a condenser, a feed-water heater, and a distilled-water receiving tank or vessel. When no exhaust or waste steam is available the plant also includes a suitable steam-boiler.

Fig. 318 is a perspective view, partly in section, illustrating a complete single effect distilling apparatus of the Varyan type, which are made in various sizes, adapted to produce from 3 tons to 48 tons of distilled water per twenty-four hours. The apparatus consists essentially of a cylindrical evaporator, having a horizontal body or shell of wrought-iron, with a separator similarly constructed at one end, and a number of straight, solid-drawn tubes (according to the capacity of the machine) so fixed in tube plates provided at both ends of the shell or body as to be capable of being readily withdrawn when necessary for cleaning purposes. These tubes are connected at their ends by return heads, so as to throw them into sets or series, thus practically forming coils of pipe of any desired length. The water to be distilled is passed through these coils or sets of pipes, the exhaust steam

being admitted to the space round them, and the steam or vapour from the evaporating coils passes through the separating chamber, which is

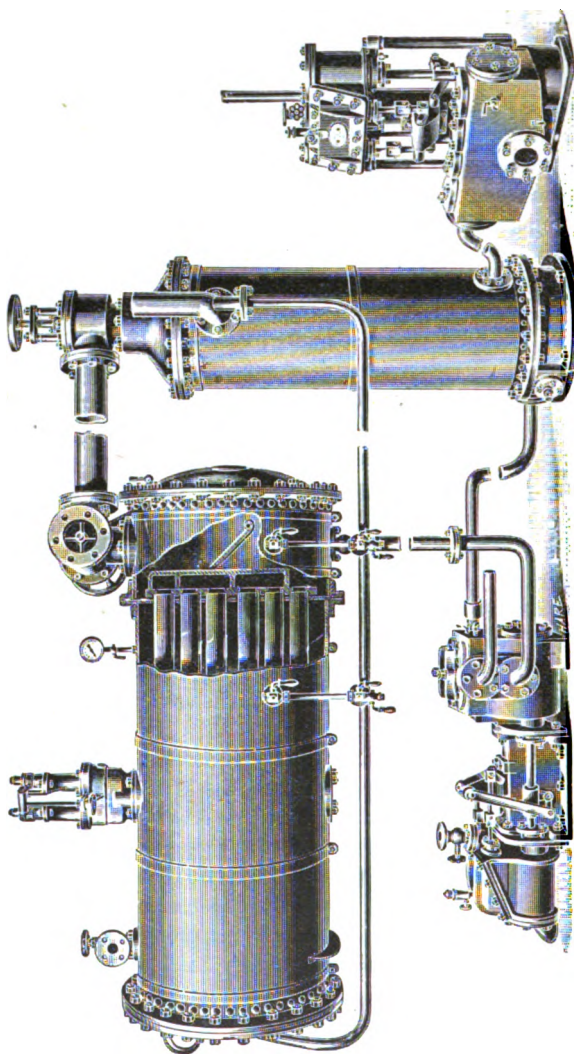


Fig. 318.—Complete Single-Effect Distilling Apparatus on the Yaryan System.

fitted with baffle or check plates, one of which is shown in the drawing, to the condenser, which latter also forms an interchanger and heats the water to be distilled.

The distinctive feature of this system is film evaporation, that is, the blowing of the whole mass of the liquid to be evaporated into spray, and its rapid motion through the sets or series of tubes during the process. This latter point is of great importance, and is the chief reason of the great efficiency of this type of apparatus. The result is due to the fact that there is a very considerable gain in absorption of heat by the liquid under treatment as its velocity increases, owing to the fact that new particles of the liquid are being constantly brought into contact with the heated surfaces, and naturally the more rapid its motion over the latter the more frequently will this occur.

When in operation there will be a vacuum of from 12 in. to 15 in. in the separator, and the steam pressure in the evaporator should be about 15 lbs. per square inch: the latter may, however, be increased to about 40 lbs. per square inch.

The feed taken from the circulating discharge is usually drawn into the tubes by reason of the vacuum in the separator; if, however, condensation is carried out at atmospheric pressure, it is forced in owing to the head of water due to the height of the circulating discharge, or to a loaded valve.

The advantages of a triple effect, or an apparatus of this type for producing pure distilled water for ice-making, are obvious, inasmuch as it admits of its being obtained free from the slightest trace of oil, by the use of exhaust or waste steam only, and that without any necessity for filtering. The dispensing with filtering is of some importance, as each time the distilled water is passed through a new filter it takes up a considerable quantity of air, and consequently until all the air has become expelled from the filter the water is in no way superior to ordinary undistilled water, and the ice made from it is opaque and porous. The condensed exhaust steam, after having performed its duty in the evaporator, may be either run into a hot-well to be used for boiler feeding purposes, or it may be run to waste.

Fig. 319 illustrates one of the Mirreles, Watson, and Yaryan Company's larger forms of distilling apparatus, which is suitable for installations turning out considerable quantities of ice per twenty-four hours. As will be seen from the drawing it is a sextuple or six-effect apparatus. On the right are situated the air, circulating, brine, fresh water, and feed pumps, which are all driven off one engine, and are, with the latter, the only moving parts. Next is placed the distilling condenser (between two heaters in which the feed-water becomes partially heated on its way to the evaporator); and finally, on the left, six separators placed in a vertical column, with the corresponding six effects arranged horizontally in the rear.

In operation there will be a pressure of from 40 to 60 lbs. in the first effect, and a vacuum of about 27 inches in the distilling condenser, the apparatus being so proportioned that this difference of

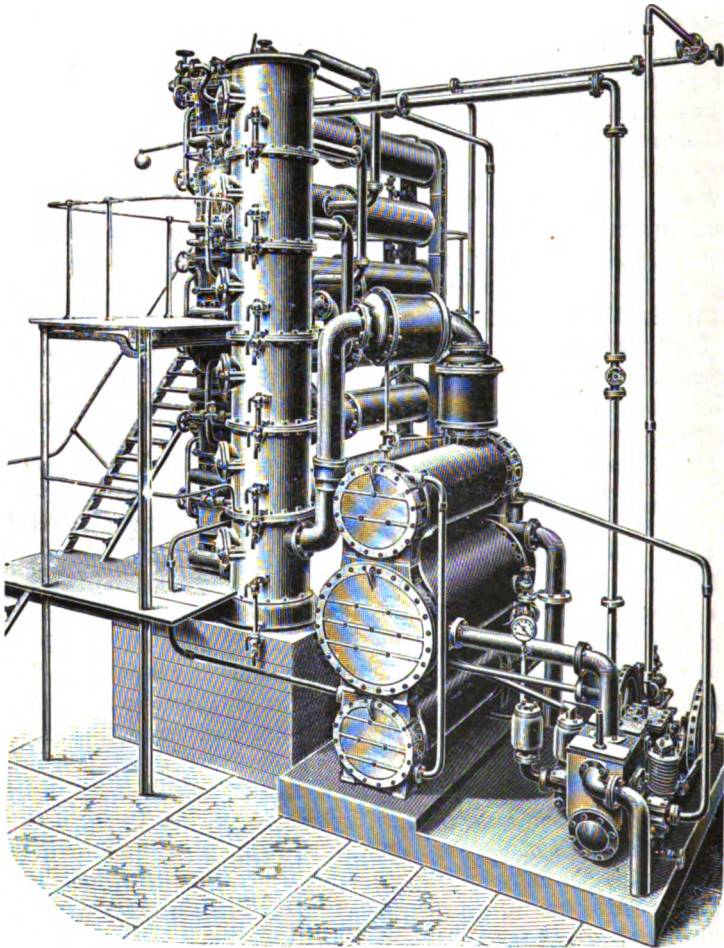


Fig. 319.—Complete Sextuple-Effect Distilling Apparatus on the Yaryan System.

pressure will distribute itself automatically between the several effects. The feed for the evaporator being taken from the circulating water of the distilling condenser, a certain amount of heat, which would other-

wise be rejected, is utilised at the very commencement of the operation, and the efficiency of the apparatus is further increased and heat economised by a multiple-effect system of heating the feed before reaching the evaporating vessel. The first stage of heating the feed referred to is effected by exposing it to the vapour given off by the water evaporated in the last effect while this vapour is on its way to the distilling condenser, and then to the vapour from the several effects constituting the evaporating apparatus, until it receives its final increment of heat from the steam employed to heat the first effect, into which the feed enters at or about the boiling point of that effect.

The feed entering the first, passes down through all the effects of the apparatus. The water resulting from the condensation which takes place on the different heating surfaces, together with that from the last effect, being eventually delivered as cold distilled water. Usually the water resulting from the condensation of the steam employed to heat the first effect is separated from that produced in the remainder of the apparatus, as being likely to be slightly contaminated, and is reserved for feeding the boiler supplying steam to the apparatus, pumping engines, etc. On the number of effects used in combination with the system of evaporating water in continuous motion depends the great economy of fuel which is obtained in apparatus of this type. The only labour required in connection with the apparatus is that for stoking the boilers, and the necessary attention to the feeding of these, and to the working of the pumps. All parts of the apparatus are readily accessible, hinged doors at the end of each effect giving easy access to the interior of these for cleaning purposes when required.

An exceedingly compact and efficient form of portable Yaryan distilling apparatus has also been designed by the same firm, which is entirely self-contained and is easily movable, being mounted upon an independent carriage supported upon strong iron wheels. The apparatus comprises two Yaryan evaporators arranged to work as a double effect, a distilling condenser in connection therewith, a suitable feed water tank, a pump for feeding the water to be distilled through a heater into the first effect or vessel, and a tail or circulating pump for condensing the steam given off from the second effect or vessel in the distilling condenser. The steam required for working the apparatus is supplied from a portable boiler fitted with a donkey feed-pump, etc., and also mounted upon iron road wheels.

The advantages of a portable distilling apparatus capable of being shifted with great facility from one source of water supply to another, or to any desired location in the works, are obvious. And the com-

pactness of the installation renders it very easily manageable, one skilled attendant and a boy being sufficient for a machine having a capacity to produce 85 gallons of pure fresh water per hour from strong brine averaging twice the density of ordinary sea water. Exhaustive tests proved most conclusively that the efficiency of the plant was fully equal at the termination of each run to what it was at the commencement, which abundantly demonstrated the self-cleaning powers of the apparatus when treating water so strongly charged with salts. The evaporative duty was $4\frac{3}{4}$ lbs. of water per pound of common wood fuel; with coal, however, the duty would be about double per pound of coal consumed, and naturally when treating impure water of less density than the said brine, or comparatively pure water for de-aerating purposes, the amount of pure de-aerated water obtained per pound of fuel consumed would be proportionately larger.

In the case of a single-effect distilling apparatus the above fuel consumption would be doubled to produce the same amount of distilled water, and the more effects that are employed up to a certain point the greater the economy, a six-effect apparatus being found capable of producing 36 lbs. of pure distilled water for each pound of fuel consumed, that amount being over and above what was evaporated in the boiler which was returned to the latter.

It is obviously, therefore, advisable wherever the demand for the de-aerated water warrants it, to employ a multiple-effect distilling apparatus.*

In most factories, however, the exhaust steam from the engines will be available for use in the apparatus, and the expenditure on fuel for raising steam, specially for use in the evaporator, will thus be saved.

The evaporator should be opened every two or three weeks, and if scale is found on any of the tubes, these should be withdrawn and clean ones inserted in their place. The best means to employ for removing the scale from the tubes is to pass them over a slow fire, care, however, being taken not to apply more heat than is necessary to bring off the scale.

VACUUM SYSTEM OF ICE-MAKING.

The method of making ice without the use of either a primary or secondary cooling agent, that is to say, by freezing the water in vacuo, has been already dealt with when describing the Carré, Wind-

* A detailed description of the larger forms of multiple-effect Yaryán evaporators, with reference to their use for the evaporation and concentration of saccharine juices and solutions, will be found in a treatise on "Sugar Machinery," by the same author.

hausen, Harrison, and other vacuum machines. Briefly, the principle upon which they work is that if water be exposed in a practically perfect vacuum it is rapidly turned into vapour, and this change requiring a large quantity of heat which must be provided by the water itself, that portion of the water which is not vaporised becomes frozen solid. As already mentioned, however, the ice thus made is more in the form of granulated snow, and, being brittle, charged with air, and possessing no durability, it is practically of very little or no market value.

IMITATION OF NATURAL SYSTEM.

In another system, wherein an imitation of the natural process is attempted, the water to be frozen is exposed in well-insulated rooms or chambers to a temperature far below freezing point. This plan, however, is not found to answer commercially owing to the extreme slowness with which the freezing or congealing of the water is effected, by reason of the low specific heat of air and its poor capacity for conduction, a fault which cannot be got over even by increasing the cooling surfaces of the rooms to an abnormal degree.

ICE FACTORIES.

A factory for making ice consists of more or less solid buildings in accordance with the particular regulations of the locality, capital at command, etc. Fig. 320 shows an arrangement of the ice-tank, or box room, but in addition to this the factory will comprise a machine room, boiler room, ice store, offices, loading platforms, etc.

The arrangement shown in the drawing is intended for making ice on the can system, and the ice-boxes are precisely similar to those previously described. Above the ice-boxes is provided a travelling hoist, or crane, by means of which the cans, or moulds, can be conveniently raised one by one from the ice-boxes, when the water in the cans has been frozen, and transferred to the platform shown on the right-hand side of the drawing. On or beneath this platform are provided a suitable number of thawing or relieving tanks filled with warm, or tepid water, at about 70° Fahr., and into this the can or mould is dipped for a few seconds, after which the block of ice can be readily turned out on a tip-table, and the can or mould is again filled with water and returned into the brine-tank to recommence freezing. The ice blocks, or cakes, are in some instances turned out of the cans or moulds at, or delivered to, the upper end of an inclined plane, or runway, down which they pass to the ice-store, or ante-chamber

leading thereto. The waste-water tanks, etc., are located beneath the ice-making tanks or boxes.

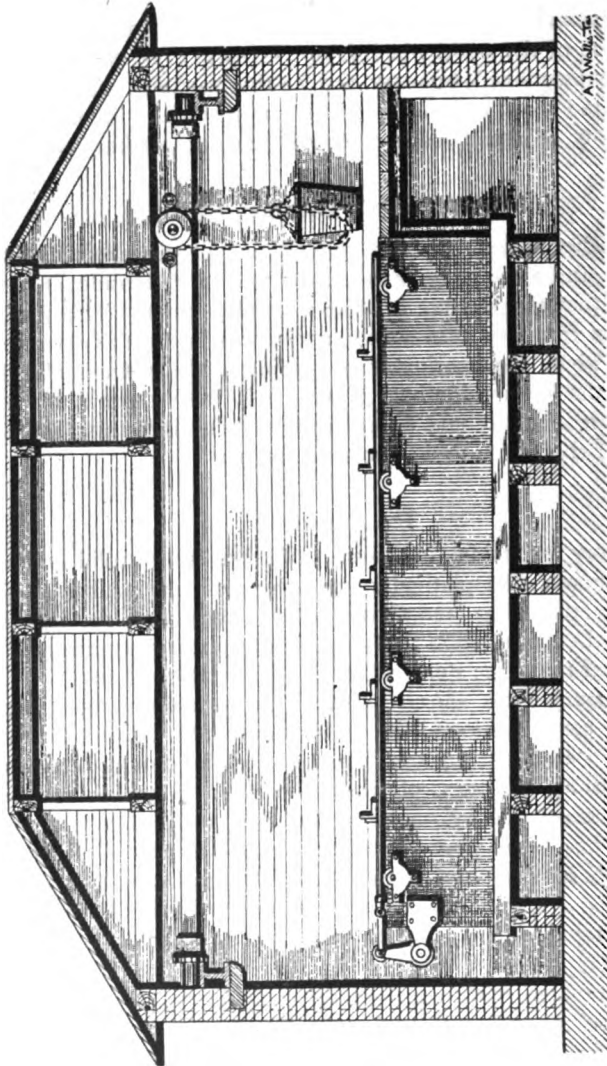


Fig. 320.—Ice Tank or Box Room of Ice Factory on the Can System. Sectional Elevation.

Fig. 321 shows the arrangement of an ice tank or box room of an ice factory for making ice on the plate or wall system, designed by the

Pulsometer Engineering Company, Limited. The mechanism for raising the slabs or blocks of ice from the ice-tanks or boxes is clearly shown in this illustration.

Figs. 322 to 324, 325 to 327, and 328 to 330 are suggested plans by the Frick Company for can ice factories respectively of the following capacities: Six to ten tons, thirty to thirty-five tons, and one hundred tons. The arrangement of these factories is explained by the writing upon the drawings. Figs. 331 and 332 is a plan of a model ice factory


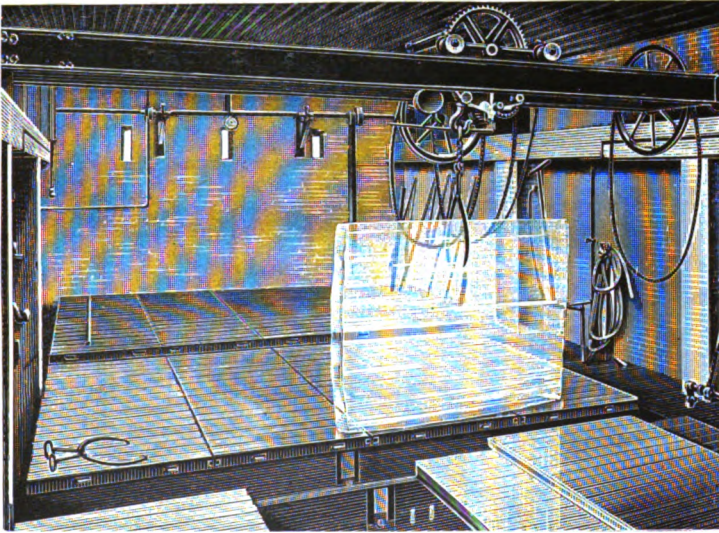


Fig. 321.—Ice Tank or Box Room of Ice Factory on the Plate or Wall System, showing mechanism for raising slabs or blocks of ice.

by the Triumph Ice Machine Company. Figs. 333 and 334 show in plan and sectional elevation a five-ton ice factory on the can system, designed by the Vulcan Iron Works. And Fig. 335 is a sectional elevation showing an ice factory on the "Eclipse" can system, as constructed by the Frick Company. These three drawings are also self-explanatory.


ICE ELEVATING AND CONVEYING MACHINERY.

As has been already mentioned, numerous contrivances for minimising the work of handling the cans or moulds and the blocks of ice have been devised.

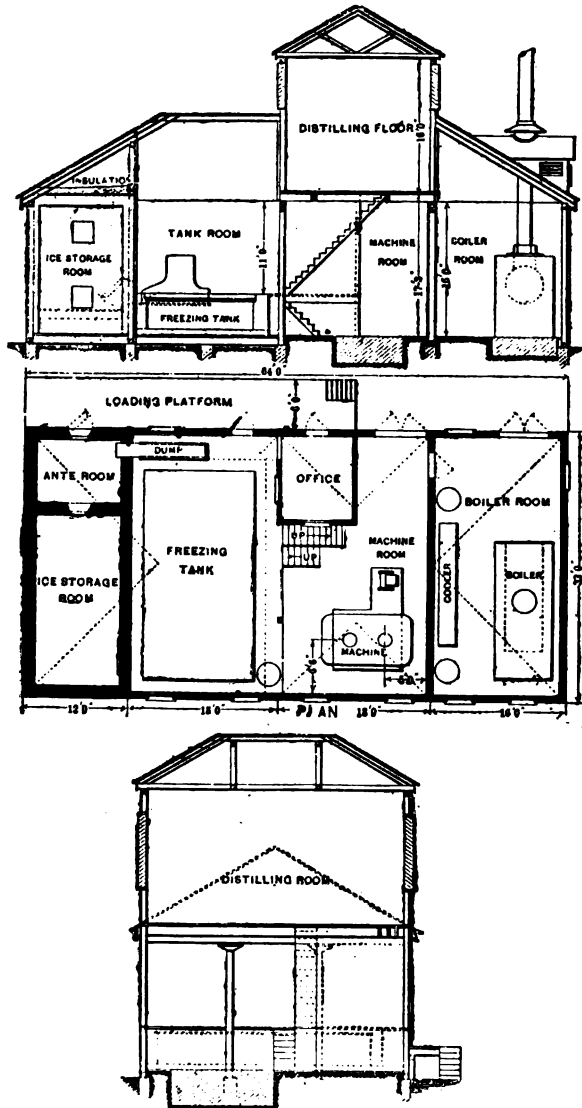

SECTION THROUGH DISTILLING ROOM

Figs. 322 to 324.—Frick Company Arrangement for Ice Factory of six to ten tons capacity. Plan, Sectional Side Elevation, and Transverse Section.

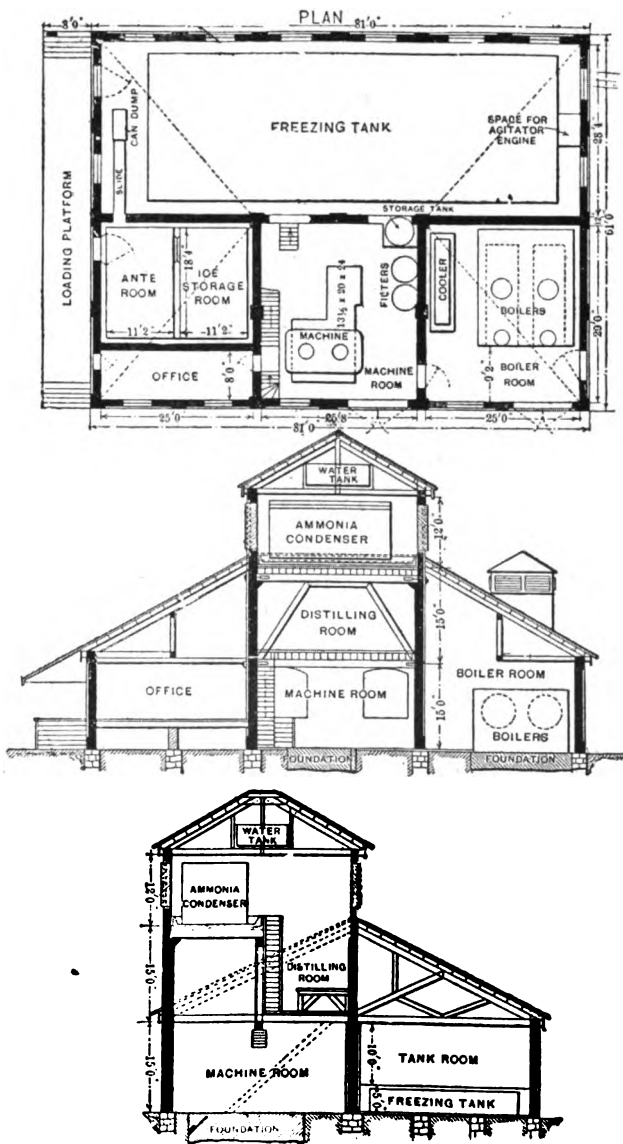

Figs. 325 to 327.—Frick Company Arrangement for Ice Factory of thirty to thirty-five tons capacity. Sectional Side and End Elevations and Plan.

G G

Puplett and Rigg's patent of 1887 comprises an arrangement for facilitating the lifting of the cans or cases, and removing the ice. This labour-saving contrivance consists in an apparatus for connecting two or more of the cans, moulds, or cases together, and comprises a frame which is provided with trunnions or gudgeons, so situated as to be


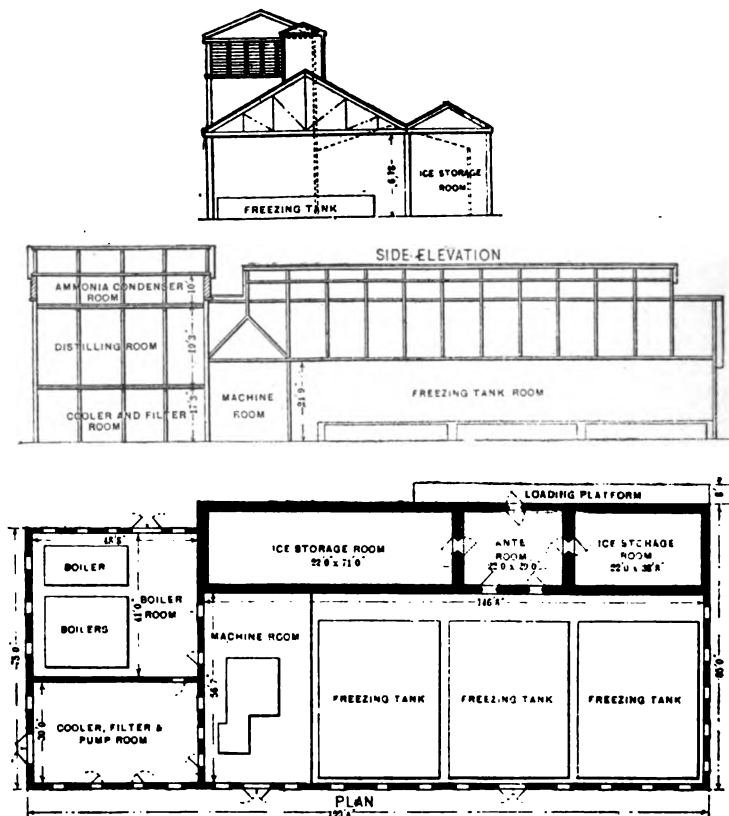


Fig. 328 to 330.—Frick Company Arrangement for Ice Factory of one hundred tons capacity. Plan and Sectional Side and End Elevations.

slightly above the centre of gravity of the cans or moulds. At one end of each of these frames a quadrant, worm and worm wheel, or some other convenient means, are provided, for enabling the frame and moulds therein to be inclined to any required angle. To admit of the frames being raised from the ice-making tank or box by the overhead

traveller the latter is fitted with links adapted to engage with the above-mentioned trunnions or gudgeons. The frame, and moulds or

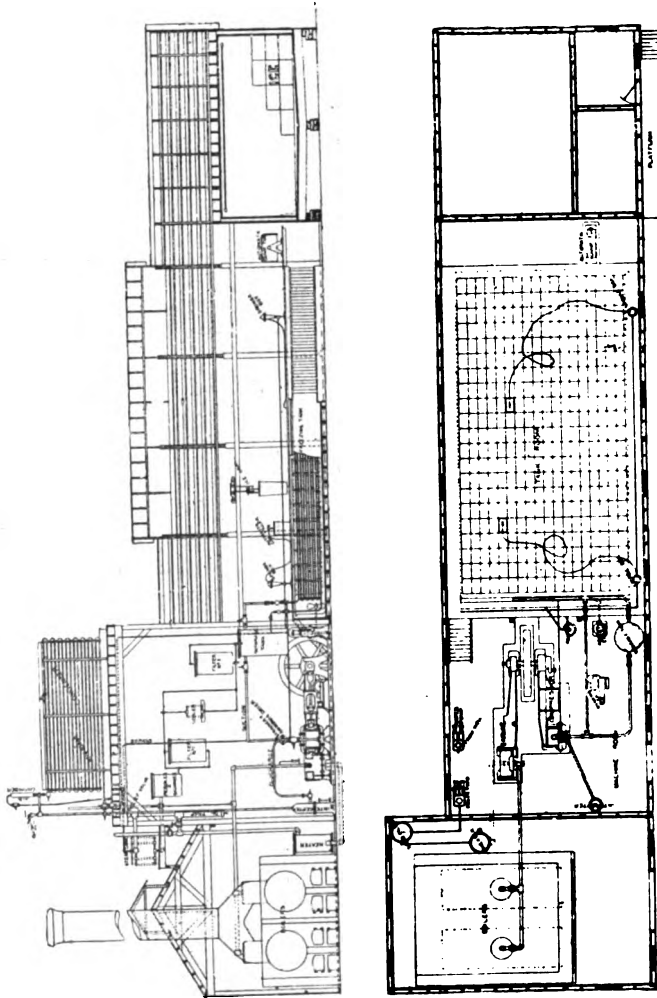


Figs. 331 and 332.—Arrangement of Model Ice Factory by the Triumph Ice Machine Company. Plan and Sectional Elevation.

cans, being nearly balanced on their trunnions, the labour of discharging the ice therefrom is greatly reduced, and the operation is moreover considerably expedited. The quadrant or worm gearing is usually

so arranged as to engage with a suitable device fixed on to the links of the overhead traveller; but mechanical contrivances can be dispensed with, and the frame containing the moulds tipped by hand, which operation, owing, as above mentioned, to its being almost balanced, can be so accomplished without any difficulty.

Fig. 336 is a truck ice-can hoist for use with very small ice-making plants. Fig. 337 is a travelling crane, and geared hand-power ice-can

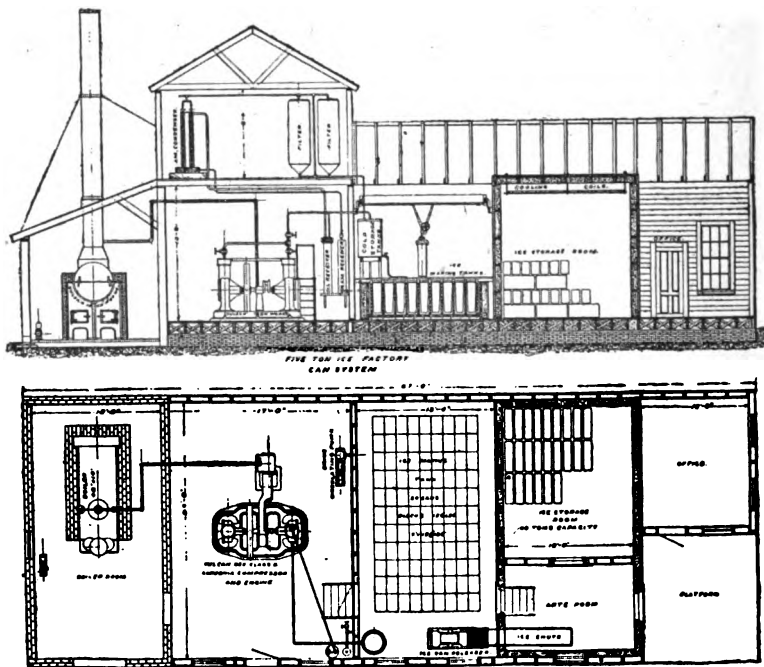

Figs. 333 and 334.—Vulcan Iron Works Arrangement for a five-ton Ice Factory on the Can System. Plan and Sectional Elevation.

hoist, by means of which one man, whilst on watch, can take care of from 10 to 15 cans per hour. And Fig. 338 is an electric crane for use in connection with large installations, and which is capable of handling any desired number of cans. The above appliance is constructed by the Frick Company.

Fig. 339 represents an automatic ice-dump, made by the Triumph Ice Machine Company. The box is made of 3-16 in. steel, reinforced

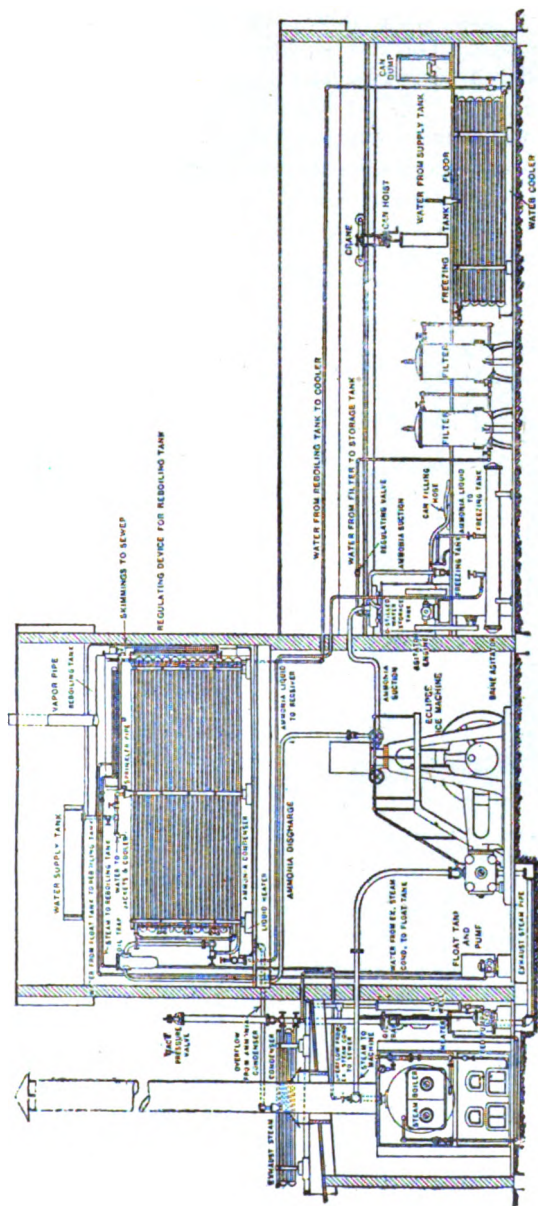


Fig. 335.—Ice Factory on the "Eclipse" Can System, constructed by Frick Company. Sectional Elevation.

by $\frac{3}{8}$ in. $\times$ $\frac{1}{2}$ in. iron. The valve and shaft are bolted on this box with a heavy flange. The stands carry the bearings and box, and are bolted to a cast-iron waste box, there being no wood about the box to decay or give way.

The operation of this dump is as follows, viz. :—The box being in a vertical position to receive the can, the small lever at the bottom can be operated by the foot so as to give the dump a slight tilt toward the front, when the dump will go over slowly and turn on the warm water automatically, while same is turning down in position to dump the ice. The water strikes all sides, and under the can. The

valves are so regulated that the bottom of the can will receive the most water, thereby melting the ice away from that part. The weight of the ice starting, the cake will then fall on the bottom of the can, and the air will rush in over the top of the ice, forcing same out of the can.

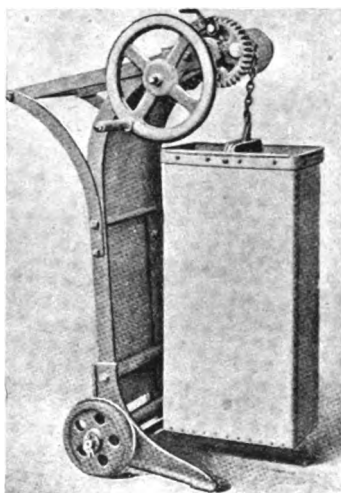


Fig. 33b.—Frick Ice-can Hoist for use with small Ice-making Plants.

Fig. 340 shows the Vulcan Iron Works track system. The rail in this arrangement is supported during the throw of the switches, so that no abnormal strain can come upon the hinge or joint, and the latter cannot be broken off if the switch be left open. The rail is formed of $2\frac{1}{2}$ in. $\times$ $\frac{1}{2}$ in. iron, and the hangers are so constructed that

any portion of the rail can be secured to the hanger without drilling.

These switches are made two, three, and four throw.

Ice-delivery machines and other labour-saving appliances are also manufactured by the Pulsometer Engineering Company, Limited, and others.

Whatever the arrangement, however, for drawing the ice, one thing is absolutely necessary to ensure economical working, and that is the strictest regularity. It is, of course, understood that the machinery should also be kept working at as uniform a speed as possible, and that all temperatures should be maintained as normal as practicable.

Suitable ice elevators or hoists are also required for raising the

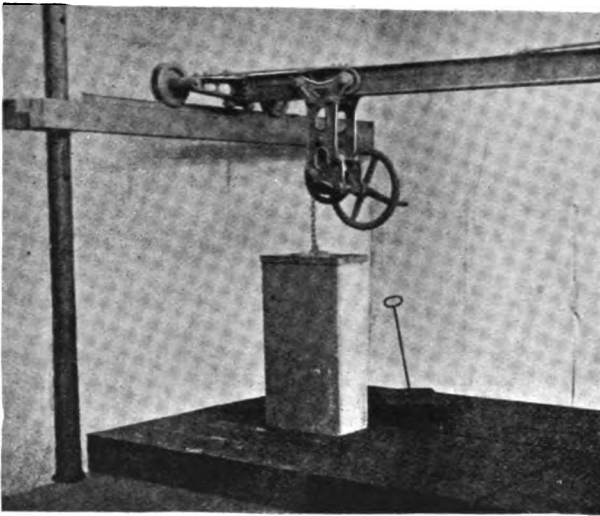


Fig. 337.—Travelling Crane and Geared hand-power Ice-can Hoist.

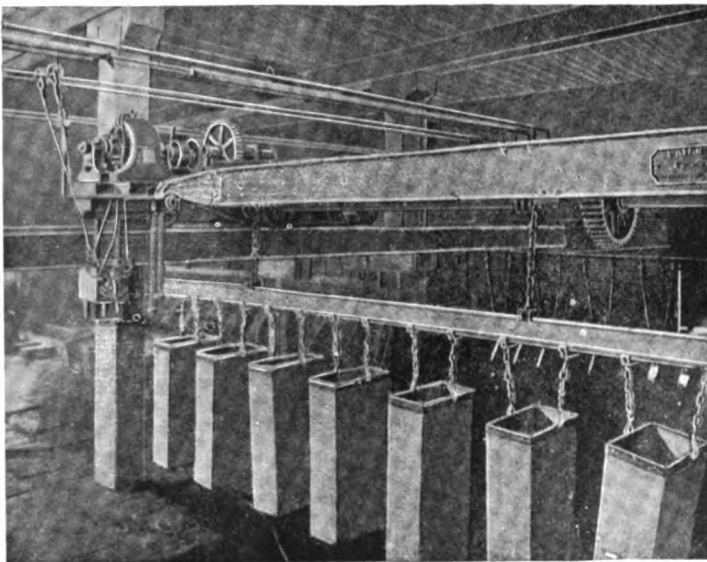


Fig. 338.—Electric Crane for handling Ice Cans in large factories.

blocks of ice from one level of the factory to another. Amongst numerous devices for this purpose, mention may be made of the following, viz., that wherein an endless chain, provided with hooks, is employed

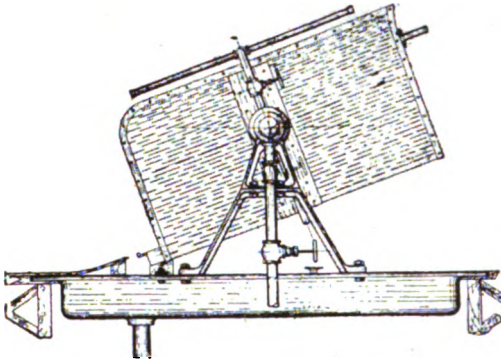


Fig. 339.—Automatic Ice Dump.

to grab the blocks of ice, and drag them up an incline, which latter may be made in sections, so as to admit of the ice being discharged at different elevations. The hooks are set in position to engage with the blocks of ice by a spring bar upon the frame carrying the driving - wheel. In another arrangement

the blocks of ice are shoved up a fixed spiral incline, by arms or levers projecting radially from a shaft, located vertically in the centre of the incline, and rotated in any convenient manner.

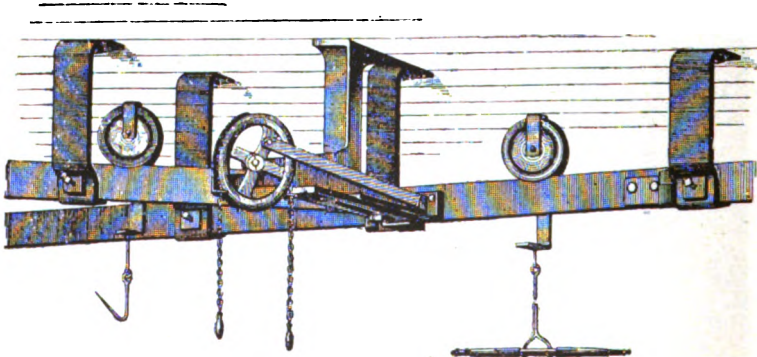


Fig. 340.—Vulcan Iron Works Track System.

Ordinary hydraulic or steam platform lifts, communicating between the different floors of the factory, may be located wherever found to be necessary and convenient, as also run-ways or slip-ways and gravity hoists.

A number of loose tools are likewise required in an ice factory for

manipulating the ice, such as ice-saws, hatchets, hooks and picks, hoisting tongs, trollies, etc., etc.

ICE-MAKING, GENERAL.

It is advisable to have hydrants in suitable positions throughout the buildings, and this precaution is especially desirable where ammonia machines are in use, the extreme affinity of ammonia for water rendering the latter (as already mentioned) the best remedy to employ for killing the ammonia should any considerable quantity become accidentally spilt.

The ice store is usually refrigerated by means of a brine or direct expansion coil, and the ante-room thereto should be cooled in a similar manner. It may be taken that, as usually stored, a ton of ice will occupy about 50 cubic feet. The top layer should be covered with dry sawdust or shavings. See also "Storing Ice."

In some places it is found advisable and advantageous to add to the ice factory buildings one or more cold stores or chambers, wherein perishable products can be preserved for customers desiring such accommodation.

The management of ice-making and refrigerating machines will be found dealt with in the next chapter, so far as the space at command will allow. That of the steam engines or other motors employed for driving these and of the miscellaneous accessory machines and apparatus will, of course, in no way differ from those used for other purposes, and instructions for the proper care and working thereof are outside the province of this work.*

FREEZING TIMES FOR DIFFERENT TEMPERATURES AND THICKNESSES OF CAN ICE.
(Siebert.)

Thickness.	1 in.	2 in.	3 in.	4 in.	5 in.	6 in.	7 in.	8 in.	9 in.	10 in.	11 in.	12 in.
Temperature 10°	0'32	1'28	2'86	5'10	8'00	11'5	15'6	20'4	25'8	31'8	38'5	45'8
" 12°	0'35	1'40	3'15	5'60	8'75	12'6	17'3	22'4	28'4	35'0	42'3	50'4
" 14°	0'39	1'56	3'50	6'22	9'70	14'0	19'0	25'0	31'5	39'0	47'0	56'0
" 16°	0'44	1'75	3'94	7'00	11'0	15'8	21'5	28'0	35'5	43'7	53'0	63'0
" 18°	0'50	2'00	4'50	8'00	12'5	18'0	24'5	32'0	40'5	50'0	60'5	72'0
" 20°	0'58	2'32	5'25	9'30	14'6	21'0	28'5	37'3	47'2	58'3	70'5	84'0
" 22°	0'70	2'80	6'30	11'2	17'5	25'2	34'3	44'8	56'7	70'0	84'7	100'0
" 24°	0'88	3'5	7'86	14'0	21'0	31'5	42'8	56'0	71'0	87'5	106'0	126'0

* For detailed information regarding friction, and the management and lubrication of the rubbing parts of machinery, see "Bearings and Lubrication," by the same author.

TIME REQUIRED FOR WATER TO FREEZE IN ICE CANS.

(The Triumph Ice Machine Company, Catalogue).

Cans, size, 6 in. by 12 in. by 24 in. Weight of cake, 50 lbs. Time to freeze, 20 hours.
 Cans, size, 8 in. by 18 in. by 32 in. Weight of cake, 100 lbs. Time to freeze, 36 hours.
 Cans, size, 8 in. by 16 in. by 40 in. Weight of cake, 150 lbs. Time to freeze, 36 hours.
 Cans, size, 11 in. by 22 in. by 32 in. Weight of cake, 200 lbs. Time to freeze, 55 hours.
 Cans, size, 11 in. by 22 in. by 44 in. Weight of cake, 300 lbs. Time to freeze, 60 hours.
 Cans, size, 11 in. by 22 in. by 57 in. Weight of cake, 400 lbs. Time to freeze, 60 hours.

NOTE.—Temperature of bath 14 to 18 degrees Fahrenheit. As a rule the higher the bath temperature the slower the process of freezing, but the finer and clearer the ice.

TABLE OF ICE-PLANT EFFICIENCIES COLLECTED FROM TWENTY-SEVEN EXISTING AND OPERATING PLANTS.—*Sneddon.*

Ice Produced in Tons per 24 hours.	Coal Consumed in lbs. per 24 hours.	Pounds of Water Evaporated to 100 lbs. G. Pressure from 212° per 24 hours (or max. Ice Production).	Pounds of Water evaporated per lb. of Coal (or lbs. of Ice made).	B.T.U. contained in 1 lb. of Coal (calcu- lated).	Total Heat put into total Water evaporated by 1 lb. of Coal.	Efficiency per cent.	Loss on 70 per cent. basis per cent.
5.4	4,800	10,800	2.25	13,400	2,261	17.6	75
5.7	4,800	11,400	2.37	13,400	2,381	17.7	74.8
7.25	4,000	14,500	3.62	12,200	3,638	29.8	57.5
7.5	4,000	15,000	3.75	12,200	3,768	30.8	56.0
10.33	5,000	20,660	4.13	14,858	4,150	27.9	60.2
11	5,000	22,000	3.93	14,858	3,949	19.9	71.6
14	12,000	28,000	2.33	12,700	2,341	18.4	74.3
14.5	9,000	29,000	3.22	11,900	3,236	27.2	61.2
16.5	9,500	33,000	3.47	11,900	3,488	29.3	58.0
15.6	9,600	31,200	3.25	12,300	3,266	26.5	62.2
16.5	11,200	33,000	2.94	12,300	2,945	24	65.8
20	12,000	40,000	3.33	12,600	3,346	26.5	62.2
19	8,000	38,000	4.75	12,200	4,773	39.1	44.2
14.5	6,000	29,000	4.83	12,200	4,854	39.8	43.2
17.5	10,000	35,000	3.5	12,000	3,517	29.3	58.0
17.66	10,000	35,320	3.53	12,600	3,547	28.1	60.0
27.5	13,500	55,000	4.07	13,000	4,090	31.3	55.3
19	7,000	38,000	5.42	12,200	5,447	44.6	36.3
20	6,000	40,000	6.66	13,000	6,693	51.4	26.6
23	6,800	46,000	6.76	13,000	6,793	52.2	25.5
24	7,000	48,000	6.85	13,000	6,884	53.0	25.8
29	14,000	58,000	4.14	12,000	4,160	34.6	50.6
25	18,000	50,000	2.77	12,000	2,783	23.2	66.9
32	22,000	4,000	2.90	12,000	3,045	25.3	62.9
31	14,000	62,000	4.42	10,500	4,442	42.2	39.8
82	22,500	164,000	7.28	13,100	7,286	55.6	20.6
85	20,740	170,000	8.22	13,100	8,261	63.0	10.0

TABLE GIVING SIZES AND CAPACITIES OF VARIOUS ICE-MAKING PLANTS.

H. H. Kelly, *The Engineer*, New York.

Tons* per 24 Hours.	Size of Engine.	Rev.	Size of Com- pressor.	Size of Blocks of Ice.	Gallons of Water per Hour.	Tons of Coal.	No. of Engineers.	No. of Firemen.	No. of Labourers
1	7 X 9	90	† 5 X 10	8 X 8 X 28	5	$\frac{1}{2}$	1	—	—
3	8 X 16	80	5 X 15	8 X 15 X 28	15	1	2	2	2
5	10 X 20	75	6 X 18	8 X 15 X 28	20	1 $\frac{1}{2}$	2	2	2
10	12 X 30	70	8 X 20	11 X 22 X 28 11 X 11 X 28	30	2	2	2	3
10 $\frac{1}{2}$	14 X 30	65	8 X 25	11 X 22 X 28 11 X 11 X 28	35	2 $\frac{1}{2}$	2	2	3
15	14 X 30	65	10 X 20	11 X 22 X 28 11 X 11 X 28	40	3	2	2	4
20	16 X 30	55	10 X 30	11 X 22 X 28 11 X 11 X 28	50	4	2	2	5
30	16 X 42	52	11 X 30	11 X 22 X 28 11 X 11 X 28	60	5	2	2	6
40	18 X 36	50	12 X 30	11 X 11 X 28	90	6 $\frac{1}{2}$	2	2	7
45	20 X 36	50	15 X 30	11 X 11 X 28	94	8	2	2	8
60	24 X 36	45	16 X 36	11 X 11 X 28	96	10	2	2	9
80	26 X 48	45	20 X 36	11 X 22 X 28	100	13	2	2	10

* 2,000 pounds.

† One cylinder.

BRINE FOR USE IN REFRIGERATING AND ICE-MAKING PLANTS.

A brine suitable for the above purpose can be made with from 3 to 5 lbs. of chloride of calcium, or muriate of lime, in accordance with its degree of purity, dissolved in each gallon of water. The density of this solution is about 23° Beaumé, its weight about 13 $\frac{1}{2}$ lbs. per gallon, and the freezing point is -9° Fahr. As the above standard of density must be kept up, in order to prevent the brine from becoming congealed in the refrigerator, or the ice-making tanks or boxes, it is desirable to test it periodically with a salinometer.

In the best American practice first quality medium ground salt, preferably in bags for convenience of handling, is employed, the proportions being about 3 lbs. of salt to each gallon of water. The brine is made in a brine mixer, such as that shown in Fig. 341, which consists of a water-tight box or tank A, about 4 ft. X 8 ft. X 2 ft., having a suitably perforated false bottom B, and a small compartment C, partitioned off at one extremity, communicating with the main compartment through an overflow D, situated at the upper end of the partition, and fitted with a large strainer, to prevent the passage into the small

compartment of salt or foreign bodies. The water is admitted through a pipe E, which extends into the tank A, and runs the full length of the false bottom, the latter portion being perforated, as shown, and the brine is removed through a pipe F, from the upper part of the end compartment, at the lower extremity of which latter pipe is a strainer-box and strainer through which the brine passes before delivery into the brine-tank. A salt gauge, salinometer, or hydrometer is also placed in this end compartment. The sketch shown is from one given in the New York "Engineer."

The salt should be dissolved in the water until it reaches a density of about 90° by the hydrometer. To facilitate dissolution it is desirable to stir the salt in the mixer with some handy implement, the salt being shovelled in as fast as it can be got to dissolve.

By the use of this mixer the settlement of salt on the bottom and

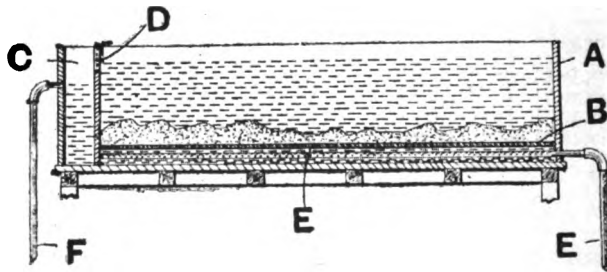


Fig. 341.—Brine Mixing Tank. Vertical Longitudinal Central Section.

on the coils in the brine tank, which inevitably results when the dissolution is effected directly in the latter, is avoided.

To maintain the strength of the brine it is recommended to suspend bags filled with salt in the brine-tank, or to pass the return brine through the above-described brine maker or mixer.

A cheap and easily constructed apparatus for mixing brine can be made out of an old barrel in which a perforated false bottom is fixed a short distance above the bottom, the water to form the solution being delivered to the space between the two bottoms, and an overflow pipe fitted with a suitable strainer and a well to receive a salinometer being provided near the top to draw off the brine.

When the temperature falls below 7 degrees below zero Fahr. chloride of calcium must be employed, as a solution of common salt can only be reduced to 7 degrees below zero, whilst chloride of calcium can be cooled down to 39 degrees below zero Fahr.

STORING, HANDLING, AND SELLING ICE.

For storing purposes ice should be clear, solid, and devoid of core. In America some persons insist that ice for storage should not be made at temperatures higher than 10° to 14° in brine tank.

The first requisite for a storage house for artificial ice, as also for natural ice, is of course the best possible insulation; other necessary points to be attended to are drainage and ventilation. The best shape for an ice storage house is square, or as nearly approaching this form as possible, and the roof should have a good pitch. An ante-room or lobby is also desirable, as by the provision of this latter the necessity for the frequent opening of the main store is done away with.

To preserve the ice, the storage rooms, as well as the ante-chambers or lobbies must be refrigerated, and the amount of the latter required may be roughly estimated, according to Prof. Siebel, at from about ten to sixteen British thermal units of refrigeration per cubic feet contents for twenty-four hours. About one foot of 2-inch pipe (or its equivalent in other size pipe) per fourteen to twenty cubic feet of space is frequently allowed, says the same gentleman, in ice storage houses for direct expansion, and about one-half to one-third more for brine circulation. The pipes should be located on the ceiling of the ice storage house.

The ventilation of an ice storage house should be carefully attended to, and ventilators fitted with suitable regulators should be provided both in the highest part of the roof and also in the gable ends. The drainage should be such as to absolutely prevent the accumulation of any moisture beneath the bed of ice. It is recommended to paint an ice store white, preferably with a mineral such as barytes, or patent white.

Respecting the best method to adopt for packing the ice in the store, considerable diversity of opinion seems to exist. It is well to provide a bed of from eighteen inches to two feet of cinders, as this tends to improve the drainage of the house. In one method the blocks are placed on edge and as closely packed together as possible, the blocks in each succeeding layer being placed exactly over those beneath and all breaking of joints being avoided. The ice is covered between the times of storing with dry sawdust or soft wood shavings, and the uppermost layer is invariably covered with dry sawdust or shavings.

Mr. R. Thompson, writing to the Canadian *Farming World*, says that in filling the house he places the ice on edge, placing every alter-

nate layer crossways, which plan, he claims, enables ice to keep better and come out easier.

Others recommend that the ice be stored with alternate ends touching and alternately from one and a half to two inches apart, so as to prevent the ice from freezing together. The cakes or slabs of ice should not be parallel to each other, and storage should only be made when the temperature is at or below freezing. Or, again, $\frac{1}{2}$ -in. strips placed between the layers of ice in the store so as to separate the cakes or blocks, top, side, and bottom, from all others in the house.

For packing the ice, sawdust, rice chaff, straw, hay—marsh or prairie hay being said to be preferable—are employed. Of these materials hay is the best, rice chaff is capable of being dried and re-used. Six inches of well packed hay should be placed between the ice and the walls, and no covering until the store is full.

A cubic foot of ice is taken to weigh 57.5 lbs. approximately at 32° Fahr. A cubic foot of water frozen at 32° will make 1.0855 cubic foot of ice, thus showing an expansion of 8.5 per cent. due to freezing. A cubic foot of pure water at 39° Fahr., its point of greatest density, weighs 62.43 lbs. Fifty cubic feet of ice, as usually stored, equals about one American or short ton of ice (2,000 lbs.), or 62 cubic feet one English ton. In small ice houses in which the ice is closely packed, a short ton of ice can be got into from 40 to 45 cubic feet.

When withdrawing ice from a store breaking-out bars for bottom and side breaking are required, and if properly skilled assistance is not available a considerable amount of the ice will in all probability be broken up and wasted.

The wastage of ice in an ice store not artificially cooled, from January to July is, in the United States, at the rate of about .1 pound of ice per twenty-four hours for each square foot of wall surface, or say from 5 to 10 per cent. of the ice stored during the six months.

The amount of heat that will pass through a square foot of ice one inch in thickness is put at 10 British thermal units per hour for each degree Fahrenheit difference between the respective temperatures on each side of the sheet of ice.

In handling and selling ice, the waggons should be clean and sanitary, the men in charge should avoid walking about in them with dirty boots, and blocks of ice should not be deposited and slid about on filthy pavements. These matters are attended to in the United States, but here they are totally neglected.

In the United States the selling and delivery of ice is generally done by the coupon system, which is thus described by Prof. Siebel: "It is

a system of keeping an accurate account with each customer of the delivery of and the payment for ice by means of a small book containing coupons, which in the aggregate equal 500 or 1,000 or more pounds of ice taken by the customer every time ice is delivered. These books are

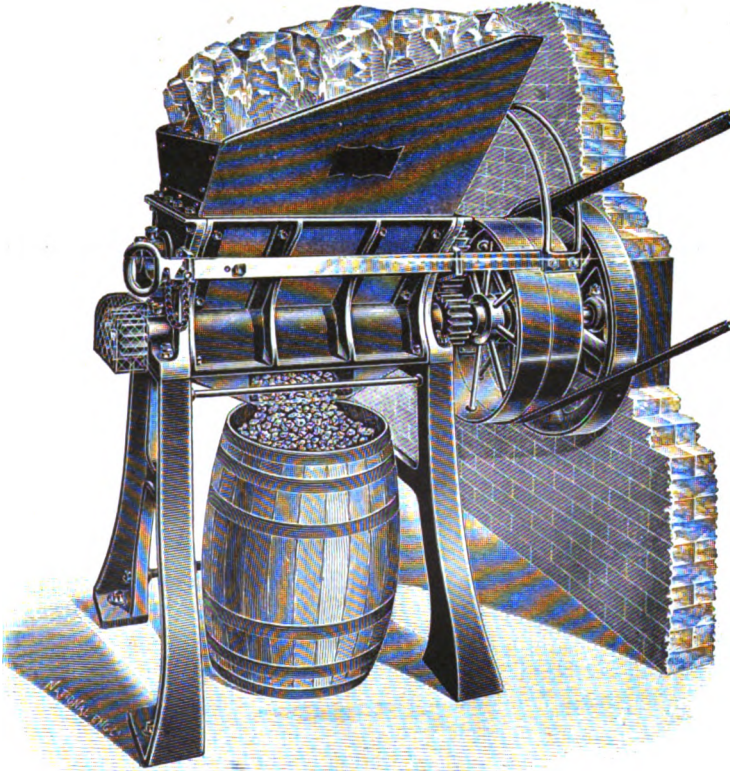


Fig. 342.—15-Tons Per Hour Power Ice-crushing Machine.

used in the delivery of ice in like manner as mileage books or tickets are used on the railroad. A certain number of coupons are printed on each page, each coupon being separated from the others by perforation, so that they are easily detached and taken up by the driver, when ice is delivered. Such books are each supplied with a receipt or due bill,

so that if the customer purchases his ice on credit, all that is necessary for the dealer to do is to have the customer sign the receipt or due bill and hand him the book containing coupons equal in the aggregate to the number of pounds of ice set forth in the receipt or due bill. The dealer then has the receipt or due bill, and the customer has the book of coupons. The only entry which the dealer has to enter against such purchaser in his books is to charge him with coupon book number, as per number on book, to the amount of 500, 1,000, or more pounds of ice, as the value of the book so delivered may be. The driver then takes up the coupons as he delivers the ice from day to day."

ICE-CRUSHING OR BREAKING MACHINERY.

A class of machine required in most modern ice factories is that for ice-crushing or breaking. There are numerous uses for this type of machine, but probably the most important is the crushing of ice for use on board fishing smacks and vessels, where it would be comparatively useless in large solid blocks, and must be crushed or broken up into small pieces before it can be satisfactorily employed for the purpose of packing the fish. This latter desideratum likewise applies to the transport of fish by rail, and to the requirements of fishmongers, hotels, restaurants, etc. Fig. 342 shows a belt-driven machine having a crushing capacity of 15 tons per hour, built by Messrs. David Bridge and Co., Castleton, Manchester, a firm that have made a speciality of this class of machinery. The machine consists essentially of a suitable hopper to receive the blocks or pieces of ice, and a pair of crushing or breaking rollers provided with steel spikes arranged in such a manner that the ice will not be allowed to slip or slide, and the breaking operation will consequently commence without loss of time. The breaking or crushing rollers are suitably geared, and the bearings are independent, gun-metal bushed, and provided with effective lubricating arrangements. An excellent feature in the design of the machine is that all the parts are so arranged as to be readily accessible for cleaning and repairs.

Besides the machine shown, the firm also make various other sizes of power-driven crushers from $1\frac{1}{2}$ tons up to 30 tons per hour capacity, as well as small hand-power machinery intended for the use of fishmongers, and in hotels, restaurants, or anywhere, in fact, where it is required to crush or break ice from the block, but the demand is not large. These latter machines are made in three sizes, viz., of 10, 15, and 25 cwt. capacities. Ice-crushing machines are also made by Mr. C. E. Barton, of Grimsby, and others.

CHAPTER XIX.

THE MANAGEMENT AND TESTING OF REFRIGERATING MACHINERY.

Management.—Ammonia Compression Machines.—Oil Separators or Collectors.—Accumulations of Deposit in the Condenser.—Breaking Joints.—Lubricating Qualities of Ammonia.—Compressor Rod Packings.—To Charge and Work a Carbonic Acid Machine.—Freezing or Choking up of Compression System.—Lubrication of Refrigerating Machinery.—Testing.—Interpretation of Compressor Diagrams.—Leaks in Ammonia Apparatus.—Leaks in Carbonic Acid Machines.—Management of Cold-air Machines.—Determination of Moisture in Air.—Psychrometers.—Hygrometers.—Electric Tell-Tales and Long-distance Thermometers.—Thermographs.

MANAGEMENT.

AMMONIA COMPRESSION MACHINES.

EVERY particular type of machine working on this principle has, as a rule, certain distinctive or characteristic features, and will, of course, so far at least as these are concerned, require special care and adjustment, and it would consequently be totally impossible to lay down an arbitrary set of rules for working, that would be suitable to all; nor is this necessary or required, as full particulars relating to the manipulation of each particular machine are invariably supplied by the makers. The following points, however, are more or less applicable to all machines working on the ammonia compression principle, and should therefore be familiar to those in charge of same.

Before charging an empty machine with anhydrous ammonia, all air must first be carefully expelled. This is effected by working the pumps so as to discharge the air through special valves which are usually provided on the pump dome for that purpose.

The entire system should have been previously to this thoroughly

tested by working the compressor, and permitting air to enter at the suction through the special valves provided for that purpose, and it should be perfectly tight at 300 lbs. air pressure on the square inch, and should be able to hold that pressure without loss. Whilst testing the system under air pressure it should be also carefully blown through and thoroughly cleansed from all dirt, every trace of moisture being likewise removed.

It is totally impossible to eject all air from the plant by means of the compressor, therefore it is advisable to insert the requisite charge of ammonia gradually and not all at once, the best practice being to put in from 60 to 70 per cent. of the full charge at first, and cautiously permit the air still remaining to escape through the purging-cocks with as little loss of gas as possible, subsequently inserting an additional quantity of ammonia once or twice a day, until all the air has been got rid of by displacement, and the complete charge has been introduced.

To charge the machine, the dryer or dehydrator of the apparatus for manufacturing or generating anhydrous ammonia, or, where no such apparatus is included in the installation, the drum or iron steel flask of anhydrous ammonia, should be connected, through a suitable pipe, to the charging valve; the expansion valve must be then closed, and the valve communicating with the dryer or dehydrator, or that in the flask or bottle opened. The machine should be run at a slow speed when sucking ammonia from the drier, or whilst the flask is being emptied, with the discharge and suction valves full open. In the latter case, when one of the said flasks or bottles has been completely emptied it must be removed, the charging-valve having been first closed, and another placed in position, until the machine is sufficiently charged to work, when the charging-valve should be finally closed, and the main expansion valve opened and regulated. A glass gauge upon the liquid receiver will show when the latter is partially filled, and the pressure gauges, and the gradual cooling of the brine in the refrigerator (in the case of a brine circulation or ice-making apparatus), and the expansion pipe leading to the refrigerator coils becoming covered with frost, indicate when a sufficient amount to start working has been inserted.

It is sometimes advisable to slightly warm the vessels or bottles containing the anhydrous ammonia by means of a gas jet, or in some other convenient manner, whilst transferring their contents to the machine, as otherwise if frost forms on the exterior of the bottles they will not be completely discharged, and loss of ammonia will ensue.

The flasks, bottles, or other receptacles containing the anhydrous ammonia should be always kept in a tolerably cool and a perfectly safe situation, and they should moreover be moved and handled with the utmost caution and care.

In the event of an accident occurring, and any considerable quantity of the ammonia becoming spilt, it is well to remember that it is so extremely soluble in water that one part of the latter at a temperature of 60° Fahr. will absorb some 800 parts of the ammonia gas, therefore water should be employed to kill or neutralise it, and any person attempting to penetrate an atmosphere saturated with this gas should not fail to place a cloth well saturated with water over his nose and mouth, or, better still, a suitable helmet or respirator.

The machine having been started, and the regulating valve opened, it is essential to note carefully the temperature of the delivery pipe on the compressor, and if it shows a tendency to heat then the regulating valve must be opened wider; whilst, on the contrary, should it become cold, the valve must be slightly closed, the regulation or adjustment thereof being continued until the normal temperature of the above pipe is the same as that of the cooling water leaving the condenser. When the charge of ammonia in the machine is insufficient, the delivery pipe will become heated, and that even when the regulating valve is wide open.

There are many additional signs of the healthy working of the apparatus other than the fact that it is satisfactorily performing its proper refrigerating duty, which soon become easily recognisable to those in charge; for example, every stroke of the piston will be clearly marked by a corresponding vibration of the pointers or indexes of the pressure and vacuum gauges. The frost visible on the exterior of the ammonia pipes leading to and from the refrigerator will be about the same. The liquid ammonia can be distinctly heard passing in a continuous and uninterrupted stream through the regulating valve. The temperature of the condenser will be about 15° higher than that of the cooling water running from the overflow. And finally, the temperature of the refrigerator will be about 15° lower than the actual temperature of the brine or water being cooled.

Air will find its way into the system through leaky stuffing boxes, improper regulation of the expansion valve, etc. Its presence in any considerable volume is shown by a kind of whistling noise, the liquid ammonia passing through the expansion valve in an intermittent manner, a rise of pressure in the condenser, and also loss of efficiency thereof, and other obvious signs. In this case the air must be got

rid of through the purging-cocks in a similar manner to that which remains in the system when first charging the machine.

The presence of any considerable amount of oil or water in the system, which may result from careless distillation, will cause a reduction in efficiency, and will be evidenced by shocks within the compressor cylinder.

The temperature can be regulated either by running the machine at a higher speed or by increasing the back pressure, or by a combination of both. The back pressure can be regulated by means of an expansion valve or valves fitted between the receiver and the refrigerator evaporating coils or pipes in the main liquid pipe.

It is absolutely necessary that an ample supply of oil for lubricating purposes be forced into the stuffing box of the compressor at frequent intervals, otherwise it will be found that the heated ammoniacal gas at high pressure will very rapidly cut through even the very best packing. Pure mineral oil of good body is found to be the best lubricant; animal and vegetable oils should not be used, as on contact with ammonia they will saponify, and much trouble and loss will ensue therefrom.

Another matter requiring special attention is the proper lift of the suction and discharge valves, and these should invariably be provided with suitable means for admitting of the lift being readily adjusted. The lift should not be too high, otherwise the valves will not close with sufficient promptitude, and a loss of efficiency will result, and that more especially in compressors running at high speed.

When superheating of the ammonia gas in the compressor is guarded against by the circulation of cooling water through a jacket surrounding the latter, it is desirable to ascertain the proper amount of water necessary to secure the best results. This will, of course, vary with the condensing pressure, about 12 gallons of water per hour for each ton of refrigerating effect per day of 24 hours being usually found to be sufficient for low condensing pressures of, say, from 95 to 110 lbs., whilst, on the other hand, with a high condensing pressure of about 150 lbs., the amount will have to be increased to 50 gallons or more per hour.

The larger the amount of cooling water that is employed in the separator jacket the better; and this water need not be wasted, as it may be conducted through a suitable overflow into the condenser, and utilised together with that delivered specially thereto. The overflow pipe conducting this water to the condenser should preferably dip down for a certain distance into the condenser.

Respecting the quantity and temperature of the cooling water for the condenser, it must be remembered the lower the temperature of the condensed ammonia the less will be the pressure against which the compressor has to work, and consequently the greater will be the saving in fuel and in wear and tear to the moving parts.

The amount of condensing water required will vary in accordance with the temperature at which it is run from the condenser; for instance, if the condensing water be run into the condenser at a temperature of about 60° Fahr., and leaves at the overflow or waste at a temperature of say 90° Fahr., the quantity of water required will be about 1 gallon per minute for each ice capacity of one ton per twenty-four hours; whilst if the temperature of the overflow or waste were 75° Fahr., the original temperature at the inlet being the same as before, the amount of water required would be about 2.5 gallons per minute for each ice capacity of one ton per twenty-four hours, and a reduction of about 40 lbs. in the condensing pressure would be effected. In large towns and cities, however, where the water from the water companies' mains has to be used, and paid heavily for, it is often doubtful economy to attempt to reduce the temperature of the condensed ammonia below a certain point, say 60° Fahr., during the winter months, and 70° Fahr. during the summer months. It is obvious that when a high price has to be paid for the water employed for cooling and other purposes, every effort possible should be made to utilise it to the fullest extent, and, with this end in view, it is desirable to use the overflow water from the condenser for boiler-feeding purposes, or to employ some means, such as a cooling-tower, for saving that which would be otherwise run to waste and be completely lost.

To prevent loss of efficiency from heating of the condensed ammonia, it is advisable that the receiver and piping should be covered with a thick layer of some suitable non-conducting material, which precaution is the more necessary, inasmuch as the piping generally passes through the engine room, and consequently the temperature of the ammonia is not infrequently raised as much as 25°, above that at which it left the condenser, before it enters the coils or pipes of the refrigerator, which causes a loss of about 2.5 per cent on the ice-making capacity of the machine. The pipes conveying the ammonia gas from the coils or pipes of the refrigerator to the compressor should be likewise well covered with non-conducting material, so as to prevent, as far as possible, any further accession of heat in the gas during the transit. The desirability of this will be readily seen when it is remembered that the refrigerating capacity of a machine of this

type is dependent upon the weight of ammonia circulated, and that the volume of a given weight of the gas increases in proportion to the elevation of its temperature, and consequently the higher this is raised the smaller will be the weight of the gas circulated or dealt with by the compressor, although the volume may be the same.

OIL SEPARATORS OR COLLECTORS.

In the case of a compressor wherein the cylinder is cooled by a water circulation round its exterior walls, and not by the introduction of cooling liquid to the interior thereof, a certain amount of the oil employed for lubricating purposes will gain access to the interior round the piston rod, and this oil would, unless proper means be taken to prevent it, be carried through the discharge valve along with the ammonia gas, and, after first passing into the condenser, would finally gain access to the evaporating or expansion coils or pipes of the refrigerator, and also stop or clog up the expansion valve, and otherwise reduce the efficiency of the machine.

The method employed for recovering any oil carried over with the ammonia gas in a compressor of the De La Vergne type, employing a sealing, cooling, and lubricating liquid in the cylinder, has been already mentioned when dealing with that machine; with compressors wherein other means are employed for ensuring a complete or a practically complete discharge of the ammonia at each stroke of the piston, suitable oil separators or collectors for the mechanical separation of the oil from the gas, and in some cases rectifiers are used. The oil separator, which should be at least as large as the liquid ammonia receiver, is, as a rule, placed in the main pipe between the compressor and the condenser. Another oil separator or trap is frequently fitted on the expansion or low pressure side of the refrigerator, usually in close proximity to the inlet to the compressor pump. The object of this latter is to intercept any scale, dirt, etc., from the pipes, and prevent its gaining access to the pump cylinder and injuring the piston and valves. The shells of these separators or traps are usually constructed of wrought-iron or steel, and it is essential to have perfectly gas-tight joints.

The separator or oil collector frequently supplied consists merely in a cylindrical vessel into which the ammonia gas is conducted at one extremity and leaves at the other. The inlet and outlet being situated at some inches from the ends or covers, the gas is supposed to be freed from the oil carried over therewith by coming in contact with the

sides of the cylinder, and it passes on to the condenser, whilst the oil falls to the bottom of the vessel.

A better form of separator is that wherein baffles or plates, descending vertically to slightly below the centre of the cylindrical vessel, and extending alternately nearly but not quite to the opposite sides of it, are employed. In this arrangement the gas is admitted at one side of the cylinder, and, after taking a zig-zag course between the baffles or plates, leaves at the other side. A very considerable increase of contact surface is thus ensured in a separator of this type, a modified form of which is employed in the De La Vergne system, and the separator is rendered considerably more efficient.

The gas being at a temperature of some 200° Fahr. when passing through the separator or interceptor, the oil contained or carried over with it is in a limpid condition, and is, therefore, difficult to eliminate from the gas. To obviate this objection the separator or oil collector is sometimes water-jacketed, by which means the temperature can be maintained low enough to cause the oil to separate easily from the gas and fall to the bottom of the cylinder or vessel. By this arrangement its efficiency is still further increased.

Puplett and Rigg's patent separator or interceptor has been already described in a previous chapter, and centrifugal oil separators have also been used with some success. A type of oil separator recommended by some makers is fitted with an arrangement of wire screens.

A separator of this latter type was patented in 1887 by S. Puplett and J. L. Rigg, which consisted of a cylindrical vessel having a water-jacket through which a circulation of cooling water is maintained, and provided centrally with two or more sheets or screens of wire gauze or perforated sheet metal, by which the cylindrical vessel or chamber is divided vertically into two compartments. The gas from the compression pump is discharged into this vessel or chamber against the sheets or screens, and is forced through the interstices or meshes, the surface contact separating the oil, held in mechanical suspension, from the gas. The separator being maintained at a lower temperature than the gas by means of the above-mentioned water-jacket, a rapid condensation of any oil passing over with the gas takes place, and this oil is first deposited on the sheets or screens, from which it falls to the bottom of the separator, from whence it can be drawn off through a discharge-cock fixed therein, without stopping the machine, and without any material loss of gas or admission of air occurring.

To catch any oil that may pass down the return-liquid pipe, an inter-

ceptor is attached to the latter in any convenient position, but preferably as near as possible to the refrigerator. This interceptor is formed of a cylindrical vessel having a diaphragm extending from the cover to within a short distance of the bottom, and another diaphragm extending from the bottom thereof to within a short distance of the cover, thus forming three compartments. The return-liquid pipe passes through the cover nearly, but not quite, to the bottom of the interceptor on one side of the first diaphragm—that is in the outer compartment—and is continued from near the bottom of the interceptor to beyond the second diaphragm, that is to say, out of the third compartment. Any oil that passes down the return liquid pipe collects in the first compartment of the interceptor, from whence it can be withdrawn through a cock fixed in the first compartment without stopping the machine, or causing an appreciable loss of gas or the admission of air to any injurious extent. This interceptor is preferably jacketed, and is surrounded with, and maintained at a suitable temperature by means of cold brine, in order to aid in separating the oil from the liquefied gas.

Even the best of the ordinary separators or oil collectors at present in common use are, however, more or less defective in action, and those having under their charge expansion coils or brine coolers are well aware of the fact that considerable quantities of oil gain access to the expansion coils or the ammonia space of the brine cooler in compression systems. This oil, it is well known, is a great drawback to the successful working of the system, acting as an insulator and preventing the efficient transfer of heat from the ammonia to the pipe, and also occupying a considerable part of the space required for the liquid ammonia. The oil is in a finely-divided and partially vaporised condition, for which reason the ordinary separators fail to eliminate it from the liquid ammonia. The obvious remedy seems to be to so construct the separator that the liquid ammonia will be cooled before passing to the expansion valve and so as to condense the oil vapour and separate same from the liquid ammonia. This action would be ensured in the oil separator shown in Fig. 343, designed by Mr. Gardner T. Voorhees, S.B., M.A.S.M.E., which was lately described in "Ice and Refrigeration." The liquid ammonia from the condenser, after passing through the gas trap, then passes by pipe A, into the space B, of the separator. Here the velocity of the liquid ammonia is reduced by the large flow area of the separator. The ammonia flows slowly over the outer surface of the coil C. This coil is as cold as the cold liquid ammonia after it has passed the expansion

valve. This cold coil cools the whole body of the liquid ammonia in the separator, and the oil separates out in small globules, as shown, and settles to the bottom of the separator.

The liquid ammonia, now free from oil, passes out by the pipe D, to the expansion valve D*, and expands through the coil C, passing out through the pipe E to the expansion coils, or to the ammonia space in the brine cooler. The oil can be seen in the glass of the automatic gauge-cocks, and can be drawn off from time to time through the pipe F and the valve G. The separator can be insulated or not, as desired. If insulated the only loss of refrigeration would be a neglectable small one through the insulation. If uninsulated, it would be relatively small, and less than is often found in uninsulated liquid headers and expansion valves.

Fig. 344 shows a modified arrangement of the catch-alls or interceptors employed on the Yaryan patent evaporators, which, the author thinks, would, in all probability, ensure a very perfect elimination of the oil. As will be seen from the illustration it consists in a cylinder A, which is water-jacketed as shown at A', and divided into two compartments by a tube-plate or partition B, from which project tubes C, C, which extend round the gas outlet pipe D, and extend nearly but not quite to the end of the cylinder, the outlet pipe extending into the cylinder for a distance equal to about half the length of the tubes. E is the inlet pipe through which the ammonia gas and the particles of oil carried over therewith are delivered into the first chamber of the separator or oil collector, F is a wire gauze or perforated screen or diaphragm, and F', F', are baffle or check-plates which extend alternately to within

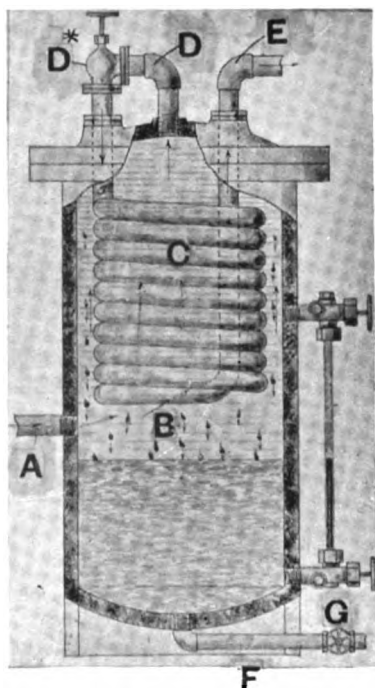


Fig. 343.—Voorhees Oil Separator or Collector. Vertical Central Section.

close proximity to the opposite sides of the cylinder. A clearance is likewise provided at the bottom of each of the baffle or check-plates *F*, and of the partition or tube-plate *B*, to allow of the free passage of the oil from the first compartment or chamber to a well formed in the bottom of the separator cylinder *A*; *G* is a pipe leading from this well, through which the oil can be drawn off when required; *H*, *H'*, are respectively the inlet and outlet pipes for the cooling water to the water-jacket.

In operation the gas and oil enter the first chamber or compartment of the separator, and pass to the tubes *C*, through the wire gauze diaphragm *F*, and taking a zig-zag course from side to side of the separator past the baffle or check-plates *F'*. A large proportion of the

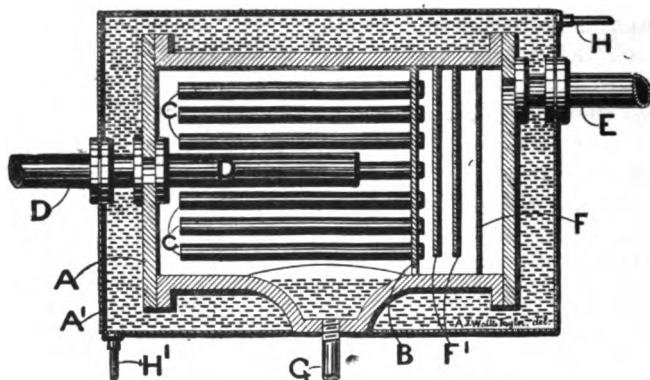


Fig. 344.—Proposed form of Oil Separator, Collector, or Interceptor. Vertical Central Section.

oily particles strike against the diaphragm, and the check, division, or baffle-plates *F'*, and become separated from the gas, finally falling to the bottom of the compartment, and passing to the well *A'*. The partially cleared gas then passes through the interior of the open-ended tubes *C* into the second chamber or compartment, and returns along the space on the outside thereof to the outlet pipe *D*, the remainder of the oily particles becoming deposited on the interior and exterior surfaces of the tubes *C*, and on the walls of the compartment, from which they likewise fall, and are collected in the well in the bottom of the latter. The very extended surfaces with which the gas thus comes in contact during its passage through the separator or collector, will ensure the complete deposition of the oil held in suspension by the

gas, and the latter will finally pass out from the separator or oil collector at the outlet pipe *D* completely, or practically completely, freed therefrom.

The separator or oil collector is sometimes so connected with the compressor that the oil can be used over again; this, however, is objectionable in the case of a double-action compressor, as the connection is liable to become choked with pieces of packing that find their way into the separator. When a rectifier is used, the separator is in some instances connected therewith through a rotary cock, operated from the main shaft by means of a band, which cock is kept constantly working discharging a small quantity of oil at each revolution into the rectifier, so long as any remains in the separator. The failure of oil in the separator is indicated by the connecting pipe between the latter and the separator becoming covered with frost, when the cock must be immediately thrown out of gear and the oil allowed to accumulate in the separator before re-starting it. When the separator is connected directly with the rectifier the cock in the connecting pipe should be opened periodically, say about every twelve hours. The oil may be discharged from the rectifier at about similar intervals, and the amount of oil that is found to be entering the compressor cylinder is an index to the state of the packing in the stuffing box, a large quantity being a certain sign that it requires renewal or seeing to. It is most important that the separator or oil collector be cleaned out at pretty frequent and regular intervals.

The liquid ammonia receiver is invariably located below the condenser, a supply pipe being led from it to the evaporator or refrigerator governed by the expansion cock or valve.

Fig. 345 illustrates a type of ammonia receiver and oil trap made by the Triumph Ice Machine Company. The pipe shown passing through the vessel is the suction pipe to the compressor pump cylinder, and when this pipe becomes coated with frost, it materially assists in cooling the liquid ammonia, and thereby greatly increasing the efficiency of the plant. At the top of the receptacle is a wire gauze strainer, shown in plan on the left-hand side of the drawing, which prevents foreign bodies and impurities from gaining access to the system.

ACCUMULATIONS OF DEPOSIT IN THE CONDENSER.

It not infrequently happens that deposit accumulates on the exterior surface of the condenser coils from sediment in the water, and on the interior surface thereof from oil and foreign bodies. The

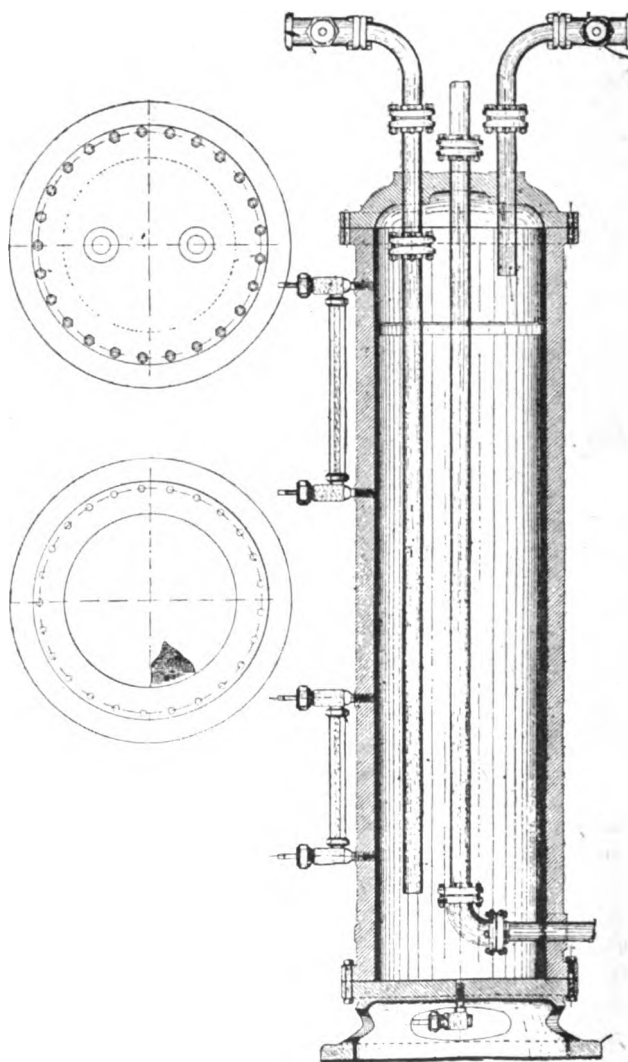


Fig. 345.—Triumph Ice Machine Company Ammonia Receiver and Oil Trap.
Vertical Central Section and Detail Views.

smaller ammonia pipes may sometimes become filled with obstructions to the extent of completely blocking them up. These bodies may consist of lumps of solder or other matter accidentally left in the tubes when making the joints, or of pieces of packing from the stuffing-box carried over with the gas. The deposit or furring of the condenser coils or pipes is objectionable inasmuch as it acts as a non-conducting covering, and prevents them from freely transferring the heat to the cooling water, and the choking of other conduits is likewise followed by corresponding loss of efficiency, for example, that of one of those leading to one of the refrigerator coils or sets of pipes will result in the latter not acting at all, or only very slightly. Complete choking up or obstruction of one of these latter conduits is evidenced by that particular pipe, and also the corresponding return pipe, not becoming covered with frost at all, or only so to a very small extent; and a slightly less degree of frost upon any of these pipes indicates partial choking or obstruction, and a consequent very feeble action of the coil or set of pipes.

The coils or pipes in the condenser should be frequently cleaned on the exterior with a suitable brush, and, whenever practicable, removed at fixed periods and carefully scaled. This is best and most easily effected by heating the tubes, care being taken, however, not to carry such heating to an injurious extent. The interior surfaces of the tubes can be cleansed by blowing steam through them at a considerable pressure. To clear small obstructions from a conduit leading to one of the refrigerator coils or sets of pipes, it is usually sufficient to turn the entire stream of ammonia into it. Should, however, the obstruction prove obstinate, and it be found impossible to shift it in this manner, an early opportunity must be taken to clear it by blowing steam through it. Any considerable choking of the conduits leading to the refrigerator coils is followed by a very marked decrease of efficiency in the latter.

BREAKING JOINTS.

Whenever a joint has to be broken, and any portion of the machine opened for any purpose whatever, it is absolutely essential that the whole of the ammonia contained in that part should be pumped or transferred to another part, or if this cannot be done it should be discharged, preferably into water, which can readily be effected by means of a short strong indiarubber tube. On account of the already-mentioned great solubility of ammonia in water, it will become readily absorbed, if the vessel into which it is discharged be kept sufficiently re-

plenished with cool water. It is of the utmost importance that the rule of carefully removing all ammonia pressure before breaking a joint be strictly adhered to.

In warm weather, or in hot climates, the joints will require constant attention, and periodical inspection, and tightening up of the bolts; and at all times, even in the winter in this climate, they are liable to develop leaks through the working of the machinery.

LUBRICATING QUALITIES, ETC., OF AMMONIA.

Ammonia being a good solvent, and having no effect upon iron or steel, the parts will become clean and free from deposit, after working for a short period, and the cylinder and piston will be found highly polished. Ammonia also possesses some slight lubricating qualities, and, therefore, after starting, no other lubricant need be introduced into the compressor cylinder. The cylinder covers, as also the valve box covers, should be occasionally removed and a thorough inspection made of the piston, cylinder, and valves. The latter are exceedingly apt to become cut or marked by fragments of scale, and require grinding in periodically.

COMPRESSOR PISTON ROD PACKINGS.

A properly packed piston-rod will remain in good order for at least six months, provided the rod be in first-rate condition and perfectly true; under contrary conditions, however, trouble will be experienced in a fortnight or less. The usual precautions to be observed in order to properly pack a steam engine or other stuffing box, which are well known, or should be so, to those in charge of ammonia plants, are equally applicable in the case of the compressor, but the herein-before-mentioned extensively searching nature of ammonia gas demands the exertion of extra care. These observations apply more especially in the case of a double-acting compressor.

For single-acting compressors metallic packing will be found the best, that of Victor Duterne, the patent for which expired many years ago, being an excellent one for the purpose.

A single-acting compressor stuffing box, being only subjected to the suction pressure, that is to say, to one of about 28 pounds per square inch, or even less, the maintenance of a tight joint is a matter of comparative facility. With a double-acting compressor, however, the case is different, as the pressure will vary from 125 lbs. at the lowest to sometimes as much as 180 lbs. at the highest, and with such a searching gas as ammonia the stuffing box is a part likely to give the engineer in

charge at least as much concern as any other portion of the machine. Should, however, the piston-rod be in first-rate condition and perfectly true, a properly-packed stuffing-box will, as already mentioned, enable a gas-tight joint to be maintained for six months or more; with the opposite state of things leakage will probably occur in a fortnight or less, and in practice the rod will seldom be found to be in the first-named state of high perfection, consequently the joint may be expected to remain tight for any period of time between the two above mentioned.

The stuffing box should be of considerable depth, say a foot, a clearance of from half-inch to three-quarter inch being left between the piston-rod and its inner wall. Fig. 346 is a diagram from a sketch given in an American journal showing one form of stuffing box, and method of packing, from which it will be seen that it is packed in two

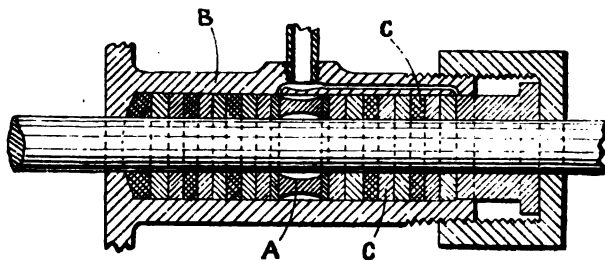


Fig. 346.—Stuffing Box and Packing for Ammonia Machine. Longitudinal Section.

sections, a steel lantern A, some inches long, being inserted centrally in the stuffing box B, with packing, c, on each side of it.

Double-acting compressor stuffing boxes are best packed with combinations of packings, metallic packings (which are found very suitable for the stuffing boxes of single-acting compressors) not giving good results with the former. Many of the special and patented packings will be found suitable. Plaited cotton packing, cut into suitable lengths, and inserted in the form of rings, may be employed, it being desirable, however, in this case to finish off with a couple or more rubber insertion rings.

Packings, consisting of indiarubber and duck, and indeed most packings of good quality containing indiarubber, are suitable when the piston-rod is in good order, and the larger the proportion of rubber the better, as the ammonia has no injurious action upon the latter, only making it swell and become spongy, and thereby enabling a gas-tight joint to be maintained with but a trifling amount of friction.

The packing should be driven home tightly, piece by piece, with a packing stick made of hard wood, and a mallet, the gland being finally screwed on by hand only, so as to allow for the expansion of the packing. This latter precaution is absolutely necessary in order to ensure the maximum life of the latter. When tightening up the gland care must be taken to do so equally all round, and not to screw up the nut on one bolt more than on any of the others.

Several of the patented systems for preventing the occurrence of leakage of gas taking place past the stuffing box have been described in previous chapters, but the present purpose is only to endeavour to show how a good job can be made with ordinary stuffing boxes and packings.

TO CHARGE AND WORK A CARBONIC ACID MACHINE.

The following directions, whilst applying more or less to all carbonic acid refrigerating machines, refer more especially to those made by Messrs. J. and E. Hall, Limited.

Before charging, fill the compressor with glycerine and run the machine for an hour or two with all the valves open wide.

To charge the machine, suspend a flask of CO_2 , valve upwards, from a spring balance and connect by a copper wire to the evaporator. See that connecting joints are tight. The steel flasks contain about 40 lbs. of CO_2 , and the number required will, of course, depend upon the size of the machine.

Open the valve on the flask and on evaporator. The difference in weight between the empty and full flask will denote the weight of CO_2 that has passed into the machine.

After the flasks are half empty, warm them with hot water. When empty close the valve whilst the flask is still warm. Should any CO_2 remain, it will be cold, and at the lower extremity.

On first charging a new machine, blow the air out of the system by breaking the joint between the regulator and the pipe leading to it, the regulator being closed and all other valves open, and blow two or three pounds of CO_2 through.

When charging, carefully examine all joints as the pressure rises, using soap and water for the purpose.

The CO_2 gauges on condenser and evaporator indicate on the outer circle the pressure in atmospheres, and on the inner circle the corresponding temperatures of CO_2 .

When fully charged, start the machine with all the valves open and adjust the regulator (*i.e.*, the inlet valve of the evaporator), so that the

condenser gauge will indicate on the inner circle 5° to 10° above the temperature of the cooling water at the inlet to the condenser, and the evaporator gauge 10° to 15° below the temperature of the brine or water to be cooled.

Under normal working conditions the compressor should be cold or partly covered with snow, and the delivery pipe from it should be rather warmer than the hand can comfortably bear. If the delivery pipe is not hot enough, slightly close the regulator, when the temperature will quickly rise. If the compressor becomes warm, it points to the regulator being insufficiently open.

Should it be impossible to secure the conditions above-mentioned, the system is short of gas. To further test this, close the regulator, and if the evaporator gauge falls rapidly and continuously, the system is short of gas. If properly charged, the gauge should remain almost stationary for several revolutions of the machine. Besides, if sufficient gas be present in the system, the condenser gauge could hardly rise at all, even after working two minutes.

When short of gas, or in doubt, insert more, extra gas in the system, up to a quarter charge, will do no harm. It will be indicated by the condenser gauge showing 20 or more degrees above the inlet water temperature. If the machine be short of gas the refrigerating work done will be but a fraction of its proper duty.

The temperature of the brine to be maintained depends, of course, upon the refrigeration that is to be performed.

The clearance spaces at the ends of the compressor being small, they must be maintained equal at both ends.

The hydraulic leathers forming the piston packing will require examination and removal occasionally, and it is particularly necessary that the nut securing these leathers should be well screwed up and locked. After putting in new leathers it is advisable, two days after starting, to tighten up the nut again.

The suction and delivery valves should be examined periodically. When they require re-grinding, spare ones may be put in.

In machines with the valve seatings making double joints, see that both copper rings are equally crushed by the valve casing. Leakage at the outer joint will indicate itself outside, but at the inner joint will not be perceptible except in reducing the work done by the machine.

To test the work of the compressor, close the regulator, when the evaporator gauge should be pumped down from say 25 atmospheres to 5 atmospheres in about 200 revolutions. If slower, either the valves or the pistons are faulty.

The gland is packed with two hydraulic battens, between which a pressure of glycerine is maintained by means of the special lubricator provided. The gland should not be screwed up too hard. The lubricator will require pumping up after some hours' work, and when the piston has moved four inches. This, however, should not occur under three hours if the gland battens and compressor-rod are in good order. The lubricator-valve should be open a full turn. The glycerine which leaks from the gland should be caught, and after filtering, used again. Great care should be taken to keep the compressor-rod free from scratches or marks, which would rapidly destroy the gland leathers.

If short of leathers, the gland may be temporarily packed with ordinary tallowed packing, thus: first put in two or three turns of packing, then the spiral ring, and then fill up with packing, care being taken that the ring comes opposite the glycerine outlet when the gland is screwed up.

Any glycerine passing into the compressor will be caught in the separator, and must be drawn off twice daily by slacking the nut at the bottom, and after filtering, used over again.

All glycerine used should be free from water, acid, and dirt.

On the suction side of the compressor is a strainer, and, with a new machine, this should be taken out and cleaned after the first and second day, and then occasionally.

When stopping, it is not necessary to close any valves. The gauges will then equalise, standing at the pressure of the evaporator. Before starting, care should be taken to see that all the valves are open, a safety valve, however, is provided to relieve the pressure should this be neglected.

The speed will vary in accordance with the size of the machine.

It is particularly necessary that all pipes, joints, and glands of spindle-valves should be carefully examined and kept tight. For the first few days especially they should be examined daily, and all bolts and gland-nuts screwed hard up. The most minute leak should be instantly stopped.

To examine the compressor, close the suction and delivery, screw down valves, and slack off a joint to let the gas escape. Make sure all pressure is gone before opening up.

When the machine is stopped for a week or more, the piston-rod should be withdrawn and oiled, or painted with white lead and tallow.

FREEZING OR CHOKING UP OF COMPRESSION SYSTEM.

In working a compression machine considerable trouble is frequently experienced owing to freezing or choking up. This is caused by small particles of moisture entering with the gas from the compressor, or from the escape of glycerine or oil through the separator, which gradually accumulates in the system, and finally solidifies at the bottom of the evaporator or refrigerator coil, or at the expansion or regulator valve or cock. The latter place is the least objectionable, and as a general rule it can be cleared away by quickly throwing the valve open to its fullest extent. To clear the evaporator or refrigerator coil, a cock should be fitted to the evaporator or refrigerator casing or shell as low down as possible, and to this should be connected a steam pipe or hose from any available source of supply, such as a drain-cock on the steam pipe to the engine. The steam should be turned on slowly, and the temperature of the brine in the evaporator or refrigerator raised to about 70° Fahr., the overflow cock from the evaporator to the brine tank being opened. The effect of this will be to liquefy the oil on the interior of the coil, and it will then run down to the bottom of the latter, where the expansion valve should be full opened, so as to communicate with the condenser. If the compressor be then slowly started in the ordinary manner, in about half-an-hour the oil will float to the top of the liquid and may be drawn off at the separator.

In drawing off or clearing out the separator, the drain valve should be prevented from getting too cold, as if it does so the gas will come away in semi-solidified form, and there will be considerable wastage. The clearing out will be necessary about every three or four weeks, and lasts between one and two hours, the rise of efficiency in the machine being very perceptible.

In charging a system, it is always desirable to pass the gas from the charging cylinder through a gas drier, so as to thoroughly cleanse and extract all moisture from it. This drier consists of a vessel fitted with a suitable inlet and outlet valve, and a drain or purging cock, and charged with alternate layers of chloride of calcium and cotton wool.

This apparatus can be also used for the cleansing or purification of the gas already in the system, by connecting the outlet valve on the condenser with the inlet valve on the drier, closing the expansion and condenser outlet valves, and disconnecting the pipe between them. Then opening the outlet from the condenser, inlet to the drier, outlet, and charging valve on the top of the evaporator or refrigerator, and

by working the compressor very slowly any impurities in the gas will be taken up by the calcium and cotton-wool in the drier.

LUBRICATION OF REFRIGERATING MACHINERY.

This important point, which has been already touched upon in previous portions of this work, is apt to be as much neglected by users of refrigerating machinery as it is by users of other types of machinery. It will be well for these gentlemen to at once dismiss from their minds the idea that low-priced inferior quality oils are really the cheapest, and understand that on the contrary not only are high grade oils necessary to ensure the highest efficiency of the machinery, but that they are also the least expensive in the long run.

In refrigerating machinery the use of three different kinds of oil is demanded, viz. :—

Oil for the steam cylinder: Good cylinder oil is entirely free from grit, does not gum up the valves and cylinder, and does not evaporate rapidly on exposure to the heat of the steam. The quality of a cylinder oil is demonstrated on removal of the cylinder head. If the oil is of good quality the wearing surfaces should appear well coated with lubricant, which will not show a gummy deposit, or blacken on the application of clean waste.

Oil for general use on all the bearings and wearing surfaces of the machine proper: This may be any oil that will not gum, is not too limpid, possesses a good body, is free from grit and acids, is of good wearing quality, and flows freely from the oil cups at a fine adjustment without a tendency to clog. For the larger bearings it is well to use a heavier grade of oil.

Oil for use in compressor pumps: When it is necessary to use oil in these it should be what is known as zero oil, or cold test oil, that is to say, that it should be capable of withstanding a very low temperature, without freezing, and it should be the best quality. American makers recommend the use of the best paraffin oil, and clear West Virginia crude oil.

TESTING.

The object of testing a refrigerating plant is in order to ascertain what it is capable of performing under comparable normal conditions, and as regards the amount of refrigeration produced in relation to the expenditure of work, and the coal consumption.

To determine the efficiency of an installation on the compression

system, the following fittings are required, viz., an indicator, so that diagrams can be taken from the compressor; stroke counters, to enable the number of strokes made by the steam-engine and brine pumps to be ascertained; and mercury wells to admit of the temperature being obtained at various points throughout the system.

In making a test it is desirable that it should last at the very least for fully twelve hours, and it is better to carry it on for twenty-four


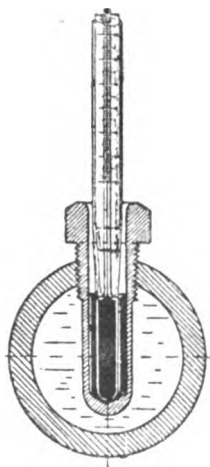


Fig. 347.—Mercury Well for Horizontal Pipe. Vertical Section.

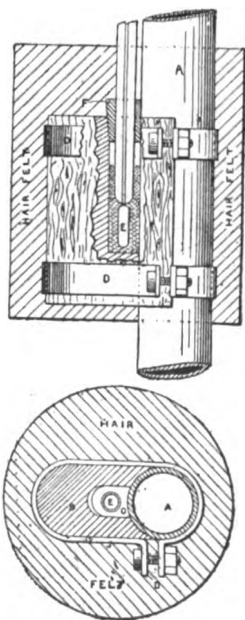

Figs. 348 and 349.—Mercury Well for Vertical Pipe. Vertical and Horizontal Sections.

hours. The number of readings which it is desirable should be taken from the various instruments will vary in accordance with whether or not the work is steady or otherwise, and the person carrying out the test will have, of course, to use his own judgment on this head. Where artificial ice is made, for example, twice an hour will be sufficient, whilst on the other hand, four or more readings per hour should be taken in cases where the variation in the temperature of the materials to be cooled is wide. Indicator diagrams should be taken

from both the steam engine cylinder and the compressor cylinder every two hours.

A mercury well, for a horizontal pipe, when the latter is of sufficient dimensions, is shown in Fig. 347. It consists in a short piece of tubing closed at its lower end, and fitted into the pipe by means of a suitable bushing. It is filled about three parts full of mercury, and the thermometer, which should have an elongated cylindrical bulb, is held in position therein by means of a perforated cork. For vertical pipes, or pipes of very small dimensions, where this arrangement would be impracticable, the well is recommended by Mr. Redwood to be formed (as shown in vertical and horizontal section in Figs. 348 and 349) by means of a wooden or other block, one side of which is shaped to the outline of the pipe to which it is to be applied, and has a suitable recess formed in it. This block is firmly secured against the pipe by metal straps in such a manner that a portion of the wall of the well will be formed by the pipe, the latter being scraped perfectly clean at that part. The joint between the block and the pipe must be made perfectly tight, which can easily be effected by means of a little white lead paint, as there is no pressure, and the whole should be surrounded by a thick layer of non-conducting composition, through which the stem of the thermometer is permitted to project.

The points in the system where it is desirable to locate the mercury wells are:—The suction pipe just at its connection with the compressor; the discharge pipe, as close as possible to its connection with the compressor; the ammonia discharge pipe from the condenser, as near the latter as practicable. Where a brine circulation is employed:—The pipe or manifold supplying the various coils or sets of pipes in the refrigerator; the discharge pipe of the refrigerator; the brine discharge pipe, at the point where it connects to the refrigerator; and the brine return pipe in proximity to where it connects with the refrigerator.

An excess condensing pressure is invariably found in ammonia compression machines. This excess of the actual working condensing pressure over the theoretical is caused by the ammonia gas being imprisoned in the comparatively confined space afforded by the coils or pipes in the refrigerator, and the excess pressure is more marked in a horizontal compressor running at a high speed of, say, 140 revolutions per minute, than it is in vertical ones having only a low speed of from 35 to 60 revolutions per minute; it varies, moreover, in almost every make of compressor. At a low suction pressure of about 15 lbs. it should not be more than 10 lbs., but with a suction pressure of, say, 27 or 28 lbs. it may rise to 50 lbs., or even more.

The condensing pressure affords a means of ascertaining whether or not the apparatus contains the proper full charge of ammonia, or if the losses sustained by leakage are sufficient to render it necessary to insert an additional supply. For this reason it is advisable for the person in charge to keep a record in a proper book, suitably ruled for the purpose, of the temperature of the condensed ammonia when leaving the condenser, and also of the condensing and suction pressures, at regular intervals of, say, three hours. This will enable him to follow the state of the ammonia charge; for example, if the condensing pressure is found to be gradually falling during a three months' period, as compared with the average condensing pressure of the previous three months, whilst at the same time the condensing temperature and the suction pressure remain constant, it will be evident that the charge of ammonia has become reduced by leakage to a sufficient extent to require replenishing. This reduction in the condensing pressure is caused by the diminution in the charge of ammonia giving larger condenser space, the gas having thus a much more extended worm, coil, or tube space wherein to condense and liquefy, and hence the decrease. As a general rule it may be taken that, whenever the condensing pressure is found to have fallen about 8 lbs., enough ammonia to restore the original condensing pressure should be inserted into the machine.

The following method of testing the capacity of a refrigerating machine is given by Mr. Constanz Schmitz in the *Eis und Kälte Industrie* :—

“In testing the effective capacity and the consumption of power of a refrigerating machine, it has been hitherto usual to take the amount of heat removed per hour, and the power consumed in indicated horsepower. This, however, does not afford a satisfactory basis upon which to judge of the relative merits of machines under test. If, for example, the theoretical capacity of any particular refrigerating machine be taken, it will be found in every instance that this capacity will not be reached in practical working.”

A more satisfactory means of comparison is furnished by the results obtained from a large number of caloric production and power consumption tests, which, however, under varying working conditions, and for different sizes of the machines, will not be found to correspond.

To avoid, therefore, possible mistakes, and to facilitate the work, the caloric production and the consumption of power should be reduced to a special unit, and for this purpose the following method is proposed :—

It is expressed in the following manner :

1. Specific refrigerating efficiency = Q sp.

That number of calories which is indicated per 1 cubic metre hourly volume of stroke of the compressor, in the evaporator.

2. Specific consumption of power = N sp.

That number of horse-power which is indicated in the air compressor for 10,000 calories evaporator production.

Let a compressor have, for instance, the following dimensions:—

Cylinder diameter $d = 250$ millimetres.

Piston stroke $s = 420$ „

Piston rod $\delta = 55$ „

Number of revolutions per

minute $n = 65$

Then its hourly volume of stroke is :

$V = 15. n. s. \pi. (2d^2 - \delta^2) = 156.920$ cubic metres (and since 1,000 cubic decimetres = 1 cubic metre, also 1 litre = 1 cubic decimetre we have : $V = 156,920$ litres).

Should now the evaporator productions per hour be found by $Q_2 = 63,750$ Cal., the specific refrigerating efficiency of the machine will be :

$$Q \text{ sp.} = \frac{63750}{156.92} = 406 \text{ Cal.}$$

Should at the same time during the caloric trial 23.7 horse-power be indicated in the compressor, then the specific consumption of power will amount to :

$$N \text{ sp.} = \frac{23.7 \times 100000}{63750} = 3.72 \text{ horse-power.}$$

If then, in addition to this, the evaporator temperature, that is the mean temperature of the volatile cold-producing agent or medium, and the liquefaction temperature in the condenser be given, four figures afford a practical demonstration of the performance of the machine in question.

On the basis of these figures, refrigerating machines may be conveniently compared as regards their productive capacity. The comparison as regards the specific refrigerating capacity Q sp. is, of course, only possible directly between machines constructed to operate on the same system, while the comparison as regards the specific amount of power required is rendered directly possible between machines constructed to operate on any system.

INTERPRETATION OF COMPRESSOR DIAGRAMS.

The interpretation of a compressor diagram with respect to the working, valves, defects, etc., of the latter are given as follows by Hans Lorenz, in "Neuere Kuehlmaschinen," Muenchen and Leipzig, 1899.

"Assuming all the parts of the machine to be in good order, then the diagram will have the general appearance shown in Fig. 350. The suc-




Fig. 350.—Diagram from Compressor in good order.




Fig. 351.—Diagram from Compressor indicating an excessive amount of clearance.

tion line *s* is only slightly below the suction pressure line *v*, and the pressure line *d* is only slightly above the condenser pressure *k*. Small projections at the pressure and suction line indicate the work required to open the compressor valves, and the effect of clearance is shown




Fig. 352.—Diagram from Compressor indicating binding of Pressure Valve.




Fig. 353.—Diagram from Compressor indicating too great a resistance in Pressure and Suction Pipes.

by the curve *R*, which latter cuts the back pressure line after the piston has commenced to perform its return or back stroke, and consequently reduces the suction volume to that amount. It can also be seen from this diagram that the vapours are taken in by the compressor, not at the back pressure, but at what may be called the suction pressure, which is

somewhat lower. This is the reason that the compression curve *c*, does not intersect the back pressure line until after the piston has changed its direction of movement. The theoretical volume of the compressor, as indicated by the line *v*, is consequently reduced in practical working for vapours possessing a certain tension.

In Fig 351 is shown a diagram taken from a compressor having an




Fig. 354.—Diagram from Compressor indicating binding of Suction Valve.




Fig. 355.—Diagram from Compressor indicating leaking of Compressor Valve.

excessive amount of clearance. In this case, it will be seen, the back expansion line *R* passes through a flat course, and thereby reduces the useful volume of the compressor.

Fig. 352 is a diagram which indicates the binding of the pressure valve, which may be due to an inclined position of the guide-rod of the




Fig. 356.—Diagram from Compressor indicating defective packing of Piston.

valve. This deficiency also frequently causes a delay in the opening of the pressure valves, a state of things indicated by a too great projection in the pressure line. As soon as the valve is once opened the pressure line pursues its normal course until the piston commences its return stroke, when the defect is again manifested in the back pressure line, as mentioned.

Fig. 353 shows a diagram indicating too great a resistance in the pressure and suction pipes respectively, when the valves are over-weighted. In this case the pressure and suction lines are at a comparatively great distance from the condenser pressure line and the back pressure line. The remedy for this is to replace the valve springs by weaker ones; and should there be then no marked effect, then the pipe lines and shutting-off valves should be inspected and, if found necessary, cleaned.

Fig. 354 indicates the binding of the suction valve, by which a considerable decline is caused in the pressure at the beginning of the suction, which is consequently shown by an increased projection in the commencement of the suction line. At the beginning of compression this defect makes itself felt by causing a delay in the latter, which effect is also shown on this diagram.

Fig. 355 shows leaking of the compressor valves. In this diagram the projections in the compression and suction line do not appear, but the compression line gradually merges into the pressure line, and the back expansion line passes gradually into the suction line. If the leak in the pressure valve is the predominant one, then the compression curve will be almost in a straight line and very steep; if, on the contrary, the leak in the suction valve is the predominant one, then the compression line will run a rather flat course.

Fig. 356 indicates that the piston is not well packed, and being leaky, the vapours are permitted to pass from one side of the piston to the other, thus causing a very gradual compression, and as a result a compression line having a flat course. On the other hand, a longer time will be taken before the suction line reaches its normal level on the return or backward stroke, inasmuch as the suction valve is prevented from opening until such time as the velocity of the piston becomes such, that the amount of vapours leaking past the piston is insufficient in amount to fill the suction space. The pressure then gradually diminishes and the suction valve then begins to act, as is shown on the diagram.

It is to be understood that several of the defects above-mentioned may exist at the same time.

LEAKS IN AMMONIA APPARATUS.

Leaks are readily detected by the smell of the escaping ammonia gas when the machine is being filled; at a later stage, when working, their detection is not so easy. During the operation of the machine, when

the liquor or brine in the tanks commences to smell of ammonia it indicates a considerable leakage. It is recommended to test the liquor or brine periodically with Nessler's solution or otherwise.

Nessler's reagent, which is the best to use for the discovery of traces of ammonia in water or brine, consists of 17 grms. of mercuric chloride dissolved in about 300 cc. of distilled water, to which is added 35 grms. potassium iodide dissolved in 100 cc. of water, and constantly stirred until a slight permanent red precipitate is produced. To the solution thus formed is added 120 grms. of potassium hydrate dissolved in about 200 cc. of water, allowed to cool before mixing; the amount is then made up to 1 litre, and mercuric chloride added until a permanent precipitate again forms. After standing for a sufficient time, the clear solution can be placed in glass-stoppered blue bottles and kept in a dark place.

If a few drops of this reagent be added to a sample of the suspected brine or water in a test-tube, or other small vessel, and the slightest trace of ammonia is present, a yellow colouration of the liquid will take place; a large quantity of ammonia will produce a dark-brown.

When the leaks are comparatively insignificant they can be closed in the usual way, by solder, using as a flux muriatic or hydrochloric acid killed with zinc. In some instances electric welding may be resorted to with advantage, or the leak may be closed by means of a composition of litharge and glycerine mixed into a stiff paste, bound with sheet-rubber, and covered with sheet-iron clamped firmly in position. When, however, the leak is at all serious, it is usually the better plan to at once put in a new coil, or a new length of pipe.

LEAKS IN CARBONIC ACID MACHINES.

To detect these, smear the joints with a solution of soap and water, and any leakage of gas will be evidenced by the formation of bubbles. Carbon dioxide or carbonic acid being a completely inodorous gas, great precautions are required to prevent the occurrence of leakage.

MANAGEMENT OF COLD-AIR MACHINES.

The proper management of cold-air machines is far simpler than that of those working on other principles, the exact treatment of each particular machine, however, varying of course somewhat with the make. In all machines, however, the parts most liable to give trouble are the valves, and these, as also the pistons and slide valves, should be periodically tested, and any defect promptly remedied.

DETERMINATION OF MOISTURE IN AIR.—(*Siebel.*)

The moisture in the atmosphere may be determined by a wet bulb thermometer, which is an ordinary thermometer the bulb of which is covered with muslin kept wet, and which is exposed to the air, the moisture of which is to be ascertained. Owing to the evaporation of the water on the muslin the thermometer will shortly acquire a stationary temperature which is always lower than that of the surrounding air (except when the latter is actually saturated with moisture). If t is the temperature of the atmosphere, and t' the temperature of the wet bulb thermometer in degrees Celsius, the tension e , of the aqueous vapour in the atmosphere is found by the formula—

$$e = e' - 0.00077 (t - t') h,$$

e' being the maximum tension of aqueous vapour for the temperature t' as found in table, and h the barometric height in millimetres.

If e_2 is the maximum tension of aqueous vapour for the temperature t , the degree of saturation H , is expressed by—

$$H = \frac{e}{e_2}$$

and the dew point is also readily found in the same table, it being the temperature corresponding to the tension e .

PSYCHROMETERS.

Instead of the wet bulb thermometer alone it is more convenient to use two exact thermometers combined (one with a wet bulb and the other with a dry bulb, to give the temperature of the air), to determine the hygrometric condition of the atmosphere, or of the air in a room. Instruments on this principle can be readily bought, and are called psychrometers. If they are arranged with a handle, so that they can be whirled around, they are called "sling psychrometers." These permit a quicker correct reading of the wet bulb thermometer than the plain psychrometer, in which the thermometers are stationary and are impracticable at a temperature below 32° Fahr., while the sling instrument can be read down to 27° Fahr.

The following table can be used to ascertain the degree of saturation or the relative humidity of air :—

RELATIVE HUMIDITY—PER CENT.—(*U.S. Weather Bureau.*)

<i>t</i> (Dry Ther.)	Difference between the Dry and Wet Thermometers (<i>t</i> — <i>t</i> ₁ .)												<i>t</i> (Dry Ther.)
	0°·5	1°·0	1°·5	2°·0	2°·5	3°·0	3°·5	4°·0	4°·5	5°·0	5°·5	6°·0	
28	94	88	82	77	71	65	60	54	49	43	38	33	28
29	94	89	83	77	72	66	61	56	50	45	40	35	29
30	94	89	84	78	73	67	62	57	52	47	41	36	30
31	95	89	84	79	74	68	63	58	53	48	43	38	31
32	95	90	84	79	74	69	64	59	54	50	45	40	32
33	95	90	85	80	75	70	65	60	56	51	47	42	33
34	95	91	86	81	75	72	67	62	57	53	48	44	34
35	95	91	86	82	76	73	69	65	59	54	50	45	35
36	96	91	86	82	77	73	70	66	61	56	51	47	36
37	96	91	87	82	78	74	70	66	62	57	52	48	37
38	96	92	87	83	79	75	71	67	63	58	54	50	38
39	96	92	88	83	79	75	72	68	63	59	55	52	39
40	96	92	88	84	80	76	72	68	64	60	56	53	40

The hygrometer of Marvin is a sling psychrometer of improved construction,

HYGROMETERS.

While the term hygrometer applies to all instruments calculated to ascertain the amount of moisture in the air, it is specifically used to designate instruments on which the degree of humidity can be read off directly on a scale without calculation and table. Their operation is based on the change of the length of a hair, or similar hygroscopic substance, under different conditions of humidity.

Table giving weights of aqueous vapour held in suspension by 100 lbs. of pure dry air when saturated, at different temperatures, and under the ordinary atmospheric pressure of 29.9 in. of mercury.—*Box and Lightfoot.*

Temper- ature.	Weight of vapour.	Temper- ature.	Weight of vapour.
Fahr. degs.	lbs.	Fahr. degs.	lbs.
-20	0.0350	102	4.547
-10	0.0574	112	6.253
0	0.0918	122	8.584
+10	0.1418	132	11.771
20	0.2265	142	16.170
32	0.379	152	22.465
42	0.561	162	31.713
52	0.819	172	46.338
62	1.179	182	71.300
72	1.680	192	122.643
89	2.361	202	280.230
92	3.289	212	Infinite

N.B.—The weight in lbs. of the vapour mixed with 100 lbs. of pure air at any given temperature and pressure is given by the formula—

$$\frac{62.3 E}{29.9 - E} \times \frac{29.9}{p}$$

Where E = elastic force of the vapour at the given temperature, in inches of mercury (to be taken from Tables).

p = absolute pressure in inches of mercury.

= 29.9 for ordinary atmospheric pressure.

ELECTRICAL TEMPERATURE TELL-TALES AND LONG DISTANCE THERMOMETERS.

At the West Smithfield Cold Meat Stores a system of electric temperature tell-tales, designed by Mr. C. E. Vernon, were put in in 1896.

These electrical thermometers were on the multiple-wire system. Six wires, in conjunction with a Bregnet spring or compound coil of hard brass and steel connected by a suitable link to an index hand or pointer, were required for a range of 11° Fahr. with six points of contact with the instrument in the chamber, and a six-drop indicator in the engine room. Eleven wires were required for a range of 20° Fahr., and it is evident that for a wide range the multiplicity of wires would form a serious objection.

On the three-wire system the same compound coil of hard brass and steel was used. Instead, however, of a connecting link and movable hand or pointer, the loose end of the coil had attached to it at a given distance from an electromagnet a small bar of iron, and by reason of the unequal expansion and contraction of the two metals, the distance between the bar and the magnet will vary in accordance with the temperature, and the amount of current required to draw down the bar to the magnet will be measured by the ampere-metre. The construction of this latter is such that on the bar touching the magnet a second circuit would be completed and the hand of the ampere-metre stopped at a given point. The ampere-metre is calibrated and marked off into degrees Fahrenheit, and a wide range in temperature is obtainable with only three wires, readable at any distance, and accurate to within a degree.

A long distance thermometer which has been extensively used in Cold Stores is that devised by Mr. A. P. Trotter. In this instrument a blind stem is placed alongside of the elongated capillary stem, the former having at its further end a scale-tube corresponding exactly to that of the main thermometer. The action of this is that whatever variation in reading was produced by the varying temperatures passed through by the elongated capillary stem, the blind stem suffered like alterations of temperature, and a shifting scale adjusted by a thumb-screw was in this manner established by means of which the fluctuations of the main instrument were accurately compensated for.

THERMOGRAPHS.

The thermograph or registering thermometer is a very useful instrument which enables a record to be kept of the exact temperature of a cold store. On an ordinary pattern of instrument the record paper or card is secured round a drum or cylindrically-shaped body, so arranged that it will be slowly rotated by a train of clock-work, which takes two weeks to run down, performing in this space of time one complete

revolution. The diameter of the drum is $3\frac{3}{4}$ inches, and the record fits it accurately, the ends butting.

Upon this record card or paper there rests gently a sloped pen holding about a drop of ink, this pen being suspended on a slender arm attached to the base of the instrument, and the mechanism being of such a nature that the slightest rise or fall of temperature will affect it, and will raise or lower the pen resting against the record paper or card upon the drum or cylinder.

The ink line will start from the top and thus indicate when the instrument was placed in the cold store or room, and the temperature will fall very rapidly at first and afterwards more gradually approximate itself to that of the store.

The record paper or card is ruled with horizontal lines showing the temperature in degrees, and with vertical lines showing the days for a period of two weeks, each day being divided into six watches of four hours each, viz., midnight, 4 and 8 a.m., noon, 4 and 8 p.m., and midnight again. At the termination of every two weeks, the record paper or card, now forming a thermograph chart, must be removed, the clockwork of the instrument be re-wound, and a new record paper or card placed in position on the drum or cylinder.

CORRECT RELATIVE HUMIDITY FOR A GIVEN TEMPERATURE IN
EGG ROOMS.—(*Madison Cooper.*)

TEMPERATURE IN DEGREES FAHR.	RELATIVE HUMIDITY PER CENT.
28	80
29	78
30	76
31	74
32	71
33	69
34	67
35	65
36	62
37	60
38	58
39	56
40	53

K K

SPECIFIC HEAT AND COMPOSITION OF VICTUALS.

	Water.	Solids.	Specific Heat above Freezing Calc.	Specific Heat below Freezing Calc.	Latent Heat of Freezing Calc.
Lean beef ..	72.00	28.00	0.77	0.41	102
Fat beef ..	51.00	49.00	0.60	0.34	72
Veal ..	63.00	37.00	0.70	0.39	90
Fat pork ..	39.00	61.00	0.51	0.30	55
Eggs ..	70.00	30.00	0.76	0.40	100
Potatoes ..	74.00	26.00	0.80	0.42	105
Cabbages ..	91.00	9.00	0.93	0.48	129
Carrots ..	83.00	17.00	0.87	0.45	118
Cream ..	59.25	30.75	0.68	0.38	84
Milk ..	87.50	12.50	0.90	0.47	124
Oysters ..	80.38	19.62	0.84	0.44	114
White fish ..	78.00	22.00	0.82	0.43	111
Eels ..	62.07	37.93	0.69	0.38	88
Lobsters ..	76.62	23.38	0.81	0.42	108
Pigeons ..	72.40	27.60	0.78	0.41	
Poultry ..	73.70	26.30	0.80	0.42	

CHAPTER XX.

COST OF WORKING.

Main Items of Expense.—Absorption Machines.—Compression Machines.—Vacuum Machines.—Cold-Air Machines.—Cost of Ice-Making.

THE cost of producing cold with any of the hereinbefore-described machines must of necessity vary in different localities in accordance with the prices of material and labour, and even in the same district with the fluctuations in the market, consequently any estimates made thereof can only apply to the particular case in point, and in others can be taken as approximate only.

The main items of expense in the production of cold by artificial means, are fuel and skilled and other labour for operating the machinery, and in the manufacture of ice, for handling the latter. The degree of economy of working to which the apparatus has been brought, and the point to which the operation thereof has been rendered automatic, will naturally tend to minimise the cost of the production of cold and of ice-making, and the latter will also vary inversely with the power of the machine, as the consumption of fuel and the number of attendants necessary to work the machinery do not increase in a ratio corresponding to the size thereof, and consequently those having the larger outputs require proportionately fewer operatives. The saving, moreover, under this latter head is the greatest in the more expensive skilled labour. For instance, an ammonia machine on either the absorption or compression principle, with a capacity of 1 ton of ice per twenty-four hours, requires the services of two engine-drivers and two labourers; whilst the same number of attendants can likewise work a 2 or a 5-ton machine, and the addition of a single labourer will be sufficient for either a $7\frac{1}{2}$, 10, or 12-ton machine, and of three labourers for a 28-ton machine. The same skilled attendants are sufficient for a machine having an output of 50 tons per twenty-four hours.

According to calculations made by Mr. F. Colyer, M.Inst.C.E., in 1884, from observations of the working of a Pontifex-Wood ammonia absorption machine of a capacity of 20 tons of can ice per twenty-four hours, the cost of making ice, taking coals at London price, was 4s. 9d.

per ton. If, however, two machines were used the price would be reduced to 3s. 5d. per ton, and with coals at Glasgow price the cost would be further lowered, and would stand respectively at 3s. 7d. and 2s. 10d.

The cost of cooling water 10° by the same machine he estimated to be $\cdot 15$ of a penny per barrel cooled.

The calculations from which these figures were deduced include the cost of labour, coals, water, oil and sundries, repairs, loss of ammonia, 5 per cent. interest on capital invested, and an allowance of 4 per cent. for depreciation.

The cost of producing clear block ice in this country with an ammonia machine working on the absorption principle is given at a somewhat higher figure* by Mr. Lightfoot, viz., for a machine of 15 tons capacity per twenty-four hours about 4s. per ton, and this estimate, moreover, is made on the assumption that good coals can be obtained at 15s. per ton, and is exclusive of any allowance for repairs and depreciation.

The cost of producing ice with a Pontifex-Wood improved ammonia absorption machine, is stated by the makers to be, for a machine having a capacity of 24 tons per twenty-four hours, allowing for labour, coals, oil, chemicals, and water (taking coals at 10s. a ton and water at 6d. per 1,000 gallons), 2s. $0\frac{3}{4}$ d. per ton. With coals at 20s. a ton it rises, however, to 2s. $10\frac{1}{2}$ d. per ton. For a machine with a capacity of 15 tons per twenty-four hours, it is respectively, with coals at the above prices, 2s. $7\frac{3}{4}$ d. and 3s. $7\frac{3}{4}$ d. per ton. For a machine with a capacity of 9 tons per twenty-four hours, 3s. 4d. and 4s. $5\frac{1}{2}$ d. per ton. For a machine with a capacity of 6 tons per twenty-four hours, 4s. $5\frac{1}{2}$ d. and 5s. 8d. per ton. And for a machine with a capacity of 4 tons per twenty-four hours, 5s. and 6s. 3d. per ton.

According to Mr. Lightfoot† the action of, and losses experienced in working an ammonia absorption machine are as follows :—

“ Assuming the action of the economiser to be perfect—which, of course, is a condition never met with in practice—all the heat given out by the steam in the generator-coils would be found in the water issuing from the condenser, less that portion directly lost by radiation and conduction. In this case the total heat expended would be that required to vaporise the ammonia, and the water, which, in the form of steam, unavoidably passes off with the ammonia to the rectifier and condenser : plus the heat lost by radiation and conduction. In the refrigerator

* “ Proceedings, Institution of Mechanical Engineers,” 1886, p. 221.

† “ Proceedings, Institution of Mechanical Engineers,” 1886, pp. 220, 221.

the liquid ammonia in becoming vaporised will take up the precise quantity of heat that was given off during its cooling and liquefaction in the condenser, less the amount due to difference in pressure, and less also the small amount due to the difference in temperature between the vapour entering the condenser and that leaving the refrigerator. Again, when the vapour enters into solution with the weak liquor in the absorber, the heat taken up in the refrigerator is given to the cooling water, subject to slight corrections for differences of pressure and of temperature. Supposing there were no losses therefore, the heat given up by the steam in the generator, plus that taken up by the ammonia in the refrigerator, would be precisely equal to the amount taken off by the cooling water from the condenser, plus that taken off from the absorber. The sources of loss are: inefficiency of the economiser; radiation and conduction from all vessels and pipes that are above normal temperature; useless evaporation of water which passes into the rectifier and condenser; conduction of heat into all vessels and pipes that are below normal temperature; water passing into the refrigerator along with the liquid ammonia.

"It will have been seen that the heat demanded from the steam is very much greater in the absorption system than in the compression. This is chiefly due to the fact that in the absorption system the heat of vaporisation acquired in the refrigerator is rejected in the absorber; so that the whole heat of vaporisation required to produce the ammonia vapour prior to condensation, has to be supplied by the steam. In the compression system the vapour passes direct from the refrigerator to the pump, and power has to be expended merely in raising the pressure and temperature to a sufficient degree for enabling liquefaction to occur at ordinary temperatures. On the other hand, a great advantage is gained in the absorption machine by using the direct heat of the steam without first converting it into mechanical work; for in this way its latent heat of vaporisation can be utilised by condensing the steam in the coils, and letting it escape in the form of water. Each lb. of steam passed through can thus be made to give up some 950 units of heat; while in the steam engine using 2 lbs. of coal per indicated horse-power per hour, about 160 units only are utilised per lb. of steam, without allowance for mechanical inefficiency. In the absorption machine also the cooling water has to take up about twice as much heat as in the compression system, owing to the ammonia being twice liquefied, namely, once in the condenser and once in the absorber. It is usual to pass the condensing water first through the condenser and then through the absorber."

The cost of ice-production with machines of the ammonia compression type is somewhat less on the whole than with those working on the absorption principle.

The estimate given by the Pulsometer Engineering Company as the approximate amount per ton of clear or crystal ice is, cost of coals, 1s., all labour, including that of getting the ice out of the tanks, 1s. 3d., and cost of ammonia lost through leakage, etc., $\frac{1}{4}$ d. per ton of ice made, or a total cost of 2s. 3 $\frac{1}{4}$ d. per ton. If an allowance of, say, 10d. per ton be added to this for interest and depreciation, repairs to machinery, cost of water supply and sundries, this would increase the cost of production to about 3s. 2d. per ton.

Mr. Lightfoot states* that one ton of coal is capable of producing as much as 12 tons of ice in well-constructed ammonia compression apparatus, having a capacity of 15 tons per twenty-four hours; and with coals at 15s. a ton, he estimates the cost of making ice by the ammonia compression system at about 3s. 9d. per ton for a production of 15 tons per twenty-four hours, exclusive, however, of any allowance for repairs and depreciation.

The estimate given for the total cost of ice per ton, made by a Frick ammonia compression machine, is, for a daily production of 15 tons, 5s. 2d. per ton of ice. This calculation, however, is got out at the much higher rate of wages paid in America, and if due allowance be made for this, and also for the falling off in efficiency of the machine, due to the greater heat of the climate in summer, the cost per ton in this country would probably be something under 4s. If the capacity of the machine be 100 tons of ice per day, the cost per ton falls to 3s. 11d., or allowing for the larger item for labour, about 2s. 10d. here.

In an ether compression machine Mr. Lightfoot accounts for the work as followst:—Friction. Heat rejected during compression. Heat acquired by the refrigerating agent in passing through the pump. Work expended in discharging the compressed vapour from the pump. Against this he sets the work done by the vapour in entering the pump. Assuming that vapour alone enters the pump, the heat rejected in the condenser he states to be:—Heat of vaporisation acquired in the refrigerator, with the correction necessary for difference in pressure. And the heat acquired in the pump, less the amount due to the difference between the temperature at which liquefaction occurs, and that at which the vapour entered the pump, and less also the amount lost by radiation and conduction between the pump and the condenser.

* "Proceedings, Institution of Mechanical Engineers," 1886, p. 221.

† "Proceedings, Institution of Mechanical Engineers," 1886, p. 214.

The mechanical work expended in compressing ammonia is to be accounted for in a precisely similar manner to that expended in the compression of ether.

Notwithstanding, however, that the degree of compression is so much greater with ammonia than with ether, the energy expended in the compression, heating, and delivering of the gas is less, owing to the much smaller weight of ammonia required to produce a given refrigerating effect, the weights being in the reverse ratio of the heats of vaporisation, or as 1 to 5.45. For this reason the cost of making ice with ether is far higher than with ammonia, and assuming the coal consumption per indicated horse-power to be 2 lb. per hour, and the price of coals 15s. a ton, the total cost of producing transparent block ice in this country on the ether system would be about 5s. per ton, exclusive of any allowance for repairs and depreciation. The production of ice would be about 8.3 tons per ton of coal consumed.

On the other hand, however, as already mentioned, ether machines, by reason of their low working pressures in the condensers, offer considerable advantages in hot climates, especially in the case of machines with small outputs.

The expense of producing ice with the Tellier and Pictet machines is about the same. The results obtained with Pictet's special liquid (combination of carbon dioxide and sulphur dioxide) is stated to equal a production of 35 tons of ice per ton of coal, but this is in all probability far in excess of any result obtained in actual working.

It will be obvious that the arrangement made for the use of any particular machine acting on the principle of the abstraction of heat by the evaporation of a separate refrigerating agent of a more or less volatile nature, must have a very considerable effect upon its economical working, and it is doubtless owing to the superiority of the fixing and manipulation of the installation that so much better results are occasionally obtained in one case than in another, as, these things being equal, all first-rate machines of this class are about the same in point of economy. In relation to this it must also be borne in mind that the thickness of the blocks of ice that are being made exercises an important influence upon the time occupied in their production, for whereas a block 3 in. thick can be frozen in eight hours, a block 9 in. in thickness will require thirty-six hours. The time varying also, of course, more or less with the temperature of the brine.

The cost of making a ton of opaque and porous ice with a vacuum machine such as the Windhausen is estimated* by Dr. Hopkinson at 4s.

* "Journal of the Society of Arts," 1882, vol. xxi., p. 20.

The amount of water required (including that used for cooling purposes) is stated* by Mr. Pieper to be from 10 to 12 tons per ton of ice produced, and the fuel consumption 1 ton of coal for every 12 tons of ice. The fuel is required for the generation of steam to drive the vacuum pump, and the air pump, of the concentrator. The total heat which must be abstracted to produce a ton of ice from a ton of water at a temperature of 60° Fahr. is 382,144 units. The Windhausen machine is heavy, and takes up a considerable floor space, and the necessary outlay for keeping it in an efficient state of repair, even under the most favourable circumstances, must be high.

The cost of making opaque ice by means of the Harrison (1878) patent vacuum apparatus would undoubtedly be lower than with the Windhausen machine, as the larger part of the friction, which forms a very considerable item of the loss in the latter, is got rid of, and a corresponding saving of fuel is thus effected. The expenditure of fuel for concentrating the acid is also entirely eliminated, much less water is required for cooling purposes, and the first cost and subsequent outlay for repairs, etc., are likewise much less. It is stated that the inventor expected to be able to produce opaque ice on a large scale at a cost of about 1s. per ton.

The outlay per ton of ice made on the system of abstracting the heat by the rapid melting or liquefaction of a solid is the greatest, and so much so that for producing ice on a commercial scale in this climate it is completely out of the running. The cost of making 15 tons of ice per twenty-four hours, with an apparatus working on a substantially similar principle to that of Sir William Siemens', is stated to be 7s. per ton with good coals at 15s. a ton, and not making any allowance whatever for depreciation, interest, repairs, etc.

This estimate, moreover, is based upon the erroneous assumption that 1 lb. of coal is capable of evaporating 20 lbs. of water, and it is undoubtedly far too low. According to Mr. Lightfoot†:—

"Nearly the whole of the coal is used for evaporating the water in recovering the salt, the quantity being given at $2\frac{1}{2}$ tons of coal for every 15 tons of ice. If, however, this has been calculated on an evaporative duty of 20 lbs. of water per lb. of coal, the amount actually used will probably be about 5 tons of coal, which would make the cost per ton of ice 9s. 3d. instead of 7s. On the other hand, it must be remembered that under certain climatic conditions much of the water could be evaporated in the open air, without the use of fuel, in which

* "Transactions of the Society of Engineers," 1882, p. 145.

† "Proceedings, Institution of Mechanical Engineers," 1886, p. 204.

case the coal consumption, and therefore the cost of ice production, would be greatly lessened."

As regards the capacity, etc., of cold-air machines, those of the Haslam type vary from an ice equivalent of one-third of a ton, requiring 4 indicated horse-power at average speed, or 9 indicated horse-power at maximum speed, and delivering 2,000 cubic ft. per hour (capacity of compressor in cubic ft. per hour, 2,500), up to an ice equivalent of 60 tons, requiring 460 indicated horse-power at average speed, or 566 indicated horse-power at maximum speed, and delivering 300,000 cubic ft. of air per hour (capacity of compressor in cubic ft. per hour 353,000). This latter machine is of the quadruple duplex condensing type.

It has been stated* by Mr. Lightfoot that with the best machines of large size then (1886) made, a weight of 1,000 lbs. of air per hour could be reduced from 60° above to 80° below zero, the cooling water being at 60° Fahr., with an expenditure of about 18 indicated horse-power. That is to say, that an abstraction of 916 units of heat is effected to each pound of coal used, with an engine consuming 2 lbs. of coal per indicated horse-power per hour.

The results of later test experiments made with Messrs. F. and W. Cole's "Arctic" dry cold-air machines will be found on page 219.

For Haslam's formula to enable the amount of air delivered by a cold-air machine per hour to be ascertained, the revolutions, and size of the compressor being known, see page 549.

The following tables, giving the approximate cost of ice-making in the United States, are respectively by the Frick Company and the Triumph Ice Machine Company:—

* "Proceedings, Institution of Mechanical Engineers," 1886, p. 230.

ICE MANUFACTURE.—APPROXIMATE COST OF OPERATING ICE FACTORIES (FRICK CO., U.S.).

Tons Ice per day.	Engineers \$1.50 to \$5.00 per day.	Oilers \$1.25 per day.	Firemen \$1.25 per day.	Tankmen and Labourers \$1.00 per day.	General Helpers \$1.25 per day.	Coal 15 cts. per cwt., or \$3.00 per ton.	Oil Waste Lights & Sundries.	Daily Operating Expenses.	Ice per ton.
1	2 \$3 00	—	—	—	—	500	\$0 50	\$4 25	\$4 25
2	2 3 00	—	—	—	—	1,000	50	5 00	2 50
4	2 3 00	—	—	1 \$1 00	—	2,000	50	7 50	1 88
6	2 3 50	—	—	1 1 00	—	2,700	50	9 05	1 51
10	2 3 50	—	—	1 1 00	—	4,500	75	12 00	1 20
15	2 3 75	—	—	2 2 00	—	6,700	1 00	16 80	1 12
20	2 3 75	—	—	2 2 00	—	8,000	1 00	18 75	94
25	2 4 00	—	2 \$2 50	2 2 00	—	8,400	1 10	22 20	89
30	2 4 00	—	2 2 50	2 2 00	—	9,500	1 25	24 00	80
35	2 4 00	—	2 2 50	2 2 00	—	10,800	1 50	26 20	75
40	2 4 50	—	2 2 50	3 3 00	—	11,500	1 75	29 00	73
50	1 2 75	—	2 2 50	4 4 00	—	14,300	2 00	34 45	69
60	2 5 00	1 \$1 25	3 3 75	4 4 00	—	16,000	2 25	40 25	67
75	2 5 00	1 1 25	3 3 75	4 4 00	1 \$1 25	20,000	3 00	48 25	65
100	2 5 50	2 2 50	4 5 00	6 6 00	1 1 25	25,000	4 00	61 75	62

COST OF WORKING.

597

APPROXIMATE COST OF ICE-MAKING (TRIUMPH ICE MACHINE COMPANY, U.S.).

Tons Ice per day.	Engines \$2.00 to \$5.00 per day.	Night Engi- neer, Others \$1.50 to \$2.50 per day.	Or Firemen \$1.50 per day.	Tankmen and Labourers \$1.00 per day.	Pipe Fitter or Mechanic \$2.50 per day.	Office Ex- penses, H.K. \$1.00 to \$2.50 per day.	Coal \$2 per ton.	Oil, Waste, Light & Sundries.	Daily Operating Expenses.	Ice, per ton.
1	\$2 00					\$1 00	1,000	\$ 25	\$ 3 25	\$3 25
2	2 00					1 00	1,400	25	4 65	2 32
3	2 00					1 00	1,800	25	4 75	1 90
4	2 00					1 00	2,200	40	5 20	1 73
5	2 00	\$1 50				1 00	2,500	50	5 70	1 42
7	2 50	1 50				1 50	3,100	50	7 50	1 50
8	2 50	1 75				1 50	3,300	85	10 70	1 52
10	2 50	2 00		\$1 25		1 70	3,600	90	10 95	1 36
12	2 50	2 00		2 50		1 75	4,800	1 00	13 10	1 31
15	2 75	2 00	2	2 50		1 75	5,000	1 25	14 80	1 23
20	2 75	2 00	2	3 00		1 75	6,600	1 25	18 25	1 21
25	2 75	2 00	2	3 00		1 75	7,200	1 50	20 60	1 03
30	3 00	2 00	2	3 00		2 00	9,000	1 50	21 20	88
35	3 00	2 00	2	3 00		2 00	9,000	2 00	24 00	80
40	3 00	2 00	2	3 00		2 00	12,300	2 00	27 30	78
45	6 00	2 00	2	4 50		2 50	13,300	2 50	30 80	77
50	6 00	2 50	2	4 50		2 50	13,600	2 50	34 10	75
60	6 00	2 50	3	4 50		4 00	14,000	2 50	36 50	73
65	6 00	2 50	3	4 50	1	4 00	16,700	2 50	43 20	72
70	6 00	2 50	3	4 50	1	4 00	17,800	3 50	46 80	72
80	7 00	2 50	4	6 00	1	4 00	19,000	3 50	49 00	70
90	7 00	2 50	4	6 00	1	5 00	25,000	4 00	63 00	70
100	9 00	4 00	5	7 50	2	5 00	28,500	5 00	68 00	68



CHAPTER XXI.

THE PRODUCTION OF VERY LOW TEMPERATURES.

Early Investigators and Experimenters.—The Cascade System.—The Regenerative Method.—Properties of Liquid Air.—Physical Constants of Liquefied Gases.

EARLY INVESTIGATORS AND EXPERIMENTERS.

THE CASCADE SYSTEM.

THE first experimenters in the liquefaction of gases were Mouge and Clouet before 1800, who succeeded in liquefying sulphur dioxide; Northmore in 1805, who liquefied chlorine and sulphurous acids; Faraday, 1823, who liquefied chlorine sulphuret of hydrogen, carbon dioxide, nitrous oxide, cyanogen, ammonia and hydrochloric acid. Habrier, Nattuer, Andrews, and Siemens, the latter making, in a provisional application filed in 1857, the suggestion that refrigeration might be produced by expanding a compressed gas, either in a cylinder doing work, or freely, to a lower pressure, and using this cold gas to cool before expansion the gas coming to the apparatus. This it will be seen is the basis upon which the latest investigators have proceeded, and which has admitted in the closing years of the last century of the liquefaction of all gases being effected.

In 1878 Cailletet and Pictet, working quite independently of each other, succeeded in liquefying certain of the so-called permanent gases.

The method employed by the first was to compress the gas under very high pressure, cool it moderately, so that it was still above its critical temperature, and then allow it to expand suddenly, by opening a cock or valve by which the pressure on the gas was relieved, doing work against a column of mercury which formed the equivalent of a piston for compressing the gas. In this manner the gas cooled itself, the expansion being sudden and almost adiabatic, and the temperature was reduced below the critical point, whilst the pressure was still sufficiently high to liquefy the gas at the temperature which it had then acquired.

Cailletet in the above manner experimented with various gases, amongst others laughing gas, acetylene, and carbon monoxide, and suc-

ceeded in obtaining a mist of hydrogen. He was the first to use liquid ethylene as a cooling agent.

The second, or Pictet, on the other hand, employed what has been styled the cascade or successive cycle system, and is described by Prof. Ewing as follows.—*

"The general idea of this method is illustrated in Fig. 357. Imagine a refrigerating agent, such as carbonic acid, to have been compressed and to expand through a valve into the chamber A, where it evaporates. In the example, as sketched, it is evaporating into the atmos-

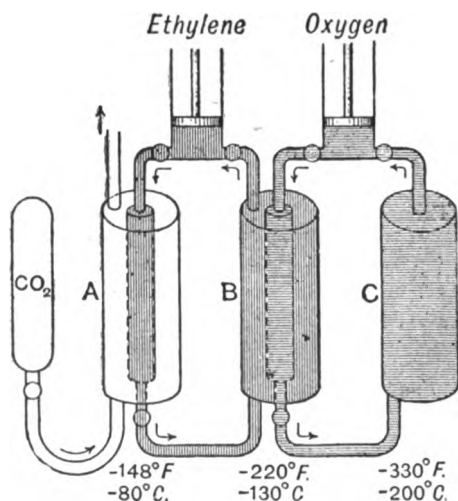


Fig. 357.—Diagram Illustrating the Cascade or Successive Cycle System of producing very low Temperatures.

phere. When carbonic acid evaporates freely to the atmosphere, it falls to a temperature of about -80°C . It could be made to go 30° or more lower by using an air pump to preserve a partial vacuum in the chamber; but, assuming the pressure A to be atmospheric, the temperature then will be about -80°C . Now we may use this as the condensing temperature of some other volatile material. The material which is indicated in the sketch is ethylene, which was not used by Pictet, but has come into use subsequently, and has done good service in the hands especially of Professor Dewar. It forms a convenient

* "Journal of the Society of Arts," September 17th, 1897.

intermediate link between the comparatively easily liquefiable carbonic acid and the much more difficult oxygen. Ethylene has a critical temperature of -10°C ., and needs only moderate pressure to liquefy it when exposed to a temperature of -80°C . It is pumped at the necessary pressure into the inner vessel at A, and is there liquefied, and passes through an expansion valve to the outer vessel at B, where it evaporates. The pressure in B is supposed to be kept at something not much over one inch of mercury, and in that case the temperature reached by the ethylene in evaporating will be -130°C . After expansion, it is re-compressed, so that the part of the apparatus in which the ethylene is carried through its cycle may simply be regarded as a separate vapour compression refrigerating machine, the same as the ordinary machine using ammonia or carbonic acid; B is the refrigerator and A is the condenser.

"The remainder of the apparatus is another similar machine, using in this case oxygen as its working substance, and with B as its condenser. The critical temperature of oxygen is about -150°C ., and as the temperature in B is lower than that, the oxygen liquefies when compressed into the inner vessel at B. A moderate pressure of 20 or 30 atmospheres suffices. The liquid oxygen may be passed through a valve, and evaporated again in the vessel C, and in that way a temperature of -200°C ., or lower, can be reached, the temperature, of course, in this last vessel depending on the pressure in it, and consequently on the rapidity with which the pump is worked. By working the pump tolerably fast, to preserve a good vacuum in C, we can get down to something like -220° , or even -225°C ., a temperature which is no very long way above the absolute zero -273°C . In Pictet's cascade of successive cycles, the substances used were sulphurous acid and carbonic acid. The ethylene is a useful addition, as giving readily a temperature considerably below the critical point of oxygen. Without it, however, Pictet succeeded in liquefying oxygen by the device of letting it suddenly escape when under high pressure, and after being cooled as far as the carbonic acid would cool it."

Further experiments, made during the next decade by the two Polish chemists, Wroblewski and Olszewski, working together and using Cailletet's type of apparatus, and latterly Pictet's cascade system, for cooling the compression tube, confirmed the results obtained by Cailletet and Pictet on hydrogen in 1884.

In this year (1884) Professor Dewar demonstrated at the Royal Institution that liquid air could be produced by the use of solid carbon dioxide and nitrous oxide as cooling agents, giving -184°Fahr .

(-120° Cent.). With a compression to 200 atmospheres, and subsequent expansion, about 5 per cent, of the air compressed was liquefied.

Professor Dewar also devised the vacuum flasks for holding liquid gases which bear his name, and which consist of two glass walls with a sealed space between from which the air has been completely exhausted, and which consequently acts as the best possible insulator. By the addition to the vacuum-jacket of a film of mercury spread over the surface of the glass on the inner side of the outermost wall, a bright surface is produced which reduces the absorption of heat by the latter, and permits much less radiation to pass through. This vacuum vessel enables the rate of evaporation of a liquid gas to be reduced from 1-5th to 1-6th of that which would take place in the open air, and if the inner wall be coated as above-described, with mercury to form a heat mirror, the evaporation will then be only from 1-20th to 1-33rd that of the free rate. Until quite recently these flasks were the means by which liquid gases were handled and maintained in a static form.

Subsequently Olszewski, after Wroblewski's death in 1888, replaced the glass tube of Cailletet by a steel one fitted with a stop-cock, and obtained enough liquids to be handled in Dewar flasks.

Discarding after a time the Cailletet apparatus, as altered by Wroblewski, Dewar employed the Pictet apparatus, using, however, pumps to compress the gases previously made, and force them into the liquefying chamber, and he also employed ethylene in place of carbon dioxide, placed the draw-off cock within the cooling chamber, and still later adopted the regenerative principle suggested by Siemens, for cooling the chamber in the case of hydrogen liquefaction. In 1895 Dewar demonstrated that air in the liquid form could be frozen to a jelly-like solid by the expansion method, this jelly proving to be a mass of nitrogen with the liquid oxygen of the air contained in the interstices; this solid air melts instantly on contact with the atmosphere. In 1896 he effected the production of a jet of liquid hydrogen by means of the expansion of the cooled and compressed gas, and by the use of this hydrogen jet, oxygen and air were frozen to a solid white mass. In 1898 Dewar succeeded in collecting hydrogen in a static condition, and in keeping it in this form by the use of one of his bulbs at a temperature of -396.4° Fahr. (-238° C.), only 65° Fahr. above the absolute zero.

Amongst other workers in this field must be mentioned Professor Onnes of Leyden, and Moissau, the latter investigator together with Dewar having succeeded in liquefying fluorine, the last of the elements to yield.

A considerable amount of attention, it is true, was devoted to the production of liquid air by the above-mentioned investigators, especially by Professor Dewar, but they were primarily interested in the scientific investigation of the properties of the elementary gases, and the former has been more particularly dealt with by Linde, Hampson, and Tripler, who have all been experimenting especially with a view to the simplification and cheapening of the production of liquid air in order that it might be made on a commercial scale, and they have all been working on the lines of direct regenerative action which was proposed by the late Sir William Siemens forty-four years ago. In this direction it should be stated that Professor Dewar had also been working, combining cooling with a separate fluid, his experiments being, however, on the smaller scale suitable for a chemical laboratory.

THE REGENERATIVE METHOD.

As has been already mentioned, Siemens was the first to describe the regenerative process, and in the specification of the provisional application already referred to he describes the employment of an interchanger to extract cold from the air already cooled by the refrigerating machine, and thereby to cool the air which is on its way to be expanded. Siemens especially pointed out that theoretically, at least, no limit existed to the degree of cold which could be produced by the use of such an interchanger, and after giving an example of the temperatures that might be expected in a particular instance, he says:—"These temperatures are mentioned, not as absolute temperatures, but to show that the principle of the invention is adapted to produce an accumulated effect, or an indefinite reduction of temperature."

Siemens' idea, observes Professor Ewing, was that the compressed air should pass through this interchanger, and should then be caused to do work in an expansion cylinder. This expansion would chill it, and it would then pass again through the interchanger, giving up its cold through the interchanger to the next succeeding supply of compressed air. The effect would be to make each fresh supply, on its way to the expansion cylinder, a little colder than the last. The cumulative fall in temperature resulting from this would only be limited by accidental losses due to conduction of heat from outside and to heat developed from friction within the machine.

In 1885 Solway took out a patent for an apparatus and process for producing, applying, and keeping up extreme temperatures, by

means of a regenerative method somewhat akin to that of Siemens, only that he employed a regenerator instead of an interchanger. With this apparatus Solway succeeded in reaching a temperature of about -95°C. , at which he found the losses of cold balanced the gains.

In 1892 Windhausen obtained a patent for an apparatus for the production of extreme degrees of cold with an interchanger substantially similar to that of Siemens, but employed in combination with an expansion cylinder. With this he obtained about the same degree of temperature as Solway, and this apparatus is said to be now in use on a commercial scale for such processes as the extraction of benzol from the mixed gases which are given off by the distillation of coal.

The particular workers in this field, however, who have aimed at the simplification and cheapening of the production of liquid air, so that it might be made commercially useful, are, to take them in the order of their applications for patents, Tripler, Hampson, and Linde. Tripler's English patents were filed in 1891, Dr. William Hampson's on the 23rd May, 1895, and Dr. Linde's three weeks later in the same year. A good deal of discussion has taken place as to which of these three should have assigned to them the real credit of having first produced a practical machine. It is averred by some that the apparatus described by Tripler was impracticable, and by others that Hampson's provisional specification was very brief, and so vague as to indicate but little. It certainly appears that the first to produce a practical working apparatus was Dr. Linde, although he was the last to proceed to the Patent Office for protection; it is on record that his apparatus, in a practical and workable form, was produced in the summer of 1893. Mr. Tripler has been refused a patent by the U.S. Patent Office.

The principle of the regenerative method of producing very low temperatures is, says Mr. A. L. Rice, in a paper read before the American Society of Mechanical Engineers, December, 1899, a perfect gas expanding to do work loses heat; if this cooled gas be exhausted, so as to jacket the pipe through which the incoming gas enters, it will cool that incoming gas; the process is cumulative without limit, if the machinery is frictionless and insulated against heat from the surrounding objects. Solway built a machine on this principle, but was unable to get lower than -139°Fahr. (-95°C.), on account of the heat due to the friction of the pistons and to conduction.

In a perfect gas no lowering of the temperature would result from lowering of the pressure by free expansion, but none of the so-called gases are perfect, and all are cooled somewhat by expansion through an orifice. Joule and Kelvin found that with air the fall of tempera-

ture is about 0.45° Fahr. ($\frac{1}{4}^{\circ}$ C.), for each atmosphere difference of pressure at the orifice, at ordinary temperatures, and that the effect increases as the temperature falls, because the gases are coming more nearly to the vaporous state. If, then, air be compressed to a high pressure, and be allowed to expand through a small orifice, it will become considerably cooled, and may be used to cool the incoming air, which, in turn, will lose heat by expansion. The process may be

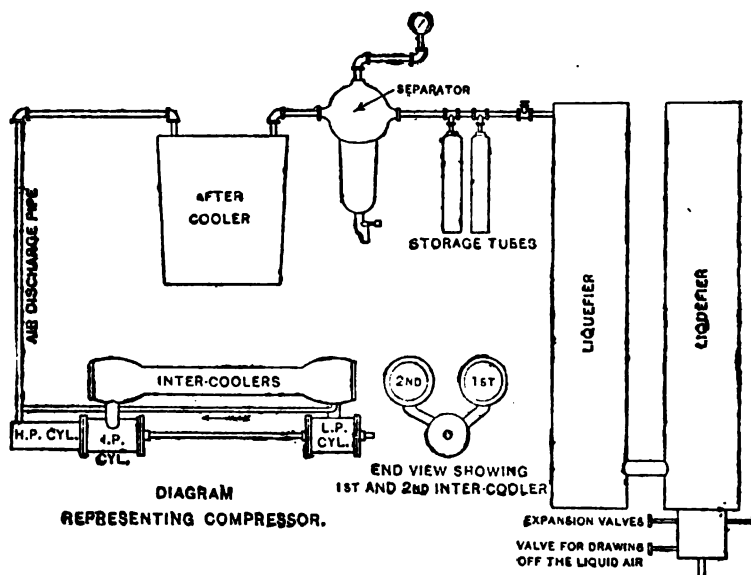


Fig. 358.—Diagram illustrating Tripler's Apparatus for the Production of Very Low Temperatures by the Regenerative Method.

carried on until some of the air, on or before leaving the orifice, is liquefied.

Mr. Tripler's apparatus is shown in Fig. 358, and as described by Mr. Rice, "consists of a three-stage compressor, drawing air directly from the atmosphere, and driven by a steam engine. The air is taken first into the low pressure cylinder, where it is compressed to 65 lbs. per square inch; it is then sent through an intercooler to reduce the temperature to that of the atmosphere, and taken into the intermediate-pressure cylinder; from that, at a pressure of 400 pounds, it is taken through a second intercooler to the high pressure cylinder, where it is forced up to 2,000 to 2,500 pounds, and thence sent to the after-

cooler to be reduced again to the temperature of the atmosphere. The air is passed through a separator to take out all moisture, and then passes to storage tubes in which compressed air, not in the liquid form, may be kept. The liquefier is Mr. Tripler's special invention. This takes the air from the separator, and by expansion through a coil of pipe and a small orifice, cools it to a low temperature; it passes up around the coil of pipe, cooling the air inside, and thus gives the regenerative action. The expansion valve is placed at a little distance above the bottom of the coil, so that some liquid air collects in the bottom of the latter, and thus serves to further cool the air as it comes to the expansion cock. The air which is to be drawn off collects in the liquefier just below the expansion valve, and may be drawn off at will. The expanded air escapes to the atmosphere after having been used to cool the coil of the liquefier. The capacity of the present plant is two or four gallons per hour, and the ice will begin to liquefy in 15 minutes after the starting up. No data are available as to the power used in the compression."

The provisional specification of Dr. William Hampson's 1895 patent was, as above-mentioned, extremely brief, and the following is the text *in extenso* :—


"The usual cycle of compressing, cooling, and expansion, is modified by using all the gas after its expansion, to reduce as nearly as possible to its own temperature the compressed gas which is on its way to be expanded; with this object all the expanded gas surrounds the pipe or pipes of compressed gas through all their length from the point of expansion to the point of normal temperature, and the length of pipe is sufficient to allow of the fullest possible interchange of temperatures between the compressed and expanded gas."

In a subsequent patent the improved apparatus shown in vertical and horizontal sections in Figs. 359 and 360 is described. In this apparatus the interchanger is made with a tube or tubes coiled into spirals, the convolutions of which are separated by very narrow spaces and with the coils lying one upon the other. The space between the tubes does not exceed 1-10th of an inch. The gas after compression is purified by caustic potash or the like. The vacuum vessel 1 is supported by a cap 2 inside concentric glass tubes mounted between rings 3 and 5 held by a frame 4. Insulating or tight joints may be made at 5, 6, 7, 8. Cold carbonic acid or the like is passed on to the coils in the neighbourhood of the expansion joint, and thence over their other parts before beginning expansion of compressed gas, and the arrangement shown in Fig. 360 is used for supplying the cold carbonic

acid free from solid particles. In this, the gas expands from the valve 1, which is kept at a proper temperature by a stream of warmer

gas from the valve 2, and then any solid material is removed by filtering-material 4 from the vapour which is led away by the pipe, etc., 7.

Fig. 361 represents the latest (1898) type of the Linde apparatus, as depicted in Mr. Rich's paper, and which apparatus only differs in a few minor details from that made in 1893. It has been already stated that the fall of temperature is proportional to the difference of pressures at the orifice, and this difference should, therefore, be large; the work required to compress the air again will depend upon the ratio of the pressures, that is to say, upon the ratio of compression, and should be as small as possible. This necessitates that both pressures be high for the most economical working, and, therefore, Linde works his machine between 200 atmospheres and 16

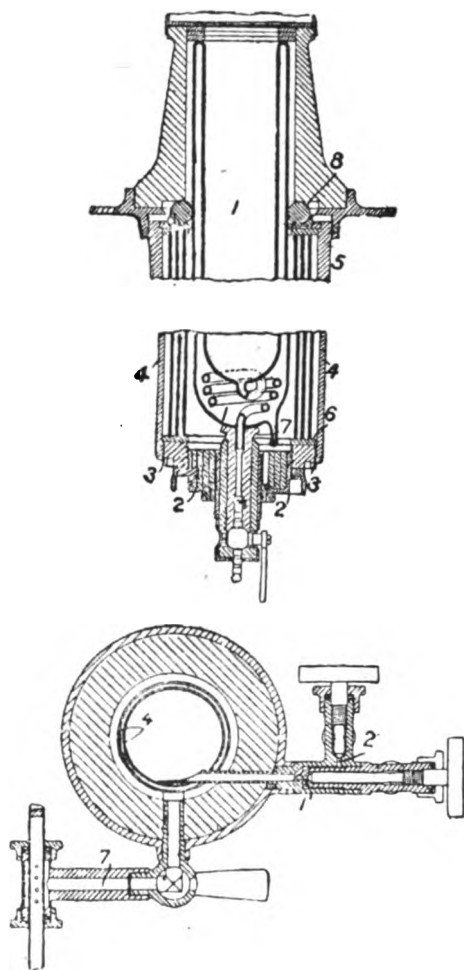

Figs. 359 and 360.—Hampson's Apparatus for the Production of Very Low Temperatures by the Regenerative Method. Vertical and Horizontal Sections.

air by expanding through the valve marked *a*. 1.5th is then expanded to 1 atmosphere through the valve *b* so as to cool it

still further, and about $\frac{1}{4}$ of this amount is condensed. The expanded air is sent back in the outer pipes as shown, the part which is at 16 atmospheres to the compression pump, and the rest to the atmosphere. *f* is a separator and *g* a freezing bath, both being used to remove the moisture from the air; *d* is the compression pump, and

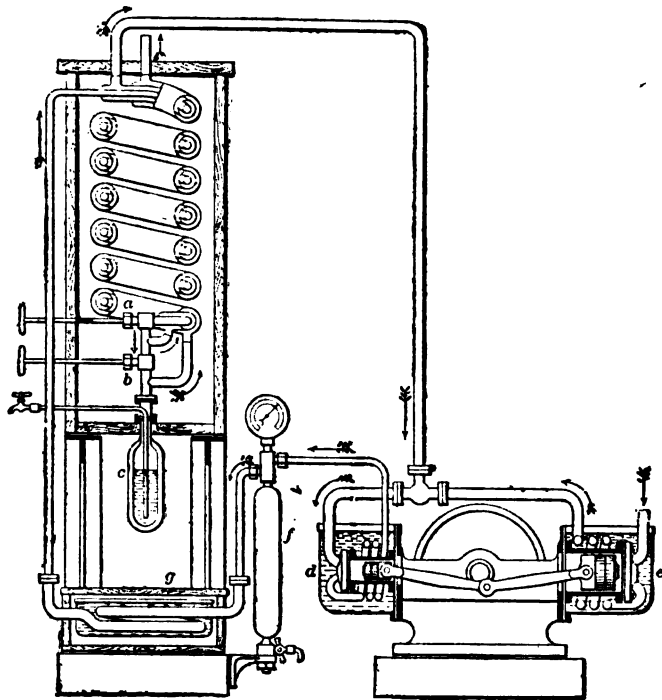


Fig. 361.—Linde's Apparatus for the Production of Very Low Temperatures by the Regenerative Process. Sectional Elevation.

e a pump for supplying at 16 atmospheres as much air as escapes at *b*. *c* is the receptacle for the liquid air. In the earlier form of the machine none of the air was expanded below 50 atmospheres, and the air was cooled by a surface condenser supplied with water. With this apparatus about $\cdot 9$ of a quart of liquid can be obtained per hour with the use of 3 horse-power, this being about 5 per cent. of the air

handled, the first liquid will appear about two hours after starting up the machine.

The following extended extract from Mr. Rice's paper regarding the properties of liquid air will be of interest :—

"The physical constants which have been determined with regard to the liquefied gases are given in the foregoing table, which was prepared by Mr. Walter Dickerson. It will be noted that the order of the liquefaction of the gases historically is almost exactly that of the descending critical temperatures; it is the attaining of a low temperature limit that has taken all the time and study that have been devoted to this matter. Some of the gases when in the liquid form are lighter, and some heavier than water, as shown by the values of specific gravity; of the constituents of air, nitrogen is lighter and oxygen is heavier; the mixture, containing 4-5ths nitrogen and 1-5th oxygen, is a little lighter than water.

"Professor Jacobus and Mr. Dickerson have found the latent heat of air at atmospheric pressure to be about 140 British thermal units, but this figure is stated as only a rough approximation. This is about the only value which has been determined with regard to air in the intermediate or vaporous state.

"Any calculations as to the efficiency of liquid air as a fluid for a prime mover must necessarily be only approximate. The approximations can, however, be made on the right side, and the air given the benefit of the doubt.

"Professor Henry Morton has recently made some calculations regarding the maximum amount of power which could be obtained by the expansion of one pound of liquid air under certain circumstances. The same hypothesis which he used will be assumed and his figures adopted.

"Suppose one pound of liquid air to be confined in a cylinder and heated to 70° Fahr., then let it expand at 70° to atmospheric pressure, the expansion to be hyperbolic. It is not known what the volume of the air will be at 70° before expanding, but it is certain that its ratio of expansion will be less than it would be if expanding from the volume of the liquid at — 312° to the volume of the gas at 70° and atmospheric pressure; this ratio is something less than 800, hence we will call the ratio of expansion 800. The volume of one pound of air at 70° Fahr. and atmospheric pressure is 13.36 cubic feet.

"The work done in a hyperbolic expansion is, $W = p_2 \times v_2 \times \log_e R$.

when p_2 = final pressure per square foot = 2,117 pounds

v_2 = " volume = 13.36 cubic feet.

$$R = \frac{v_2}{v_1} = \text{Ratio of expansion.}$$

$$W = 2,117 \times 13.36 \times 6.685 = 188,000 \text{ foot-pounds.}$$

$$\frac{188,000}{60 \times 33,000} = .095 = \text{horse-power per pound of air used per}$$

hour, and $\frac{1}{.095} = 10.55$ pounds of air per horse-power per hour, if the terminal pressure equals the back pressure, no compression and no clearance being considered.

"This result cannot, of course, be realised, for there are many sources of loss which cannot be avoided, and which will make this figure for the weight of air per horse-power hour much higher. However, even if it could be realised in actual practice, it is only just inside of the figure which has been obtained in our best steam engines under practical working conditions.

"In these figures the liquid is considered simply as a storage medium for energy, and no account is taken of the amount of heat necessary to develop or store the energy.

"In order to get a comparative idea as to the relative values of liquid air and water for power storage, two similar cycles for water will be calculated, and comparative figures obtained.

"The range of temperature in the cycle taken for air is from -31.2° to 70° , or 382° .

"Starting with water and heating it to 504° under 700 pounds pressure absolute, and expanding it to 2 pounds pressure absolute and 126° Fahr., gives a range of temperature slightly less, viz., 378° . The ratio of expansion will be 254. This final volume of one pound is 172 cubic feet, and considering the expansion to be hyperbolic, we have

$$W = 288 \times 173 \times 5.59 = 280,000 \text{ foot-pounds; } \frac{280,000}{60 \times 33,000} =$$

$$.1415 \text{ horse-power per pound of water used per hour, and } \frac{1}{.1415} = 7.08 \text{ pounds of water per horse-power per hour.}$$

By heating the water to 546° under 1,000 pounds pressure and expanding to atmospheric pressure the range of temperature would be still less, or about 334° .

The final volume would be 26.3 cubic feet.

$$\text{Ratio of expansion } \frac{26.3}{.48} = 55.$$

$$W = 21.7 \times 26.3 \times 4.04 = 225,000 \text{ foot-pounds.}$$

$$\frac{225,000}{60 \times 33,000} = \cdot 1139 \text{ horse-power per pound of water used per hour.}$$

$$\frac{1}{\cdot 1139} = 8.8 \text{ pounds water per horse-power per hour.}$$

"From these figures it will be seen that under the conditions assumed, water will give off from 20 per cent. to 50 per cent. more energy than liquid air, during expansion through equal temperature ranges. The possibility of the use of liquid air in a prime mover comes from the fact that the upper temperature limit for the range assumed is so low as compared with that for the steam. The upper limit for the air is at 70° Fahr. or 531° absolute, and the possible thermal efficiency is $\frac{331}{331} = \cdot 72$; for the water the upper limit is 504° Fahr., or 965° Fahr., and the possible efficiency is $\frac{331}{331} = \cdot 39$. If the efficiency of the liquid is in any way comparable with that which can be gotten from steam in the steam engine, the efficiency of the air engine should be good. The cost of production of a pound of air would be much greater than that of a pound of steam, so that to be a commercial factor, the efficiency of the air engine would have to be much greater than that of the steam engine. Whether this can be accomplished, the future alone must decide.

"As to other uses, refrigeration, medical cautery, prevention of chemical action, explosive compounds, reduction of resistance of conductors for electricity and use for prevention of the ill-effects of anæsthetics have been suggested, and others will doubtless develop as experiments are tried. It is only within a few months that the liquid could be obtained at a cost that allowed of trial of its properties for any except scientific purposes where no possible financial return was to be expected, and cost was a secondary consideration. With a large supply available, rapid development may be looked for, and new uses will be constantly discovered."

APPENDIX.

I.—USEFUL TABLES AND MEMORANDA.

EVAPORATION OF LIQUIDS.—*Lightfoot.*

Liquid or gas.		Water.	Anhydrous Ammonia.	Sulphuric ether.	Mythylic ether.	Sulphur dioxide.	Pictet's liquid.
Specific gravity of vapour, compared with air = 1·000		0·622	0·59	2·24	1·61	2·24	—
Boiling point at atmospheric pressure		Fahr.	Fahr.	Fahr.	Fahr.	Fahr.	Fahr.
		212°	−37·3°	96°	−10·5	14°	−2·2°
Latent heat of vaporisation at atmospheric pressure		966	900	165	473	182	—
Absolute vapour tensions in lbs. per square inch at different temperatures.	Fahr.	lbs.	lbs.	lbs.	lbs.	lbs.	lbs.
	− 40°	—	—	—	—	—	—
	− 20°	—	19·4	—	12·0	5·7	11·6
	0°	—	30·0	1·5	18·7	9·8	15·4
	+ 20°	—	47·7	2·6	28·1	16·9	22·0
	+ 32°	0·089	61·5	3·6	36·0	22·7	27·0
	+ 40°	0·122	73·0	4·5	42·5	27·3	31·3
	+ 60°	0·254	108·0	7·2	61·0	41·4	44·0
	+ 80°	0·503	152·4	10·9	86·1	60·2	60·0
	100°	0·942	210·6	16·2	118·0	84·5	79·1
	120°	1·685	283·7	23·5	—	117·5	99·7
	140°	2·879	—	33·5	—	—	—
	160°	4·731	—	45·6	—	—	—
	180°	7·511	—	62·0	—	—	—
	200°	11·526	—	81·8	—	—	—
	212°	14·7	—	96·0	—	—	—

THE METRIC SYSTEM.

This table provides a ready means of converting millimetres into inches.

Mm.	Inches.	Mm.	Inches.	Mm.	Inches.	Mm.	Inches.
1	0.0394	26	1.0236	51	2.0079	76	2.9922
2	0.0787	27	1.0630	52	2.0473	77	3.0315
3	0.1181	28	1.1024	53	2.0866	78	3.0709
4	0.1575	29	1.1417	54	2.1260	79	3.1103
5	0.1968	30	1.1811	55	2.1654	80	3.1496
6	0.2362	31	1.2205	56	2.2047	81	3.1890
7	0.2756	32	1.2598	57	2.2441	82	3.2284
8	0.3150	33	1.2992	58	2.2835	83	3.2677
9	0.3543	34	1.3386	59	2.3228	84	3.3071
10	0.3937	35	1.3780	60	2.3622	85	3.3465
11	0.4331	36	1.4173	61	2.4016	86	3.3859
12	0.4724	37	1.4567	62	2.4410	87	3.4252
13	0.5118	38	1.4961	63	2.4803	88	3.4646
14	0.5512	39	1.5354	64	2.5197	89	3.5040
15	0.5906	40	1.5748	65	2.5591	90	3.5433
16	0.6299	41	1.6142	66	2.5984	91	3.5827
17	0.6693	42	1.6536	67	2.6378	92	3.6221
18	0.7087	43	1.6929	68	2.6772	93	3.6614
19	0.7480	44	1.7323	69	2.7166	94	3.7008
20	0.7874	45	1.7717	70	2.7559	95	3.7402
21	0.8268	46	1.8110	71	2.7953	96	3.7796
22	0.8661	47	1.8504	72	2.8347	97	3.8189
23	0.9055	48	1.8898	73	2.8740	98	3.8583
24	0.9449	49	1.9291	74	2.9134	99	3.8977
25	0.9843	50	1.9685	75	2.9528	100	3.9370

Equivalents of weight may be calculated by means of the following Tables :—

ENGLISH WEIGHTS.

1 oz. = 28.35 grammes. 1 cwt. = 50.80 kilogrammes.
1 lb. = 0.4536 kilogramme. 1 ton = 1016 kilogrammes.

METRIC WEIGHTS.

1 gramme . . . = 15.43 grains.
1 kilogramme . . . = 2.2046 pounds, or 2 lbs. 3 ozs. 4 drachms
and 10.47 grains.
1 millier (metric ton) = 2204.62 pounds or 0.9842 ton.

Below are given some of the most useful measures of volume :—

METRIC.

1 litre = 1.76 pints.
1 decalitre . . . = 0.1 „ = 3.5 fluid ozs.
1 centilitre . . . = 0.01 „ = 0.35 „
1 cubic centimetre . . . = 0.001 „ = 0.35 „

ENGLISH.

1 dram = 3.55 cubic centimetres.
8 drams = 1 ounce = 28.4 „ „
20 ounces = 1 pint = 567.9 „ „
2 pints = 1 quart = 1.136 litres.
4 quarts = 1 gallon = 4.544 „

PROPERTIES OF SATURATED AMMONIA GAS.

(Yaryan.)

Temperature Fahr.	Pressure from vacuum in lbs. per sq. in.	Heat of vaporization.	Volume of vapour per lb. cubic ft.	Volume of liquid per lb. cubic ft.	Gauge pressure per sq. in.
-40	10.69	579.67	24.38	.0234	0.
-35	12.31	576.69	21.21	.0236	0.
-30	14.13	573.69	18.67	.0237	0.
-25	16.17	570.68	16.42	.0238	1.47
-20	18.45	567.67	14.48	.0240	3.75
-15	20.99	564.64	12.81	.0242	6.29
-10	23.77	561.61	11.36	.0243	9.07
-5	27.57	558.56	9.89	.0244	12.87
0	30.37	555.5	9.14	.0246	15.67
+5	34.17	552.43	8.04	.0247	19.47
+10	38.55	549.35	7.20	.0249	23.85
+15	42.93	546.26	6.46	.0250	28.23
+20	47.95	543.15	5.82	.0252	33.25
+25	53.43	540.03	5.24	.0253	38.73
+30	59.41	536.92	4.73	.0254	44.71
+35	65.93	533.78	4.28	.0256	51.23
+40	73.00	530.63	3.88	.0257	58.30
+45	80.66	527.47	3.53	.0260	65.96
+50	88.96	524.30	3.21	.02601	74.26
+55	97.63	521.12	2.93	.02603	82.93
+60	107.60	517.93	2.67	.0265	92.90
+65	118.03	515.33	2.45	.0266	103.33
+70	129.21	511.52	2.24	.0268	114.51
+75	141.25	508.29	2.05	.0270	126.55
+80	154.11	504.66	1.89	.0272	139.41
+85	167.86	501.81	1.74	.0273	153.16
+90	182.8	498.11	1.61	.0274	168.10
+95	198.37	495.29	1.48	.0277	183.67
+100	215.14	491.50	1.36	.0279	200.44

TO CONVERT DEGREES CENTIGRADE OR REAUMUR INTO
DEGREES FAHRENHEIT.

Let F = degrees Fahrenheit; C = degrees Centigrade; and R = degrees Reaumur.

$$F = \frac{9C}{5} + 32$$

$$F = \frac{9R}{4} + 32$$

$$C = \frac{5(F - 32)}{9}$$

$$R = \frac{4(F - 32)}{9}$$

MEAN PRESSURE OF COMPRESSOR.

The following table from the *De La Vergne* catalogue admits of the mean pressure in the compressor, and indirectly the work of the compressor being approximately ascertained from the refrigerator and condenser pressure and temperature.

Condenser Pressure.		103	115	127	139	153	168	184	200	218
Condenser Temperature.		65°	70°	75°	80°	85°	90°	95°	100°	105°
Refrigerator Pressure.	Refrigerator Temperature.									
4	— 20°	41.46	43.91	46.34	48.77	51.23	53.68	56.11	58.54	60.99
6	— 15°	42.72	45.38	47.90	50.74	53.40	56.08	58.86	61.40	64.08
9	— 10°	44.40	47.38	50.33	53.29	56.25	59.20	62.16	65.14	68.09
13	— 5°	45.86	49.15	52.42	55.70	58.97	62.25	65.53	68.81	72.08
16	— 0°	46.94	50.56	54.16	57.78	62.40	65.00	68.62	72.22	75.84
20	5°	47.74	51.73	55.70	59.68	63.67	67.66	71.62	75.61	79.61
24	10°	48.04	52.40	56.77	61.13	65.51	69.86	74.24	78.59	82.97
28	15°	47.88	52.67	57.44	62.23	67.02	71.81	76.60	81.39	86.18
33	20°	47.08	52.30	57.53	62.75	67.98	73.23	78.46	83.68	88.91
39	25°	45.06	51.34	57.05	62.75	68.46	74.17	79.88	85.58	91.29
45	30°	43.16	49.71	55.92	62.14	68.35	74.56	80.77	86.98	93.19
51	35°	40.52	47.26	54.02	60.76	67.52	74.28	81.02	87.78	94.52

TABLE GIVING NUMBER OF CUBIC FEET OF GAS THAT MUST BE PUMPED PER MINUTE AT
DIFFERENT CONDENSER AND SUCTION PRESSURES TO PRODUCE ONE TON OF
REFRIGERATION IN 24 HOURS.

(Professor Siebel, "Compend of Mechanical Refrigeration.")

Temperature of Gas in Degrees F.	Corresponding Suction Pressure, lbs. per sq. in.	Temperature of the Gas in Degrees Fahr.											
		65	70	75	80	85	90	95	100	105			
		Corresponding Condenser Pressure (Gauge) lbs. per square inch.											
G. Pres.	—27	103	115	127	139	153	168	184	200	218			
	—20	7.22	7.3	7.37	7.46	7.54	7.62	7.70	7.79	7.88			
	—15	5.84	5.9	5.96	6.03	6.09	6.16	6.23	6.30	6.43			
	—10	5.35	5.4	5.46	5.52	5.58	5.64	5.70	5.77	5.83			
	—5	4.66	4.73	4.76	4.81	4.86	4.91	4.97	5.05	5.08			
	0	4.09	4.12	4.17	4.21	4.25	4.30	4.35	4.40	4.44			
	5	3.59	3.63	3.66	3.70	3.74	3.78	3.83	3.87	3.91			
	10	3.20	3.24	3.27	3.30	3.34	3.38	3.41	3.45	3.49			
	15	2.87	2.9	2.93	2.96	2.99	3.02	3.06	3.09	3.12			
	20	2.59	2.61	2.65	2.68	2.71	2.73	2.76	2.80	2.82			
	25	2.31	2.34	2.36	2.38	2.41	2.44	2.46	2.49	2.51			
	30	2.06	2.08	2.10	2.12	2.15	2.17	2.20	2.22	2.24			
	35	1.85	1.87	1.89	1.91	1.93	1.95	1.97	2.00	2.01			
		1.70	1.72	1.74	1.76	1.77	1.79	1.81	1.83	1.85			

APPROXIMATE ALLOWANCES PER TON CAPACITY TO BE MADE WHEN
SELECTING A MACHINE FOR REFRIGERATING PURPOSES.—
Triumph Ice Machine Company.

Beer Wort: 15 barrels per ton on Baudelot Cooler. One thousand gallons of sweet water per ton from 70 to 40 degrees. Six beeves, 600 to 700 pounds each, per ton. Ten to twenty hogs per ton. One thousand cubic feet of space per ton for small machines up to 2 tons. Four thousand cubic feet of space per ton for machine from 10 to 15 tons. Ten thousand cubic feet of space per ton for larger machines used for general purposes.

The above will serve as a guide, but it must be borne in mind that the climate, construction and exposure of buildings that are to be refrigerated, character of the insulation, management and method of handling work, all have to be taken into consideration. See also section on "Cold Storage."

TABLE SHOWING PRESSURE AND BOILING POINT OF SOME OF THE
LIQUIDS AVAILABLE FOR USE IN REFRIGERATING MACHINES.—
Ledoux.

Tempera- ture of Ebullition.	Tension of Vapour, in pounds per square inch, above Zero.					
	Deg. Fahr.	Sulphuric Ether.	Sulphur Dioxide.	Ammonia.	Methylic Ether.	Carbonic Acid.
(1)	(2)	(3)	(4)	(5)	(6)	(7)
—40	—	—	10·22	—	—	—
—31	—	—	13·23	—	—	—
—22	—	5·56	16·95	11·15	—	—
—13	—	7·23	21·51	13·85	251·6	—
—4	1·30	9·27	27·04	17·06	292·9	13·5
5	1·70	11·76	33·67	20·84	340·1	16·2
14	2·19	14·75	41·58	25·27	393·4	19·3
23	2·79	18·31	50·91	30·41	453·4	22·9
32	3·55	22·53	61·85	36·34	520·4	26·9
41	4·45	27·48	74·55	43·13	594·8	31·2
50	5·54	33·26	89·21	50·84	676·9	36·2
59	6·84	39·93	105·99	59·56	766·9	41·7
68	8·38	47·62	125·08	69·35	864·9	48·1
77	10·19	56·39	146·64	80·28	971·1	55·6
86	12·31	66·37	170·83	92·41	1085·6	64·1
95	14·76	77·64	197·83	—	1207·9	73·2
104	17·59	90·32	227·76	—	1338·2	82·9

TABLE OF SPECIFIC GRAVITIES AND PERCENTAGE OF AMMONIA.
Carius.

Degrees Beaumé.	Specific Gravity.	Percentage.	Degrees Beaumé.	Specific Gravity.	Percentage.
10	1·000	0	21	·9271	19·4
11	·9929	1·8	22	·921	21·4
12	·9859	3·3	23	·915	23·4
13	·979	5·	24	·909	25·3
14	·9722	6·7	25	·9032	27·7
15	·9655	8·4	26*	·8974	30·1
16	·9589	10·	27	·8917	32·5
17	·9523	11·9	28	·886	35·2
18	·9459	13·7	29	·8805	..
19	·9395	15·5	30	·875	..
20	·9333	17·4	..	..	..

* Known by the trade as 29½ per cent.

NOTE.—The specific gravity of pure anhydrous ammonia is ·623.

USEFUL DATA.

Lbs. per sq. inch by ·070308 = kg. per sq. c/m.

" " ·000703 = " m/m.

Tons per sq. inch by 157·49 = " c/m.

" " 1·5749 = " m/m.

Kg. per sq. c/m by 14·2232 = lbs. per sq. inch.

Kg. per sq. metre by ·205 = " foot.

KILOS PER SQ. M/M INTO TONS PER SQ. IN.

Kilos. per Sq. M/M.	= Tons per Sq. in.	Kilos. per Sq. M/M.	= Tons per Sq. in.
26	16·510	46	29·210
27	17·145	47	29·845
28	17·780	48	30·480
29	18·415	49	31·115
30	19·050	50	31·750
31	19·685	51	32·385
32	20·320	52	33·020
33	20·955	53	33·655
34	21·590	54	34·290
35	22·225	55	34·925
36	22·860	56	35·560
37	23·495	57	36·195
38	24·130	58	36·830
39	24·765	59	37·465
40	25·400	60	38·100
41	26·035	61	38·735
42	26·670	62	39·370
43	27·305	63	40·005
44	27·940	64	40·640
45	28·575	65	41·275

BOILING POINT, LATENT HEAT, ETC., OF ANHYDROUS AMMONIA.—Redwood.

Pressure.			Boiling Point. Fahr.	Latent Heat.	Pressure.			Boiling Point. Fahr.	Latent Heat.
Absolute.	Gauge.	Absolute.			Gauge.				
10.69	-4.01	-40	579.7	579.7	37.00	22.30	8.2	550.5	38.6
11.00	-3.70	-39	579.1	579.1	38.55	23.85	10	549.3	56.30
12.31	-2.39	-35	576.7	576.7	39.00	24.30	10.6	549.0	58.30
13.00	-1.70	-32.7	575.3	575.3	40.00	25.30	12	548.1	59.37
14.13	-0.57	-30	573.7	573.7	42.30	27.50	14	546.8	60.30
14.70	+0.00	-28.5	573.2	573.2	42.93	28.23	15	546.3	61.30
15.00	+0.30	-27.8	571.7	571.7	44.00	29.30	16	545.6	63.30
16.17	1.47	-25	570.7	570.7	45.00	30.30	17	545.0	65.00
16.71	2.01	-22	568.9	568.9	46.00	31.30	18.1	544.3	66.30
17.00	2.30	-21.8	568.7	568.7	47.00	32.30	19.1	543.7	67.30
18.45	3.75	-20	567.7	567.7	47.95	33.25	20	543.1	68.30
19.00	4.30	-18.9	567.0	567.0	49.00	34.30	21.1	542.5	69.30
20.99	6.29	-15	564.6	564.6	50.00	35.30	22.3	541.7	70.30
21.27	6.57	-13	563.4	563.4	50.67	35.97	23	541.3	71.30
22.10	7.40	-12	562.8	562.8	51.00	36.30	23.3	541.1	72.30
22.93	8.23	-11	562.2	562.2	52.00	37.30	24	540.7	73.30
23.77	9.07	-10	561.6	561.6	53.43	38.73	25	540.0	74.30

M M

BOILING POINT, LATENT HEAT, ETC., OF ANHYDROUS AMMONIA.—*Redwood.*—(Continued).

Pressure.			Boiling Point. ° Fahr.	Latent Heat.		Pressure.		Boiling Point. ° Fahr.	Latent Heat.	
Absolute.	Gauge.					Absolute.	Gauge.			
24.56	9.86		—	561.0	25.5	54.00	39.30	69.0	514.1	
25.32	10.62		9	560.4	26.3	55.00	40.30	68.0	512.8	
26.08	11.38		7	559.8	27.1	56.00	41.30	69.0	512.2	
26.84	12.14		6	559.2						
27.57	12.87		5	558.5	28	57.00	42.30	70.0	511.5	
28.30	13.60		4	557.9	28.9	58.00	43.30		508.6	
28.64	13.94		3	557.3	30.0	59.41	44.71		508.3	
29.17	14.47		2	556.7	30.6	60.00	45.30		507.0	
29.76	15.06		1	556.1	32.0	61.50	46.80		506.0	
30.37	15.67		0	555.5	32.3	62.00	47.30		504.7	
		(zero)								
31.00	16.30	+		554.6	33.0	63.00	48.30		503.5	
32.00	17.30	3.5		553.4	33.7	64.00	49.30		502.1	
33.66	18.96	5		552.4	35.0	65.93	51.23		501.8	
35.00	20.30	5.9		551.9	35.8	67.00	52.30		501.6	
36.00	21.30	7		551.2	37.2	69.00	54.30		501.2	

SOLUBILITY OF AMMONIA IN WATER AT DIFFERENT TEMPERATURES.—*Sims.*

Degrees Fahr.	Sb. of NH_3 to 1 lb. of Water.	Volume of NH_3 in 1 Volume of Water.	Degrees Fahr.	Sb. of NH_3 to 1 lb. of Water.	Volume of NH_3 in 1 Volume of Water.
32°	0·899	1,180	125°	0·274	359
35°	0·853	1,120	129°	0·265	348
39°	0·809	1,062	132°	0·256	336
42°	0·765	1,005	136°	0·247	324
46°	0·724	951	140°	0·238	312
50°	0·684	898	143°	0·229	301
53°	0·646	848	147°	0·220	289
57°	0·611	802	150°	0·211	277
60°	0·578	759	154°	0·202	265
64°	0·546	717	158°	0·194	254
68°	0·518	683	161°	0·186	244
71°	0·490	643	165°	0·178	234
75°	0·467	613	168°	0·170	223
78°	0·446	585	172°	0·162	212
82°	0·426	559	176°	0·154	202
86°	0·408	536	179°	0·146	192
89°	0·393	516	183°	0·138	181
93°	0·378	496	186°	0·130	170
96°	0·363	478	190°	0·122	160
100°	0·350	459	194°	0·114	149
104°	0·338	444	197°	0·106	139
107°	0·326	428	201°	0·098	128
111°	0·315	414	204°	0·090	118
114°	0·303	399	208°	0·082	107
118°	0·294	386	212°	0·074	97
122°	0·284	373	..	..	..

SOLUBILITY OF AMMONIA IN WATER AT DIFFERENT TEMPERATURES.—*Roscoe.*

Degrees Celsius.	Degrees Fahrenheit.	lbs. of NH_3 to one lb. of Water.	Degrees Celsius.	Degrees Fahrenheit.	lbs. of NH_3 to one lb. of Water.
0	32°	0·875	28	82°	0·426
2	35°	0·833	30	86°	0·403
4	39°	0·792	32	89°	0·382
6	42°	0·751	34	93°	0·362

SOLUBILITY OF AMMONIA IN WATER AT DIFFERENT TEMPERATURES.—*Roscoe.*—(Continued.)

Degrees Celsius.	Degrees Fahrenheit.	lbs. of NH_3 to one lb. of Water.	Degrees Celsius.	Degrees Fahrenheit.	lbs. of NH_3 to one lb. of Water.
8	46.4	0.713	36	96.8	0.343
10	50.	0.679	38	100.4	0.324
12	53.6	0.645	40	104.0	0.307
14	57.2	0.612	42	107.6	0.290
16	60.8	0.582	44	111.2	0.275
18	64.4	0.554	46	114.8	0.259
20	68.	0.526	48	118.4	0.244
22	71.6	0.499	50	122.	0.229
24	75.2	0.474	52	125.6	0.214
26	78.8	0.449	54	129.2	0.200
			56	132.8	0.186

STRENGTH OF LIQUOR AMMONIA.

Percentage of Ammonia by Weight.	Specific Gravity.	Degrees Beaumé, Water, 10.
0	1.000	10
2	0.986	12
4	0.979	13
6	0.972	14
8	0.966	15
10	0.960	16
12	0.953	17.1
14	0.945	18.3
16	0.938	19.5
18	0.931	20.7
20	0.925	21.7
22	0.919	22.8
24	0.913	23.9
26	0.907	24.8
28	0.902	25.7
30	0.897	26.6
32	0.892	27.5
34	0.888	28.4
36	0.884	29.3
38	0.880	30.2

YIELD, ETC., OF ANHYDROUS AMMONIA FROM AMMONIA
SOLUTIONS.—*Redwood.*

SOLUTION.			ANHYDROUS AMMONIA.			
Degrees Beaumé.	Weight of Ice.		Volume of Gas (at 32° Fahr., and Atmospheric pressure) in one volume of the Solu- tion.	lbs. in one gallon of the Solution.	Per cent. by Volume.	Per cent. by Weight.
	lbs. per Gallon.	Boiling Point.				
34.7	7.09	26°	494	3.077	59.5	43.4
32.8	7.17	38°	456	2.841	54.9	39.6
31.0	7.25	50°	419	2.610	50.7	36.0
29.0	7.34	62°	382	2.379	46.0	32.5
27.2	7.42	74°	346	2.156	41.7	29.1
26.0	7.48	83°	320	1.993	38.5	26.6
25.6	7.50	86°	311	1.937	37.5	25.8
23.7	7.59	98°	277	1.726	33.4	22.8
22.2	7.67	110°	244	1.520	29.4	19.7

TEMPERATURES TO WHICH AMMONIA GAS IS RAISED BY
COMPRESSION.

Temperature of Suction.	Absolute Con- densing pressure.	ABSOLUTE SUCTION PRESSURE.					
		20	25	30	35	40	45
° Fahr.	90	199	165	138	116	98	83
	100	216	181	153	131	113	97
	110	232	196	166	145	126	109
	120	245	211	181	158	138	121
	130	261	222	193	169	150	132
	140	273	235	205	181	161	143
	150	285	246	216	191	171	153
	160	296	257	226	202	181	163

TEMPERATURES TO WHICH AMMONIA GAS IS RAISED BY
COMPRESSION.—(Continued.)

Temperature of Suction.	Absolute Con- densing pressure	ABSOLUTE SUCTION PRESSURE.					
		20	25	30	35	40	45
5° Fahr.	90	266	172	145	123	104	89
	100	223	186	160	138	119	103
	110	239	203	174	151	132	115
	120	254	218	188	163	145	127
	130	268	230	200	176	156	139
	140	281	242	212	188	167	150
	150	293	254	223	198	178	160
	160	305	265	234	209	188	170
10° Fahr.	90	213	178	151	129	110	96
	100	231	195	167	144	125	109
	110	247	210	181	158	139	122
	120	261	226	195	171	151	134
	130	275	237	207	183	163	145
	140	289	250	219	195	174	156
	150	301	262	231	205	185	167
	160	313	273	241	216	195	176
15° Fahr.	90	221	185	158	135	117	101
	100	238	202	173	151	131	115
	110	254	217	188	164	145	128
	120	269	233	202	178	158	140
	130	283	245	214	191	170	152
	140	297	257	226	202	181	163
	150	309	269	238	213	192	173
	160	321	281	249	223	202	183
20° Fahr.	90	228	192	164	141	123	106
	100	245	209	180	157	137	121
	110	262	224	195	171	150	134
	120	277	240	209	185	164	146
	130	291	252	222	197	176	158
	140	305	265	234	209	188	169
	150	317	277	245	220	198	180
	160	329	288	256	230	209	190
25° Fahr.	90	235	199	171	148	129	111
	100	252	216	187	163	144	127
	110	269	230	200	178	155	140
	120	284	247	216	191	171	153
	130	299	259	229	204	183	165
	140	313	271	241	216	194	176
	150	325	284	253	227	205	187
	160	338	296	264	237	216	197

TEMPERATURES TO WHICH AMMONIA GAS IS RAISED BY
COMPRESSION.—(Continued.)

Temperature of Suction.	Absolute Con- densing pressure.	ABSOLUTE SUCTION PRESSURE.					
		20	25	30	35	40	45
30° Fahr.	90	242	206	177	154	134	118
	100	260	223	193	170	150	133
	110	277	239	208	184	164	147
	120	292	255	223	198	177	159
	130	307	267	236	211	190	171
	140	321	280	248	223	201	183
	150	334	292	260	234	212	193
	160	346	304	271	245	223	203
32° Fahr.	90	245	209	179	157	137	121
	100	263	225	196	173	153	135
	110	280	241	211	187	167	149
	120	295	256	226	201	180	162
	130	310	270	239	213	192	174
	140	324	283	251	226	204	185
	150	337	295	263	237	215	196
	160	350	307	274	248	226	206
35° Fahr.	90	249	213	182	160	141	124
	100	268	229	200	176	156	139
	110	286	246	215	191	170	153
	120	300	260	230	205	184	166
	130	315	274	243	217	196	178
	140	329	288	255	230	208	189
	150	341	300	268	241	219	200
	160	354	312	279	252	230	210

METRIC SYSTEM.

The Unit of Weight is the Gramme = $\frac{1}{160}$ drams.

The Decagramme	.	.	.	10 grammes
„ Hectogramme	.	.	.	100 „
„ Kilogramme	.	.	.	1,000 „
„ Myriagramme	.	.	.	10 kilogrammes
„ Metric Quintal	.	.	.	100 „
„ Millier	.	.	.	1,000 „
„ Decigramme	.	.	.	$\frac{1}{10}$ of a gramme
„ Centigramme	.	.	.	$\frac{1}{100}$ „
„ Milligramme	.	.	.	$\frac{1}{1000}$ „

A Cubic Centimetre of distilled water at 39 $\frac{1}{4}$ ° F. weighs
1 gramme in a vacuum.

PROPERTIES OF SATURATED AMMONIA GAS.

DE VOLSON WOOD AND GEO. DAVIDSON.

Gauge pressure lbs. per sq. inch.	Absolute Pressure, lbs. per sq. inch.	Tem. Degrees F.	Absolute Temp. Degrees F.	Latent Heat of Evaporation in Thermal Units.	Volume of 1 lb. vapour in cubic ft.	Weight of 1 cubic ft. of vapour in lbs.	Volume of 1 lb. of liquid in cubic ft.	Weight of 1 cubic ft. of liquid in lbs.
-4.01	10.69	-40	420.66	579.67	24.38	.0410	.0234	42.589
-2.39	12.31	-35	425.66	576.68	21.32	.0469	.0236	42.337
-0.57	14.13	-30	430.66	573.69	18.69	.0535	.0237	42.123
+1.47	16.17	-25	435.66	570.68	16.44	.0608	.0238	41.858
3.75	18.45	-20	440.66	567.67	14.51	.0690	.0240	41.615
6.29	20.99	-15	445.66	564.64	12.83	.0779	.0241	41.374
9.10	23.80	-10	450.66	561.61	11.38	.0878	.0243	41.135
12.22	26.92	-5	455.66	558.56	10.12	.0988	.0244	40.900
15.67	30.37	0	460.66	555.50	9.03	.1107	.0246	40.650
19.46	34.16	+5	465.66	552.43	8.07	.1240	.0247	40.404
23.64	38.34	10	470.66	549.35	7.23	.1383	.0249	40.160
28.24	42.94	15	475.66	546.26	6.49	.1541	.0250	39.920
33.25	47.95	20	480.66	543.15	5.84	.1711	.0252	39.682
38.73	53.43	25	485.66	540.03	5.27	.1897	.0253	39.432
44.72	59.42	30	490.66	536.91	4.76	.2099	.0255	39.200
51.22	65.92	35	495.66	533.78	4.31	.2318	.0256	38.940
58.29	72.99	40	500.66	530.63	3.91	.2554	.0258	38.684
65.96	80.66	45	505.66	527.47	3.56	.2809	.0260	38.461
74.26	88.96	50	510.66	524.30	3.24	.3084	.0261	38.226
83.22	97.92	55	515.66	521.12	2.96	.3380	.0263	37.994
92.89	107.59	60	520.66	517.93	2.70	.3697	.0265	37.736
103.33	118.03	65	525.66	514.73	2.48	.4039	.0266	37.481
114.49	129.19	70	530.66	511.52	2.27	.4401	.0268	37.230
126.52	141.22	75	535.66	508.29	2.09	.4791	.0270	36.995
139.40	154.10	80	540.66	505.05	1.92	.5205	.0272	36.751
153.18	167.00	85	545.66	501.81	1.77	.5649	.0273	36.509
167.92	182.62	90	550.66	498.55	1.64	.6120	.0275	36.258
183.65	198.35	95	555.66	495.29	1.51	.6622	.0277	36.023
200.42	215.12	100	560.66	492.01	1.39	.7153	.0279	35.778
218.28	232.98	105	565.66	488.72	1.289	.7757	.0281	
237.27	251.97	110	570.66	485.42	1.203	.8312	.0283	
258.7	272.14	115	575.66	482.41	1.121	.8912	.0285	
275.79	293.49	120	580.66	478.79	1.041	.9608	.0287	
301.46	316.16	125	585.66	475.45	.9699	1.0310	.0289	
325.72	340.42	130	590.66	472.11	.9051	1.1048	.0291	
350.46	365.16	135	595.66	468.75	.8457	1.1824	.0293	
377.52	392.22	140	600.66	465.39	.7910	1.2642	.0295	
405.79	420.49	145	605.66	462.01	.7408	1.3497	.0297	
435.5	450.20	150	610.66	458.62	.6946	1.4396	.0299	
466.84	481.54	155	615.66	455.22	.6511	1.5358	.0302	
499.70	514.50	160	620.66	451.81	.6128	1.6318	.0304	
534.34	549.04	165	625.66	448.39	.5765	1.7344	.0306	

One atmosphere in this table is equal to a pressure of a column of mercury 29.9 ins. high.

Specific heat of ammonia gas and vapour at constant pressure . . . = 0.508

The same at constant volume = 0.3913

Weight of 1 cubic ft. liquid ammonia at 32° Fahr. = 39.108 lbs.

Volume of 1 lb. liquid ammonia at 32° Fahr. = 0.02557 cu. ft.

Specific heat of liquid ammonia = 1.01235 + 0.008378 t, °.

COMPARISON BETWEEN THE SCALES OF CENTIGRADE AND
FAHRENHEIT THERMOMETERS.

Centigrade.	Fahrenheit.	Centigrade.	Fahrenheit.
-73	-100.0	-24	-11.2
-72	-97.6	-23	-9.3
-71	-95.8	-22	-7.6
-70	-94.0	-21	-5.8
-69	-92.2	-20	-4.0
-68	-90.4	-19	-2.2
-67	-88.6	-18	-0.4
-66	-86.8	-17	+ 1.4
-65	-85.0	-16	+ 3.2
-64	-83.2	-15	+ 5.0
-63	-81.4	-14	+ 6.8
-62	-79.6	-13	+ 8.6
-61	-77.8	-12	+ 10.4
-60	-76.0	-11	+ 12.2
-59	-74.2	-10	+ 14.0
-58	-72.4	-9	+ 15.8
-57	-70.7	-8	+ 17.6
-56	-68.8	-7	+ 19.4
-55	-67.0	-6	+ 21.2
-54	-65.3	-5	+ 23.0
-53	-63.4	-4	+ 24.8
-52	-61.6	-3	+ 26.6
-51	-59.8	-2	+ 28.4
-50	-58.0	-1	+ 30.2
-49	-56.2	0	+ 32.0
-48	-54.4	+ 1	+ 33.8
-47	-52.6	+ 2	+ 35.6
-46	-50.8	+ 3	+ 37.4
-45	-49.0	+ 4	+ 39.2
-44	-47.2	+ 5	+ 41.0
-43	-45.4	+ 6	+ 42.8
-42	-43.6	+ 7	+ 44.6
-41	-41.8	+ 8	+ 46.4
-40	-40.0	+ 9	+ 48.2
-39	-38.2	+ 10	+ 50.0
-38	-36.4	+ 11	+ 51.8
-37	-34.6	+ 12	+ 53.6
-36	-32.8	+ 13	+ 55.4
-35	-31.0	+ 14	+ 57.2
-34	-29.2	+ 15	+ 59.0
-33	-27.4	+ 16	+ 60.8
-32	-25.6	+ 17	+ 62.6
-31	-23.8	+ 18	+ 64.4
-30	-22.0	+ 19	+ 66.2
-29	-20.2	+ 20	+ 68.0
-28	-18.4	+ 21	+ 69.8
-27	-16.6	+ 22	+ 71.6
-26	-14.8	+ 23	+ 73.4
-25	-13.0	+ 24	+ 75.2

COMPARISON OF VARIOUS HYDROMETER SCALES.—*Yarvan.*

Degrees Reaumé.	Specific Gravities.		Degrees Centimetric 15.5° C.	Degrees Twaddell 60 Fahr. 1° = 800 (Sp. gr. — 1).	Degrees Brix. Official Prussian Hydrometer 15.6° C. 400 Sp. gr. = 400—R ₂ °	Degrees Beck 12.5° C. Sp. gr. = 170—B ₂ °	Degrees Brix Saccharimetric (per cent. Sugar).	Gay-Lussac (Centigrade). Sp. gr. = 100—C°
	Standard adopted by U.S. Chem. Mfg. Ass. 15.5° Sp. gr. = 145.04	Modulus 145.38. Custom in France.						
0	1.000	1.0000	0.0	0.0	0.0	0.0	0.0	0.0
1	1.007	1.0070	0.7	1.4	2.8	1.2	1.8	0.4
2	1.014	1.0140	1.4	2.8	5.5	2.3	3.6	1.4
3	1.021	1.0215	2.1	4.2	8.2	3.5	5.4	2.1
4	1.028	1.0285	2.8	5.6	10.9	4.6	7.1	2.7
5	1.036	1.0380	3.6	7.2	13.9	5.9	9.0	3.5
6	1.043	1.0435	4.3	8.6	16.5	7.0	10.7	4.1
7	1.051	1.0510	5.1	10.2	19.4	8.3	12.6	4.8
8	1.058	1.0585	5.8	11.6	21.9	9.3	14.3	5.5
9	1.066	1.0665	6.6	13.2	24.8	10.4	16.1	6.2
10	1.074	1.0745	7.4	14.8	27.5	11.7	18.0	6.9
11	1.082	1.0825	8.2	16.4	30.3	12.9	19.8	7.6
12	1.090	1.0905	9.0	18.0	33.0	14.1	21.5	8.3
13	1.098	1.0990	9.8	19.6	36.0	15.2	23.3	8.9
14	1.107	1.1075	10.7	21.4	39.0	16.4	25.2	9.7
15	1.115	1.1160	11.5	23.0	41.3	17.6	27.0	10.3
16	1.124	1.1245	12.4	24.8	44.2	18.8	28.9	11.0
17	1.133	1.1335	13.3	26.6	46.5	20.0	30.7	11.7
18	1.142	1.1425	14.2	28.4	49.7	21.2	32.6	12.4
19	1.151	1.1515	15.1	30.2	52.5	22.3	34.4	13.1
20	1.160	1.1607	16.0	32.0	55.2	23.5	36.2	13.8
21	1.169	1.1705	16.9	33.8	57.8	24.6	38.0	14.5
22	1.179	1.1795	17.9	35.8	60.7	25.8	40.0	15.2
23	1.188	1.1895	18.8	37.6	63.3	26.9	41.7	15.8
24	1.198	1.1995	19.8	39.6	66.1	28.1	43.6	16.5
25	1.208	1.2095	20.8	41.6	68.9	29.3	45.5	17.2
26	1.218	1.2195	21.8	43.6	71.6	30.4	47.3	17.9
27	1.229	1.2300	22.9	45.8	74.5	31.7	49.4	18.6
28	1.239	1.2405	23.9	47.8	77.2	32.8	51.2	19.3
29	1.250	1.2515	25.0	50.0	79.3	34.0	53.2	20.0
30	1.261	1.2625	26.1	52.2	82.8	35.2	55.1	20.7
31	1.272	1.2735	27.2	54.4	85.5	36.4	57.0	21.4
32	1.283	1.2850	28.3	56.6	88.3	37.5	58.9	22.1
33	1.295	1.2960	29.5	59.0	91.1	38.8	60.9	22.8
34	1.306	1.3080	30.6	61.2	93.7	39.9	62.7	23.4
35	1.318	1.3200	31.8	63.6	96.5	41.0	64.7	24.1

COMPARISON OF VARIOUS HYDROMETER SCALES.—Yaryan.—
(Continued).

Degrees Baumé.	Specific Gravities.		Degrees Densimetric 15° C.	Degrees Twaddell 60 Fahr. 1° = 200 (Sp. gr. —1).	Degrees Brix. Official Prussian Hydrometer 15° C. Sp. gr. = $\frac{400}{100 - Bx^{\circ}}$	Degrees Beck 12° C. Sp. gr. = $\frac{170}{170 - Bk^{\circ}}$	Degrees Brix Saccharimetric (per cent. Sugar).	Gay-Lussac (Centigrade). Sp. gr. = $\frac{100 - Cs}{100}$
	Standard adopted by U.S. Chem. Mfg. Ass. 15°.	Modulus 145° 38'. Custom in France.						
36	1.330	1.3320	33.0	66.0	99.2	42.2	66.7	24.8
37	1.342	1.3445	34.2	68.4	101.9	43.3	68.6	25.5
38	1.355	1.3570	35.5	71.0	104.7	44.6	70.7	26.2
39	1.368	1.3700	36.8	73.6	107.6	45.8	72.7	26.9
40	1.381	1.3830	38.1	76.2	110.3	46.9	74.7	27.6
41	1.394	1.3955	39.4	78.8	113.5	48.0	76.7	28.3
42	1.408	1.4100	40.8	81.6	115.9	49.3	78.8	28.9
43	1.421	1.4240	42.1	84.2	118.5	50.4	80.8	29.6
44	1.436	1.4380	43.5	87.0	121.3	51.5	82.9	30.3
45	1.450	1.4525	45.0	90.0	124.1	52.8	85.1	31.0
46	1.465	1.4675	46.5	93.0	126.7	53.9	87.2	31.7
47	1.479	1.4827	48.0	96.0	129.7	55.1	89.4	32.4
48	1.495	1.4980	49.5	99.0	132.4	56.3	91.5	33.1
49	1.510	1.5135	51.0	102.0	135.1	57.4	93.6	33.8
50	1.526	1.5300	52.6	105.2	137.9	58.6	..	34.5
51	1.542	1.5460	54.2	108.4	140.6	59.8	..	35.2
52	1.559	1.5630	55.9	111.8	143.4	61.0	..	35.9
53	1.576	1.5800	57.6	115.2	146.2	62.2	..	36.6
54	1.593	1.5965	59.3	118.6	148.9	63.3	..	37.2
55	1.611	1.6150	61.1	122.2	151.7	64.5	..	37.9
56	1.629	1.6335	62.9	125.8	154.5	65.7	..	38.6
57	1.648	1.6520	64.8	129.6	157.3	66.9	..	39.3
58	1.666	1.6715	66.7	133.4	160.0	68.0	..	40.1
59	1.686	1.6910	68.6	137.2	162.8	69.2	..	40.7
60	1.706	1.7110	70.6	141.2	165.5	70.4	..	41.4
61	1.726	1.7315	72.6	145.2	168.3	71.5	..	42.1
62	1.747	1.7525	74.7	149.4	171.0	72.7	..	42.8
63	1.768	1.7740	76.8	153.6	173.8	73.8	..	43.4
64	1.790	1.7950	79.0	158.0	176.5	75.0	..	44.1
65	1.812	1.8185	81.2	162.4	179.3	76.2	..	44.8
66	1.835	1.8420	83.5	167.0	182.0	77.4	..	45.5
67	1.859	1.8660	85.9	171.8	184.8	78.6	..	46.2
68	1.883	1.8910	88.3	176.6	187.5	79.7	..	46.9
69	1.907	1.9151	90.7	181.4	190.2	80.9	..	47.6
70	1.933	1.9410	93.3	186.6	193.0	82.1	..	48.3
72.5	2.000	2.0085	100.0	200.0	200.0	85.0	..	50.0

PRESSURE OF WATER.

Worthington Pumping Engine Company.

The pressure of water in pounds per square inch for every foot in height to 270 ft. By this Table, from the pounds pressure per square inch the feet head is readily obtained, and *vice versa*.

Feet Head.	Pressure per sq. in.	Feet Head.	Pressure per sq. in.	Feet Head.	Pressure per sq. in.	Feet Head.	Pressure per sq. in.	Feet Head.	Pressure per sq. in.	Feet Head.	Pressure per sq. in.	Feet Head.	Pressure per sq. in.
1	0.43	46	19.92	91	39.42	136	58.91	181	78.40	226	97.90		
2	0.86	47	20.35	92	39.85	137	59.34	182	78.84	227	98.33		
3	1.30	48	20.79	93	40.28	138	59.77	183	79.27	228	98.76		
4	1.73	49	21.22	94	40.72	139	60.21	184	79.70	229	99.20		
5	2.16	50	21.65	95	41.15	140	60.64	185	80.14	230	99.63		
6	2.59	51	22.09	96	41.58	141	61.07	186	80.57	231	100.06		
7	3.03	52	22.52	97	42.01	142	61.51	187	81.00	232	100.49		
8	3.46	53	22.95	98	42.45	143	61.94	188	81.43	233	100.93		
9	3.89	54	23.39	99	42.88	144	62.37	189	81.87	234	101.36		
10	4.33	55	23.82	100	43.31	145	62.81	190	82.30	235	101.79		
11	4.76	56	24.26	101	43.75	146	63.24	191	82.73	236	102.23		
12	5.20	57	24.69	102	44.18	147	63.67	192	83.17	237	102.66		
13	5.63	58	25.12	103	44.61	148	64.10	193	83.60	238	103.09		
14	6.06	59	25.55	104	45.05	149	64.54	194	84.03	239	103.53		
15	6.49	60	25.99	105	45.48	150	64.97	195	84.47	240	103.96		
16	6.93	61	26.42	106	45.91	151	65.40	196	84.90	241	104.39		
17	7.36	62	26.85	107	46.34	152	65.84	197	85.33	242	104.83		
18	7.79	63	27.29	108	46.78	153	66.27	198	85.76	243	105.26		
19	8.22	64	27.72	109	47.21	154	66.70	199	86.20	244	105.69		
20	8.66	65	28.15	110	47.64	155	67.14	200	86.63	245	106.13		
21	9.09	66	28.58	111	48.08	156	67.57	201	87.07	246	106.56		
22	9.53	67	29.02	112	48.51	157	68.00	202	87.50	247	106.99		
23	9.96	68	29.45	113	48.94	158	68.43	203	87.93	248	107.43		
24	10.39	69	29.88	114	49.38	159	68.87	204	88.36	249	107.86		
25	10.82	70	30.32	115	49.81	160	69.31	205	88.80	250	108.29		
26	11.26	71	30.75	116	50.24	161	69.74	206	89.23	251	108.73		
27	11.69	72	31.18	117	50.68	162	70.17	207	89.66	252	109.16		
28	12.12	73	31.62	118	51.11	163	70.61	208	90.10	253	109.59		
29	12.55	74	32.05	119	51.54	164	71.04	209	90.53	254	110.03		
30	12.99	75	32.48	120	51.98	165	71.47	210	90.96	255	110.46		
31	13.42	76	32.92	121	52.41	166	71.91	211	91.39	256	110.89		
32	13.86	77	33.35	122	52.84	167	72.34	212	91.83	257	111.32		
33	14.29	78	33.78	123	53.28	168	72.77	213	92.26	258	111.76		
34	14.72	79	34.21	124	53.71	169	73.20	214	92.69	259	112.19		
35	15.16	80	34.65	125	54.15	170	73.64	215	93.13	260	112.62		
36	15.59	81	35.08	126	54.58	171	74.07	216	93.56	261	113.06		
37	16.02	82	35.52	127	55.01	172	74.50	217	93.99	262	113.49		
38	16.45	83	35.95	128	55.44	173	74.94	218	94.43	263	113.92		
39	16.89	84	36.39	129	55.88	174	75.37	219	94.86	264	114.36		
40	17.32	85	36.82	130	56.31	175	75.80	220	95.30	265	114.79		
41	17.75	86	37.25	131	56.74	176	76.23	221	95.73	266	115.22		
42	18.19	87	37.68	132	57.18	177	76.67	222	96.16	267	115.66		
43	18.62	88	38.12	133	57.61	178	77.10	223	96.59	268	116.09		
44	19.05	89	38.55	134	58.04	179	77.53	224	97.03	269	116.52		
45	19.49	90	39.98	135	58.48	180	77.97	225	97.46	270	116.96		

DIAMETERS, AREAS, AND DISPLACEMENTS.

Worthington Pumping Engine Company.

Diameter.	Area.	Displacement in Imperial Gallons per foot of Travel.	Diameter.	Area.	Displacement in Imperial Gallons per foot of Travel.	Diameter.	Area.	Displacement in Imperial Gallons per foot of Travel.
1	0.122	0.005	7	41.28	1.783	18	261.5	11.297
1	0.490	0.021	7	44.17	1.908	18	268.8	11.612
1	1.104	0.047	7	47.17	2.037	18	276.1	11.927
1	1.963	0.084	8	50.26	2.171	19	283.5	12.247
1	3.068	0.132	8	53.45	2.309	19	291.0	12.571
1	4.417	0.190	8	56.74	2.451	19	298.6	12.900
1	6.013	0.259	8	60.13	2.597	19	306.3	13.232
1	7.854	0.339	9	63.61	2.747	20	314.1	13.569
1	9.940	0.429	9	67.20	2.903	20	330.0	14.256
1	1.227	0.530	9	70.88	3.062	21	346.3	14.960
1	1.484	0.641	9	74.66	3.225	21	363.0	15.681
1	1.767	0.763	10	78.54	3.393	22	380.1	16.420
1	2.073	0.895	10	82.51	3.564	22	397.6	17.176
1	2.405	1.038	10	86.59	3.740	23	415.4	17.945
1	2.761	1.192	10	90.76	3.920	23	433.7	18.735
2	3.141	1.356	11	95.03	4.105	24	452.3	19.539
2	3.546	1.531	11	99.40	4.294	24	471.4	20.364
2	3.976	1.717	11	103.8	4.484	25	490.8	21.202
2	4.430	1.913	11	108.4	4.682	25	510.7	22.062
2	4.908	2.120	12	113.0	4.881	26	530.9	22.935
2	5.411	2.337	12	117.8	5.088	26	551.5	23.824
2	5.939	2.565	12	122.7	5.300	27	572.5	24.732
2	6.491	2.804	12	127.6	5.512	27	593.9	25.656
3	7.068	3.053	13	132.7	5.732	28	615.7	26.598
3	7.669	3.313	13	137.8	5.952	28	637.9	27.567
3	8.295	3.583	13	143.1	6.182	29	660.5	28.533
3	8.946	3.864	13	148.4	6.410	29	683.4	29.522
3	9.621	4.156	14	153.9	6.649	30	706.8	30.533
3	10.32	4.458	14	159.4	6.886	31	754.8	32.607
3	11.04	4.769	14	165.1	7.132	32	804.2	34.741
3	11.79	5.093	14	170.8	7.388	33	855.3	36.949
4	12.56	5.426	15	176.7	7.633	34	907.9	39.221
4	14.18	6.125	15	182.6	7.888	35	962.1	41.562
4	15.90	6.868	15	188.6	8.147	36	1017.9	43.973
4	17.72	7.655	15	194.8	8.415	37	1075.2	46.448
5	19.63	8.480	16	201.0	8.683	38	1134.1	48.993
5	21.54	9.348	16	207.3	8.955	39	1194.6	51.607
5	23.75	1.026	16	213.8	9.236	40	1256.6	54.259
5	25.96	1.121	16	220.3	9.516	41	1320.3	57.037
6	28.27	1.221	17	226.9	9.802	42	1385.4	59.849
6	30.67	1.325	17	233.7	10.095	43	1452.2	62.735
6	33.18	1.433	17	240.5	10.389	44	1520.5	65.686
6	35.78	1.545	17	247.4	10.687	45	1590.4	68.688
7	38.48	1.662	18	254.4	10.990	46	1661.9	71.794

In estimating the capacity of Worthington (and other duplex) Pumps (*i.e.*, the delivery in gallons per minute or per hour) at a given rate of piston speed, it should be noted that they have *two* double-acting water plungers: the capacity, therefore, is double that of any ordinary double-acting pump of same size, or four times as large as a single-acting pump.

TABLE OF POWER REQUIRED TO RAISE WATER FROM DEEP WELLS.—*Appleby.*

Gallons of water raised per hour	200	350	500	650	800	1,000
Height of lift for 1 man working on crank, in feet	90	52	36	28	22	18
Height of lift for 1 donkey working on gin, in feet	180	102	72	56	45	36
Height of lift for 1 horse working on gin, in feet	630	357	252	196	154	126
Height of lift for 1 horse-power steam engine, in feet	990	561	396	308	242	198

TABLE GIVING QUANTITY OF WATER DISCHARGED PER MINUTE BY BARREL PUMPS.—*Hutton.*

Diameter of pump.	Length of stroke.	Single barrel.		Double barrel.		Treble barrel.	
		30 strokes per min.	40 strokes per min.	30 strokes per min.	40 strokes per min.	30 strokes per min.	40 strokes per min.
Inches.	Inches.	Galls.	Galls.	Galls.	Galls.	Galls.	Galls.
1½	9	1½	2½	3½	4½	4½	6½
2	9	3	4	6	8	9	12
2½	9	4½	6½	9½	12	14	19
3	9	6½	9	13½	18	20	27
3½	9	9½	12½	18½	25	28	37
4	9	12½	16	24½	32	36	48
4½	9	15½	20½	32	42	46	62
5	9	19	25½	38	50	57	76
5½	9	23½	32	46½	62	69	92
6	9	27½	37	55	73	82	110
2	10	3½	4½	6	9	10	13
2½	10	5½	7	10	14	15	22
3	10	7½	10	15	20	22	30
3½	10	10½	13½	20	27	32	42
4	10	13½	18	27	36	40	54
4½	10	17	23	34	45	52	68
5	10	22	28	42	56	63	84
5½	10	25½	34	51	68	77	102
6	10	30½	40	62	82	92	122
2	12	4	5	8	10	12	16
2½	12	6½	8	12	17	19	25
3	12	9	12	18	24	27	36
3½	12	12½	16	24	33	37	50
4	12	16½	22	32	43	49	65
4½	12	20½	27	42	55	62	82
5	12	25½	33	50	68	76	100
5½	12	30½	42	62	82	92	123
6	12	36½	49	73	97	110	146
6½	12	43	57	86	114	129	172
7	12	50	66	100	134	149	199
7½	12	57	76	114	152	171	229
8	12	65	87	130	174	195	262
9	12	82	110	165	220	246	330
10	12	102	134	202	268	303	404
12	12	146	195	294	390	440	588

HYDRAULIC RAM PROPORTIONS OF THE SUPPLY PIPES AND
DELIVERY PIPES TO THE NUMBER OF GALLONS.—*Hutton.*

Number of gallons to be raised in 24 hours	500	1,000	2,500	4,000	6,000
Diameter of fall or supply pipe, in inches	1½	2	2½	3	4
Diameter of rising main or de- livery pipe, in inches . . .	¾	1	1½	2	2

EFFICIENCY OF HYDRAULIC RAMS.—*Hutton.*

Number of times the height to which the water to be raised is contained in the fall	4	5	6	7	8	9	10	11	12	13	14	15	16	18	19	20	25
Efficiency per cent. . . .	75	72	68	62	57	53	48	43	38	35	32	28	23	17	15	12	0

POWER REQUIRED TO DRIVE CENTRIFUGAL PUMPS.

Diameter of suc- tion and delivery pipes in inches.	Quantity of water delivered per minute, in gallons.	Horse-power re- quired for every foot in height the water is raised.
1	16	·01
2	50	·02
3	100	·05
4	200	·08
5	300	·16
6	500	·25
7	700	·35
8	800	·40
9	1,000	·50
10	1,500	·75
11	1,800	1·
12	2,000	1·01
13	2,300	1·08
14	2,500	1·20
15	3,000	1·31
16	3,500	1·60
17	3,800	1·75
18	4,200	2·

FRICTION IN PIPES.

Friction loss in pounds pressure for each 100 ft. in length of cast-iron pipe discharging the stated quantities per minute.—*G. A. Ellis, C.E.*

Imperial Gallons.	Sizes of Pipes, inside diameters.															U.S. Gallons.
	$\frac{3}{4}$ "	1"	1 $\frac{1}{4}$ "	1 $\frac{3}{8}$ "	2"	2 $\frac{1}{2}$ "	3"	4"	6"	8"	10"	12"	14"	16"	18"	
4	3'3	0'84	'31	'12												5
8	13'	3'16	1'05	'47	'12											10
12	28'7	6'98	2'38	'97	'27											15
16	50'4	12'30	4'07	1'66	'42											20
20	78'	19'00	6'40	2'62	'67	'21	'10									25
25		27'5	9'15	3'75	'91	'30	'12									30
29		37'	12'4	5'05	1'26	'42	'14									35
33		48'	16'1	6'52	1'60	'51	'17									40
37			20'2	8'15	2'01	'62	'27									45
41			24'0	10'00	2'44	'81	'35	'09								50
42			22'40	5'32	1'80	'74	'21									55
83			39'	9'46	1'20	'31	'33	'05								100
103			48'1	14'9	4'89	1'99	'51	'07								125
124				21'2	7'00	2'85	'69	'10	'02							150
145				28'1	9'46	3'85	'95	'14	'03							175
166				37'5	12'47	5'02	1'22	'17	'05	'01						200
207				47'7	19'56	7'76	1'89	'26	'07	'04	'005					250
249					28'06	11'20	2'66	'37	'09	'04	'007					300
290					33'41	15'20	3'65	'59	'11	'05	'007					350
332					42'96	19'50	4'73	'65	'15	'06	'01					400
373						25'00	6'01	'81	'20	'08	'02					450
415						30'80	7'43	'96	'25	'09	'04	'017	'009	'005		500
621							14'32	2'21	'53	'18	'08	'036	'019	'011		750
830								3'88	'94	'32	'13	'062	'036	'020		1,000
1,037									1'40	'49	'20	'091	'046	'028		1,250
1,245									2'09	'70	'29	'135	'071	'040		1,500
1,450										'95	'38	'181	'095	'054		1,750
1,660										1'23	'49	'234	'123	'071		2,000
1,867											'63	'297	'153	'086		2,250
2,075											'77	'362	'188	'107		2,500
2,490											1'11	'515	'267	'150		3,000
2,905												'697	'365	'204		3,500
3,320												'910	'472	'265		4,000
3,735													'593	'333		4,500
4,150													'730	'408		5,000
4,980														'585		6,000

The frictional loss is greatly increased by bends or irregularities in the pipes.

DIMENSIONS, ETC., OF STANDARD WROUGHT-IRON PIPES.

	Nominal size in inches.	Inside dia. in inches.	Inside dia. ex- tra strong in ins.	Inside dia. ex- tra double strong in ins.	External dia. in inches.	Internal area in inches.	External cir- cumference in inches.	Length in ft. per sq. ft. outside surface.	Weight per ft. in lbs.	No. of threads per inch.
1		·27	·20	—	·40	0·0572	1·272	9·44	·24	27
1 1/8		·36	·29	—	·54	0·1041	1·696	7·075	·42	18
1 1/2		·49	·42	—	·67	0·1916	2·121	5·657	·56	18
2		·62	·54	·24	·84	0·3048	2·652	4·502	·85	14
2 1/2		·82	·73	·42	1·05	0·5333	3·299	3·637	1·12	14
3		1·04	·95	·58	1·31	0·8627	4·134	2·903	1·67	11 1/2
3 1/2		1·38	1·27	·88	1·66	1·496	5·215	2·301	2·25	11 1/2
4		1·61	1·49	1·08	1·90	2·038	5·969	2·01	2·69	11 1/2
4 1/2		2·06	1·93	1·49	2·37	3·355	7·461	1·611	3·66	11 1/2
5		2·46	2·31	1·75	2·87	4·783	9·032	1·328	5·77	8
5 1/2		3·06	2·89	2·28	3·50	7·388	10·996	1·091	7·54	8
6		3·54	3·35	2·71	4·00	9·887	12·566	0·955	9·05	8
6 1/2		4·02	3·81	3·13	4·50	12·730	14·137	0·849	10·72	8
7		5·04	—	—	5·56	19·990	17·475	0·629	14·56	8
7 1/2		6·	—	—	6·62	28·889	20·813	0·577	18·77	8
8		7·02	—	—	7·62	38·737	23·954	0·505	23·41	8
8 1/2		7·98	—	—	8·62	50·039	27·096	0·444	28·35	8
9		9·00	—	—	9·68	63·633	30·433	0·394	34·07	8
10		10·01	—	—	10·75	78·838	33·772	0·355	40·64	8

COMPARISON OF BRITISH MEASURES WITH U. S. STANDARDS.

United States Standard.

British Standard.

1 gill = ·833565 imperial gill.

4 gills = 1 pint = ·833565 „ pint.

2 pints = 1 quart = ·833565 „ quart

4 quarts = 1 gallon = ·833565 „ gallon.

An imperial gallon = 4·5435 litres = 1·19968 U. S. standard gallons.

An imperial gallon contains (Act of Parliament, 1878) 10 lbs. of water at a temperature of 62° Fahr. Its accepted volume is 277·274 cubic inches.

USEFUL INFORMATION.

A gallon of water contains 231 cubic in., and weighs 8 1/8 lbs. (U. S. standard).

A cubic foot of water contains 7 1/2 gallons, and weighs 62 1/2 lbs.

The friction of liquids and vapours through pipes increases as the square of the velocity.

N N

Sensible heat of a liquid is the amount indicated by the thermometer when immersed in it.

Specific heat is the amount of heat absorbed to produce sensible heat.

Latent heat is the amount of heat required for the conversion into vapour after a liquid has reached its boiling point.

The latent heat of vapour is given off whilst condensing to a liquid ; the sensible heat is retained.

One U. S. gallon = $\cdot 133$ cubic ft. ; $\cdot 83$ imperial gallon ; $3\cdot 8$ litres.

An imperial gallon contains $277\cdot 274$ cubic in. ; $\cdot 16$ cubic ft. ; $10\cdot 00$ lbs. ; $1\cdot 2$ U. S. gallons ; $4\cdot 537$ litres.

A cubic in. of water = $\cdot 03607$ lb. ; $\cdot 003607$ imperial gallon ; $\cdot 004329$ U. S. gallon.

A cubic foot of water = $6\cdot 23$ imperial gallons ; $7\cdot 48$ U. S. gallons ; $28\cdot 375$ litres ; $\cdot 0283$ cubic metre ; $62\cdot 35$ lbs. ; $\cdot 557$ cwt. ; $\cdot 028$ ton.

A lb. of water = $27\cdot 72$ cubic in. ; $\cdot 10$ imperial gallon ; $\cdot 083$ U. S. gallon ; $\cdot 4537$ kilo.

One cwt. of water = $11\cdot 2$ imperial gallons ; $13\cdot 44$ U. S. gallons ; $1\cdot 8$ cubic ft.

A ton of water = $35\cdot 9$ cubic ft. ; 224 imperial gallons ; $298\cdot 8$ U. S. gallons ; $1,000$ litres (about) ; 1 cubic metre (about).

A litre of water = $\cdot 22$ imperial gallon ; $\cdot 264$ U. S. gallon ; 61 cubic in. ; $\cdot 0353$ cubic ft.

A cubic metre of water = 220 imperial gallons ; 264 U. S. gallons ; $1\cdot 308$ cubic yard ; $61,028$ cubic in. ; $35\cdot 31$ cubic ft. ; $1,000$ kilos ; 1 ton (nearly) ; $1,000$ litres.

A kilo of water = $2\cdot 204$ lbs.

A vedros of water = $2\cdot 7$ imperial gallons.

An eimer of water = $2\cdot 7$ imperial gallons.

A pood of water = $3\cdot 6$ imperial gallons.

A Russian fathom = 7 ft.

One atmosphere = $1\cdot 054$ kilos per square in.

One ton of petroleum = 275 imperial gallons (nearly).

One ton of petroleum = 360 U. S. gallons (nearly).

A column of water 1 ft. in height = $\cdot 434$ lb. pressure per square in.

A column of water 1 metre in height = $1\cdot 43$ lbs. pressure per square in.

One lb. pressure per square in. = $2\cdot 31$ ft. of water in height.

One U. S. gallon of crude petroleum = $6\cdot 5$ lbs. (about).

SOLUTIONS OF CHLORIDE OF CALCIUM (CA CL₂).*(Manufacturer of Chloride of Calcium, U.S.)*

Specific Gravity at 64° Fahr.	Degree Beaumé at 64° Fahr.	Degree Salinometer at 64° Fahr.	Per Cent. of Chloride of Calcium.	Freezing Point Degrees Fahr.	Ammonia Gauge. Lbs. per square inch at Freezing Point.
1.007	1	4	0.943	+31.20	46
1.014	2	8	1.886	+30.40	45
1.021	3	12	2.829	+29.60	44
1.028	4	16	3.772	+28.80	43
1.035	5	20	4.715	+28.00	42
1.043	6	24	5.658	+26.89	41
1.050	7	28	6.601	+25.78	40
1.058	8	32	7.544	+24.67	38
1.065	9	34	8.487	+23.56	37
1.073	10	40	9.430	+22.09	35.5
1.081	11	44	10.373	+20.62	34
1.089	12	48	11.316	+19.14	32.5
1.097	13	52	12.259	+17.67	30.5
1.105	14	56	13.202	+15.75	29
1.114	15	60	14.145	+13.82	27
1.112	16	64	15.088	+11.89	25
1.131	17	68	16.031	+9.96	23.5
1.140	18	72	16.974	+7.68	21.5
1.149	19	76	17.917	+5.40	20
1.158	20	80	18.860	+3.12	18
1.167	21	84	19.803	-0.84	15
1.176	22	88	20.746	-4.44	12.5
1.186	23	92	21.689	-8.03	10.5
1.196	24	96	22.632	-11.63	8
1.205	25	100	23.575	-15.23	6
1.215	26	104	24.518	-19.56	4
1.225	27	108	25.461	-24.43	1.5
1.236	28	112	26.404	-29.29	1 ⁶⁶ vacuum
1.246	29	116	27.347	-35.30	5 ⁶⁶
1.257	30	120	28.290	-41.32	8.5 ⁶⁶
1.268	31	—	29.233	-47.66	12 ⁶⁶
1.279	32	—	30.176	-54.00	15 ⁶⁶
1.290	33	—	31.119	-44.32	10 ⁶⁶
1.302	34	—	32.062	-34.66	4 ⁶⁶
1.313	35	—	33.000	-25.00	1.5 lbs.

PROPERTIES OF SOLUTION OF CHLORIDE OF CALCIUM.

(Prof. Siebel, "Compend of Mechanical Refrigeration.")

Percentage by Weight.	Specific Heat.	Specific Gravity at 60° Fahr.	Freezing Point Degrees Fahr.	Freezing Point Degrees Cels.
1	0.996	1.009	31	— 0.5
5	0.964	1.043	27.5	— 2.5
10	0.896	1.087	22	— 5.6
15	0.860	1.134	15	— 9.6
20	0.834	1.182	5	— 14.8
25	0.7.0	1.234	—8	—22.1

TABLE SHOWING PROPERTIES OF SOLUTIONS OF CHLORIDE OF SODIUM.

1 Per-centage of Salt by Weight.	2 Pounds of Salt per Gallon of Solution.	3 Degrees on Salinometer at 60° F.	4 Weight per Gallon at 39° F. — 4° C.	5 Specific Gravity at 39° F. — 4° C.	6 Specific Heat.	7 Freezing Point, Fahrenheit.
1	0.084	4	8.40	1.007	0.992	30.5
2	0.169	8	8.46	1.015	—	29.3
2.5	0.212	10	8.50	1.019	—	28.6
3	0.256	12	8.53	1.023	—	27.8
3.5	0.300	14	8.56	1.026	—	27.1
4	0.344	16	8.59	1.030	—	26.6
5	0.433	20	8.65	1.037	0.960	25.2
6	0.523	24	8.72	1.045	—	23.9
7	0.617	28	8.78	1.053	—	22.5
8	0.708	32	8.85	1.061	—	21.2
9	0.802	36	8.91	1.068	—	19.9
10	0.897	40	8.97	1.076	0.892	18.7
12	1.092	48	9.10	1.091	—	16.2
15	1.389	60	9.26	1.115	0.855	12.2
20	1.928	80	9.64	1.155	0.829	6.1
24	2.376	96	9.90	1.187	—	1.2
25	2.488	100	9.97	1.196	0.783	.5
26	2.610	—	10.04	1.204	—	—1.1
29	—	—	—	—	—	—4.7

To determine the weight of one cubic foot of brine, multiply the values given in column 4 by 7.48.

To determine the weight of salt to one cubic foot of brine, multiply the values given in column 2 by 7.48.

FORMULA FOR CALCULATING THE AMOUNT OF AIR DELIVERED PER HOUR BY COLD-AIR MACHINES, WHEN THE REVOLUTIONS AND THE SIZE OF THE COMPRESSORS ARE KNOWN.

This is given as follows by Messrs. Haslam in their Catalogue of ice-making and refrigerating machinery :—

$$\text{Air discharged per hour} = \frac{A \times N \times 2R \times S \times 60}{1728} \times C$$

Where A = Area of each compressor in inches.

N = Number of compressors.

2R = Strokes per minute (or twice the revolutions).

60 = Minutes per hour.

S = Stroke in inches.

1728 = Cubic inches in one foot.

C = Factor of efficiency which is taken as .8 for short strokes, and .85 for long strokes.

INFORMATION REQUIRED BY MANUFACTURERS TO ENABLE THEM TO ESTIMATE FOR THE COST OF A REFRIGERATING PLANT.

1. The length, breadth, and height of the cellars, rooms, or stores to be refrigerated. If the ceiling or roof is vaulted, the height to the centre and spring of the arch will be required. Full particulars of the means of insulation adopted; or if none exist, of the materials from which the chambers are built.
2. Whether it is desired to refrigerate on the direct expansion or on the brine circulation system.
3. The temperature desired to be maintained in each chamber or store.
4. The nature of the substance which it is desired to refrigerate.
5. In the case of a packing house, or an abattoir, the largest number of carcasses to be cooled daily, and their average weight.
6. In the case of a freezing chamber for beef, mutton, or other produce, the number of carcasses, etc., to be frozen in each 24 hours, and their average weight.
7. When a liquid is to be cooled, the number of gallons, or barrels, to be dealt with per hour, and from what temperature down.
8. The nature, quantity, and temperature of the water supply available for use.
9. Rough dimensioned plan of the establishment showing the most convenient spot to locate the refrigerating machine.

INFORMATION REQUIRED BY MANUFACTURERS TO ENABLE THEM TO
ESTIMATE FOR THE COST OF AN ICE-MAKING PLANT.

1. Number of tons of ice that it is desired to produce per 24 hours.
2. If clear, crystal, transparent ice is required, or whether opaque ice will do for the purpose.
3. The nature, quantity, and temperature of the supply of water procurable for use.
4. Whether there is an available source of steam supply on the premises; and if spare steam-power, then how many horse-power could be utilised.
5. When the installation is to be erected in existing buildings, a rough dimensioned plan of same.
6. Where an estimate of cost of making ice is required, price and quality of fuel; wages of engine drivers, stokers, and common labourers, for 12 hours day work, and for 12 hours night work; if water has to be bought, cost of same.

AMOUNT OF WATER REQUIRED IN REFRIGERATING APPARATUS.—

Vulcan Iron Works.

For each rated ton refrigerating capacity (24 hours), allow $1\frac{1}{2}$ gallons of 70° Fahr. water per minute for ammonia condenser.

For each rated ton ice-making capacity (24 hours), can system, with distilling and purifying apparatus, allow 3 to 4 gallons of 70° Fahr. water per minute for all purposes.

Five to eight tons of ice can be produced for each ton of good coal consumed, depending upon the size and care of plant, etc.

CUBE ICE.

An arrangement invented by Mr. Van der Weyde for cutting ice into small blocks or cubes, comprises circular saws and endless conveying bands or belts, by means of which the cut blocks or cubes are delivered to a special packing table, where they are stowed in boxes for delivery.

LOSS OF PRESSURE BY FRICTION OF COMPRESSED AIR IN PIPES.
F. A. Halsey.

Diameter of Pipe.	Cubic feet of Free Air compressed to a Gauge Pressure of 60 lbs. per Square Inch and passing through the Pipe per Minute.									
	50	75	100	125	150	200	250	300	400	600
	Loss of Pressure in Pounds per Square Inch for each 1,000 Feet of Straight Pipe.									
ins.	lbs.	lbs.	lbs.	lbs.	lbs.	lbs.	lbs.	lbs.	lbs.	lbs.
1	10.40									
1½	2.63	5.90								
1½	1.22	2.75	4.89	7.65	11.00					
2	.35	.79	1.41	2.20	3.17	5.64	8.78			
2½	.14	.32	.57	.90	1.29	2.30	3.58	5.18	9.20	
3		.11	.20	.31	.44	.78	1.23	1.77	3.14	7.05
3½				.15	.21	.38	.59	.85	1.51	3.40
4						.20	.31	.45	.80	1.81
5							.10	.15	.26	.59
6										.23

FRICTION OF AIR IN TUBES.—Unwin, "Min. Proceedings Inst. C.E."

k = coefficient of friction = $\frac{a}{v} + b$, a and b being constants, and
 v = velocity of air feet per second.

Diameter of tube, ft.	1.64	1.07	.83	.338	.266	.164
Value of a	.00129	.00972	.01525	.03604	.0379	.04518
" b	.00483	.0064	.00704	.00941	.00959	.01167
" k if $v=100$	.00484	.0065	.00719	.00719	.00997	.01212

COEFFICIENTS FOR EFFLUX OF AIR FROM ORIFICES.—*Molesworth.*

Vena contracta	. '98
Conical converging	'9
Cylindrical rounded at ends	'9
Cylindrical throughout	'8
Thin plates	'6

CENTRIFUGAL FANS.—*Molesworth.*

D = Diameter of fan.

V = Velocity of tips of fan in feet per second.

P = Pressure in lbs. per square inch.

$$V = \sqrt{P \times 97300}.$$

$$P = \frac{V^2}{97300}$$

POWER REQUIRED FOR FANS.—*Molesworth.*

P = Pressure of blast in lbs. per square inch.

A = Area of the sum of the tuyeres in square inches.

V = Velocity of tips of fan in feet per second.

HP = Indicated horse-power required.

$$HP = '000016 V^2 A p.$$

PROPORTIONS OF FANS.—*Molesworth.*

$$\text{Length of vanes} = \frac{D}{4} \quad \text{Width of vanes} = \frac{D}{4}.$$

$$\text{Diameter of inlet} = \frac{D}{2} \quad \text{Eccentricity of fan} = \frac{D}{10}.$$

$$\text{Length of spindle journal} = 4 \text{ diameters of spindle.}$$

SOLUBILITY OF AMMONIA IN WATER AT DIFFERENT TEMPERATURES AND PRESSURES.—*Sims.*

1 lb. of water (also unit volume) absorbs the following quantities of ammonia :—

Absolute Pressure in lbs. per sq. in.	32° F.		68° F.		104° F.		212° F.	
	lbs.	vols.	lbs.	vols.	lbs.	vols.	grms.	vols.
14·67	0·899	1·180	0·518	0·683	0·338	0·443	0·074	0·97
15·44	0·937	1·231	0·535	0·703	0·349	0·458	0·078	0·102
16·41	0·980	1·287	0·556	0·730	0·363	0·476	0·083	0·109
17·37	1·029	1·351	0·574	0·754	0·378	0·496	0·088	0·115
18·34	1·077	1·414	0·594	0·781	0·391	0·513	0·092	0·120
19·30	1·126	1·478	0·613	0·805	0·404	0·531	0·096	0·126
20·27	1·177	1·546	0·632	0·830	0·414	0·543	0·101	0·132
21·23	1·236	1·615	0·651	0·855	0·425	0·558	0·106	0·139
22·19	1·283	1·685	0·669	0·878	0·434	0·570	0·110	0·140
23·16	1·336	1·754	0·685	0·894	0·445	0·584	0·115	0·151
24·13	1·388	1·823	0·704	0·924	0·454	0·596	0·120	0·157
25·09	1·442	1·894	0·722	0·948	0·463	0·609	0·125	0·164
26·06	1·496	1·965	0·741	0·973	0·472	0·619	0·130	0·170
27·02	1·549	2·034	0·761	0·999	0·479	0·629	0·135	0·177
27·99	1·603	2·105	0·780	1·023	0·486	0·638	..	..
28·95	1·656	2·175	0·801	1·052	0·493	0·647	..	..
30·88	1·758	2·309	0·842	1·106	0·511	0·671	..	..
32·81	1·861	2·444	0·881	1·157	0·530	0·696	..	..
34·74	1·966	2·582	0·919	1·207	0·547	0·718	..	..
36·67	2·070	2·718	0·955	1·254	0·565	0·742	..	..
38·60	..	..	0·992	1·302	0·579	0·764	..	..
40·53	..	..	..	..	0·594	0·780	..	..

ROUGH ESTIMATE OF REFRIGERATION IN BREWERIES.

A ready method of obtaining a rough estimate in tons of the amount of refrigeration required in a brewery is to divide the capacity of the brewery in barrels by 4.

GENERAL RULES IN RELATION TO THE CIRCLE.

Multiply the diameter by 3·1416, the product is the circumference.
 Multiply the circumference by ·31831, the product is the diameter.
 Multiply the square of the diameter by ·7854, the product is the area.
 Multiply the square root of the area by 1·12837, and the product is the diameter.
 Multiply the diameter by ·8862, the product is the side of a square of equal area.
 Multiply the side of a square by 1·128, the product is the diameter of a circle of equal area.

TABLE SHOWING PROPERTIES OF SATURATED STEAM.—*Varyan.*

Absolute Pressure from Vacuum.		Above Atmosphere.		Tempera- ture. Deg. Fahr.	Total Heat in British Units.	Heat of Vaporiza- tion or Latent Heat.
lbs. per Square In.	Inches of Mercury.	lbs. per Square In.	Inches of Mercury.			
1	2.0355	-13.7	-27.886	101.99	1113.1	1043.0
2	4.0710	-12.7	-25.851	126.27	1120.5	1026.1
3	6.1065	-11.7	-23.815	141.62	1125.1	1015.3
4	8.142	-10.7	-21.780	153.09	1128.6	1007.2
5	10.178	-9.7	-19.744	162.34	1131.5	1000.8
6	12.213	-8.7	-17.709	170.14	1133.8	995.2
7	14.249	-7.7	-15.673	176.90	1135.9	990.5
8	16.284	-6.7	-13.638	182.92	1137.7	986.2
9	18.320	-5.7	-11.602	188.33	1139.4	982.5
10	20.355	-4.7	-9.567	193.25	1140.9	979.0
11	22.319	-3.7	-7.531	197.78	1142.3	975.8
12	24.266	-2.7	-5.496	201.98	1143.6	972.9
13	26.162	-1.7	-3.460	205.89	1144.7	970.1
14	28.097	-0.7	-1.425	209.57	1145.8	967.5
14.7	29.922	0.0	0.000	212.00	1146.6	965.8
15	30.533	0.3	0.611	213.03	1146.9	965.1
16	32.568	1.3	2.646	216.32	1147.9	962.8
17	34.604	2.3	4.682	219.44	1148.9	960.6
18	36.639	3.3	6.717	222.40	1149.8	958.5
19	38.675	4.3	8.753	225.24	1150.7	956.6
20	40.710	5.3	10.788	227.95	1151.5	954.6
21	42.746	6.3	12.824	230.55	1152.3	952.8
22	44.781	7.3	14.859	233.06	1153.0	951.0
23	46.787	8.3	15.895	235.47	1153.7	949.2
24	48.852	9.3	18.930	237.79	1154.4	947.6
25	50.888	10.3	20.966	240.04	1155.1	946.0
26	52.923	11.3	23.007	242.21	1155.8	944.6
27	54.972	12.3	25.043	244.32	1156.5	943.1
28	57.008	13.3	27.079	246.36	1157.1	941.7
29	59.044	14.3	29.115	248.34	1157.7	940.3
30	61.080	15.3	31.143	250.27	1158.3	938.9
31	63.116	16.3	33.187	252.15	1158.8	937.5
32	65.152	17.3	35.223	253.98	1159.4	936.3
33	67.188	18.3	37.239	255.76	1159.9	935.0
34	69.224	19.3	39.295	257.50	1160.4	933.7
35	71.260	20.3	41.321	259.19	1161.0	932.6
36	73.296	21.3	43.367	260.85	1161.5	931.5
37	75.331	22.3	45.319	262.47	1162.0	930.3
38	77.367	23.3	47.397	264.06	1162.5	929.2
39	79.403	24.3	50.403	265.61	1163.0	928.2

TABLE SHOWING PROPERTIES OF SATURATED STEAM.—*Yaryan.*—
Continued.

Absolute Pressure from Vacuum.		Above Atmosphere.		Tempera- ture.	Total Heat	Heat of
lbs. per Square In.	Inches of Mercury.	lbs. per Square In.	Inches of Mercury.	Deg. Fahr.	in British Units.	Vaporiza- tion or Latent Heat.
40	81.439	25.3	51.499	267.13	1163.4	927.0
41	83.475	26.3	53.534	268.62	1163.9	926.0
42	85.511	27.3	55.568	270.08	1164.3	925.0
43	87.547	28.3	57.619	271.51	1164.8	924.0
44	89.583	29.3	59.655	272.91	1165.2	923.0
45	91.619	30.3	61.691	274.29	1165.6	922.0
46	93.655	31.3	63.727	275.65	1166.0	921.0
47	95.691	32.3	65.763	276.99	1166.4	920.1
48	97.727	33.3	67.799	278.30	1166.8	919.2
49	99.763	34.3	69.835	279.58	1167.2	918.3
50	101.799	35.3	71.871	280.85	1167.6	917.4
55	111.98	40.3	82.050	286.89	1169.4	913.1
60	122.16	45.3	92.230	292.51	1171.2	909.3
65	132.34	50.3	102.410	297.77	1172.7	905.5
70	142.52	55.3	112.59	302.71	1174.3	902.1
75	152.70	60.3	122.77	307.38	1175.7	898.8
80	162.88	65.3	132.95	311.80	1177.0	895.6
85	173.06	70.3	143.13	316.02	1178.3	892.5
90	185.24	75.3	153.31	320.04	1179.6	889.6
95	193.42	80.3	163.49	323.89	1180.7	886.7
100	203.06	85.3	173.67	327.58	1181.9	884.0
105	213.78	90.3	185.85	331.13	1182.9	881.3
110	223.96	95.3	194.03	334.56	1184.0	878.8
115	234.14	100.3	203.67	337.86	1185.0	876.3
120	244.32	105.3	214.39	341.05	1186.0	874.0
125	254.50	110.3	224.57	344.13	1186.9	871.7
130	264.68	115.3	234.75	347.12	1187.8	869.4
135	274.86	120.3	244.93	350.03	1188.7	867.3
140	285.04	125.3	255.11	352.85	1189.5	865.1
145	295.22	130.3	265.29	355.59	1190.4	863.2
150	305.40	135.3	275.47	358.26	1191.2	861.2
160	325.76	145.3	295.83	363.40	1192.8	857.4
170	345.82	155.3	316.19	368.29	1194.3	853.8
180	366.48	165.3	336.55	372.97	1195.7	850.3
190	386.84	175.3	356.91	377.44	1197.1	847.0
200	407.20	185.3	377.27	381.73	1198.4	843.8

FRACTIONS OF AN INCH AND DECIMAL EQUIVALENTS.

Fractions.	Inch.	Fractions.	Inch.	Fractions.	Inch.
1-32	.03125	3-8	.375	23-32	.71875
1-16	.0625	13-32	.40625	3-4	.75
3-32	.09375	7-16	.4375	25-32	.78125
1-8	.125	15-32	.46875	13-16	.8125
5-32	.15625	1-2	.5	27-32	.84375
3-16	.1875	17-32	.53125	7-8	.875
7-32	.21875	9-16	.5625	29-32	.90625
1-4	.25	19-32	.59375	15-16	.9375
9-32	.28125	5-8	.625	31-32	.96875
5-16	.3125	21-32	.65625		
11-32	.34375	11-16	.6875		

The measurement of an air current in feet per minute, divided by 88, will give the measurement in miles per hour.

TABLE SHOWING THE NUMBER OF MILES PER HOUR OF AIR CURRENTS AT VELOCITIES PER MINUTE.

Feet per Minute.	Miles per Hour.	Feet per Minute.	Miles per Hour.
10	.113	600	6.818
20	.227	700	7.954
30	.340	800	9.090
40	.454	900	10.227
50	.568	1,000	11.363
60	.681	2,000	22.727
70	.795	3,000	34.090
80	.909	4,000	45.454
90	1.022	5,000	56.818
100	1.136	6,000	68.181
200	2.272	7,000	79.545
300	3.409	8,000	90.909
400	4.545	9,000	102.272
500	5.681	10,000	113.636

MEAN TEMPERATURES OF PRINCIPAL CITIES OF THE WORLD.

CITIES.	Spring.	Summer.	Autumn.	Winter.	Annual.
ENGLAND.	Degs. Fahr.	Degs. Fahr.	Degs. Fahr.	Degs. Fahr.	Degs. Fahr.
Birmingham ..	48·0	62·0	50·0	34·2	48·2
Bristol ..	49·7	63·0	51·5	40·0	51·05
Liverpool ..	48·8	62·9	51·8	39·8	50·8
London ..	49·0	62·8	51·3	39·5	50·6
Manchester ..	48·0	62·0	50·5	34·8	48·8
SCOTLAND.					
Edinburgh ..	45·7	57·9	48·0	38·5	47·5
Glasgow ..	47·9	60·9	50·5	39·9	49·8
IRELAND.					
Belfast ..	—	—	—	—	52·1
Dublin ..	—	—	—	—	50·1
FRANCE.					
Bordeaux ..	—	—	—	—	57·0
Boulogne ..	—	—	—	—	54·4
Marseilles ..	—	—	—	—	58·3
Nice ..	55·9	72·5	63·0	48·7	60·1
Paris ..	—	—	—	—	51·3
GERMANY.					
Berlin ..	46·4	63·1	47·8	30·6	47·5
Breslau ..	—	—	—	—	46·7
Buda Pesth ..	—	—	—	—	47·5
Dresden ..	—	—	—	—	49·1
Frankfort ..	—	—	—	—	49·6
Hamburg ..	—	—	—	—	48·0
Leipsic ..	—	—	—	—	46·4
Munich ..	—	—	—	—	48·4
Trieste ..	53·8	71·5	56·6	39·5	55·8
Vienna ..	49·5	63·9	52·8	39·9	—
ITALY.					
Florence ..	—	—	—	—	59·2
Genoa ..	—	—	—	—	61·1
Milan ..	—	—	—	—	55·1
Naples ..	59·5	74·5	62·5	49·9	61·6
Palermo ..	59·5	74·5	65·9	52·0	63·1
Rome ..	57·4	73·2	61·7	46·6	59·7
Turin ..	53·1	71·6	53·8	33·4	53·1
Venice ..	—	—	—	—	55·4

MEAN TEMPERATURES OF PRINCIPAL CITIES OF THE WORLD.—

(Continued.)

CITIES.	Spring.	Summer.	Autumn.	Winter.	Annual.
	Degs. Fahr.	Degs. Fahr.	Degs. Fahr.	Degs. Fahr.	Degs. Fahr.
SPAIN & PORTUGAL.					
Barcelona ..	—	—	—	—	63·0
Madrid ..	57·6	74·1	56·7	42·1	57·6
Lisbon ..	59·9	71·1	62·5	52·3	61·4
SWITZERLAND.					
Berne ..	45·8	60·4	47·3	30·4	46·0
Geneva ..	—	—	—	—	52·7
HOLLAND.					
Amsterdam ..	—	—	—	—	49·9
Rotterdam ..	—	—	—	—	51·0
BELGIUM.					
Brussels ..	—	—	—	—	50·7
NORWAY & SWEDEN.					
Christiania ..	39·2	59·5	42·4	25·2	41·7
Stockholm ..	38·3	61·0	43·8	25·4	42·1
DENMARK.					
Copenhagen ..	43·7	63·0	48·5	31·5	46·8
RUSSIA.					
Moscow ..	43·3	62·6	34·9	13·5	38·5
Nicolaief ..	49·3	72·2	50·0	25·9	48·7
St. Petersburg..	35·1	60·3	40·5	16·6	38·3
Warsaw ..	44·6	63·5	46·4	27·5	45·5
TURKEY.					
Bucharest ..	—	—	—	—	46·4
Constantinople.	51·8	73·4	60·4	40·6	56·7
PALESTINE.					
Jerusalem ..	60·6	72·6	66·3	49·6	62·2
EGYPT.					
Cairo ..	71·6	84·6	74·3	58·5	72·3
ALGERIA.					
Algiers ..	63·0	74·5	70·5	50·4	63·0
Tunis ..	—	—	—	—	68·8

MEAN TEMPERATURES OF PRINCIPAL CITIES OF THE WORLD.—

(Continued.)

CITIES.	Spring.	Summer.	Autumn.	Winter.	Annual.
	Degs. Fahr.	Degs. Fahr.	Degs. Fahr.	Degs. Fahr.	Degs. Fahr.
NORTH AMERICA.					
Baltimore ..	60.0	83.0	64.6	43.5	54.9
Boston ..	48.0	66.0	53.0	28.0	49.0
Chicago ..	52.8	74.5	61.3	38.5	45.9
Cincinnati ..	63.2	81.8	66.4	46.6	54.7
Mexico ..	53.6	63.5	65.1	60.2	60.5
Montreal ..	44.2	69.1	47.1	17.5	43.7
New Orleans ..	73.0	84.0	72.0	58.0	72.0
New York ..	50.0	72.0	56.0	33.0	53.0
Philadelphia ..	52.0	76.0	57.0	34.0	55.0
Quebec ..	—	—	—	—	40.3
San Francisco ..	58.0	59.0	60.0	53.0	57.5
St. Louis ..	84.6	67.8	44.6	46.0	55.0
Washington ..	69.0	79.0	58.0	35.0	59.0
SOUTH AMERICA.					
Buenos Ayres ..	59.4	73.0	64.6	52.5	62.5
Lima ..	63.0	73.2	60.6	59.0	66.2
Quito ..	60.3	60.1	62.5	59.7	60.1
Rio Janeiro ..	72.5	79.0	74.5	68.5	73.6
Valparaiso ..	—	—	—	—	64.0
EAST INDIES.					
Bombay ..	—	—	—	—	81.3
Calcutta ..	82.6	83.3	80.0	67.8	78.4
Madras ..	—	—	—	—	81.9
WEST INDIES.					
Havanna ..	—	—	—	—	79.1
Kingstown ..	78.3	81.3	80.0	76.3	79.0
Port of Spain ..	—	—	—	—	81.5
CHINA.					
Canton ..	69.8	82.0	72.9	54.8	69.8
Pekin ..	56.6	77.8	54.9	29.0	52.6
AUSTRALASIA.					
Melbourne ..	—	—	—	—	57.0
Paramatta ..	66.6	73.9	61.8	54.5	64.6
Sydney ..	—	—	—	—	65.8
CANARY ISLANDS.					
Funchal ..	63.5	70.0	67.6	61.3	65.7
NEW ZEALAND.					
Auckland ..	60.1	66.7	58.0	53.5	59.6

LEAKS IN AMMONIA APPARATUS.

Leaks are readily detected by the smell of the escaping ammonia gas when the machine is being filled ; at a later stage, when working, their detection is not so easy. During the operation of the machine when the liquor or brine in the tanks commences to smell of ammonia it indicates a considerable leakage. It is recommended to test the liquor or brine periodically with Nessler's solution or otherwise.

Nessler's reagent, which is the best to use for the discovery of traces of ammonia in water or brine, consists of 17 grms. of mercuric chloride dissolved in about 300 cc. of distilled water, to which is added 35 grms. potassium iodide dissolved in 100 cc. of water, and constantly stirred until a slight permanent red precipitate is produced. To the solution thus formed is added 120 grms. of potassium hydrate dissolved in about 200 cc. of water, allowed to cool before mixing ; the amount is then made up to 1 litre, and mercuric chloride added until a permanent precipitate again forms. After standing for a sufficient time, the clear solution can be placed in glass-stoppered blue bottles and kept in a dark place.

If a few drops of this reagent be added to a sample of the suspected brine or water in a test-tube, or other small vessel, and the slightest trace of ammonia is present, a yellow colouration of the liquid will take place ; a large quantity of ammonia will produce a dark-brown.

When the leaks are comparatively insignificant they can be closed in the usual way, by solder, using as a flux muriatic or hydrochloric acid killed with zinc. In some instances electric welding may be resorted to with advantage, or the leak may be closed by means of a composition of litharge and glycerine mixed into a stiff paste, bound with sheet-rubber, and covered with sheet-iron clamped firmly in position. When, however, the leak is at all serious it is usually the better plan to at once put in a new coil, or a new length of pipe.

LEAKS IN CARBONIC ACID MACHINES.

To detect these, smear the joints with a solution of soap and water, and any leakage of gas will be evidenced by the formation of bubbles. Carbon dioxide or carbonic acid being a completely inodorous gas, precautions are required to prevent the occurrence of leakage. If the joints, however, are properly made to start with, they are found in practice, when once tight, to remain so for years.

II.—BIBLIOGRAPHY OF REFRIGERATION.

Books.

- BEHREND, GOTTLIEB.—Eis und Kälteerzeugungs Maschinen. Halle-a-Salle. 1888.
- COOPER, MADISON.—Eggs in Cold Storage.
- KOLLER, THEODORE.—Die Kälteindustrie.
- LEASK, A. RITCHIE.—Refrigerating Machinery and Its Management. Second Edition. London.
- LEDoux, M.—Ice Making Machines, with additions by Messrs. Denton, Jacobus, and Riesenberger. New York.
- LORENZ, HANS.—Neuere Kuehlmaschinen. Muenchen und Leipzig.
- MARCHENA, R. E. DE.—Compressions Maschinen.
- MARCHERRA, DE.—Machines Frigorifiques à Gaz Liquifiable. Paris.
- NELSON's Encyclopædia. Edinburgh.
- PROCEEDINGS, American Warehousemen's Association, United States.
- PROCEEDINGS, Ice and Cold Storage Association, London.
- PROCEEDINGS, Institution Civil Engineers, London.
- PROCEEDINGS, Institution Mechanical Engineers, London.
- PROCEEDINGS, Shipmasters' Society, London.
- PROCEEDINGS, Société Nationale d'Agriculture de France.
- REDWOOD, ILTYD J.—Theoretical and Practical Ammonia Refrigeration. New York.
- RICHMOND, GEORGE.—Notes on the Refrigeration Process and Its Place in Thermodynamics. New York.
- RITTER, FRIEDRICH.—Wasser und Eis.
- SCHMIDT, L. M.—Principles and Practice of Artificial Refrigeration. Philadelphia.
- SCHWARZ, ALOIS.—Die Eis und Kuehlmaschinen. Muenchen und Leipzig.
- SELF, NORMAN, M.I.C.E.—Machinery for Refrigeration. Chicago.
- SIEBEL, J. E.—Compend. of Mechanical Refrigeration. Third Edition. Chicago.
- SKINKLE, E. T.—Practical Ice Making and Refrigeration. Chicago.
- SPON's Dictionary of Engineering. London.
- SPON's Encyclopædia. London.

- STETEFELD, RICHARD.—Die Eis und Kälteerzeugungs Maschinen, Stuttgart.
- VORHEES, GARDNER T.—Indicating the Refrigerating Machine, Chicago.
- WALLIS-TAYLER, A. J.—Refrigerating and Ice-Making Machinery. Third Edition. London.
- WOOD, DE VOLSON.—Thermodynamics, Heat, Motors, and Refrigerating Machines. New York.

PERIODICAL PUBLICATIONS DEALING WHOLLY OR PARTLY WITH
REFRIGERATION.

- British Refrigeration.—Monthly. London.
- Cold Storage.—Monthly. London.
- Cold Storage.—Monthly. New York.
- Eis- und Kälte-Industrie.—Bi-monthly. Berlin.
- Pocket Book of Refrigeration.—Annually. London.
- "Practical Engineer" Pocket Book.—Annually. Manchester.
- The Refrigerating Engineer.—Monthly. London.
- Ice and Cold Storage. Monthly. London.
- Ice and Cold Storage Trades Directory.—Annually. London.
- Ice and Refrigeration.—Monthly. New York.
- Ice Record.—Monthly. Philadelphia.
- Ice Trade Journal.—Monthly. New York.
- Le Froid, La Glace et La Réfrigération. Monthly. Paris.
- Zeitschrift für Eis.—Bi-monthly. Lübeck.
- Zeitschrift für die gesamte Kälte-Industrie.—Monthly. Munich.

INDEX.

- A**BSOLUTE pressure and temperature, 9
- Absorber for absorption machine, 154, 157, 164, 166, 172
- Absorption machine, refrigeration by, 247
- in butter works, 397, 398
- system, the, 18, 154-188.
- Abstraction of heat by compressing air, 189-220
- by evaporation of liquid to be cooled, 18, 24-32
- by evaporation and mechanical compression of a separate refrigerating agent, 18, 33-136
- by evaporation and re-absorption of a separate refrigerating agent, 18, 154-188
- by the rapid dissolution of a solid, 18, 19-23
- Abyssinian war, use of ether machine, 109
- Accumulations of deposit in condenser, 475-477
- Admiralty, cold-air machines supplied to, 371
- Admixture of sulphurous acid and carbonic acid as a refrigerating agent, 44
- Advantages of absorption system, 154, 155
- of atmospheric condensers, 142
- of carbonic acid machines for marine installations, 359
- claimed for Gobert system of constructional congelation, 413
- of cold air blast system, 252
- of cold air system, 189, 190
- of Cooper system of mechanical air circulation, 297
- of direct expansion system, 248
- of ether as a refrigerating agent in hot climates, 43
- of submerged condensers, 137
- of using sealing and lubricating oil in ammonia compressors, 56, 57
- of wall or plate system of ice-making, 425
- of Yaryan apparatus for the production of distilled water, 441
- After preservation of frozen meat, 245
- Agent, liquefied arrangement for removal of, from condenser, 144
- or medium used in vacuum machines, 31, 32
- Agitation, method of making clear crystal ice by, 416, 418-434
- Air, atmospheric, germs of fungus or mould in, 282
- circulation, means for improving, 286-288
- of, in cold storage chambers, 282
- co-efficients of efflux of, from orifices, 552
- cold, machines, 18, 189-220, 371-374
- compressed, loss of pressure by friction of, in pipes, 551
- cooler, or chamber, with corrugated brine battery, 265-267
- currents, at velocities per minute, number of miles per hour, 556
- determination of moisture in, 38
- effect of pressure of, 467
- ejection of, from ammonia system, 465, 466
- friction of, in tubes, 551
- instruments for measuring moisture in, 492-493
- presence of, in ammonia machine, to detect, 467, 468
- trunks, construction of, 244, 245
- value of, as in insulator, 299
- Allen dense-air ice machine, 214-216
- Allowances, per ton capacity, in refrigerating machine, 527
- America, number of firms directly interested in refrigeration in, 5
- American absorption machine, 185
- arrangement for removing liquefied agent from condenser, 144
- arrangement for wort cooling, 382, 383
- Engineer, relative heat conductivity of various materials, 308
- ice-making machine, 20
- practice as to the making of brine, 459, 460
- Society of Mechanical Engineers, paper on regenerative method of

- producing very low temperatures, 513
- American Warehousemen's Association, table showing transmission of heat through various insulating structures, 312
- Ammonia, advantages of, as a refrigerating agent, 43
 - anhydrous, 49
 - — boiling point, latent heat, etc., of, 529
 - — manufacture of, 49, 50
 - — yield of, from ammonia solutions, 533
 - anti-putrescent, qualities of, 249
 - apparatus, leaks in, 491, 492, 560
 - composition of, 48
 - compression machine, arrangement of, in butter dairy, 399
 - compression machines, management of, 465-470
 - compression machines, marine types, 363-371
 - condensers, marine types, 368, 369
 - disadvantages of, as a refrigerating agent, 48-50
 - gas, difficulties of dealing with, 50
 - gas, properties of saturated, 524
 - gas, superheating of, 468
 - gas, temperature to which raised by compression, 533-535
 - lubricating qualities of, 478
 - machines, 48-106
 - machine, most important part of, 50-56
 - of commerce, 49, 50
 - properties of, 48
 - receiver and oil trap, 475
 - solubility of, in water at different temperatures and pressures, 531
 - specific gravity and percentage of, 528
 - strength of liquor, 532
- Amount of refrigerating pipes necessary for chilling, storage, and freezing chambers, 253
 - of refrigeration required in cold stores, 253
 - of water required in refrigerating apparatus, 550
- Analysers for absorption machine, 159
- Ancients, use of liquefaction by, for refrigerating purposes, 19
- Andref formula of relation of specific gravity of sulphurous acid to temperature, 110
- Andrews' experiments in liquefaction of gases, 508
- Anhydride, carbonic. *See* Carbonic acid
- Anhydrous ammonia, 49
 - — boiling point, latent heat, etc., of, 529, 530
 - — manufacture of, 49, 50
 - — yield of, from ammonia solutions, 533
 - sulphurous acid and carbonic acid refrigerating agent, 44
- Antarctic, single-acting compressor, 97
- Anti-putrescent properties of ammonia, 249
- Apparatus, ammonia, leaks in, 491, 492
 - for de-aerating or distilling water, 435-444
 - for making distilled water from exhaust steam, 437
 - gravity, for lowering carcasses, 344
- Appendix, 561, 562
- Appleby, power required to raise water from deep wells, 542
- Apples, cold storage of, 350
 - first cargo of, from Melbourne, 4
- Appliances required in absorption system, 154, 155
- Applications of refrigeration, constructional, 404-414
 - — manufacturing, 378-404
- Approximate allowances, per ton capacity, in refrigerating machine, 527
 - cost of operating ice factories, 506
 - — of ice-making, 507
- Aqueous vapour held in suspension in pure dry air, 495
- Architectural aspects of cold stores, 257
- Arctic cold-air machines, experiments with, 219, 220
- Areas. *See* Diameters, areas, and displacements
- Armitage, Mr. H. T., regulating the fermentation of tea by refrigeration, 402
- Armstrong, Lord, definition of heat by, 7
 - Machine Manufacturing Company, ammonia compressors, 94
- Articles, various proper temperatures for cold storage of, 345, 357
- Artificial butter works, use of refrigerating machinery in, 396-399
 - cold, use of, by Estonian tribe, 19
 - currents of air, atmospheric condensers cooled by, 145
 - ice, storage house for, 461
 - refrigeration in bacon curing works, 275, 276
 - surfaces of ice, formation of, 404

- Arrangement for chilling and freezing on wall system, 264, 265
 — for lifting ice cans, 450-452
 — for more even distribution of work of compressor piston, 95, 96
 — for traversing carcasses through chilling and freezing rooms, 265
 — of air cooling tower, 267-269
 — of cold stores, internal, 257
 — of cooling pipes in bacon factories, 272-274
 — — — in ceiling lofts, 262
 — — — in cold stores, 248
 — — — on brine circulation system, 261, 262
 — of corrugated brine air - cooling battery, 265-267
 — of piping in cold storage rooms, 282-297
 — of refrigerating plant in an hotel, 277, 278
- Arrangements for making clear or crystal ice, miscellaneous, 429-434
 — of pump or piston agitators, 431-434
- Asbestos paper or cloth, value of, as an insulating material, 304
 — results of tests as to conductivities of, 303
 — use of, as an insulating material, 298
- Ashantee campaigns, use of ether machine, 109, 110
- Asparagus, cold storage of, 352
- Atlas Company, Limited, carbonic acid compressor, 135
- Atmosphere of cold stores, 243, 244, 246
 — of hospitals and large public buildings, cooling of, 403
- Atmospheric surface condensers, 142-146.
See also Condensers
- Attemperating in breweries, refrigerated water for, 380-383, 388-392
- Auldjo Machine Co., compressor made by, 97
- Australian apples, trade in, 4
- Australia, use of pumice stone as an insulating material in, 298
- Automatic electric beef hoist, 339-342
 — ice dump, 452-454
 — Refrigerating Machine Co., ammonia compressor, 91
- Auxiliary or separate absorber, 175, 176
- Aylesbury Dairy, vacuum machine at, 26
- B**ABY compressor, A. H. Barber Manufacturing Company, 100, 101
- Back pressure, loss of efficiency in ammonia compressors from, 56
- Bacon factories, arrangement of cooling pipes in, 272, 273, 274
 — — — reasons for use of artificial refrigeration in, 275, 276
- Ball, improvements in absorption machines, 178, 179
- Balloons, use of refrigeration for purification of gas for inflation of, 403
- Baltic, imports of butter from, 4
- Bananas, transport of, from Jamaica, 4
- Barber, A. H., Manufacturing Company, double - acting ammonia compressor, 99, 100
 — — — plans for insulation, 228
 — — — small cold store and ice plant for hotel, 277, 278
 — — — single - acting ammonia compressor, 100, 101
- Bar-box, cooling of, 278
- Barges, refrigerated, 377
- Barnard water-cooling tower, 152
- Barrel, old, to make brine mixer of, 460
- Baudelot cooler for breweries, 381, 383
- Bavarian engineers, tests of Linde compression machine by committee of, 73
- Bayswater, vacuum machine at, 26
- Beck, William Henry, improvements in absorption machines, 155, 164
- Becks, G. A., experiments on heat conductivity of slag wool and charcoal, 310-312
- Beef, chilled, imports of, from Canada, 3
 — chill room fitted with Haslam patent brine-cooling battery, 271
 — chill room fitted with the De La Vergne patent pipesystem, 270, 271
 — hoist, automatic, electrically operated, 339-342
- Beer wort, refrigeration of, 381-383
- Beffa, Della, and West, ether machine, 41
- Belgian dairies, type of cream cooler used in, 401
- Bell-Coleman cold-air machine, 199, 200
 — — — freezing machine, tests to determine best covering for, 304
- Bibliography of refrigeration, 561, 562
- Binary absorption process, 187, 188
- Black currants, cold storage of, 350
- Black, Dr., discovery of latent heat by, 8
- Blast, cold air system, 252
- Bleaching of clothes by refrigeration, 403
- Block, Louis, improvements in ammonia compressors, 57, 58
- Blowers, use of, for cooling atmospheric condensers, 145
- Blythe and Southby improved vacuum machine, 30, 31

- Board of Trade instructions to surveyors
re carbonic acid machines, 359
- Boiler-covering materials, heat conductivity of, 308
- feeding purposes, use of waste condensation water for, 149
- Boiling point, latent heat, etc., of anhydrous ammonia, 529, 530
- Books on refrigeration, 561, 562
- Borsig, A., sulphurous acid machines, 118
- Bottles containing anhydrous ammonia, warming when charging machine from, 466
- — desirability of keeping in cool place, 467
- Box and Lightfoot, table of aqueous vapour held in suspension in air, 405
- Boyle, Mr. David, pioneer of refrigerating machinery, 87
- — modern type of ammonia compressor, 87-89
- Boyle's or Mariotte's law, 10
- Bramwell, Sir Frederick, on Perkin's compression machine, 33
- Breaking joints in ammonia machines, 477, 478
- machinery, ice, 464
- Breweries, cubic feet of space per running foot of 2-inch piping, 253
- refrigeration in, 380-393
 - rough estimate of refrigeration in, 553
- Brewery, ammonia pumps or compressor for, 77, 78
- Brick surfaces, waterproof coatings for, 313-317
- Bridge, Messrs. David, & Co., ice crushing or breaking machinery, 464
- Brine circulation system, arrangement of cooling pipes on, 261, 262
- — of refrigeration, 247, 248
 - — objections to, 252
 - cold, passing air through body of, 269
 - cooling battery for cooling air, 265-267
 - for use in refrigerating and ice-making plants, 459, 460
 - strainer, 421, 422
- British government, use of refrigerating machines by, 109, 110
- measures, comparison of, with U.S. standards, 545
- Broadbent, Mr. J. C., rotary chocolate cooler, 379
- Brompton, vacuum machine at, 26
- Bronze alloy, use of in compressor cylinder, 122, 127
- Brotherhood's refrigerator, 382
- "Bulletin de la Société de l'Industrie Minérale," Poetsch process, 405-407
- Butter brought over from Denmark, 4
- manufactories and dairies, refrigeration in, 396-401
 - imports of, 4
- C**ABBAGE, cold storage of, 350
- Cailletet, experiments in liquefaction of gases, 508
- Calahan suction valve, 233
- Campania*, refrigeration of cargo holds on board of, 367-369
- — of provision store on board of, 369-371
- Campbell. *See* Westerlin and Campbell
- Canada, imports of butter and cheese from, 4
- — of chilled beef from, 3
- Canadian apples, trade in, 4
- Canadian Farming World*, article on filling ice houses, 461, 462
- Candle and paraffin oil works, refrigeration in, 393-396
- Can hoist for small plants, 452
- system of ice-making, 418-422
 - — — objectionable features of, 419-421
- Cans or moulds, ice, 26
- Canvas saturated with cold brine, cooling air with, 269
- Capacities, refrigerating, table of, 256
- Capacity of machine required for refrigeration of cold chamber, 258, 259
- of refrigerating machine, diagram showing variations in, 251
- Capillary cream cooler, 401
- Carafes, arrangement for freezing, 278
- frappés, production of, 26
- Carbon dioxide. *See* Carbonic acid
- Carbonic acid, advantages of, 46
- — and sulphurous acid refrigerating agent, 44
 - — composition of, 119
 - — compressors, 119-136, 358-362
 - — disadvantages of, 46, 47
 - — machine, 44-47
 - — — leaks in, 492, 560
 - — — marine types, 358-362
 - — — to charge and work, 480-484
 - — properties of, 44, 46, 47, 119
 - — solidification of gas, 119
 - — anhydride. *See* Carbonic acid
- Carcasses, freezing-of, for transport, 243, 245

- Carcasses, imports of frozen, 2, 3
 - packing, in cold rooms, 258, 376
 - storing, on board ship, 374, 375
- Carcass hoists, 339-344
- Cargo of apples, first, from Melbourne, 4
 - of frozen meat, first, 2
 - of fruit, storage of, 376
- Carius, specific gravities and percentage of ammonia, 528
- Carpets, preservation of, by refrigeration, 403
- Carré, Edmond, sulphuric acid machines, 26
 - Ferdinand, absorption machine, 154, 155-159
 - hand power ice machine, 32
- Carrots, cold storage of, 252
- Cars, refrigerated. *See* Vans
- Cascade system of producing very low temperatures, 509, 510
- Case Refrigerating Machine Co.'s ammonia compression machines, 97-99
- Catamba grapes, cold storage of, 349
- Cattle, live, cooling holds of vessels for, 403
- Ceiling lofts, cooling pipes in, 262
- Ceilings for cold stores and ice houses, 323
- Celery, cold storage of, 352
- Cell ice-making boxes or tanks, 425-429
- Centigrade thermometrical scale, zero on, 9, 10
 - and Fahrenheit thermometers, comparison of, 537
- Centrifugal fans, 552
 - pumps, power required to drive, 543
- Challoner, Sons & Co., Geo., ammonia compressor, 94, 95
- Chambers. *See* Cold storage chambers
- Charcoal, consistency for packing insulating spaces with, 299
- Charge and work carbonic acid machine, to, 480-484
- Charging an ammonia machine, 466, 467
- Charles' law of expansion of gases, 10
- Chart applicable to any value of n , construction of, 12, 13
- Cheese, imports of, from Canada, 4
 - refrigeration of, 347
- Chemical process of refrigeration, the, 18, 19-23
 - works, use of refrigeration in, 402, 403
- Cherries, cold storage of, 350
- Chew, Mr. Leuig, submerged condenser, 138
- Chief danger of deterioration of frozen meat, 5
 - features to be looked for in an air-cooling tower, 151, 152
- Childs, J. G., & Co., Ltd., automatic electric beef hoist, 339-342
- Chilled beef, imports of, 3
- Chilling, amount of refrigerating pipes necessary for, 253
 - or freezing on wall system, 264, 265
- Chill room, bacon, with side cooling pipes, 273, 274
 - — beef, cooled by brine air-cooling battery, 271
 - — beef, fitted with patent pipe system, 270, 271
- Chimogene, use of, as a refrigerating agent, 43
- Chloride, methyl, properties of, 110
 - of calcium, solutions of, 547
 - of sodium, brine made from, 247, 248
 - — properties of solution of, 548
- Chocolate, cold slabs or tables for manufacture of, 174
 - cooler, rotary, 379, 380
 - cooling by cold air, 379
 - — first application of refrigerating machine to, 379
- Choice of agent for refrigerating purposes, 34-36
- Choke-damp, same as carbonic acid, 119
- Choking up or freezing of compression system, 483, 484
- Christiansen, Adolph Gothard, improvements in absorption machines, 164, 165
- Christiansen. *See also* Mackay and Christiansen
- Circle, general rules in relation to, 553
- Circulation, methods of piping that hinder air, 282-286
 - of air in cold storage chambers, 282-297
- Cities of the world, principal, mean temperatures of, 557-559
- Citron. *See* Citrus fruits
- Citrus fruits, cold storage of, 349
- Clark, Mr. D. K., report on experiments with non-conducting substances, 305
- Classification of refrigerating machinery, 18
- Clausius, definition of heat by, 7
- Clearances in ammonia compressors, 53-56
- Cleveland, Ohio, Twining's compression machine in, 36, 37

- Clothes, white bleaching of, by refrigeration, 403
- Cloth, hard-pressed asbestos, value of, as an insulating material, 304
- Clouet, experiments by, in liquefaction of gases, 508
- Coal ashes, use of, for insulating purposes, 298
- consumption of, by cold-air machines, 247
- Coatings for brick surfaces, waterproof, 313-317
- Cochran Company, carbonic acid compressor, 135
- Cocks and valves, 221-233
- expansion or regulating, 53, 221-226
- stop, 226-228
- Coefficients for efflux of air from orifices, 552
- Coil bend, evaporating, 239, 240
- Coils of pipe in submerged condenser, dimensions of, 140-142
- Coke, use of, for charging air-cooling tower, 217
- Cold air blast system, the, 252, 253
- machines, 18, 189-220, 371-374
- refrigeration by, 245-247
- for marine work, 359, 371-374
- proper management of, 492
- marine types, 371-374
- system, the, 189-220, 371-374
- trunk for marine installations, 371, 372
- brine, passing air through body of, 269
- rooms or chambers, construction of, 257-328
- packing of carcasses in, 258
- simple method of producing, in hot climates, 24
- slabs or tables for the manufacture of chocolate, 174
- storage chambers, circulation of air in, 282-297, 374
- temperatures for, 353-357
- ventilation of, 281-297
- cubic feet of space per running foot of 2-inch piping, 254
- space, inspection of, 374, 375
- 243-357
- stores, ceilings for, 323
- divisional partitions for, 320
- flooring for, 321-323
- in United Kingdom, 5
- walls for, 317-320
- Coleman, C. J., improved absorption machine, 183-185
- Coleman, J. J., experiments by, on heat conductivities of substances, 304, 305
- See Bell-Coleman
- Cole, Messrs. T. and W., Ltd., chocolate cooling, 379
- cold-air machine, 212-214
- Collectors or oil separators, 71, 436, 437, 470-475
- "Colliery Manager's Handbook," Gobert congelation method, 408-414
- shafts, application of refrigeration to sinking of, 404-414
- Collins, Mr. W. Hepworth, on evaporative values of various substances, 305
- Colyer, Frederick, C.E., results obtained with ether machine, 42
- on working of absorption machine, 499, 500
- Combined refrigerating and ice-making tank, 484
- utilisation of cold air and brine for cooling, 264
- Common ammonia of commerce, 49, 50
- salt. See Chloride of sodium
- Comparison between scales of Centigrade and Fahrenheit thermometers, 537
- of British measures with U.S. standards, 545
- of various hydrometer scales, 538, 539
- Compensating chamber for stuffing box, 76, 77
- Complete discharge of gas from compressor cylinder, to ensure, 53, 54
- installation of ammonia plant on the De La Vergne system, 59-62
- small brewery fitted with refrigerating plant, 393
- Composition of freezing mixtures, 22, 23
- fossil meal, use of, for insulating purposes, 298
- kieselguhr, use of, for insulating purposes, 298
- victuals, 498
- Compound ammonia compressors, 71, 72, 364-366
- compressor, Haslam marine type, 364-366
- single-acting marine type, 363
- submerged condensers, 138-140
- Compression head, safety, 68-70
- heat generated by, misleading phrase, 14, 15
- machine, refrigeration by means of, 247
- machines, ammonia, cycle of operation in, 52

- Compression machines, main parts comprised in all, 35, 36
 — process, the, 18, 33-106. *See also* Compression system
 — side of ammonia, machines, 52
 — system, choking up or freezing of, 483, 484
 — — the, 18, 33-106
 — temperatures to which ammonia gas is raised by, 533-535
 Compressor, connection of oil separator to, so that oil can be used over again, 475
 — diagrams, interpretation of, 489-491
 — mean pressure of, 525
 — piston rod packings, 478-480
 — safety crosshead for, 70, 71
 Compressors, ammonia, 51-106
 — carbonic acid, 44-47, 119-136, 358-362
 — double-acting, 51
 — ether, 36-43, 107-110
 — methyl chloride, 110
 — methylic ether, 39-41
 — safety spring heads for, 65-70
 — single-acting, advantages of, 51
 — — — disadvantages of, 51
 — sulphurous acid, 110-118
 Condensation side of ammonia machines, 52
 Condensed ammonia, to prevent loss of efficiency by heating of, 469, 470
 — water cooler and oil separator, 436, 437
 Condenser, accumulations of deposit in, 475-477
 — atmospheric, condensing surface required, 146
 — — cooling water required, 126, 146
 — — distribution of cooling water, 143
 — — preventing spluttering of cooling water, 143, 144
 — — removing liquefied agent from, 144
 — — — usual dimensions of, 146
 — cooling water for, 469
 Condensers, ammonia, marine type, 368, 369
 — 78, 114, 117, 124, 132, 134, 135, 137-151, 155, 159, 160, 368, 369
 Condensing pressure, use of, for ascertaining whether apparatus is fully charged, 487
 — — surface for atmospheric condensers, amount required, 146
 — — — for submerged condensers, amount required, 140
 Conductivity of various substances, experiments on, 299-312
 Confectionery, cold slabs or tables for the manufacture of, 174
 Congealing tanks, marine, 375, 376
 Connections. *See* Flange unions
 Consistency for packing insulating spaces, 299
 Constructional applications of refrigeration, 404-414
 Construction of ammonia gas compressors, 51-56
 Consumption of water in sulphuric acid machines, 27
 — — *See also* Coal consumption
 Continent, imports of fresh beef from, 3
 — — — number of firms directly interested in refrigeration on, 5
 Continuous-acting absorption machine, 155-159
 Convert millimetres into inches, table to, 523
 Conveying machinery, ice, 447
 — — *See also* Hoisting and conveying machinery
 Coolers for cold-air machines, 198, 199, 204, 206, 209, 210, 212, 316
 Cooling air, arrangements for, 265-270
 — battery, corrugated brine, 265-267
 — pipes, arrangement of, in ceiling lofts, 262
 — — — on brine circulation system, 261, 262
 — towers, water, 151-153
 — water, formula for calculating amount required in submerged condensers, 141
 — — — for condenser, 469
 — — — in separator jacket, 468
 — — — to economise, 149
 Cooper, Madison, arrangement for washing, cooling, and drying air, 269, 270
 — — — correct relative humidity for a given temperature in egg rooms, 497
 — — — on air circulation in cold storage chambers, 282-297
 — — — on cold storage of eggs, 348, 349
 — — — system of mechanical air circulation, advantages of, 297
 Corliss engine for driving ammonia compressor, 74, 100, 103
 Correct relative humidity for a given temperature in egg rooms, 497
 Corrosion of cooling pipes, protection of, from, 250
 Cost of operating ice factories, approximate, 506

- Cost of working refrigerating machinery, 499-507
 Cotton wool. *See* Slag wool
 Coupon system of selling and delivering ice, 462-464
 Courrières, use of refrigeration for shaft sinking at, 405
 Cracknell's patent absorption machine, 179, 180
 Crane with long jib for raising carcasses from barges into cold stores, 343
 Cream coolers, 399-401
 Creamery Package Manufacturing Co., ammonia compressor, 96, 97
 Creams, freezing, ice, 278
 Cream, trade in frozen, 4
 Crescent or semi-cylindrical door for cold storage rooms, 281-287
 Cross-head, safety, for compressors, 70, 71
 Crushing or breaking machinery, ice, 464
 Cube ice, 550
 Cubic feet of ammonia gas per minute to produce one ton of refrigeration per day, 251
 — — of gas pumped per minute to produce one ton of refrigeration, 526
 — — of space per running foot of 2-inch piping, 253, 254
 Cullen, Dr., experiments with ether, 34
 — — vacuum machine, 25
 Currants, cold storage of, 350
 Curve $PV^n = \text{constant}$, to construct, 11, 12
 Cycle of operations in compression machines, 34-36, 52
 Cylindrical oil separators or collectors, 470, 471
 Cyrogene, use of, as a refrigerating agent, 43
- D**AIRIES, refrigeration in, 396-401
 Davidson, Geo., properties of saturated ammonia gas, 536
 Dead bodies, preservation of, by refrigeration, 403
 Dead weight safety valve, 129, 130
 De-aerated water, making clear ice with, 416
 De-aerating or distilling apparatus, 435-444
 Decimal equivalents of fractions of an inch, 556
 Definition of latent heat, 6, 546
 — of specific heat, 8
 Definitions of heat, various, 6
 Dehydrator. *See* Drier
 De La Vergne arrangement for cooling in brewery, 385, 386
- De La Vergne, atmospheric condenser, 143
 — disc or gill for cooling pipes, 241, 242
 — installation at skating rink, 404
 — installations on *Campinia* and *Lucania*, 370
 — marine types of ammonia machines 363, 370, 371
 — oil separator or collector, 470
 — patent pipe system, 270, 271
 — safety suction valve, 233
 — stop cock, 226, 227
 — type of ammonia compressor, 56-65
 — type of pipe joint, 234, 235
 Delion and Lepen, sulphurous acid machine, 118
 Della Beffa and West ether machine, 41
 De Mairan, specific gravity of ice, 415
 De Motay and Rossi absorption machine 188
 Denmark, butter brought over from, 4
 Denton, Professor, losses in compressors, 83
 Deposit in condenser, accumulations of, 475, 477
 Deterioration of frozen meat, chief dangers of, 5
 Determination of moisture in air, 492, 493
 Dewar, Professor production of liquid air, 510, 511, 512
 — use of ethylene as an agent, 509
 — vacuum flask, 511
 Diagrams from "Arctic" cold-air machine, 220
 — — Frick compressors, 70
 — interpretation of compressor, 489-491
 Diagram showing variations in capacity of refrigerating machine, 251
 — taken from double-acting compressor, with sealing oil, 64
 — — — single - acting compressor, without sealing oil, 63, 64
 — — — single - acting compressor, with sealing oil, 64
 Diameter and stroke, ratio between, in ammonia compressors, 54-56
 Dickerson, Mr. Walter, on physical constants of liquefied gases, 518, 519
 Dimensions of standard wrought-iron pipes, 545
 — of submerged condensers, 140-142
 Direct expansion, cooling brewery fermenting room by, 385, 386
 — — making ice by, 417
 — — system, 248-252

- Disadvantages of cold-air system, 189, 218, 219
 — cold-air blast system, 252
 Discharge of gas from compressor, to effect complete, 53, 54
 Discharge valves. *See* Suction and discharge valves
 Discs or gills for cooling pipes, 241, 242
 — rotating, cooling air with, 269
 Dissolution of a solid, abstraction of heat by, 18
 Distillation of anhydrous ammonia, 49, 50
 Distilling. *See* De-aerating
 — machine, methylic ether, 39
 Distinctive feature of the Yaryan evaporator, 441
 Distinct meanings of heat and temperature, 8
 Distributing valve. *See* Expansion valve
 Distribution of water in atmospheric condenser, 143
 — of work of compressor piston, 95, 96
 Divisional partitions for cold stores, 320
 Dobbie, John G., tests by, to determine conductivity of asbestos and Kieselghur composition, 303
 Donaldson, H. F., lifts designed by, 344
 — non-conductive values of different materials, 306, 307
 Door insulation, 324-327
 — rotary, 278-281.
 — wedge, 324
 Dortch. *See* Suppes and Dortch
 Douane, Messrs., methyl chloride compression machines, 110
 Douane, Mr. M.E. *See* Douane, Messrs.
 Double-acting compressor and tandem compound condensing steam engine, 82
 — — compressors, advantages of, 51
 — — disadvantages of, 51
 — — compressor stuffing boxes, packing for, 479
 — — De La Vergne ammonia compressor, 57-62
 — — horizontal ammonia compression machine, 366
 — effect water-distilling apparatus, 438
 — pipe condenser, 147, 148
 Douglas and Conroy patent sulphurous acid compressor, 114-118
 Douglas, Messrs. Wm., & Sons, Ltd., air-cooling apparatus, 267-269
 — sulphurous acid compressor, 114-118
 — Mr. T., apparatus for cooling air 267-269
 Dourges, use of refrigeration for sinking shafts at, 405
 Drawbacks to wall or plate system of ice-making, 423
 Drier or dehydrator of ammonia still lime in, 50
 Drip trays for cooling pipes, 271, 273
 Drying, cooling, and washing air, apparatus for, 269, 270
 Dry system of working ammonia compression machines, 52, 53
 Duplex marine type of carbonic acid machines, 360-362
 Duterne, Victor, metallic packing, 478
 Dynamite factories, refrigeration in, 402
- EARLY investigators and experimenters in the production of very low temperatures, 508-512
 Eclipse atmospheric condenser, 143
 — can ice-making box, 419
 — — system, plan of ice factory on, 447
 Economiser or temperature exchanger, 161, 177
 Economy of direct expansion system, 250, 251
 — of multiple effect distilling apparatus, 444
 Effective surface of cooling pipes, to increase, 264
 Efficiencies of ice plants, 458
 Efficiency, loss of, in ammonia compressors, 56
 — of refrigerating machine, greatest theoretical, 15
 — of submerged condenser, to insure utmost, 138
 — principal qualities to be sought for in compressor to ensure maximum, 53-56
 Egg rooms, correct relative humidity in, 497
 Eggs, cold storage of, 347-349
 Egypt, use of ether machine during military operations in, 109
 Elder, Dempster and Co., transport of bananas from Jamaica by, 4
 Electrically-driven ammonia compressor, 100
 — — compressor on railway van, 337
 — operated beef hoist, 339-342
 — mutton hoist, 342, 343
 Electrical temperature tell-tales and long-distance thermometers, 495, 496
 — welding of condenser and evaporator coils, 124

- Electric fans, use of, for circulating air, 288, 289
 — welding, 124, 240, 241
 Elevating and conveying machinery, ice, 447
 Elevators or hoists, ice, 454-456
 Emery, Charles E., experiments with non-conductors of heat, 304, 305
 Endless travelling band or apron chocolate-cooling apparatus, 380
Engineer, description of Poetsch method in, 405
Engineering, non-heat-conducting properties of various substances, 309
 Engine-room of steamships, location of carbonic acid machines in, 359
 Enock, Arthur G., safety device for compressors, 70, 71
 Equation expressing greatest theoretical efficiency of a refrigerating machine, 15
 Equivalent of a ton of ice, 415
 — of heat, mechanical, 8, 9, 16
 Equivalents of weight, metric, 523
 Escher, Wyss et Cie, carbonic acid machine, 135
 Esthonian tribe, use of artificial cold by, 19
 Estimate of refrigeration required in breweries, 553
 Ether, advantages of, as an agent in hot climates, 43, 107
 — composition of, 107
 — compression machines, 36-43, 107-110
 — experiments with, by Dr. Cullen, 34
 — machine at brewery, first, 379
 — — cost of working, 502
 — methylic, distilling machine, 39
 — objections to the use of, as a refrigerating agent, 43, 107, 108
 — properties of, 107
 Evaporating coil bend, 239, 240
 Evaporation of liquids, 522
 Evaporative surface condensers, 142-146
 Evaporator, care of, 444
 Evaporators, 78, 79, 83, 110, 114, 117, 118, 120, 121, 124, 135, 154, 156, 157, 160
 Even distribution of work of compressor, arrangement for, 95, 96
 Ewing, Prof., on cascade or successive cycle system, 500, 510, 512
 Exchanger, heat. *See* Economiser
 Exhaust steam, apparatus for making distilled water from, 437
 Exhibition, Paris, carbonic acid compressor in brewery section, 135
 Expansion, direct, economy of, 251
 Expansion of gases, laws of, 10
 — side of ammonia compression machines, 52
 — system, the, 248-252
 — valve for methylic ether machine, 41
 — — valves and cocks, adjustment of, 53
 — — and cocks, various, 221-226
 Experiments by Dr. Cullen with ether, 34
 — with non-conducting substances, 299-312
 External carcass hoist, 343
 Extreme limits of space per foot of piping, 253, 254
- F**ACTORIES, ice, 445-447
 Fahrenheit thermometrical scale, zero on, 9
 Fans, centrifugal, 552
 — or blowers for cooling atmospheric condensers, 145
 — power required by, 552
 — proportions of, 552
 — use of, for circulating air in cold stores, 288, 289
 Faraday, Prof., experiments in liquefaction of gases, 508
 Feathering agitators, 419
 Features, chief, to be looked for in water-cooling tower, 151, 152
 Fermenting rooms, cooling of, 384, 385-388
 Film evaporation, 441
 Firms directly interested in refrigeration, number of, 5
 First cargo of apples from Melbourne, 4
 — class ether machine, results obtained with, 42
 — compression machine, 33, 34
 — law of thermo-dynamics, 6, 9
 Fish, cold storage of, 345, 346
 Fish freezing, cubic feet of space per running foot of 2-in. piping, 254
 Fixary ammonia compressor, 76
 Flange unions or connections, 237, 238
 Flash valve. *See* Expansion valve
 Flasks, vacuum, for liquid air, 511
 Flat plates for air-cooling batteries, 267
 Flines les Raches, use of refrigeration for sinking shafts at, 405
 Flooring for cold stores, 321-323
 — — ice houses, 323
 Floors of cold stores, radiation of heat through, 260
 Fluorine, liquefaction of, 511
 Fontaine. *See* Mollet, Fontaine et Cie
 Fontinette canal lift, use of refrigeration in construction of, 407

- Forbidden fruit, cold storage of, 349
 Forced air circulation, 288-297
 Forecoolers. *See* Supplementary condensers
 Formula for ascertaining amount of air delivered by cold-air machine, 505, 549
 — — calculating amount of cooling water for submerged condensers, 141
 — — — dimensions of submerged condensers, 140, 141
 — — conversion of degrees Centigrade or Reaumur into degrees Fahrenheit, 524
 Foundations, application of refrigeration to the construction of, 404
 Fractions of an inch and their decimal equivalents, 556
 France, simple method of making ice, used in, 24
 — use of cork in, as a non-conductor, 298
 Freezing chambers, amount of refrigerating pipes necessary for, 253
 — fish, method of, 345, 346
 — mixtures, table of, 22, 23
 — or choking up of compression system, 483, 484
 — times for different temperatures and thicknesses of can ice, 457
 — water slowly, at comparatively high temperatures, 416
 French absorption machine, 187
 — brewery section of Paris Exhibition, carbonic acid compressor at, 135
 Fresh provisions, trade in, 1, 2
 Frick ammonia compression machine, 65-70
 — Company, apparatus for making distilled water, 437
 — — arrangement for cooling brewery fermenting rooms, 387, 388
 — — Baudelot cooling apparatus, 383
 — — brine strainer, 421, 422
 — — can ice-making box, 419
 — — cost of operating ice factories, 506
 — — ice, can hoist, 452
 — — pattern of suction valve, 233
 — — plans for ice factories, 447
 — — plans for insulation, 328
 — — stop valve, 228
 Friction in pipes, 544
 — of air in tubes, 551
 — of compressed air in pipes, loss of pressure by, 551
 Frigorific mixtures, general law governing production of cold by, 21
 — — *See also* Freezing mixtures
 Frozen beef, imports of, from New South Wales, 3
 — — imports of, from New Zealand, 3
 — carcasses, imports of, 2, 3
 — cream, trade in, 4
 — meat, trade in, 2
 — mutton, hanging of, before cooking, 258
 Fruit cargo, proper stowage of, 376
 — trees, regulation of, by refrigeration, 403
 Fruits, cold storage of, 349-352, 376
 Fry, J. S., use of cold air for chocolate-cooling by, 379
 Function of refrigerating and ice-making apparatus, main, 17
 Fungus or mould, germs of, in atmospheric air, 282
 Furniture, upholstered, preservation of, by refrigeration, 403
- GALE, Arthur Robert, paper on refrigerating machine, 216-218
 Gas, ammonia, difficulties of dealing with, 50
 — — properties of saturated, 536
 — compressor, most important part of compression apparatus, 50, 57
 Gases, Charles' law of expansion of, 10
 — laws of, 10
 — liquefaction of, 508-521
 — Lussac's law of expansion of, 10
 Gas for balloons, use of refrigeration for purification of, 403
 — motor, advantages of, for driving small refrigerating machines, 276
 Gasoline, use of, as a refrigerating agent, 43
 Gasworks breeze, use of, for insulating purposes, 298
 Gay, C. M., arrangement for circulating air, 287
 General law governing production of cold by frigorific mixtures, 21
 — rules in relation to the circle, 553
 Generator for absorption machine, 154, 157, 158
 Germany, use of cork in, as a non-conductor, 298
 Germs of fungus or mould in atmospheric air, 282
 Giffard cold air machine, 193, 200-202
 Gland of carbonic acid machine, to pack, 482

- Gobert method of using refrigeration for constructional work, 408-414
- Godell, Henry Carr, use of lampblack as an insulating material, 299, 333
- Gorman improvements in absorption machines, 173
- Gorrie, cold-air machine, 192,
- Gottbrecht, Dr., experiments on properties of ammonia, 249
- Gothenburg, milk shipped to London from, 4
- Grapes, cold storage of, 349, 350
- trade in, 4
- Gravity air circulation in cold rooms or chambers, 283
- apparatus for lowering carcasses, 344
- Greatest theoretical efficiency of a refrigerating machine, 15
- Great Southern and Western Railway, Ireland, refrigerator car, 323
- Green vegetables, cold storage of, 352
- HABRIER**, experiments in liquefaction of gases, 508
- Hainault coalfield, refrigeration for shaft-sinking at, 465
- Hair felt, use of, for insulating purposes, 298
- Hall, cold-air machines, 211, 212, 276, 371
- J. & E., Ltd., carbonic acid compression machines, 119-126
- — cold-air machines, marine types, 371
- — duplex horizontal carbonic acid compressor, 125, 126
- — marine types of carbonic acid machines, 359-362
- plan for chilling and freezing on wall system, 264, 265
- — small vertical self-contained carbonic acid machine, 119-125
- — single cylinder double-acting horizontal carbonic acid compressor, 125
- — steamers fitted with refrigerating machinery for the butter trade, 4
- — to charge and work carbonic acid machine of, 480-484
- Halsey, F. A., loss of pressure by friction of compressed air in pipes, 551
- Hampson, production of liquid air by, 512, 513, 515, 516
- Hand power ice-making machine, 32
- Hargreaves and Inglis cold-air machine, 202
- See *also* Hick Hargreaves
- Harrison ether machine, 2
- ether machine erected at brewery, first, 379
- ether machine in paraffin works, 393-396
- James, ether compression machine, 37
- — improved vacuum apparatus, 28-30
- vacuum machine, cost of making ice with, 504
- See *also* Twining and Harrison
- Haslam atmospheric or open-air evaporative surface condenser, 144
- beef chilling room fitted with patent brine-cooling batteries, 271
- cold-air machines, 204-288
- cold-air machines at London and St. Katherine Dock, 245, 247
- distilling apparatus, 439
- formula for ascertaining amount of air delivered by cold-air machine, 549
- Foundry and Engineering Co., Ltd., marine types of ammonia compressors, 363-366
- Sir Alfred Seale, apparatus for cooling air, 265-267
- — improvements in ammonia compressors, 82-87
- Head, safety compression, 65-70, 95, 96
- Healthy working of ammonia machine, signs of, 467
- Heat and temperature, distinct meanings of, 8
- conducting power of various substances, slate being 1000, 310
- definitions of, 6
- discovery of, 8
- exchanger. See Temperature exchanger
- generated by compression, misleading nature of phrase, 14, 15
- latent, 8, 546
- mechanical equivalent of, 8, 9, 16
- pump, refrigerating, machine, a, 18
- sensible, 546
- specific, 8, 546
- — and composition of mixtures, 498
- "Heating by Hot Water," experiments regarding heat-conducting properties of various substances, 310
- Hendrick's condenser, 148
- Henry Vogt Machine Company, absorption machine, 176, 177
- Hercules discharge and suction valve, 230, 231

- Hercules Ice-making and Refrigerating Machinery Co., ammonia compressor, 97
- Hick Hargreaves, cold-air machine, 202-204
- Hill, F. B., arrangement of cold store or chamber, 265, 266
— arrangement for removing snow or hoar frost from refrigerating surfaces, 264
- Hill and Gorman, improvements in absorption machines, 173
— and Sinclair, improvements in absorption machines, 174
— Frederick Barker, improvements in absorption machines, 173, 174-176
— method of making clear or crystal ice, 429-431
- History of trade in frozen meat, 2
- Hoar frost, removal of, from refrigerating surfaces, 264
- Hoisting and conveying machinery, 339-344
- Hoists. *See* Elevators or Hoists
- Holden system of ice-making, 434, 435
- Holds of vessels, cooling of, 403
- Hollow or semi-cylindrical door for cold storage chamber, 278-281
- Hopkinson, Dr., on cost of making ice with Windhausen machine, 503, 504
— description of Windhausen machine, 26
- Hops, cold storage for preservation of, 393
- Horizontal duplex marine type carbonic acid machines, 360, 361
— pipe, mercury well for, 486
- Hospitals, cooling of atmosphere of, in warm climates, 403
- Hot beer wort, refrigeration of, 381-383
— climates, simple methods of producing cold in, 24
- Hotel, arrangement of refrigerating plant in, 277-281
- Houses, ice, ceilings for, 323
— — floorings for, 323
- Houssu coalfields, use of refrigeration for sinking shafts at, 405
- Humidity, correct relative, for a given temperature in egg rooms, 497
- Hutton, efficiency of hydraulic rams, 543
— proportions of hydraulic rams, 543
— quantity of water discharged per minute by barrel pumps, 542
- Hydrants, advisability for provision of, in ice factory, 457
- Hydraulic memoranda, 545, 546
- Hydrometer scales, comparison of various, 538, 539
- Hygrometers, 495
- ICE and Cold Machine Co., absorption machine, 177-179
— and refrigeration, articles on circulation of air in cold storage chambers, 282-297
— apparatus for manufacture of, 62
— can hoist for small plants, 452
— cans or moulds, 26
— crushing or breaking machinery, 464
— cube, 550
— dump, automatic, 452-454
— elevating and conveying machinery, 447
— factories, advisability for provision of hydrants in, 457
— — approximate cost of operating, 506
— — — 445-447
— houses, ceilings for, 323, 324
— — flooring for, 323
— — making, 415-445
— — cost of, 507
— — in breweries, 313
— — machine, American, 20
— — machines, management of, 457, 465-498
— — or congealing tanks, marine, 375, 376
— — plant, information required to estimate cost of, 550
— packing, 457, 461, 462
— properties of, 415
— stores, refrigeration of, 461
— — ventilation of, 461
— tanks and refrigerator combined, Pictet's, 44
— water. *See* Attemperating
- Ideal Refrigerating and Manufacturing Co., ammonia compressor, 95, 96
- Imitation of natural system of ice-making, 445
- Imperfections of first absorption machines, 154, 155
- Important part of ammonia machine, most, 50-56
- Imports of butter, 4
— of cheese, 4
— of chilled beef, 3
— of fresh beef from Continent, 3
— of frozen carcasses, 2, 3
- Improved Carré hand-power ice machine, 32

- Improving air circulation, means for, 286-288
- Inclosed types of ammonia compressors, 80, 91, 94, 95, 103-106, 114-118
- Increase, the effective surface of cooling pipes, to, 264.
- India-rubber packings for ammonia compressors, 479
- — works, use of refrigerating machinery in, 403
- West, Dock, lifts at, 343
- Indicator diagrams, 63-65, 70, 220, 489-491. *See also* Diagrams
- Inflation of balloons, use of refrigeration for purification of gas for, 403
- Information required to estimate for cost of ice-making plant, 550
- — to estimate for cost of refrigerating plant, 549
- useful, 545, 546
- Inglis. *See* Hargreaves and Inglis
- Injections of sealing and lubricating oil into compressor cylinder, 53
- Inlet valves, 224-233, 266
- Inspection of cold storage space on board ship, 374, 375
- Instructions to surveyors *re* carbonic acid machines, Board of Trade, 359
- Insulating structures, transmission of heat through various, 312
- Insulation, 297
- of marine installations, 358, 367
- Internal arrangement of cold stores, 257
- Introduction, 1-5
- Iron, ammonia no chemical action on, 250
- ceilings, cellars with, 276
- J**ACOBUS, Professor, latent heat of air, 519
- Jamaica, transport of bananas from, 4
- Jamieson, Professor Andrew, experiments by, on conductivity of substances, 301, 302, 305
- Jib, crane, long, for raising carcasses from barges, 343
- Johnson and Whitelaw's absorption machine, 187
- Joints, breaking of, in ammonia machines, 477, 478
- pipe, and unions, 233-242
- Joint socket bend, soldered, 238
- Jones, Walter, experiments regarding non-conducting properties of various substances, 310
- Joule on production of very low temperatures, 513, 514
- Joule's mechanical equivalent of heat, 8, 9
- Juice, precautions to prevent loss of, from frozen mutton, 258
- K**ELVIN, on production of very low temperatures, 513, 514
- Kieselguhr, result of tests as to conductivities of, 303, 304
- use of, as an insulating material, 298
- Kilbourn ammonia compressor, inclosed type, 80
- cream cooler, 399
- improved type of ammonia compression machine in dairy, 399
- marine ice-making or congealing tank, 375, 376
- — type of ammonia compression machine, 366
- M. J. K., inventor of improvements in refrigerating machinery, 80
- pipe joints, 235-238
- stop-cock, 227, 228
- Kingdom, United, cold stores in, 5
- Kingsford, improvements in vacuum machines, 25
- Kirk, Alexander, cold-air machine, 192, 193
- Dr. A. C., application of ether machine to extraction of paraffin from shale oil, 379, 393-396
- Klein oil separator or collector, 436
- water-cooling tower, 152
- "Knight's Dictionary," description of Van der Weyde's machine, 43
- Koch method of using refrigeration for constructional work, 408
- Kroeschell Bros. Ice-Making Co., carbonic acid compressor, 131-134
- — horizontal belt-driven carbonic acid compression machine, 133-134
- — horizontal rope-driven carbonic acid compressor, 134
- — vertical belt-driven carbonic acid compression machine, 132, 133
- L**AGER beer fermenting rooms and store cellars, cooling of, 379
- La Hire's epicycloidal device, 202
- Lampblack, use of, for insulating purposes, 298, 299, 333
- Land installations, Linde machine especially designed for, 72
- Langé's improved pump for vacuum machine, 28

- Latent heat, 6, 546
 — heat, discovery of, 8
 — — of ammonia, 529, 530
 Laundries, use of refrigeration in, 403
 Lavoisier ice calorimeter, tests of conductivity with, 304
 Law, general, governing production of cold by frigorific mixtures, 21
 Lawton, Mr. A. W., process for preserving fruit, 350-352
 Leakage at joints, cocks, valves, etc., in direct expansion system, 249
 — of gas past piston rod, methods of preventing, 72, 73, 75, 76, 87, 93, 94
 — — past piston rod, stuffing box, and gland, Linde method of preventing, 72-74
 — *See also* Piston rod
 Leaks in ammonia apparatus, 491, 492, 560
 — in carbonic acid machines, 492, 560
 Lebrun, Mr. B., cooling pipe with gills or flanges, 242
 — — inclosed type of compressor, 106
 Lemons, cold storage of, 349, 350
 Leslie, improvements in vacuum machines, 25
 Lifts. *See* Elevators or Hoists
 Lightfoot cold-air machine, 208-211
 — insulation recommended by, 208
 Lightfoot, T. B., ammonia compressor, 82
 — cold-air machine, use of, for chocolate cooling, 379
 — combined refrigerating and ice-making tank, 434
 — condenser, 140
 — experiments on heat conductivity of slag wool and charcoal, 310-312
 — observations by, on frigorific mixtures, 21
 — on cold-air machines, 190-192
 — on cost of working, 500-502
 — particulars regarding ether machine, 41
 — results of tests with Linde compression machine, 73
 Lime, cold storage of, 349
 Limit to ratio between diameter and stroke in ammonia compressors, 55
 Linde, Carl, ammonia compressors, 71-76
 — — method of agitating water during freezing, 422
 — Company, water-cooling tower, 153
 — marine type ammonia compression machine, 363
 Linde, production of liquid air by, 512, 516-519
 Lineal feet of 1-inch piping required per cubic foot of cold storage space, 254
 Liquefaction of a solid, abstraction of heat by, 18
 — of gases. *See* Production of very low temperatures
 — process, the, 18, 19-23
 — use of, by the Ancients for refrigerating purposes, 19
 Liquefactor. *See* Condenser
 Liquefied agent, arrangement for removing, from condenser, 144
 Liquefier. *See* Condenser
 Liquid air, cooling van by means of, 337, 339
 — — *See* Production of very low temperatures
 Liquids available for use in refrigerating machines, pressure and boiling point, 527
 — evaporation of, 522
 Liquor ammonia, strength of, 532
 Live cattle, cooling holds of vessels for, 403
 Lobrist, John, refrigerator car designed by, 336, 337
 London and India Docks Co., refrigerating installation at, 247
 London and Tilbury Lighterage Company, refrigerated barges, 377
 Long-distance thermometers, 495, 496
 Loose tools required in an ice factory, 456
 Lorenz, Hans, interpretation of compressor diagrams, 489-491
 Lowe, carbonic acid machine, 45
 Low-pressure refrigerating agents. *See* Ether, Methyl chloride, Sulphurous acid
 Low, Professor D. A., construction of chart applicable to any value of n , 12, 13
 Lubrication of refrigerating machinery, 484
 — qualities of ammonia, 478
 Lucania, refrigeration of cargo holds of, 367-369
 — — of provision stores of, 369-371
 Lugo and McPherson, cold-air machine, 202
 — *See also* Tuttle and Lugo
 Lussac's law of expansion of gases, 10
 Lyon's improved absorption machine, 180-183

- M**ACDONALD, Mr. C. A., ammonia compressor designed by, 97
- Mach, Dr. Ernest, on heat, 6, 7
- Machines, absorption, 18, 154-188
- ammonia compression, 51-106
 - carbonic acid compression, 44, 47, 119-136, 358-362
 - capacity of, required for refrigeration of cold storage chamber, 258, 259
 - cold-air, 18, 189-220, 371-374
 - ether compression, 36-43, 107-110
 - methyl chloride compression, 110
 - sulphurous acid compression, 110-118
- Mackay and Christiansen, improvements in absorption machines, 155
- Frederick Noel, arrangement for cooling cold storage rooms or chambers, 264
 - — — improvements in absorption machines, 164, 165
- Main function of refrigerating and ice-making apparatus, 17
- Management and testing of refrigerating machinery, 465-498
- cold-air machines, proper, 492
- Manufacturer of chloride of calcium, solutions, 547
- Manufacturers, information required to estimate for refrigerating plant, 549
- Manufacturing and industrial applications, 379-414
- Marcel, Alex., rate of passage of heat through various materials, 307
- Marchant cold-air machine, 193
- Marine refrigeration, 358-377
- Mariotte's law, 10
- Martindale, Colonel B. H., on refrigerating chambers at St. Katherine's Docks, 245
- Marvin, hygrometer, 494
- Mash tuns refrigerated, 381
- Matasara*, cargo of frozen meat in, 2
- Maxwell, absolute zero, 10
- definition of heat, 7
- McRae, Mr. J., rotary chocolate cooler, 379, 380
- Mean pressure of compressor, 325
- Means for improving air circulation, 286-288
- preventing leakage at compressor piston-rod, 72, 73, 76, 81, 93, 94
- Mean temperatures of principal cities in the world, 557-559
- Meat-carrying chamber on board *Campania* and *Lucania*, 367-369
- Meat, cold storage of, 345, 346
- frozen, history of trade in, 2
- Meat, trade in frozen, 2
- Mechanical equivalent of heat, 8, 9, 16
- or forced air circulation, 288-297
 - refrigeration, theory and practice of, 6-18
 - — — work demanded of a machine for, 13, 14
- Mediums, refrigerating. *See* Agents
- Melbourne, first cargo of apples from, 4
- Mercury well for horizontal pipe, 486
- — — for vertical pipe, 486
- Method for preventing leakage of gas past compressor piston-rod, 72, 73, 75, 76
- of testing capacity of refrigerating machine, 487, 488
- Methods of ice-making, various, 416-445
- of piping that hinder circulation, 282-286
- Methyl chloride, advantages of, as a refrigerating agent, 110
- — — composition of, 110
 - — — disadvantages of, as a refrigerating agent, 110
 - — — properties of, 110
- Methylic ether compression machine, 39-41
- — — compression machine, expansion valve for, 41
 - — — distilling apparatus, 29
- Metric system, the, 523, 535
- Meyer steam engine for driving ammonia compressor, 103
- Mica, use of, as an insulating material, 298, 333
- Mild-cured bacon, use of refrigerating machinery for production of, 273, 274
- Milk, refrigeration of, 347
- shipped from Gothenburg to London, 4
 - trade in frozen, 4
- Mirrlees, Watson and Yaryan Company, distilling apparatus, 441-444
- Miscellaneous arrangements for making clear or crystal ice by agitation, 429-434
- Mixer for making brine, 459, 460
- Mixtures, frigorific, observations on, 21
- Modern physicists on heat, 7
- Modern types of Boyle ammonia compressors, 87-89
- Moissau, experiments by, in liquefaction of gases, 511
- Moisture in air, determination of, 492, 493
- properties of absorbing gases, 281, 282

- Molesworth, heat-conducting power of various substances, 310
 — coefficients for efflux of air from orifices, 552
 — centrifugal fans, 552
 Mollet, Fontaine et Cie, carbonic acid compressor, 135
 Mort, improvements in absorption machines, 155
 — temperature exchanger, 161
 — See also Nicolli and Mort
 Morton, Professor Henry, on power obtainable by expansion of liquid air, 519-541
 Mouge, experiments by, in liquefaction of gases, 508
 Mould, germs of, in atmospheric air, 282
 Moulds, cold slabs or tables for, 174
 — or cans, ice, 26
 Multiple effect distilling apparatus, 439-444
 Mutton, frozen, hanging before cooking, 258
 — hoist, electrically-driven, 342, 343
- N**AIRNE, vacuum machine, 25
 Naphtha, use of, as a refrigerating agent, 43
 Nattner, experiments in the liquefaction of gases, 508
 Natural system of ice-making, imitation of, 445
 Neff, Mr. Peter, on ratio of diameter to stroke in ammonia compressors, 56
 Nelson's cold storage wharf, external carcass hoists at, 343
 Nessler's re-agent, 492
 Neubecker, ammonia compressor, 76, 77
 Neuere Kuehlmaschinen, interpretation of compressor diagrams, 489-491
 New South Wales, imports of butter from, 4
 — — imports of frozen meat from, 3
 — Zealand, imports of frozen beef from, 3
 — — Shipping Company, refrigerating installation, 365, 366
 — — use of pumice stone as an insulating material in, 298
 Niagara Hall, artificial ice skating rink at, 404
 Nicolli and Morts' improvements in absorption machines, 188
 Nishigawa improvements in absorption machines, 173
 Non-conductive values of different materials, results of tests as to, 306, 307
- Non-heat-conducting properties of various substances, 309
Nonpareil, first cargo of West Indian fruit in, 4
 Northmore, experiments by, in the liquefaction of gases, 508
 Number of cubic feet covered by one foot of 1-inch iron pipe, 255
 — of cubic feet covered by one ton refrigerating capacity, 255
 — of firms directly interested in refrigeration, 5
 — of vessels fitted with refrigerating machinery, 5
- O**BJECTIONABLE features of can system of ice-making, 419-421
 Objections to the cold-air machine, 189, 218, 219
 — to the use of ether as a refrigerating agent, 43
 Observations on frigorific mixtures, 21
Oceana, first cargo of apples in, 4
 Oil for lubricating ammonia machines, 468
 — injection of sealing and lubricating into compressor cylinder, 53, 56-65
 — presence of, in ammonia system, 468
 — separators or collectors, 71, 436, 437, 470-475
 Olszewski, experiments by, in liquefaction of gases, 510, 511
 Omnes, experiments by, in liquefaction of gases, 511
 Onions, cold storage of, 352
 Opaque ice, reasons for, 416
 Open-air condensers. See Atmospheric condensers
 Opening up ammonia machines, necessary precautions, 52
 — — carbonic acid machines, necessary precautions, 481
 Open trough system of cooling, 271, 272
 Operation of absorption machine, 158, 159, 161
 — of Frick safety compression head, 68-70
 Operations, cycle of, in ammonia compression machines, 52
 Oranges, cold storage of, 349
 Ordinary form of atmospheric condenser, 142, 144
 — — of cream cooler, 399
 Ordway, Prof. John M., experiments by, on non-conducting coverings, 304
 — — experiments regarding non-heat-conducting properties of various substances, 309

Orient, cargo of frozen meat in, 2
 Orifices, coefficients for efflux of air from, 552
 Orosius on production of cold by Esthonian tribe, 19
 Oscillating ice-making tank or box, 431
 Oxydising of tea, regulation of, by refrigeration, 401, 402

PACKING carcasses in cold rooms or chambers, 258, 376
 — house, cubic feet of space per running foot of piping, 254
 — ice, 462
 Packings, compressor piston-rod, 478-480
 — in ammonia compressor stuffing boxes, to drive home, 480
 Palmely, Caleb, on Gobert method of congelation for constructional work, 408-414
 Paper, or cloth, hard pressed asbestos, value of, as an insulating material, 304
 — use of, for insulating purposes, 298
Para, accident on board, 351
 Paraffin oil works, refrigeration in, 393-396
 — solid, extraction of, from shale oil by refrigeration, 379
 Paris Exhibition, carbonic acid compressor at brewery section, 135
 Parsnips, cold storage of, 352
 Partially submerged pump or piston agitator, 432
 Particulars regarding ether machine, 41
 Partitions, divisional, for cold stores, 320
 Parts, main, required in all compression machines, 35, 36
 — required in ammonia compression machines, 51
 Pasteurization of milk in dairies, object of, 401
 Pastry, cold slabs or tables for the manufacture of, 174
 Patent system of preventing leakage at ammonia stuffing boxes, 480
 Peaches, cold storage of, 350
 — trade in, 4
 Pears, cold storage of, 350
 — trade in, 4
 Peclet heat, units transmitted per square foot per hour, 300
 Peninsular and Oriental Company's cold storage chamber, 375
 Percentage of ammonia, 528
 Periodical publications dealing wholly or partly with refrigeration, 562

Perkins', Jacob, first compression machine, 33, 34
 Photographic accessories, use of refrigeration in manufacture of, 402
 Physical constants of liquefied gases, 518
 Physicists, modern, on heat, 7
 Pictet ammonia compressors, 82, 83
 — experiments by, in the liquefaction of gases, 508-510
 — Raoul, experiments by, on radiation at low temperatures, 300, 301
 — — sulphur dioxide, or sulphurous acid machine, 43, 44
 Pictet's improvements in absorption machines, 187
 Pictet. *See also* Tellier and Pictet
 Pieper, Mr., on amount of water used by Windhausen machine, 504
 Pipe joints and unions, 233-242
 Pipe-loft, or coil-room, system of air circulation, 287, 288
 Pipes, friction in, 544
 — *See also* Cooling pipes
 Piping for cold stores, 253-256
 — methods of, that hinder air circulation, 282-286
 Piston or pump agitators for making clear or crystal ice, 431-434
 — rod, means for preventing leakage at, 72, 73, 76, 81, 102, 122, 129, 132, 133, 135
 — rod packings, compressor, 478-480
 Pitch, use of for insulating purposes, 298
 Plant growth, regulation of, by refrigeration, 403
 Plate, heat-units transmitted through, square foot per hour, 300
 — or wall system of ice-making, 416, 422-425
 — system of making clear or crystal ice, 416
 Poetsch process for sinking shafts by refrigeration, 405-407
 Points to be looked for in a water-cooling tower, 151, 152
 Pontifex, E. L., improvements in absorption machines, 155, 167, 168
 Pontifex-Wood, absorption machine, use of, in artificial butter works, 397, 398
 — — absorption machine, working of, 499, 500
 — — can ice-making tank or box, 418, 419, 426, 428
 — — ice-making tank or box on wall or plate system, 423, 424
 — — improvements in absorption machines, 168-173

- Pontifex-Wood, pyramid ice-making box, 418
- Portable distilling apparatus, 443, 444
- Postle cold-air machine, 193, 194
- Power obtainable by expansion of one pound of liquid air, 519-521
- required to drive centrifugal pumps, 543
- — — to raise water from deep wells, 542
- Practice, limit in, between ratio of diameter and stroke in ammonia compressors, 55
- theory and, of mechanical refrigeration, 6-18
- Precautions when opening up compression machines, necessary, 52, 481
- Preservation of dead bodies by refrigeration, 403
- of furs and various fabrics by refrigeration, 403
- of meat by refrigeration, 243
- Pressure, absolute, 9
- and boiling point of liquids available for use in refrigerating machines, 527
- back, loss of efficiency in ammonia compressors from, 56
- of water, 540
- Principal freezing mixtures, table of, 22, 23
- Principles involved in process of refrigeration, simplicity of, 17
- of operation of ammonia compressor, 51, 52
- Process, absorption, the, 18, 154-188
- compression, the, 18, 33-106
- liquefaction, the, 18, 19-23
- vacuum, 18, 24-32
- Production of cold by frigorific mixtures, general law of, 21
- of very low temperatures, 508-521
- Propeller for brine agitation, 421
- Proper management of cold-air machines, 492
- methods of storing, and temperatures for cold storage, 345-357
- Properties of saturated ammonia gas, 536
- of saturated steam, 554, 555
- of solution of chloride of calcium, 548
- of chloride of sodium, 548
- Protos*, cargo of frozen meat in, 2
- Provisional specification of Dr. William Hampson, 515
- Provision stores or chambers on board s.s. *Campania* and *Lucania*, 369, 370
- Provision trade, fresh, 1, 2
- Psychrometers, 491, 492
- Publications, periodical, dealing wholly or partly with refrigeration, 562
- Public buildings, cooling atmosphere of, in warm climates, 403
- Pulsometer Engineering Co., Ltd., ammonia compressors, 77-80
- — — cell ice-making tank or box, 429
- — — cold storage chamber, 261, 262
- — — cost of working, 502
- — — hand power ice machine, 32
- — — ice tank or box room of ice factory, 446, 447
- — — ice-making box, 424, 425
- — — refrigerated barges, 377
- — — refrigerated railway van, 330
- Pumice stone, use of, as an insulating material, 298
- Pump agitator for making clear or crystal ice, 431-434
- for clearing absorber, 168
- for vacuum machine, improved, 28
- Puplett agitators for ice-can box, 419
- ammonia compression machine in small store, 276
- and Rigg, arrangement for lifting ice cans, 450-452
- — patent separator, 471
- — regulating valve, 223, 224
- marine type of ammonia compressor, 363
- Samuel, improvements in ammonia compressors, 83, 84
- Puplett's water-saving and cooling apparatus, 149-151
- Purification of gas for inflation of balloons, use of refrigeration for, 403
- Purity of carbonic acid, to test, 119
- Pyramid ice-making box, 418
- QUALITIES of ammonia, lubricating, 478
- principal to be sought for in compressor, 53, 56
- rendering carbonic acid particularly suitable for use on ship-board, 359
- Quality of oil to be used for sealing and lubricating purposes in ammonia compressors, 57
- Quantity of water discharged per minute by barrel pumps, 542
- Queensland, imports of frozen beef from, 3

- Quiri & Co., atmospheric condensers, 145
 — sulphur dioxide compression machines, 113, 114
- R**ABBITS, trade in frozen, 4
- Radiation of heat through walls of cold storage chambers, etc., 259-261
- Railway vans, refrigerated, 330-338
- Ransome and Rapier absorption machine, 177, 188
- Raoul Pictet Co., sulphurous acid machine, 118
 — — sulphur dioxide or sulphurous acid machine, 43, 44
- Rapid liquefaction of a solid, abstraction of heat by, 18
- Ratio between diameter and stroke of ammonia compressor, 54, 56
- Rau's atmospheric condenser, 145
- Reaumur thermometrical scale, zero on, 9, 10
- Reciprocating agitators for making clear or crystal ice, 418-429
- Red currants, cold storage of, 350
- Redwood, boiling point, latent heat, etc., of anhydrous ammonia, 529, 530
- Reece, Rees, improvements in absorption machines, 155, 159-161
- Refrigerated railway vans, 330-338
- Refrigerating apparatus, amount of water required by, 550
 — capacities, table of, 255
 — capacity in B.T.U. required per cubic foot of storage, 255
 — machine a heat pump, 18
 — machine, greatest theoretical efficiency of, 15
 — machinery, classification of, 18
 — — lubrication of, 484
 — plant, information required to estimate for, 549
 — — testing of, 484-491
- Refrigeration, amount of, required in cold stores, 253-256
 — and cold storage, 243-338
 — bibliography of, 561, 562
 — chemical process of, 18, 19-23
 — in butter manufactories and dairies, 396-401
 — mechanical working of a machine for, 13, 14
 — number of firms directly interested in, 5
 — use of in various industries, 402-404
- Refrigerator. *See* Evaporator
- Regealed ice machine, 434, 435
- Regenerative method of producing very low temperatures, 512-521
- Registering thermometers, 496-497
- Regularity of temperature of fruit cargo, necessities for, 376, 377
- Regulating the temperature of fermenting of tea by refrigeration, 401, 402
- Regulating valves. *See* Expansion valves
- Regulation of plant-growth by refrigeration, 403
- Relative humidity for a given temperature in egg rooms, correct, 497
- Remington Machine Co., single-acting inclosed pattern ammonia compressor, 90, 91
- Results of experiments on the conductivities of various substances, 305
 — — regarding heat-conducting properties of various substances, 309
 — — regarding non-heat-conducting properties of various substances, 319
 — of tests to determine the non-conductive values of different materials, Donaldson, 306-307
 — of tests to determine the non-conductive values of various materials, Wallace, 307
 — of tests on the heat-conductivity of different substances, 308
- Return socket bend, 238, 239
- Revolving door for cold storage rooms, 278-281
- Rhigoline, use of, as a refrigerating agent, 43
- Rice, Mr. A. L., on production of very low temperatures, 513, 514
- Richardson, Dr. B. W., on effect of ammonia on fresh meat, 249
- Rich, H. S. and Co., work on eggs in cold storage, 349
- Rigg, Jonathan Lucas, improvements in ammonia compressors, 83, 84
- Rigg. *See* Pulett and Rigg
- Rilleux, triple-effect distilling apparatus, 438
- Rink, artificial surfaces of ice at, 404
- River Plate, imports of frozen beef from, 3
- Rocking or oscillating ice-making tank or box, 431
- Romans, cooling of wine by, with salt-petre, 19
- Roscoe, Sir Henry E., on carbonic acid, 47
- Roscoe, solubility of ammonia in water at different temperatures, 531, 532

- Rossi. *See* De Motay and Rossi
- Rotary agitators for making clear or crystal ice, 418
- Rotating discs, arrangement for cooling air with, 269
- Rotating door for cold storage rooms, 278-281
- Rough estimate of refrigeration in breweries, 553
- Ruopaku*, refrigerating installation on board of, 365, 366
- Rugs, preservation of, by use of refrigeration, 473
- Rules, general, in relation to the circle, 553
- Ryan, T. J., refrigerator car, 337
- SABROE & Co., Limited, D., carbonic acid machine, 135**
 — — Thomas Ths., sulphurous acid machine, 118
- Sacking saturated with cold brine, cooling air with, 269
- Safety devices for compressors, 70, 71
 — heads for compressor cylinders, 65-70, 95, 96
 — valves for carbonic acid machine, 125, 129, 130, 133, 134
- Salsify, cold storage of, 352
- Salt, properties of solution of, 548
- Sandbach, combined cream cooler and heater, 399-401
- Santorio, cooling wine by mixture of snow and salt, 19
- Saturated ammonia gas, properties of, 524, 536
 — steam, properties of, 554, 555
- Saving of power and cooling-water in condensers, 146, 147
- Schmidt, M. E., refrigerator car, 337
 — on Poetsch process of sinking shafts by refrigeration, 405-407
- Schmitz, Mr. Constanx, method of testing capacity of refrigerating machine, 487, 488
- Schou, H. H., patent evaporator, 135
- Scientific American, article on effect of ammonia on fresh meat, 249
- Screen or apron in front of side-wall piping, 286-287
- Screw agitator. *See* Agitator.
- Screwed and soldered joints, 234-238
- Seeley, improvements in absorption machines, 173, 185-187
- Self-contained marine type of ammonia compression machine, 363, 364
- Selfe, Norman, ammonia compressor, 96, 97
- Self-registering thermometer. *See* Thermograph
- Semi-cylindrical door for cold storage rooms, 278-281
- Semi-steel, use of, in compressor cylinder, 132
- Sensible heat, 546
- Separators or collectors, oil, 436, 437, 470-475
- Shafts, use of refrigeration for sinking, 401-414
 — ventilating, for cold stores, 281
- Shale oil, extraction of solid paraffin from, by refrigeration, 379
- Shallow stationary cell system of making clear ice, 416
- Shipley, Mr. Thomas, improvements in St. Clair compressor, 106
- Siberian rivers, use of refrigeration for prospecting in, 408
- Siebe, Gorman & Co., ether compression machine, 37, 38, 42
- Siebel, Professor, amount of condensing surface required in atmospheric condensers, 146
 — — on cold storage of fruits, 349
 — — on dimensions of submerged condensers, 140
 — — properties of solution of chloride of calcium, 548
- Siemens' ice-making apparatus, 20
 — experiments by, in liquefaction of gases, 508, 512
- Silicate cotton. *See* Slag wool
- Silks, preservation of, by means of refrigeration, 403
- Simple method of procuring ice used in France, 24
 — — of producing ice in hot climates, 24
- "Simplex" absorption machine, 179, 180
- Simplicity of principles involved in process of refrigeration, 17
- Sims, solubility of ammonia in water at different temperatures and pressures, 553
 — solubility of ammonia in water at different temperatures, 531
- Sinclair, improvements in absorption machines, 174
- Single-acting compressors, advantages of, 57
 — — — disadvantages of, 51
 — — — losses due to clearances in, 54, 55
 — compound marine type ammonia compressor, 363
 — effect, Yaryan distilling apparatus, 439, 440

- Sinking of colliery shafts, application of refrigeration to, 404, 405-414
- Sizes and capacities of various ice-making plants, 459
- Skelp, condenser pipes made of, 144, 145
- Skinkle, Eugene T., table of dimensions of atmospheric condensers, 146
- — table of dimensions of submerged condensers, 141, 142
- Slabs or tables, cold, for manufacture of chocolate, etc., 174
- Slag wool, consistency for packing insulating spaces with, 299
- — use of, as an insulating material, 298
- Small brewery, plan of refrigerating plant for, 393
- cold storage chamber, with Haslam cold-air machine, 276
- — storage chamber with Puplett ammonia compression machine, 276, 277
- — storage chamber with Triumph ammonia compression machine, 277
- Snow, removal of, from refrigerating surfaces, 264
- — marine cold storage chamber, 375
- Société Genevoise de Construction, sulphurous acid machine, 118
- Socket bend joint, 238
- — return, 239
- Soda water works, use of refrigeration in, 402
- Sodium, chloride of. *See* Salt
- Soft fruits, trade in, 4
- Solid, abstraction of heat by liquefaction of, 18
- Solidification as a test for purity of carbonic acid, 119
- Solid paraffin, extraction of, from shale oil, by refrigeration, 379
- Solid steel forging for compressor cylinders, 131
- Solubility of ammonia in water at different temperatures, 531, 532
- of ammonia in water at different temperatures and pressures, 553
- Solution of chloride of calcium, properties of, 548
- of salt, properties of, 548
- Solutions of chloride of calcium, various, 547
- Solway, regenerative method of producing low temperatures, 512, 513
- Soudan Campaign, use of ether machine during, 110
- South Africa, use of ether machine in, 110
- Southampton Docks, cold stores or chambers at, 258
- Cold Storage Company, elevators, 342
- Southby. *See* Blyth and Southby
- South Wales, New, imports of butter from, 4
- — imports of frozen beef from, 3
- Spattering of cooling water in atmospheric condensers, to prevent, 143, 144
- Specific gravities and percentage of ammonia, 528
- gravity of ice, 415
- heat, 546
- — and composition of victuals, 498
- — definition of, 8
- — of ice, 415
- — of water, 8
- Spiral agitator for can ice making box, 418
- Spring safety compressor heads, 65-70
- Stallman's ammonia compressor, 96, 97
- Standard Butter Company, railway van cooled by liquid air, 337, 338
- Standard wrought iron pipes, dimensions of, 545
- Stanley, H. F., improvements in absorption machines, 155, 162-164
- refrigerator car, designed by, 333-336
- Starr, transmission of heat through various insulating structures, 312
- Starting ammonia machine, 467
- Stationary cell system of ice making, 425-429
- St. Clair compound ammonia compressor, 106
- system of circulating air in cold chambers, 287, 288
- Steinle thermometer, used on chocolate cooler, 380
- Sterne, L. & Co., Ltd., ammonia compressors, 56-65
- Stevenson's cold-air machine, 204
- Stewart & Co., Ltd., D., carbonic acid compression machine, 136
- Stewart Balfour on rise of temperature of air under compression, 7
- Still for absorption machine, 154. *See also* Generator
- St. Katherine Docks, refrigerating chambers at, 245-247
- Stocker water cooling tower, 152
- Stockholm, construction of tunnel by refrigeration at, 404, 405
- Stop cocks and valves, 226-228

- Storage chambers, amount of refrigerating pipes required for, 253
 — of fruit cargo, proper, 376
 — of various articles, proper temperature for, 345-357
- Stores, cold, number of, in United Kingdom, 5
 — cold, walls for, 317-320
- Storing ice, 461-464
- Strainer, brine, 421, 422
- Straiton, Mr. John, door for cold storage rooms, 324
- Strathleven*, first cargo of frozen meat brought over in, 2
- Strawberries, cold storage of, 350
- Strength of liquor ammonia, 532
- Stroke, ratio between, and diameter in ammonia compressors, 54-56
- Stuffing boxes for ammonia compressors, 479
 — box glands, sealing of, 56, 57
- Sturgeon's cold-air machine, 204
- Submerged condensers, 137-142
- Successive cycle system of producing very low temperatures, 509, 510
- Suction and discharge valves, 228-233, 266
- Sugar factories and refineries, use of refrigeration in, 402
 — machinery treatise on, 444
- Sulphur dioxide. *See* Sulphurous acid
- Sulphuric acid refrigerating machines, 25, 28
 — ether compression machine 37, 38
- Sulphurous acid, advantages of, as a refrigerating agent, 11, 113
 — machine, 43, 44
 — objections to use of, as a refrigerating agent, 44, 111
 — properties of, 43, 44, 110, 111
- Sulzer engine, compressor pumps driven by, 73, 114
- Superheating of ammonia gas in compressor cylinder, means for preventing, 82, 83
- Supplementary condensers or forecoolers, 146, 147
- Supples and Dortch expansion valve, 224, 226
- Surfaces, brick, waterproof coatings for, 313-317
 — of cooling pipes, to increase, 264
- Sylvester process for waterproofing brick, 317
- System, absorption, the, 18, 154-188
 — cold air, the, 189-220, 371-374
 — compression, the, 18, 33-136
 — liquefaction, the, 18, 19-23
- Systems of operating ammonia compression machines, two, 52
- T**ABLE giving number of cubic feet of gas, that must be pumped per minute, to produce 1 ton of refrigeration in 24 hours, 526
 — quantity of water discharged per minute by barrel pumps, 542
 — size and capacities of various ice-making plants, 459
 — the extreme limits of cubic feet of space per running foot of 2-inch piping, 253, 254
 — the relative heat-conductivity of various boiler-covering materials, 308
 — of amount of heat-units transmitted, per square foot per hour, through various substances, 300
 — of approximate cost of ice-making, 507
 — of approximate cost of operating ice factories, 506
 — of boiling point, latent heat, etc., of anhydrous ammonia, 529, 530
 — of calculated relative amounts of vapour condensed and deposited in the various stages of cooling, 209
 — of comparison between the scales of Centigrade and Fahrenheit thermometers, 537, 538
 — of conductivities of asbestos and Kieselguhr composition, 303
 — of correct relative humidity for a given temperature in egg rooms, 497
 — of correct relative humidity in egg rooms, 349
 — of cubic feet of ammonia gas per minute to produce one ton of refrigeration per day, 251
 — of diameters, areas, and displacements, 541
 — of dimensions of atmospheric condensers, 146
 — of submerged condensers, 142
 — etc., of standard wrought-iron pipes, 545
 — of efficiency of hydraulic rams, 543
 — of equivalents of weight, metric, 523
 — of evaporation of liquids, 522
 — of fractions of an inch and decimal equivalents, 556
 — of freezing times for different temperatures, and thicknesses of can ice, 457

Table of friction of air in tubes, 551

- in pipes, 514
- of heat-conducting power of various substances, slate being 1000, 310
- of hydraulic ram proportions, 543
- of ice plant efficiencies, 458
- of lineal feet of 1-inch piping required per cubic foot of cold storage space, 254
- of loss of pressure by friction of compressed air in pipes, 551
- of mean pressure of compressor, 525
- of mean temperatures of principal cities of the world, 557-559
- of metric system, 535
- cf non-heat-conducting properties of various substances, 309
- of number of cubic feet covered by one foot of 1-inch iron pipe, 255
- of number of cubic feet covered by 1-ton refrigerating capacity for twenty-four hours, 255
- of physical constants of liquefied gases, 518
- of power required to drive centrifugal pumps, 543
- of power required to raise water from deep wells, 542
- of pressure of water, 540
- of principal freezing mixtures, 22, 23
- of properties of saturated ammonia gas (De Volson Wood), 536
- of properties of saturated ammonia gas (Yaryan), 524
- of solution of chloride of calcium, 548
- of rate of passage of heat through various materials, 307
- of refrigerating capacities, 256
- capacity required per cubic foot of storage room, 255
- of relative humidity per cent., 494
- of results of different experiments on the heat conductivities of various substances, 305
- of experiments regarding non-heat conducting properties of various substances, 309, 310
- of test experiments made with cold-air machines, 219, 220
- of tests to determine the non-conductive values of different materials, 306, 307
- of tests to determine the non-conductive values of various materials, 307
- of tests on the heat conductivity of different substances, 308

Table of results of tests by Professor Jamieson as to relative and absolute thermal conductivities of substances, 302

- of solubility of ammonia in water at different temperatures, 531, 532
 - of solubility of ammonia in water at different temperatures and pressures, 553
 - of solutions of chloride of calcium, 547
 - of specific gravities and percentage of ammonia, 528
 - of specific heat and composition of victuals, 498
 - of strength of liquor ammonia, 532
 - of temperatures adapted for the cold storage of various articles, 353-357
 - of temperatures to which ammonia gas is raised by compression, 533-535
 - of tests of waterproofing bricks, 314, 315, 316
 - of time required for water to freeze in ice cans, 458
 - of weights of aqueous vapour held in suspension in pure dry air, 495
 - of yearly imports of frozen and chilled beef, 3
 - of yearly imports of frozen mutton and lamb, 3
 - of yield, etc., of anhydrous ammonia from ammonia solutions, 533
 - showing pressure and boiling point of some of the liquids available for use in refrigerating machines, 527
 - showing properties of saturated steam, 554, 555
 - showing properties of solutions of salt, 548
 - showing the number of miles per hour of air currents at velocities per minute, 557
 - showing transmission of heat through various insulating structures, 312
 - to convert kilos. per sq. mm. into tons per sq. in., 528
 - to convert millimetres into inches, 523
- Tables or slabs, cold, for manufacture of chocolate, etc., 174
- Tancredus, Latinus, freezing water by mixture of snow and saltpetre, 19
- Tangye pattern frame ammonia compressor, 99
- Tank insulation, 28-33
- Tapestries, preservation of, by means of refrigeration, 403

- Taylor. *See* Wallis-Taylor
 Taylor's patent fittings for doors of cold stores, 324
 Tea regulating, fermenting of, by refrigeration, 401, 402
 Tellier and Pictet machines, cost of making ice with, 503
 Tellier, Charles, methylic ether compression machine, 39-41, 243
 Tell-tales. *See* Temperature tell-tales
 Temperature absolute, 9
 — and heat distinct meanings of, 8
 — best, to maintain a fruit cargo, 376
 — exchanger and economiser, 161
 — of condensed gas most economical, 149
 — of oxydising or fermentation of tea by refrigeration, 401, 402
 — tell-tales and long distance thermometers 495, 496
 Temperatures for the cold storage of various articles, proper, 345, 357
 — to which ammonia gas is raised by compression, 533-535
 Tender fruits, cold storage of, 349, 350
 Testing of refrigerating machinery, 484-491
 — work of carbonic acid machine, 481
 Tests of waterproofing brick, 314-317
 Thames, refrigerated barges on, 377
 Theoretical efficiency of a refrigerating machine, greatest, 15
 Theory and practice of mechanical refrigeration, 6-18
 Thermo-dynamics, first laws of, 6, 9
 Thermographs, 377, 496
 Thermometrical scale, Fahr., zero on, 9
 Thomas, F. S., arrangement for increasing the surface of cooling pipes, 264
 Thompson, M. R., on filling ice houses, 461, 462
 Time required for water to freeze in ice cans, 458
 Tomkins, E. H., improvements in absorption machines, 165, 166
 Tools, loose, required in ice factory, 456
 Toselli's ice-making machine, 20
 Tower, air cooling, 267-269
 — water cooling, 151-153
 Track system for ice factories, 454
 Trade in Australian apples, 4
 — in fresh provisions, 1-5
 — in frozen cream, 4
 — in frozen meat, 2
 — in grapes, 4
 — in peaches, 4
 — in pears, 4
 Trans-Mississippi Exposition, refrigerating machine at, 100
 Trays, drip. *See* Drip trays
 Triple-effect distilling apparatus, 437, 438
 Tripler's apparatus for the production of very low temperatures, 514, 515
 Triumph Ice Machine Co. approximate cost of ice making, 507
 — atmospheric condenser, 144
 — automatic ice dump, 452-454
 — complete brewery refrigerating plant, 393
 — dimensions of submerged condensers, 140
 — discharge and suction valves, 230-233
 — double-acting ammonia compressor, 80-82
 — expansion valves, 222, 223
 — oil separator or collector, 436, 437, 475
 — plan of ice factory, 447
 — plan for insulation, 330
 — propeller for brine agitation, 421
 — small cold storage room, 277
 — stop valve, 228
 — water cooling tower, 153
 Tropical climates, cooling of hospitals, etc., in, 403
 Trotter, Mr. A. P., long distance thermometer, 496-498
 Trough, open, system of cooling, 271, 272
 Truman, Hanbury & Co. brewery, first use of ether machine at, 378
 Trunk for admitting cold air in marine installations, 371, 372
 Tunnelling, application of refrigeration to, 404
 Tuttle and Lugo, cold-air machine, 202
 Tuxen and Hammerich Engineering Works, Limited, ammonia compressor, 91, 92
 — carbonic acid compressor, 135
 Twining and Harrison, wall or plate system of ice making, 422, 423
 — Professor, improved compression machine, 36, 37
 Tyler and Ellis Manufacturing Co., Ltd., ammonia absorption machine, 179, 180
 Tyndall, Prof., definition of heat by, 7
- UNIONS, flange, 237, 238
 — pipe joints and, 233-242
 United Kingdom, cold stores in, 5
 — imports of frozen provisions into 1-5

- United States, construction of first refrigerator car in, 330
 — — Illinois Central Railway, refrigerator car on, 333-336
 — — imports of chilled meat from, 3
 — — method of freezing fish in, 345, 346
 — — pattern of Linde ammonia compressor, made in, 73
 — — selling and delivering of ice in, 462-464
 — — standards, comparison of British measures with, 545
 — — water cooling towers in, 152
 Unit of measure of heat, 8
 Unnecessary clearance spaces in ammonia compressor, 53-56
 Unwin, friction of air in tubes, 551
 Upholstered furniture, preservation of by refrigeration, 403
 Useful data, 528
 Useful information, 545, 546
 Utilisation of dissolution of a solid to abstract heat, 18, 19-23
- V**ACUUM flasks for liquid air, 511
 — machine, cost of making ice by, 584
 — machine, improved pump for, 28
 — process, the, 18, 24-32
 — system of ice making, 444, 445
 — system of refrigeration, the, 18. *See also* Vacuum Process
 Vallance, improvements in vacuum machines, 25
 Valves, safety, 52, 125, 130, 133, 134
 — compressor, unnecessary clearance spaces, 56
 — discharge, 228-233
 — expansion, 41, 53, 221-226
 — inlet, 228-233
 — suction, 223-233, 366
 Value of different substances, non-conductive, 306, 307
 Van der Weyde refrigerating machine, 43
 — system of packing ice, 550
 Vans, railway, refrigerated, 330-338
 Vapour, method of cooling in compression cylinder, 73
 — *See also* Gas
 Various articles, proper temperatures for cold storage of, 345-357
 — hydrometer scales, comparison of, 538, 539
 — insulating structures, table showing transmission of heat through, 31
- Various inventions for refrigerating and ice-making, 18
 — manufacturing and industrial applications of refrigeration, 402-404
 — methods of ice making, 416-445
 — substances, results of experiments on the heat conductivity of, 308
 — — results of tests on the heat conductivity of, 308
 — substances used for purposes of insulation, 289
 Vault in brewery, cooling of, 387
 Vegetables, cold storage of, 352
 Vendin-Sens use of refrigeration for sinking shafts at, 405
 Ventilation of cold storage chambers, 281-297
 Ventilating shafts for cold stores, 281
 Vernon, Mr. C. E., electric temperature tell-tales, 495, 496
 Vertical duplex marine type of carbonic acid machine, 361, 362
 — marine types of cold-air machines, 371
 — marine type of single acting ammonia compression machine, 363
 — pipe, mercury well for, 486
 Vessels carrying live cattle, cooling holds of, 403
 — fitted with refrigerating machinery, number of, 5
 Vicq-Auzin, use of refrigeration for sinking shafts at, 403
 Victoria Dock, lifts at, 343
 — imports of butter from, 4
 — imports of frozen beef from, 3
 Victorals, specific heat and composition of, 498
 Villafranca, Blasius, use of saltpetre by, for the reduction of temperature, 19
 Vilter Manufacturing Co., ammonia compressor, 73-75
 Vogt Machine Company, Henry, improved ammonia absorption machine, 176, 177
 Voorhees, Mr. Gardiner F., oil separator or collector, 472, 473
 V-shaped or corrugated bottom to cooling tank, 264
 Vulcan Iron Works, amount of water required in refrigerating apparatus, 550
 — enclosed type ammonia compressor, 103-105
 — horizontal double acting ammonia compression machine, 101-103
 — ice factory, 447
 — track system, 454

- WAGELIN** and Hübner carbonic acid compression machine, 136
- Wagons**, refrigerated. *See* Vans
- Walker**, laboratory ice-making machine, 20
- Wallace**, Dr. Wm., results of tests by, to determine non-conductive values of various materials, 307
- Wallis-Taylor** and Whitehead, revolving door for cold stores, 278-281
— tests conducted by, on cold-air machines, 219, 220
- Wall** or plate system of making clear ice, 416, 422-425
- Walls** for cold stores, 317-320
— of cold stor.s, radiation of heat through, 259, 260
- Wall** system, plan for chilling and freezing by circulation of cold brine on, 264, 265
- Washed** intestines of freshly killed pigs, experiments with ammonia on, 249
- Washing**, cooling, and drying air, apparatus for, 269, 270
- Wastage** of ice, 452
- Water**, amount of, required in refrigerating apparatus, 550
— common arrangement for distribution in atmospheric condensers, 143
— consumption in carbonic acid machines, 126
— consumption in sulphuric acid machine, 27
— consumption in sulphuric ether machine, 38
— cooling towers, 151-153
— de-aerating or distilling apparatus, 435-444
— power required to raise from deep wells, 542
— presence of, in ammonia system, 468
— pressure of, 540
— quantity of, discharged per minute by barrel pump, 542
— saving and cooling apparatus, 149-151
— specific heat of, 8
- Waterproof** coatings for brick surfaces, 313-317
- Waygood & Co.**, external carcass hoist, 343
— lifts, passenger or goods, 343
- Webb's** arrangement of suction valves for ammonia compressors, 366
- Weddel & Co.**, on imports of mutton, lamb, and beef, 3
- Wedge**, adjustable shoes on crossheads of compressor, 75
— doors for cold stores, 324
- Well**, mercury, for horizontal pipe, 486
— — vertical pipe, 486
— sinking, application of refrigeration to, 404
- Westerlin** and Cambell double-pipe condenser, 147, 148
- West**, H. J. & Co., Ltd., carbonic acid compression machines, 126-131
— ether compression machine, 108-110
— *See also* Della, Beffa and West
- West India Docks**, lifts at, 343
— Indian fruit, first cargo of, 4
— Smuthfield, lifts at, 343, 344
- Wet** system of operating ammonia compression machines, 52, 53
- Wetzel** pan, water cooling tower on principle of, 153
- Weyde**, Van der, refrigerating machine, 43
— system of packing ice, 550
- White** bleaching of clothes by refrigeration, 403
- Whitehead**. *See* Wallis - Taylor and Whitehead
- Wilson**, Thos., Sons & Co., steamers fitted with refrigerating machinery, for the butter trade, 4
- Windhausen** apparatus for production of very low temperatures, 513
— carbonic acid machine, 44, 45
— cold-air machine, 194-199
— Franz, compound vacuum pump, 26
— machine, cost of making ice with, 503, 504
— machine, installation of, at Bayswater, 26
- Window** insulation, 328
- Windows** of cold stores, radiation of heat through, 259
- Wine** growers and merchants, use of refrigerating machinery by, 401
- Wolf** Co., Fred. W., atmospheric condensers, 144, 145
— recent design of Linde compressor made by, 73
- Wood**, De Volson, properties of saturated ammonia gas, 536
— *See also* Pontifex and Wood
- Work**, carbonic acid machine, to charge and, 480-484
— demanded of a machine for effecting mechanical refrigeration, 12, 13, 15
- Worthington Pumping Engine Co.**, table of diameters, areas and displacements, 541

Worthington water-cooling tower, 152
 Wroblewski, experiments by, in liquefaction of gases, 511
 Wrought iron pipes, standard dimensions of, 545

YARYAN catchalls, modified arrangement of, 473-475
 — comparison of various hydrometer scales, 538, 539
 — distilling apparatus, 439-444
 — properties of saturated ammonia gas, 544
 — properties of saturated steam, 554, 555

Yeast rooms, brewery, cooling air in, 384, 386

Yield of anhydrous ammonia from ammonia solutions, 533

York Manufacturing Co. compound ammonia compressor, 89

— improved St. Clair ammonia compressor, 106

— single-acting ammonia compressor, 89, 90

ZERO on Centigrade thermometrical scale, 9, 10

— on Fahrenheit thermometrical scale, 9

— real, 9

Zschocke water-cooling tower, 152, 153




J. G. CHILDS & CO.,

LIMITED,

145 FARRINGTON ROAD, E.C.

Specialists in _____

**ELECTRIC HOISTING,
CONVEYING, AND LABOUR-
SAVING MACHINERY.**

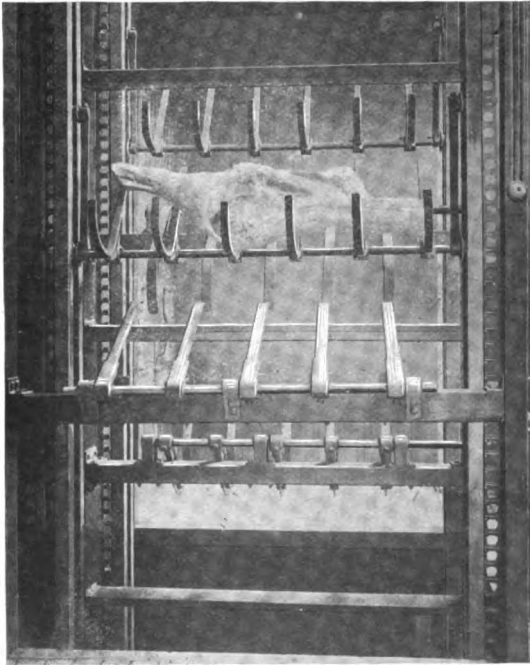

AUTOMATIC ELECTRIC BEEF HOIST.

For Cold Stores, Lifts, Elevators, Conveyors, Cranes, &c.

To lift and convey Beef, Mutton, Eggs, Butter, Fruit, &c., at a negligible cost.

UPPER FLOORS OF BUILDINGS MADE AS VALUABLE AS LOWER FLOORS.

300 Quarters of Beef placed on a top floor (50 ft.) with the same labour as is required for a ground floor at **2½d. per 100 quarters.**

THE "ENOCK" PATENT SAFETY COMPRESSOR

Is made with capacities of 1 to 500 tons Refrigeration.

(See pages 70, 70a, 70b and 71 for illustrations and description.)

**THE SIMPLEST, MOST ECONOMICAL AND
MOST MODERN REFRIGERATING MACHINE.**

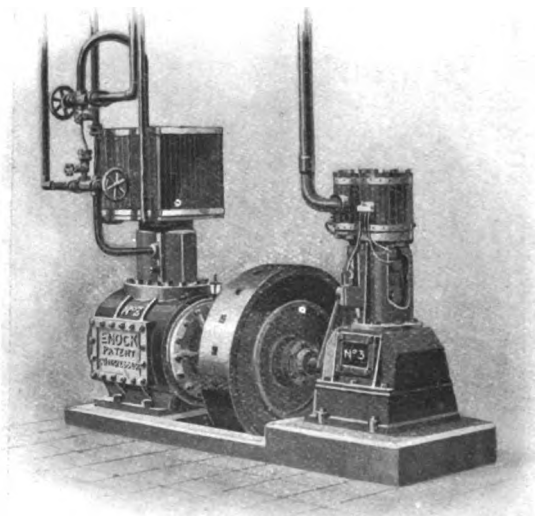


ILLUSTRATION OF 5-TON COMPRESSOR COUPLED TO STEAM ENGINE.

We undertake to design and construct **Cooling and Freezing Plant for all purposes** to which Refrigeration is applicable; also to supply and erect all auxiliaries, such as Steam Boilers, Water Cooling Towers, Piping, Insulation, &c., &c.

Work carried out complete in every detail in any part of the World.

Correspondence Invited.

WE BUILD 

Complete Refrigerating Plants

OF ANY SIZE FOR THE STORAGE OF MEAT,
BUTTER, FRUIT, ETC., ETC., IN **DRY COLD-AIR
CHAMBERS**, ON DIRECT EXPANSION, BRINE
CIRCULATION OR AIR CIRCULATION SYSTEMS.

Complete Ice-Making Plants

ON PLATE, CAN, OR BLOCK SYSTEM.
WRITE FOR ILLUSTRATED CATALOGUE.

Compressed Air or Power Hoists.
“Enock” Patent Air Compressors.
OVERHEAD RAIL SYSTEMS.

ARTHUR G. ENOCK & CO.,

*REFRIGERATING and
COLD STORAGE ENGINEERS,*

407 to 409, Birkbeck Bank Chambers,
HOLBORN, LONDON, W.C.
And Hampson's Buildings, DURBAN, SOUTH AFRICA.

Telegrams—

“ICERIMUS, LONDON.”
“ICICLE, DURBAN.”

Codes in use—

A 1 and A B C.

Q Q

A NEW REVOLVING AIR-LOCK DOOR.

**ESPECIALLY DESIGNED FOR
Cold Storage Rooms In Hotels, &c.
CANNOT BE LEFT OPEN.**

For Particulars Apply to

A. J. WALLIS-TAYLER, C.E., A.M.I.C.E.,
99, BELSIZE ROAD, LONDON, N.W.,

OR AT

THE OFFICES OF "THE REFRIGERATING ENGINEER,"
120, FLEET STREET, LONDON, E.C.

**Works by A. J. WALLIS-TAYLER, A.M.I.C.E., interesting
to Users of Refrigerating Machinery:**

Refrigerating and Ice-Making Machinery. Crown 8vo,
327 pages, 100 illustrations. Third Edition, enlarged. Cloth,
bevelled edges, price 7s. 6d., post free.

"One of the best compilations on the subject. The description of the different refrigerating machines, and the principles on which they act, are described with an intelligent appreciation of the means and the end. His book may be recommended as a useful description of the machinery, the processes, and of the facts, figures, and tabulated physics of its subject."—*The Engineer*.

Bearings and Lubrications. Crown 8vo, 220 pages, 78 illustrations. Cloth, price 3s. 6d. post free.

"Mr. Wallis-Taylor's book is one which may be studied with advantage and profit by both the machinery owner and the attendant. . . . The hints the book contains may be the means of saving a good deal of time and trouble with machinery."
—*The Machinery Market*.

The Pocket-Book of Refrigeration and Ice-Making. Small crown 8vo, cloth. Published Annually, price 2s. 6d. net.

"Forms a worthy addition to the minor additions to the literature of the ice-making and refrigerating industries."—*Ice and Refrigeration*.

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, London, E.C.

CROSBY LOCKWOOD & SON'S

Catalogue of

SCIENTIFIC, TECHNICAL AND

INDUSTRIAL BOOKS.

	PAGE		PAGE
Mechanical Engineering	1	Carpentry and Timber	28
Civil Engineering	10	Decorative Arts	30
Marine Engineering, &c.	17	Natural Science	32
Mining and Metallurgy	19	Chemical Manufactures	34
Colliery Working, &c.	21	Industrial Arts	36
Electricity	23	Commerce, Tables, &c.	41
Architecture and Building	25	Agriculture and Gardening	43
Sanitation and Water Supply	27	Auctioneering, Valuing, &c.	46
Law and Miscellaneous	47		

MECHANICAL ENGINEERING, ETC.

THE MECHANICAL ENGINEER'S POCKET-BOOK.

Comprising Tables, Formulæ, Rules, and Data: A Handy Book of Reference for Daily Use in Engineering Practice. By D. KINNEAR CLARK, M. Inst. C.E. Fourth Edition. Small 8vo, 700 pages, bound in flexible leather cover, rounded corners 6/-

SUMMARY OF CONTENTS.

MATHEMATICAL TABLES.—MEASUREMENT OF SURFACES AND SOLIDS.—ENGLISH WEIGHTS AND MEASURES.—FRENCH METRIC WEIGHTS AND MEASURES.—FOREIGN WEIGHTS AND MEASURES.—MONEYS.—SPECIFIC GRAVITY, WEIGHT AND VOLUME.—MANUFACTURED METALS.—STEEL PIPES.—BOLTS AND NUTS.—SUNDRY ARTICLES IN WROUGHT AND CAST IRON, COPPER, BRASS, LEAD, TIN, ZINC.—STRENGTH OF MATERIALS.—STRENGTH OF TIMBER.—STRENGTH OF CAST IRON.—STRENGTH OF WROUGHT IRON.—STRENGTH OF STEEL.—TENSILE STRENGTH OF COPPER, LEAD, ETC.—RESISTANCE OF STONES AND OTHER BUILDING MATERIALS.—RIVETED JOINTS IN BOILER PLATES.—BOILER SHELLS.—WIRE ROPES AND HEMP ROPES.—CHAINS AND CHAIN CABLES.—FRAMING.—HARDNESS OF METALS, ALLOYS AND STONES.—LABOUR OF ANIMALS.—MECHANICAL PRINCIPLES.—GRAVITY AND FALL OF BODIES.—ACCELERATING AND RETARDING FORCES.—MILL GEARING, SHAFTING, &c.—TRANSMISSION OF MOTIVE POWER.—HEAT.—COMBUSTION: FUELS.—WARMING, VENTILATION, COOKING STOVES.—STEAM.—STEAM ENGINES AND BOILERS.—RAILWAYS.—TRAMWAYS.—STEAM SHIPS.—PUMPING STEAM ENGINES AND PUMPS.—COAL GAS, GAS ENGINES, &c.—AIR IN MOTION.—COMPRESSED AIR.—HOT AIR ENGINES.—WATER POWER.—SPEED OF CUTTING TOOLS.—COLOURS.—ELECTRICAL ENGINEERING.

"Mr. Clark manifests what is an innate perception of what is likely to be useful in a pocket-book, and he is really unrivalled in the art of condensation. It is very difficult to hit upon any mechanical engineering subject concerning which this work supplies no information, and the excellent index at the end adds to its utility. In one word, it is an exceedingly handy and efficient tool, possessed of which the engineer will be saved many a wearisome calculation, or yet more wearisome hunt through various text-books and treatises, and, as such, we can heartily recommend it to our readers."—*The Engineer*.

"It would be found difficult to compress more matter within a similar compass or produce a book of 700 pages which should be more compact or convenient for pocket reference. . . . Will be appreciated by mechanical engineers of all classes."—*Practical Engineer*.

MR. HUTTON'S PRACTICAL HANDBOOKS.

THE WORKS MANAGER'S HANDBOOK.

Comprising Modern Rules, Tables, and Data. For Engineers, Millwrights, and Boiler Makers; Tool Makers, Machinists, and Metal Workers; Iron and Brass Founders, &c. By W. S. HUTTON, Civil and Mechanical Engineer, Author of "The Practical Engineer's Handbook." Sixth Edition, carefully Revised and enlarged. In One handsome Volume, medium 8vo, strongly bound.

[Just Published. 15/-]

The Author having compiled Rules and Data for his own use in a great variety of modern engineering work, and having found his notes extremely useful, decided to publish them—revised to date—believing that a practical work, suited to the DAILY REQUIREMENTS OF MODERN ENGINEERS, would be favourably received.

"Of this edition we may repeat the appreciative remarks we made upon the first and third. Since the appearance of the latter very considerable modifications have been made, although the total number of pages remains almost the same. It is a very useful collection of rules, tables, and workshop and drawing office data."—*The Engineer*, May 10, 1895.

"The author treats every subject from the point of view of one who has collected workshop notes for application in workshop practice, rather than from the theoretical or literary aspect. The volume contains a great deal of that kind of information which is gained only by practical experience, and is seldom written in books."—*The Engineer*, June 5, 1885.

"The volume is an exceedingly useful one, brimful with engineer's notes, memoranda, and rules, and well worthy of being on every mechanical engineer's bookshelf."—*Mechanical World*.

"The information is precisely that likely to be required in practice. . . . The work forms a desirable addition to the library not only of the works manager, but of any one connected with general engineering."—*Mining Journal*.

"Brimful of useful information, stated in a concise form, Mr. Hutton's books have met a pressing want among engineers. The book must prove extremely useful to every practical man possessing a copy."—*Practical Engineer*.

THE PRACTICAL ENGINEER'S HANDBOOK.

Comprising a Treatise on Modern Engines and Boilers, Marine, Locomotive, and Stationary. And containing a large collection of Rules and Practical Data relating to recent Practice in Designing and Constructing all kinds of Engines, Boilers, and other Engineering work. The whole constituting a comprehensive Key to the Board of Trade and other Examinations for Certificates of Competency in Modern Mechanical Engineering. By WALTER S. HUTTON, Civil and Mechanical Engineer, Author of "The Works Manager's Handbook for Engineers," &c. With upwards of 370 Illustrations. Fifth Edition, Revised, with Additions. Medium 8vo, nearly 500 pp., strongly bound. 18/-

This work is designed as a companion to the Author's "WORKS MANAGER'S HANDBOOK." It possesses many new and original features, and contains, like its predecessor, a quantity of matter not originally intended for publication, but collected by the Author for his own use in the construction of a great variety of MODERN ENGINEERING WORK.

The information is given in a condensed and concise form, and is illustrated by upwards of 370 Woodcuts; and comprises a quantity of tabulated matter of great value to all engaged in designing, constructing, or estimating for ENGINES, BOILERS, and OTHER ENGINEERING WORK.

"We have kept it at hand for several weeks, referring to it as occasion arose, and we have not on a single occasion consulted its pages without finding the information of which we were in quest."—*Athenaeum*.

"A thoroughly good practical handbook, which no engineer can go through without learning something that will be of service to him."—*Marine Engineer*.

"An excellent book of reference for engineers, and a valuable text-book for students of engineering."—*Scotsman*.

"This valuable manual embodies the results and experience of the leading authorities on mechanical engineering."—*Building News*.

"The author has collected together a surprising quantity of rules and practical data, and has shown much judgment in the selections he has made. . . . There is no doubt that this book is one of the most useful of its kind published, and will be a very popular compendium."—*Engineer*.

"A mass of information, set down in simple language, and in such a form that it can be easily referred to at any time. The matter is uniformly good and well chosen, and is greatly elucidated by the illustrations. The book will find its way on to most engineers' shelves, where it will rank as one of the most useful books of reference."—*Practical Engineer*.

"Full of useful information, and should be found on the office shelf of all practical engineers."—*English Mechanic*.

MR. HUTTON'S PRACTICAL HANDBOOKS—continued.

STEAM BOILER CONSTRUCTION.

A Practical Handbook for Engineers, Boiler-Makers, and Steam Users. Containing a large Collection of Rules and Data relating to Recent Practice in the Design, Construction, and Working of all kinds of Stationary, Locomotive, and Marine Steam-Boilers. By WALTER S. HUTTON, Civil and Mechanical Engineer, Author of "The Works Manager's Handbook," "The Practical Engineer's Handbook," &c. With upwards of 500 Illustrations. Third Edition, thoroughly Revised, in part Re-written, and much Enlarged. Medium 8vo, over 600 pages, cloth, strongly bound. 18/-

THIS WORK is issued in continuation of the Series of Handbooks written by the Author, viz:—"THE WORKS MANAGER'S HANDBOOK" and "THE PRACTICAL ENGINEER'S HANDBOOK," which are so highly appreciated by Engineers for the practical nature of their information; and is consequently written in the same style as those works.

The Author believes that the concentration, in a convenient form for easy reference, of such a large amount of thoroughly practical information on Steam-Boilers, will be of considerable service to those for whom it is intended, and he trusts the book may be deemed worthy of as favourable a reception as has been accorded to its predecessors.

"One of the best, if not the best, books on boilers that has ever been published. The information is of the right kind, in a simple and accessible form. So far as generation is concerned, this is, undoubtedly, the standard book on steam practice."—*Electrical Review*.

"Every detail, both in boiler design and management, is clearly laid before the reader. The volume shows that boiler construction has been reduced to the condition of one of the most exact sciences; and such a book is of the utmost value to the *fin de siècle* Engineer and Works Manager."—*Marine Engineer*.

"There has long been room for a modern handbook on steam boilers; there is not that room now, because Mr. Hutton has filled it. It is a thoroughly practical book for those who are occupied in the construction, design, selection, or use of boilers."—*Engineer*.

"The book is of so important and comprehensive a character that it must find its way into the libraries of every one interested in boiler using or boiler manufacture if they wish to be thoroughly informed. We strongly recommend the book for the intrinsic value of its contents."—*Machinery Market*.

PRACTICAL MECHANICS' WORKSHOP COMPANION.

Comprising a great variety of the most useful Rules and Formulæ in Mechanical Science, with numerous Tables of Practical Data and Calculated Results for Facilitating Mechanical Operations. By WILLIAM TEMPLETON, Author of "The Engineer's Practical Assistant," &c., &c. Eighteenth Edition, Revised, Modernised, and considerably Enlarged by WALTER S. HUTTON, C.E., Author of "The Works Manager's Handbook," "The Practical Engineer's Handbook," &c. Fcap. 8vo, nearly 500 pp., with 8 Plates and upwards of 250 Illustrative Diagrams, strongly bound for workshop or pocket wear and tear. [Just Published. 8/-]

"In its modernised form Hutton's 'Templeton' should have a wide sale, for it contains much valuable information which the mechanic will often find of use, and not a few tables and notes which he might look for in vain in other works. This modernised edition will be appreciated by all who have learned to value the original editions of 'Templeton.'"—*English Mechanic*.

"It has met with great success in the engineering workshop, as we can testify; and there are a great many men who, in a great measure, owe their rise in life to this little book."—*Building News*.

"This familiar text-book—well known to all mechanics and engineers—is of essential service to the every-day requirements of engineers, millwrights, and the various trades connected with engineering and building. The new modernised edition is worth its weight in gold.—*Building News*. (Second Notice.)

"This well-known and largely-used book contains information, brought up to date, of the sort so useful to the foreman and draughtsman. So much fresh information has been introduced as to constitute it practically a new book. It will be largely used in the office and workshop."—*Mechanical World*.

"The publishers wisely entrusted the task of revision of this popular, valuable, and useful book to Mr. Hutton, than whom a more competent man they could not have found."—*Iron*.

ENGINEER'S AND MILLWRIGHT'S ASSISTANT.

A collection of Useful Tables, Rules, and Data. By WILLIAM TEMPLETON. Eighth Edition, with Additions. 18mo, cloth. 2/6

"Occupies a foremost place among books of this kind. A more suitable present to an apprentice to any of the mechanical trades could not possibly be made."—*Building News*.

"A deservedly popular work. It should be in the 'drawer' of every mechanic."—*English Mechanic*.

THE MECHANICAL ENGINEER'S REFERENCE BOOK.

For Machine and Boiler Construction. In Two Parts. Part I. GENERAL ENGINEERING DATA. Part II. BOILER CONSTRUCTION. With 51 Plates and numerous Illustrations. By NELSON FOLEY, M.I.N.A. Second Edition, Revised throughout and much Enlarged. Folio, half-bound *Net. 23 3s.*

PART I. MEASURES.—CIRCUMFERENCES AND AREAS, &c., SQUARES, CUBES, FOURTH POWERS.—SQUARE AND CUBE ROOTS.—SURFACE OF TUBES.—RECIPROCALLS.—LOGARITHMS.—MENSURATION.—SPECIFIC GRAVITIES AND WEIGHTS.—WORK AND POWER.—HEAT.—COMBUSTION.—EXPANSION AND CONTRACTION.—EXPANSION OF GASES.—STEAM.—STATIC FORCES.—GRAVITATION AND ATTRACTION.—MOTION AND COMPUTATION OF RESULTING FORCES.—ACCUMULATED WORK.—CENTRE AND RADIUS OF GYRATION.—MOMENT OF INERTIA.—CENTRE OF OSCILLATION.—ELECTRICITY.—STRENGTH OF MATERIALS.—ELASTICITY.—TEST SHEETS OF METALS.—FRICTION.—TRANSMISSION OF POWER.—FLOW OF LIQUIDS.—FLOW OF GASES.—AIR PUMPS, SURFACE CONDENSERS, &c.—SPEED OF STEAMSHIPS.—PROPELLERS.—CUTTING TOOLS.—FLANGES.—COPPER SHEETS AND TUBES.—SCREWS, NUTS, BOLT HEADS, &c.—RECIPES AND MISCELLANEOUS MATTER.—WITH DIAGRAMS FOR VALVE-GEAR, BELTING AND ROPES, DISCHARGE AND SUCTION PIPES, SCREW PROPELLERS AND COPPER PIPES.

PART II. TREATING OF POWER OF BOILERS.—USEFUL RATIOS.—NOTES ON CONSTRUCTION.—CYLINDRICAL BOILER SHELLS.—CIRCULAR FURNACES.—FLAT PLATES.—STAYS.—GIRDERS.—SCREWS.—HYDRAULIC TESTS.—RIVETING.—BOILER SETTING, CHIMNEYS, AND MOUNTINGS.—FUELS, &c.—EXAMPLES OF BOILERS AND SPEEDS OF STEAMSHIPS.—NOMINAL AND NORMAL HORSE POWER.—WITH DIAGRAMS FOR ALL BOILER CALCULATIONS AND DRAWINGS OF MANY VARIETIES OF BOILERS.

"Mr. Foley is well fitted to compile such a work. The diagrams are a great feature of the work. It may be stated that Mr. Foley has produced a volume which will undoubtedly fulfil the desire of the author and become indispensable to all mechanical engineers."—*Marine Engineer.*

"We have carefully examined this work, and pronounce it a most excellent reference book for the use of marine engineers."—*Journal of American Society of Naval Engineers.*

COAL AND SPEED TABLES.

A Pocket-book for Engineers and Steam-users. By NELSON FOLEY, Author of "The Mechanical Engineer's Reference Book." Pocket-size, cloth *3/6*

"These tables are designed to meet the requirements of every-day use; they are of sufficient scope for most practical purposes, and may be commended to engineers and users of steam."—*Iron.*

TEXT-BOOK ON THE STEAM ENGINE.

With a Supplement on GAS ENGINES, and PART II. ON HEAT ENGINES. By T. M. GOODEVE, M.A., Barrister-at-Law, Professor of Mechanics at the Royal College of Science, London; Author of "The Principles of Mechanics," "The Elements of Mechanism," &c. Fourteenth Edition. Crown 8vo, cloth *8/-*

"Professor Goodeve has given us a treatise on the steam engine, which will bear comparison with anything written by Huxley or Maxwell, and we can award it no higher praise."—*Engineer.*

"Mr. Goodeve's text-book is a work of which every young engineer should possess himself."—*Mining Journal.*

ON GAS ENGINES.

With Appendix describing a Recent Engine with Tube Igniter. By T. M. GOODEVE, M.A. Crown 8vo, cloth *2/6*

"Like all Mr. Goodeve's writings, the present is no exception in point of general excellence. It is a valuable little volume."—*Mechanical World.*

THE GAS ENGINE HANDBOOK.

A Manual of Useful Information for the Designer and the Engineer. By E. W. ROBERTS, M.E. With 40 full-page Engravings. Small Fcap. 8vo. leather. [*Just Published.* *Net. 3/6*]

A TREATISE ON STEAM BOILERS.

Their Strength, Construction, and Economical Working. By R. WILSON, C.E. Fifth Edition. 12mo, cloth *6/-*

"The best treatise that has ever been published on steam boilers."—*Engineer.*

THE MECHANICAL ENGINEER'S COMPANION.

Of Areas, Circumferences, Decimal Equivalents, in inches and feet, millimetres, squares, cubes, roots, &c.; Strength of Bolts, Weight of Iron, &c.; Weights, Measures, and other Data. Also Practical Rules for Engine Proportions. By R. EDWARDS, M.Inst.C.E. Fcap. 8vo, cloth. [*Just Published.* *3/6*]

"A very useful little volume. It contains many tables, classified data and memoranda, generally useful to engineers."—*Engineer.*

"What it professes to be, 'a handy office companion,' giving, in a succinct form, a variety of information likely to be required by mechanical engineers in their everyday office work."—*Nature.*

A HANDBOOK ON THE STEAM ENGINE.

With especial Reference to Small and Medium-sized Engines. For the Use of Engine Makers, Mechanical Draughtsmen, Engineering Students, and Users of Steam Power. By HERMAN HAEDER, C.E. Translated from the German with Additions and Alterations, by H. H. P. POWLES, A.M.I.C.E., M.I.M.E. Second Edition, Revised. With nearly 1,100 Illustrations. Crown 8vo, cloth. 9/-

"A perfect encyclopædia of the steam engine and its details, and one which must take a permanent place in English drawing-offices and workshops."—*A Foreman Pattern-maker.*

"This is an excellent book, and should be in the hands of all who are interested in the construction and design of medium-sized stationary engines. . . . A careful study of its contents and the arrangement of the sections leads to the conclusion that there is probably no other book like it in this country. The volume aims at showing the results of practical experience, and it certainly may claim a complete achievement of this idea."—*Nature.*

"There can be no question as to its value. We cordially commend it to all concerned in the design and construction of the steam engine."—*Mechanical World.*

BOILER AND FACTORY CHIMNEYS.

Their Draught-Power and Stability. With a Chapter on *Lightning Conductors*, By ROBERT WILSON, A.I.C.E., Author of "A Treatise on Steam Boilers," &c. Crown 8vo, cloth. 3/6

"A valuable contribution to the literature of scientific building."—*The Builder.*

BOILER-MAKER'S READY RECKONER & ASSISTANT.

With Examples of Practical Geometry and Templating, for the Use of Platers, Smiths, and Riveters. By JOHN COURTNEY, Edited by D. K. CLARK, M.I.C.E. Third Edition, 480 pp., with 140 Illustrations. Fcap. 8vo, half-bound. 7/-

"No workman or apprentice should be without this book."—*Iron Trade Circular.*

THE POCKET BOOK OF REFRIGERATION AND ICE-MAKING FOR 1902.

Edited by A. J. WALLIS-TAYLER, A.M.Inst.C.E. Author of "Refrigerating and Ice-making Machinery," &c. With Diary and Almanac. Small crown 8vo, cloth. [Just Published. Net 2/6]

REFRIGERATING & ICE-MAKING MACHINERY.

A Descriptive Treatise for the Use of Persons Employing Refrigerating and Ice-Making Installations, and others. By A. J. WALLIS-TAYLER, Assoc. Member Inst. C.E. Third Edition, Revised and Enlarged. Crown 8vo, cloth. [Just Published. 7/6]

"Practical, explicit and profusely illustrated."—*Glasgow Herald.*

"We recommend the book, which gives the cost of various systems and illustrations showing details of parts of machinery and general arrangements of complete installations."—*Builder.*

"May be recommended as a useful description of the machinery, the processes, and of the facts, figures, and tabulated physics of refrigerating. It is one of the best compilations on the subject."—*Engineer.*

TEA MACHINERY AND TEA FACTORIES.

A Descriptive Treatise on the Mechanical Appliances required in the Cultivation of the Tea Plant and the Preparation of Tea for the Market. By A. J. WALLIS-TAYLER, A.M.Inst.C.E. Medium 8vo, 468 pp. With 218 Illustrations. [Just Published. Net 25/-]

"When tea planting was first introduced into the British possessions, little, if any, machinery was employed, but now its use is almost universal. This volume contains a very full account of the machinery necessary for the proper outfit of a factory, and also a description of the processes best carried out by this machinery."—*Journal Society of Arts.*

ENGINEERING ESTIMATES, COSTS, & ACCOUNTS.

A Guide to Commercial Engineering. With numerous Examples of Estimates and Costs of Millwright Work, Miscellaneous Productions, Steam Engines and Steam Boilers; and a Section on the Preparation of Costs Accounts. By A GENERAL MANAGER. Second Edition. 8vo, cloth. [Just Published. 12/-]

"This is an excellent and very useful book, covering subject-matter in constant requisition in every factory and workshop. . . . The book is invaluable, not only to the young engineer, but also to the estimate department of every works."—*Builder.*

"We accord the work unqualified praise. The information is given in a plain, straightforward manner, and bears throughout evidence of the intimate practical acquaintance of the author with every phase of commercial engineering."—*Mechanical World.*

AERIAL OR WIRE-ROPE TRAMWAYS.

Their Construction and Management. By A. J. WALLIS-TAYLER, A.M.Inst.C.E.
With 81 Illustrations. Crown 8vo, cloth. [Just Published. 7/6

"This is in its way an excellent volume. Without going into the minutiae of the subject, it yet lays before its readers a very good exposition of the various systems of rope transmission in use, and gives as well not a little valuable information about their working, repair and management. We can safely recommend it as a useful general treatise on the subject."—*The Engineer*.

"The book will rank with the best on this useful topic, and we recommend it to those whose business is the transporting of minerals and goods."—*Mining Journal*.

MOTOR CARS OR POWER CARRIAGES FOR COMMON ROADS.

By A. J. WALLIS-TAYLER, A.M.Inst.C.E. Author of "Modern Cycles," &c.
212 pp., with 76 Illustrations. Crown 8vo, cloth. 4/6

"The book is clearly expressed throughout, and is just the sort of work that an engineer, thinking of turning his attention to motor-carriage work, would do well to read as a preliminary to starting operations."—*Engineering*.

PLATING AND BOILER MAKING.

A Practical Handbook for Workshop Operations. By JOSEPH G. HORNER, A.M.I.M.E. 380 pp., with 338 Illustrations. Crown 8vo, cloth. 7/6

"This work is characterised by that evidence of close acquaintance with workshop methods which will render the book exceedingly acceptable to the practical hand. We have no hesitation in commending the work as a serviceable and practical handbook on a subject which has not hitherto received much attention from those qualified to deal with it in a satisfactory manner."—*Mechanical World*.

PATTERN MAKING.

A Practical Treatise, embracing the Main Types of Engineering Construction, and including Gearing, both Hand and Machine-made, Engine Work, Sheaves and Pulleys, Pipes and Columns, Screws, Machine Parts, Pumps and Cocks, the Moulding of Patterns in Loam and Greensand, &c., together with the methods of Estimating the weight of Castings; with an Appendix of Tables for Workshop Reference. By JOSEPH G. HORNER, A.M.I.M.E. Second Edition, Enlarged. With 450 Illustrations. Crown 8vo, cloth. 7/6

"A well-written technical guide, evidently written by a man who understands and has practised what he has written about. . . . We cordially recommend it to engineering students, young journeymen, and others desirous of being initiated into the mysteries of pattern-making."—*Builder*.

"An excellent *vade mecum* for the apprentice who desires to become master of his trade."—*English Mechanic*.

MECHANICAL ENGINEERING TERMS.

(Lockwood's Dictionary of). Embracing those current in the Drawing Office, Pattern Shop, Foundry, Fitting, Turning, Smiths', and Boiler Shops, &c., &c. Comprising upwards of 6,000 Definitions. Edited by JOSEPH G. HORNER, A.M.I.M.E. Third Edition, Revised, with Additions. Crown 8vo, cloth. [Just Published. Net 7/6

"Just the sort of handy dictionary required by the various trades engaged in mechanical engineering. The practical engineering pupil will find the book of great value in his studies, and every foreman engineer and mechanic should have a copy."—*Building News*.

TOOTHED GEARING.

A Practical Handbook for Offices and Workshops. By J. HORNER, A.M.I.M.E. With 184 Illustrations. Crown 8vo, cloth. 6/-

"We give the book our unqualified praise for its thoroughness of treatment and recommend it to all interested as the most practical book on the subject yet written."—*Mechanical World*.

FIRE PROTECTION.

A Complete Manual of the Organisation, Machinery, Discipline and General Working of the Fire Brigade of London. By CAPTAIN EYRE M. SHAW, C.B., Chief Officer, Metropolitan Fire Brigade. New and Revised Edition. Demy 8vo, cloth. Net 5/-

FIRES, FIRE-ENGINES, AND FIRE-BRIGADES.

With a History of Fire-Engines, their Construction, Use, and Management; Foreign Fire Systems; Hints on Fire-Brigades, &c. By C. F. T. YOUNG, C.E. 8vo, cloth. 24/-

"To such of our readers as are interested in the subject of fires and fire apparatus, we can most earnestly commend this book."—*Engineering*.

STONE-WORKING MACHINERY.

A Manual dealing with the Rapid and Economical Conversion of Stone. With Hints on the Arrangement and Management of Stone Works. By M. POWIS BALE, M.I.M.E. Second Edition, Enlarged. With Illustrations. Crown 8vo, cloth. [Just Published. 9/-]

"The book should be in the hands of every mason or student of stonework."—*Colliery Guardian*.

"A capital handbook for all who manipulate stone for building or ornamental purposes."—*Machinery Market*.

PUMPS AND PUMPING.

A Handbook for Pump Users. Being Notes on Selection, Construction, and Management. By M. POWIS BALE, M.I.M.E. Fourth Edition. Crown 8vo, cloth. [Just Published. 3/6]

"The matter is set forth as concisely as possible. In fact, condensation rather than diffuseness has been the author's aim throughout; yet he does not seem to have omitted anything likely to be of use."—*Journal of Gas Lighting*.

"Thoroughly practical and simply and clearly written."—*Glasgow Herald*.

MILLING MACHINES AND PROCESSES.

A Practical Treatise on Shaping Metals by Rotary Cutters. Including Information on Making and Grinding the Cutters. By PAUL N. HASLUCK, Author

"Lathe Work." With upwards of 300 Engravings. Large crown 8vo, 352 pag cloth. 12/-

"A new departure in engineering literature. . . . We can recommend this work to all interested in milling machines; it is what it professes to be—a practical treatise."—*Engineer*.

"A capital and reliable book which will no doubt be of considerable service both to those who are already acquainted with the process as well as to those who contemplate its adoption."—*Industries*

LATHE-WORK.

A Practical Treatise on the Tools, Appliances, and Processes employed in the Art of Turning. By PAUL N. HASLUCK. Seventh Edition. Crown 8vo, cloth.

[Just Published. 5/-]

"Written by a man who knows not only how work ought to be done, but who also knows how to do it, and how to convey his knowledge to others. To all turners this book would be valuable."—*Engineering*.

"We can safely recommend the work to young engineers. To the amateur it will simply be invaluable. To the student it will convey a great deal of useful information."—*Engineer*.

SCREW THREADS.

And Methods of Producing Them. With numerous Tables and complete Directions for using Screw-Cutting Lathes. By PAUL N. HASLUCK, Author of

"Lathe Work," &c. With Seventy-four Illustrations. Fifth Edition. Waistcoat-pocket size. 1/6

"Full of useful information, hints, and practical criticism. Taps, dies, and screwing tools generally are illustrated and their action described."—*Mechanical World*.

"It is a complete compendium of all the details of the screw-cutting lathe; in fact a *multum-in-parvo* on all the subjects it treats upon."—*Carpenter and Builder*.

TABLES AND MEMORANDA FOR ENGINEERS, MECHANICS, ARCHITECTS, BUILDERS, &c.

Selected and Arranged by FRANCIS SMITH. Sixth Edition, Revised, including ELECTRICAL TABLES, FORMULÆ, AND MEMORANDA. Waistcoat-pocket size, limp leather. [Just Published. 1/6]

"It would, perhaps, be as difficult to make a small pocket-book selection of notes and formulæ to suit ALL engineers as it would be to make a universal medicine; but Mr. Smith's waistcoat-pocket collection may be looked upon as a successful attempt."—*Engineer*.

"The best example we have ever seen of 270 pages of useful matter packed into the dimensions of a card case."—*Building News*. "A veritable pocket treasury of knowledge."—*Iron*.

POCKET GLOSSARY OF TECHNICAL TERMS.

English-French, French-English; with Tables suitable for the Architectural, Engineering, Manufacturing, and Nautical Professions. By JOHN JAMES FLETCHER, Engineer and Surveyor. Third Edition. 200 pp. Waistcoat-pocket size, limp leather. [Just Published. 1/6]

"It is a very great advantage for readers and correspondents in France and England to have so large a number of the words relating to engineering and manufactures collected in a limpid volume. The little book will be useful both to students and travellers."—*Architect*.

"The glossary of terms is very complete, and many of the Tables are new and well-arranged. We cordially commend the book."—*Mechanical World*.

THE ENGINEER'S YEAR-BOOK FOR 1902.

Comprising Formulæ, Rules, Tables, Data and Memoranda in Civil, Mechanical, Electrical, Marine and Mine Engineering. By H. R. KEMPE, A.M.Inst.C.E., M.I.E.E., Technical Officer of the Engineer-in-Chief's Office, General Post Office, London, Author of "A Handbook of Electrical Testing," "The Electrical Engineer's Pocket-Book," &c. With nearly 1,000 Illustrations, specially Engraved for the work. Crown 8vo, 850 pages, leather. [Just Published. 3/-]

"Represents an enormous quantity of work, and forms a desirable book of reference."—*The Engineer*.

"The volume is distinctly in advance of most similar publications in this country."—*Engineering*.

"This valuable and well-designed book of reference meets the demands of all descriptions of engineers."—*Saturday Review*.

"Teems with up-to-date information in every branch of engineering and construction."—*Building News*.

"The needs of the engineering profession could hardly be supplied in a more admirable, complete and convenient form. To say that it more than sustains all comparisons is praise of the highest sort, and that may justly be said of it."—*Mining Journal*.

"There is certainly room for the new comer, which supplies explanations and directions, as well as formulæ and tables. It deserves to become one of the most successful of the technical annuals."—*Architect*.

"Brings together with great skill all the technical information which an engineer has to use day by day. It is in every way admirably equipped, and is sure to prove successful."—*Scotsman*.

"The up-to-dateness of Mr. Kempe's compilation is a quality that will not be lost on the busy people for whom the work is intended."—*Glasgow Herald*.

THE PORTABLE ENGINE.

A Practical Manual on its Construction and Management. For the Use of Owners and Users of Steam Engines generally. By WILLIAM DYSON WANSBROUGH. Crown 8vo, cloth 3/6

"This is a work of value to those who use steam machinery. . . . Should be read by every one who has a steam engine, on a farm or elsewhere."—*Mark Lane Express*.

"We cordially commend this work to buyers and owners of steam engines, and to those who have to do with their construction or use."—*Timber Trades Journal*.

"Such a general knowledge of the steam-engine as Mr. Wansbrough furnishes to the reader should be acquired by all intelligent owners and others who use the steam engine."—*Building News*.

"An excellent text-book of this useful form of engine. The 'Hints to Purchasers' contain a good deal of common-sense and practical wisdom."—*English Mechanic*.

IRON AND STEEL.

A work for the Forge, Foundry, Factory, and Office. Containing ready, useful, and trustworthy information for Ironmasters and their Stock-takers; Managers of Bar, Rail, Plate, and Sheet Rolling Mills; Iron and Metal Founders; Iron Ship and Bridge Builders; Mechanical, Mining, and Consulting Engineers; Architects, Contractors, Builders, &c. By CHARLES HOARE, Author of "The Slide Rule," &c. Ninth Edition. 32mo, leather 6/-

"For comprehensiveness the book has not its equal."—*Iron*.

"One of the best of the pocket books."—*English Mechanic*.

CONDENSED MECHANICS.

A Selection of Formulæ, Rules, Tables, and Data for the Use of Engineering Students, Science Classes, &c. In accordance with the Requirements of the Science and Art Department. By W. G. CRAWFORD HUGHES, A.M.I.C.E. Crown 8vo, cloth 2/6

"The book is well fitted for those who are either confronted with practical problems in their work, or are preparing for examination and wish to refresh their knowledge by going through their formulæ again."—*Marine Engineer*.

"It is well arranged, and meets the wants of those for whom it is intended."—*Railway News*.

THE SAFE USE OF STEAM.

Containing Rules for Unprofessional Steam-users. By an ENGINEER. Seventh Edition. Sewed 6d.

"If steam-users would but learn this little book by heart, boiler explosions would become sensations by their rarity."—*English Mechanic*.

THE LOCOMOTIVE ENGINE.

The Autobiography of an Old Locomotive Engine. By ROBERT WEATHERBURN, M.I.M.E. With Illustrations and Portraits of GEORGE and ROBERT STEPHENSON. Crown 8vo, cloth. [Just Published. Net 2/6

SUMMARY OF CONTENTS. PROLOGUE.—CYLINDERS.—MOTIONS.—CONNECTING RODS.—FRAMES.—WHEELS.—PUMPS, CLACKS, &c.—INJECTORS.—BOILERS.—SMOKE BOX.—CHIMNEY.—WEATHER BOARD AND AWNING.—INTERNAL DISSENSIONS.—ENGINE DRIVERS, &c.

"It would be difficult to imagine anything more ingeniously planned, more cleverly worked out, and more charmingly written. Readers, whether young or old, of a mechanical turn, cannot fail to find the volume most enjoyable as well as most instructive."—*Glasgow Herald*.

THE LOCOMOTIVE ENGINE & ITS DEVELOPMENT.

A Popular Treatise on the Gradual Improvements made in Railway Engines between 1803 and 1896. By CLEMENT E. STRETTON, C.E. Fifth Edition, Revised and Enlarged. With 120 Illustrations. Crown 8vo, cloth 3/6

"Students of railway history and all who are interested in the evolution of the modern locomotive will find much to attract and entertain in this volume."—*The Times*.

LOCOMOTIVE ENGINE DRIVING.

A Practical Manual for Engineers in Charge of Locomotive Engines. By MICHAEL REYNOLDS, formerly Locomotive Inspector, L. B. and S. C. R. Eleventh Edition. Including a KEY to THE LOCOMOTIVE ENGINE. Cr. 8vo, cloth. 4/6

"Mr. Reynolds has supplied a want, and has supplied it well. We can confidently recommend the book not only to the practical driver, but to everyone who takes an interest in the performance of locomotive engines."—*The Engineer*.

"Mr. Reynolds has opened a new chapter in the literature of the day. This admirable practical treatise, of the practical utility of which we have to speak in terms of warm commendation."—*Athenæum*.

THE MODEL LOCOMOTIVE ENGINEER,

Fireman, and Engine-Boy. Comprising a Historical Notice of the Pioneer Locomotive Engines and their Inventors. By MICHAEL REYNOLDS. Second Edition, with Revised Appendix. Crown 8vo, cloth 4/6

"From the technical knowledge of the author, it will appeal to the railway man of to-day more forcibly than anything written by Dr. Smiles."—*English Mechanic*.

"We should be glad to see this book in the possession of everyone in the kingdom who has ever laid, or is to lay, hands on a locomotive engine."—*Iron*.

CONTINUOUS RAILWAY BRAKES.

A Practical Treatise on the several Systems in Use in the United Kingdom: their Construction and Performance. By MICHAEL REYNOLDS. Large crown 8vo, cloth 9/-

"A popular explanation of the different brakes. It will be of great assistance in forming public opinion, and will be studied with benefit by those who take an interest in the brake."—*English Mechanic*.

STATIONARY ENGINE DRIVING.

A Practical Manual for Engineers in Charge of Stationary Engines. By MICHAEL REYNOLDS. Sixth Edition. With Plates and Woodcuts. Crown 8vo, cloth 4/6

"The author is thoroughly acquainted with his subjects, and his advice on the various points treated is clear and practical."—*Engineering*.

"Our author leaves no stone unturned. He is determined that his readers shall not only know something about the stationary engine, but all about it."—*Engineer*.

ENGINE-DRIVING LIFE.

Stirring Adventures and Incidents in the Lives of Locomotive Engine-Drivers. By MICHAEL REYNOLDS. Third Edition. Crown 8vo, cloth. 1/6

"From first to last perfectly fascinating. Wilkie Collins's most thrilling conceptions are thrown into the shade by true incidents, endless in their variety, related in every page."—*North British Mail*.

THE ENGINEMAN'S POCKET COMPANION,

And Practical Educator for Enginemen, Boiler Attendants, and Mechanics. By MICHAEL REYNOLDS. With Forty-five Illustrations and numerous Diagrams. Fourth Edition, Revised. Royal 18mo, strongly bound for pocket wear 3/6

"This admirable work is the honest workmanship of a competent engineer."—*Glasgow Herald*.

"A most meritorious work, giving in a succinct and practical form all the information an engineman desirous of mastering the scientific principles of his daily calling would require."—*The Miller*.

CIVIL ENGINEERING, SURVEYING, ETC.

LIGHT RAILWAYS FOR THE UNITED KINGDOM, INDIA, AND THE COLONIES.

A Practical Handbook setting forth the Principles on which Light Railways should be Constructed, Worked, and Financed; and detailing the cost of Construction, Equipment, Revenue and Working Expenses. By J. C. MACKAY, F.G.S., A.M.Inst.C.E. Illustrated with Plates and Diagrams. 8vo, cloth **15/-**

"Mr. Mackay's volume is clearly and concisely written, admirably arranged, and freely illustrated. The book is exactly what has been long wanted. We recommend it to all interested in the subject. It is sure to have a wide sale."—*Railway News*.

TUNNELLING.

A Practical Treatise. By C. PRELINI, C.E., with Additions by C. S. HILL, C.E. With 150 Diagrams and Illustrations. Royal 8vo, cloth.

[Just Published. Net **16/-**]

PRACTICAL TUNNELLING.

Explaining in detail Setting-out the Works, Shaft-sinking, and Heading-driving, Ranging the Lines and Levelling underground, Sub-Excavating, Timbering and the Construction of the Brickwork of Tunnels. By F. W. SIMMS, M.Inst. C.E. Fourth Edition, Revised and Further Extended, including the most Recent (1895) Examples of Sub-aqueous and other Tunnels by D. KINNEAR CLARK, M.Inst.C.E. With 34 Folding Plates. Imperial 8vo, cloth **£2 2s.**

"The present (1896) edition has been brought right up to date, and is thus rendered a work to which civil engineers generally should have ready access, and to which engineers who have construction work can hardly afford to be without, but which to the younger members of the profession is invaluable, as from its pages they can learn the state to which the science of tunnelling has attained."—*Railway News*.

THE WATER SUPPLY OF TOWNS, AND THE CONSTRUCTION OF WATER-WORKS.

A Practical Treatise for the Use of Engineers and Students of Engineering. By W. K. BURTON, A.M.Inst.C.E., Consulting Engineer to the Tokyo Water-Works. Second Edition, Revised and Extended. With numerous Plates and Illustrations. Super-royal 8vo, buckram. [Just Published. **25/-**]

I. INTRODUCTORY.—II. DIFFERENT QUALITIES OF WATER.—III. QUANTITY OF WATER TO BE PROVIDED.—IV. ON ASCERTAINING WHETHER A PROPOSED SOURCE OF SUPPLY IS SUFFICIENT.—V. ON ESTIMATING THE STORAGE CAPACITY REQUIRED TO BE PROVIDED.—VI. CLASSIFICATION OF WATERWORKS.—VII. IMPOUNDING RESERVOIRS.—VIII. EARTHWORK DAMS.—IX. MASONRY DAMS.—X. THE PURIFICATION OF WATER.—XI. SETTLING RESERVOIRS.—XII. SAND FILTRATION.—XIII. PURIFICATION OF WATER BY ACTION OF IRON, SOFTENING OF WATER BY ACTION OF LIME, NATURAL FILTRATION.—XIV. SERVICE OR CLEAN WATER RESERVOIRS—WATER TOWERS—STAND PIPES.—XV. THE CONNECTION OF SETTLING RESERVOIRS, FILTER BEDS AND SERVICE RESERVOIRS.—XVI. PUMPING MA-

CHINERY.—XVII. FLOW OF WATER IN CONDUITS—PIPES AND OPEN CHANNELS.—XVIII. DISTRIBUTION SYSTEMS.—XIX. SPECIAL PROVISIONS FOR THE EXTINCTION OF FIRE.—XX. PIPES FOR WATERWORKS.—XXI. PREVENTION OF WASTE OF WATER.—XXII. VARIOUS APPLIANCES USED IN CONNECTION WITH WATERWORKS.

APPENDIX I. By PROF. JOHN MILNE, F.R.S.—CONSIDERATIONS CONCERNING THE PROBABLE EFFECTS OF EARTHQUAKES ON WATERWORKS, AND THE SPECIAL PRECAUTIONS TO BE TAKEN IN EARTHQUAKE COUNTRIES.

APPENDIX II. By JOHN DE RIJKE, C.E.—ON SAND DUNES AND DUNE SAND AS A SOURCE OF WATER SUPPLY.

"The chapter upon filtration of water is very complete, and the details of construction well illustrated. . . . The work should be specially valuable to civil engineers engaged in work in Japan, but the interest is by no means confined to that locality."—*Engineer*.

"We congratulate the author upon the practical commonsense shown in the preparation of this work. . . . The plates and diagrams have evidently been prepared with great care, and cannot fail to be of great assistance to the student."—*Builder*.

RURAL WATER SUPPLY.

A Practical Handbook on the Supply of Water and Construction of Waterworks for small Country Districts. By ALLAN GREENWELL, A.M.I.C.E., and W. T. CURRY, A.M.I.C.E., F.G.S. With Illustrations. Second Edition, Revised. Crown 8vo, cloth. [Just Published. **5/-**]

"We conscientiously recommend it as a very useful book for those concerned in obtaining water for small districts, giving a great deal of practical information in a small compass."—*Builder*.

"The volume contains valuable information upon all matters connected with water supply. . . . It is full of details on points which are continually before waterworks engineers."—*Nature*.

THE WATER SUPPLY OF CITIES AND TOWNS.

By WILLIAM HUMBER, A.-M.Inst.C.E., and M.Inst.M.E., Author of "Cast and Wrought Iron Bridge Construction," &c., &c. Illustrated with 50 Double Plates, 1 Single Plate, Coloured Frontispiece, and upwards of 250 Woodcuts, and containing 400 pages of Text. Imp. 4to, elegantly and substantially half-bound in morocco [Net 26 6s.]

LIST OF CONTENTS.

I. HISTORICAL SKETCH OF SOME OF THE MEANS THAT HAVE BEEN ADOPTED FOR THE SUPPLY OF WATER TO CITIES AND TOWNS.—II. WATER AND THE FOREIGN MATTER USUALLY ASSOCIATED WITH IT.—III. RAINFALL AND EVAPORATION.—IV. SPRINGS AND THE WATER-BEARING FORMATIONS OF VARIOUS DISTRICTS.—V. MEASUREMENT AND ESTIMATION OF THE FLOW OF WATER.—VI. ON THE SELECTION OF THE SOURCE OF SUPPLY.—VII. WELLS.—VIII. RESERVOIRS.—IX. THE PURIFICATION OF WATER.—X. PUMPS.—XI. PUMPING MACHINERY.—XII. CONDUITS.—

XIII. DISTRIBUTION OF WATER.—XIV. METERS, SERVICE PIPES, AND HOUSE FITTINGS.—XV. THE LAW AND ECONOMY OF WATER WORKS.—XVI. CONSTANT AND INTERMITTENT SUPPLY.—XVII. DESCRIPTION OF PLATES.—APPENDICES, GIVING TABLES OF RATES OF SUPPLY, VELOCITIES, &c., &c., TOGETHER WITH SPECIFICATIONS OF SEVERAL WORKS ILLUSTRATED, AMONG WHICH WILL BE FOUND: ABERDEEN, BIDEFORD, CANTERBURY, DUNDEE, HALIFAX, LAMBETH, ROTHERHAM, DUBLIN, AND OTHERS.

"The most systematic and valuable work upon water supply hitherto produced in English, or in any other language. . . . Mr. Humber's work is characterised almost throughout by an exhaustiveness much more distinctive of French and German than of English technical treatises."—*Engineer*.

HYDRAULIC POWER ENGINEERING.

A Practical Manual on the Concentration and Transmission of Power by Hydraulic Machinery. By G. CROYDON MARKS, A.M.Inst.C.E. With nearly 200 Illustrations. 8vo, cloth [Just Published. Net 9/-]

SUMMARY OF CONTENTS.

PRINCIPLES OF HYDRAULICS.—THE FLOW OF WATER.—HYDRAULIC PRESSURES.—MATERIAL.—TEST LOAD.—PACKINGS FOR SLIDING SURFACES.—PIPE JOINTS.—CONTROLLING VALVES.—PLATFORM LIFTS.—WORKSHOP AND FOUNDRY CRANES.—WAREHOUSE AND DOCK CRANES.—HYDRAULIC ACCUMULATORS.—PRESSES FOR BALING AND OTHER PURPOSES.—SHEET METAL.—

WORKING AND FORGING MACHINERY.—HYDRAULIC RIVETERS.—HAND AND POWER PUMPS.—STEAM PUMPS.—TURBINES.—IMPULSE TURBINES.—REACTION TURBINES.—DESIGN OF TURBINES IN DETAIL.—WATER WHEELS.—HYDRAULIC ENGINES.—RECENT ACHIEVEMENTS.—PRESSURE OF WATER.—ACTION OF PUMPS, &c.

"We have nothing but praise for this thoroughly valuable work. The author has succeeded in rendering his subject interesting as well as instructive."—*Practical Engineer*.

"Can be unhesitatingly recommended as a useful and up-to-date manual on hydraulic transmission and utilisation of power."—*Mechanical World*.

HYDRAULIC TABLES, CO-EFFICIENTS, & FORMULÆ.

For Finding the Discharge of Water from Orifices, Notches, Weirs, Pipes, and Rivers. With New Formulæ, Tables, and General Information on Rain-fall, Catchment-Basins, Drainage, Sewerage, Water Supply for Towns and Mill Power. By JOHN NEVILLE, Civil Engineer, M.R.I.A. Third Edition, carefully Revised, with considerable Additions. Numerous Illustrations. Crown 8vo, cloth 14/-

"It is, of all English books on the subject, the one nearest to completeness."—*Architect*.

HYDRAULIC MANUAL.

Consisting of Working Tables and Explanatory Text. Intended as a Guide in Hydraulic Calculations and Field Operations. By LOWIS D'A. JACKSON, Author of "Aid to Survey Practice," "Modern Metrology," &c. Fourth Edition, Enlarged. Large crown 8vo, cloth 16/-

"The author has constructed a manual which may be accepted as a trustworthy guide to this branch of the engineer's profession."—*Engineering*.

WATER ENGINEERING.

A Practical Treatise on the Measurement, Storage, Conveyance, and Utilisation of Water for the Supply of Towns, for Mill Power, and for other Purposes. By CHARLES SLAGG, A.M.Inst.C.E. Second Edition. Crown 8vo, cloth 7/6

"As a small practical treatise on the water supply of towns, and on some applications of water-power, the work is in many respects excellent."—*Engineering*.

"The author has collated the results deduced from the experiments of the most eminent authorities, and has presented them in a compact and practical form, accompanied by very clear and detailed explanations. . . . The application of water as a motive power is treated very carefully and exhaustively."—*Builder*.

THE RECLAMATION OF LAND FROM TIDAL WATERS.

A Handbook for Engineers, Landed Proprietors, and others interested in Works of Reclamation. By ALEXANDER BRAZELEY, M.Inst.C.E. With Illustrations. 8vo, cloth. [Just Published. Net 10/6

"The book shows in a concise way what has to be done in reclaiming land from the sea, and the best way of doing it. The work contains a great deal of practical and useful information which cannot fail to be of service to engineers entrusted with the enclosure of salt marshes, and to land owners intending to reclaim land from the sea."—*The Engineer*.

"The author has carried out his task efficiently and well, and his book contains a large amount of information of great service to engineers and others interested in works of reclamation."—*Nature*.

MASONRY DAMS FROM INCEPTION TO COMPLETION.

Including numerous Formulæ, Forms of Specification and Tender, Pocket Diagram of Forces, &c. For the use of Civil and Mining Engineers. By C. F. COURTNEY, M.Inst.C.E. 8vo, cloth. 9/-

"The volume contains a good deal of valuable data, and furnishes the engineer with practical advice. Many useful suggestions will be found in the remarks on site and position, location of dam, foundations and construction."—*Building News*.

RIVER BARS.

The Causes of their Formation, and their Treatment by "Induced Tidal Scour;" with a Description of the Successful Reduction by this Method of the Bar at Dublin. By I. J. MANN, Assist. Eng. to the Dublin Port and Docks Board. Royal 8vo, cloth. 7/6

"We recommend all interested in harbour works—and, indeed, those concerned in the improvements of rivers generally—to read Mr. Mann's interesting work."—*Engineer*.

DRAINAGE OF LANDS, TOWNS, AND BUILDINGS.

By G. D. DEMPSEY, C.E. Revised, with large Additions on RECENT PRACTICE IN DRAINAGE ENGINEERING, by D. KINNAR CLARK, M.Inst.C.E. Third Edition. Fcap. 8vo, cloth. 4/6

"The new matter added to Mr. Dempsey's excellent work is characterised by the comprehensive grasp and accuracy of detail for which the name of Mr. D. K. Clark is a sufficient voucher."—*Athenæum*.

TRAMWAYS: THEIR CONSTRUCTION & WORKING.

Embracing a Comprehensive History of the System; with an exhaustive Analysis of the Various Modes of Traction, including Horse Power, Steam, Cable Traction, Electric Traction, &c.; a Description of the Varieties of Rolling Stock; and ample Details of Cost and Working Expenses. New Edition, Thoroughly Revised, and Including the Progress recently made in Tramway Construction, &c. &c. By D. KINNAR CLARK, M.Inst.C.E. With 400 Illustrations. 8vo, 780 pages, buckram. 28/-

"The new volume is one which will rank, among tramway engineers and those interested in tramway working, with the author's world-famed book on railway machinery."—*The Engineer*.

PRACTICAL SURVEYING.

A Text-Book for Students preparing for Examinations or for Survey-work in the Colonies. By GEORGE W. USILL, A.M.I.C.E. With 4 Lithographic Plates and upwards of 330 Illustrations. Seventh Edition. Including Tables of Natural Sines, Tangents, Secants, &c. Crown 8vo, 7/6 cloth; or, on THIN PAPER, leather, gilt edges, rounded corners, for pocket use. [Just Published. 12/6

"The best forms of instruments are described as to their construction, uses and modes of employment, and there are innumerable hints on work and equipment such as the author, in his experience as surveyor, draughtsman and teacher, has found necessary, and which the student in his inexperience will find most serviceable."—*Engineer*.

"The latest treatise in the English language on surveying, and we have no hesitation in saying that the student will find it a better guide than any of its predecessors. Deserves to be recognised as the first book which should be put in the hands of a pupil of Civil Engineering."—*Architect*.

AID TO SURVEY PRACTICE.

For Reference in Surveying, Levelling, and Setting-out; and in Route Surveys of Travellers by Land and Sea. With Tables, Illustrations, and Records. By LOWIS D'A. JACKSON, A.M.I.C.E. Second Edition, Enlarged. 8vo, cloth 12/6

"Mr. Jackson has produced a valuable *vade-mecum* for the surveyor. We can recommend this book as containing an admirable supplement to the teaching of the accomplished surveyor."—*Athenæum*.

"The author brings to his work a fortunate union of theory and practical experience which, aided by a clear and lucid style of writing, renders the book a very useful one."—*Builder*.

SURVEYING WITH THE TACHEOMETER.

A Practical Manual for the use of Civil and Military Engineers and Surveyors. Including two series of Tables specially computed for the Reduction of Readings in Sexagesimal and in Centesimal Degrees. By NEIL KENNEDY, M.Inst.C.E. With Diagrams and Plates. Demy 8vo, cloth. [Just Published. Net 10/6

"The work is very clearly written, and should remove all difficulties in the way of any surveyor desirous of making use of this useful and rapid instrument."—*Nature*.

ENGINEER'S & MINING SURVEYOR'S FIELD BOOK.

Consisting of a Series of Tables, with Rules, Explanations of Systems, and use of Theodolite for Traverse Surveying and Plotting the Work with minute accuracy by means of Straight Edge and Set Square only; Levelling with the Theodolite; Setting-out Curves with and without the Theodolite; Earthwork Tables, &c. By W. DAVIS HASKOLL, C.E. With numerous Woodcuts. Fourth Edition, Enlarged. Crown 8vo, cloth 12/-

"The book is very handy; the separate tables of sines and tangents to every minute will make it useful for many other purposes, the genuine traverse tables existing all the same."—*Athenæum*.

LAND AND MARINE SURVEYING.

In Reference to the Preparation of Plans for Roads and Railways; Canals, Rivers, Towns' Water Supplies; Docks and Harbours. With Description and Use of Surveying Instruments. By W. DAVIS HASKOLL, C.E. Second Edition, Revised, with Additions. Large crown 8vo, cloth 9/-

"This book must prove of great value to the student. We have no hesitation in recommending it, feeling assured that it will more than repay a careful study."—*Mechanical World*.

"A most useful book for the student. We can strongly recommend it as a carefully-written and valuable text-book. It enjoys a well-deserved reputation among surveyors."—*Builder*.

PRINCIPLES AND PRACTICE OF LEVELLING.

Showing its Application to purposes of Railway and Civil Engineering in the Construction of Roads; with Mr. TELFORD's Rules for the same. By FREDERICK W. SIMMS, M.Inst.C.E. Eighth Edition, with LAW's Practical Examples for Setting-out Railway Curves, and TRAUTWINE's Field Practice of Laying-out Circular Curves. With 7 Plates and numerous Woodcuts, 8vo. 3/6

* * * TRAUTWINE ON CURVES may be had separate 5/-

"The text-book on levelling in most of our engineering schools and colleges."—*Engineer*.

"The publishers have rendered a substantial service to the profession, especially to the younger members, by bringing out the present edition of Mr. Simms's useful work."—*Engineering*.

AN OUTLINE OF THE METHOD OF CONDUCTING A TRIGONOMETRICAL SURVEY,

For the Formation of Geographical and Topographical Maps and Plans, Military Reconnaissance, LEVELLING, &c., with Useful Problems, Formulæ, and Tables. By Lieut.-General FROME, R.E. Fourth Edition, Revised and partly Re-written by Major-General Sir CHARLES WARREN, G.C.M.G., R.E. With 19 Plates and 115 Woodcuts, royal 8vo, cloth 16/-

"No words of praise from us can strengthen the position so well and so steadily maintained by this work. Sir Charles Warren has revised the entire work, and made such additions as were necessary to bring every portion of the contents up to the present date."—*Broad Arrow*.

TABLES OF TANGENTIAL ANGLES & MULTIPLES.

For Setting-out Curves from 5 to 200 Radius. By A. BEAZELEY, M.Inst.C.E. Sixth Edition, Revised. With an Appendix on the use of the Tables for Measuring up Curves. Printed on 50 Cards, and sold in a cloth box, waistcoat-pocket size. [Just Published. 3/6

"Each table is printed on a small card, which, being placed on the theodolite, leaves the hands free to manipulate the instrument—no small advantage as regards the rapidity of work."—*Engineer*.

"Very handy: a man may know that all his day's work must fall on two of these cards, which he puts into his own card-case, and leaves the rest behind."—*Athenæum*.

HANDY GENERAL EARTHWORK TABLES.

Giving the Contents in Cubic Yards of Centre and Slopes of Cuttings and Embankments from 3 inches to 80 feet in Depth or Height, for use with either 66 feet Chain or 100 feet Chain. By J. H. WATSON BUCK, M.Inst.C.E. On a Sheet mounted in cloth case 3/6

EARTHWORK TABLES.

Showing the Contents in Cubic Yards of Embankments, Cuttings, &c., of Heights or Depths up to an average of 80 feet. By JOSEPH BROADBENT, C.E., and FRANCIS CAMPIN, C.E. Crown 8vo, cloth 5/-

"The way in which accuracy is attained, by a simple division of each cross section into three elements, two of which are constant and one variable, is ingenious."—*Athenaeum*.

A MANUAL ON EARTHWORK.

By ALEX. J. GRAHAM, C.E. With numerous Diagrams. Second Edition. 18mo, cloth 2/6

THE CONSTRUCTION OF LARGE TUNNEL SHAFTS.

A Practical and Theoretical Essay. By J. H. WATSON BUCK, M.Inst.C.E., Resident Engineer, L. and N. W. R. With Folding Plates, 8vo, cloth 12/-

"Many of the methods given are of extreme practical value to the mason, and the observations on the form of arch, the rules for ordering the stone, and the construction of the templates, will be found of considerable use. We commend the book to the engineering profession."—*Building News*.

"Will be regarded by civil engineers as of the utmost value, and calculated to save much time and obviate many mistakes."—*Colliery Guardian*.

CAST & WROUGHT IRON BRIDGE CONSTRUCTION.

(A Complete and Practical Treatise on), including Iron Foundations. In Three Parts—Theoretical, Practical, and Descriptive. By WILLIAM HUMBER, A.-M.Inst.C.E., and M.Inst.M.E. Third Edition, Revised and much improved, with 115 Double Plates (20 of which now first appear in this edition), and numerous Additions to the Text. In 2 vols., imp. 4to, half-bound in morocco. 26 16s. 6d.

"A very valuable contribution to the standard literature of civil engineering. In addition to elevations, plans, and sections, large scale details are given, which very much enhance the instructive worth of those illustrations."—*Civil Engineer and Architect's Journal*.

"Mr. Humber's stately volumes, lately issued—in which the most important bridges erected during the last five years, under the direction of the late Mr. Brunel, Sir W. Cubitt, Mr. Hawkshaw, Mr. Page, Mr. Fowler, Mr. Hemans, and others among our most eminent engineers, are drawn and specified in great detail."—*Engineer*.

ESSAY ON OBLIQUE BRIDGES.

(Practical and Theoretical.) With 13 large Plates. By the late GEORGE WATSON BUCK, M.I.C.E. Fourth Edition, revised by his Son, J. H. WATSON BUCK, M.I.C.E.; and with the addition of Description to Diagrams for Facilitating the Construction of Oblique Bridges, by W. H. BARLOW, M.I.C.E. Royal 8vo, cloth 12/-

"The standard text-book for all engineers regarding skew arches is Mr. Buck's treatise, and it would be impossible to consult a better."—*Engineer*.

"Mr. Buck's treatise is recognised as a standard text-book, and his treatment has divested the subject of many of the intricacies supposed to belong to it. As a guide to the engineer and architect, on a confessedly difficult subject, Mr. Buck's work is unsurpassed."—*Building News*.

THE CONSTRUCTION OF OBLIQUE ARCHES.

(A practical Treatise on). By JOHN HART. Third Edition, with Plates. Imperial 8vo, cloth 8/-

GRAPHIC AND ANALYTIC STATICS.

In their Practical Application to the Treatment of Stresses in Roofs, Solid Girders, Lattice, Bowstring, and Suspension Bridges, Braced Iron Arches and Piers, and other Frameworks. By R. HUDSON GRAHAM, C.E. Containing Diagrams and Plates to Scale. With numerous Examples, many taken from existing Structures. Specially arranged for Class-work in Colleges and Universities. Second Edition, Revised and Enlarged. 8vo, cloth 16/-

"Mr. Graham's book will find a place wherever graphic and analytic statics are used or studied."—*Engineer*.

"The work is excellent from a practical point of view, and has evidently been prepared with much care. The directions for working are ample, and are illustrated by an abundance of well-selected examples. It is an excellent text-book for the practical draughtsman."—*Athenaeum*.

WEIGHTS OF WROUGHT IRON AND STEEL GIRDERS.

A Graphic Table for Facilitating the Computation of the Weights of Wrought Iron and Steel Girders, &c., for Parliamentary and other Estimates. By J. H. WATSON BUCK, M.Inst.C.E. On a Sheet 2/6

PRACTICAL GEOMETRY.

For the Architect, Engineer, and Mechanic. Giving Rules for the Delineation and Application of various Geometrical Lines, Figures, and Curves. By E. W. TARN, M.A., Architect. 8vo, cloth 9/-

"No book with the same objects in view has ever been published in which the clearness of the rules laid down and the illustrative diagrams have been so satisfactory."—*Scotsman*.

THE GEOMETRY OF COMPASSES.

Or, Problems Resolved by the mere Description of Circles, and the use of Coloured Diagrams and Symbols. By OLIVER BYRNE. Coloured Plates. Crown 8vo, cloth. 3/6

HANDY BOOK FOR THE CALCULATION OF STRAINS

In Girders and Similar Structures and their Strength. Consisting of Formulæ and Corresponding Diagrams, with numerous details for Practical Application, &c. By WILLIAM HUMBER, A.-M.Inst.C.E., &c. Fifth Edition. Crown 8vo, with nearly 100 Woodcuts and 3 Plates, cloth. 7/6

"The formulæ are neatly expressed, and the diagrams good."—*Athenæum*.
 "We heartily commend this really *handy* book to our engineer and architect readers."—*English Mechanic*.

TRUSSES OF WOOD AND IRON.

Practical Applications of Science in Determining the Stresses, Breaking Weights, Safe Loads, Scantlings, and Details of Construction. With Complete Working Drawings. By WILLIAM GRIFFITHS, Surveyor, Assistant Master, Tranmere School of Science and Art. Oblong 8vo, cloth 4/6

"This handy little book enters so minutely into every detail connected with the construction of roof trusses that no student need be ignorant of these matters."—*Practical Engineer*.

THE STRAINS ON STRUCTURES OF IRONWORK.

With Practical Remarks on Iron Construction. By F. W. SHEILDS, M.I.C.E. 8vo, cloth 5/-

A TREATISE ON THE STRENGTH OF MATERIALS.

With Rules for application in Architecture, the Construction of Suspension Bridges, Railways, &c. By PETER BARLOW, F.R.S. A New Edition, revised by his Sons, P. W. BARLOW, F.R.S., and W. H. BARLOW, F.R.S.; to which are added, Experiments by HODGKINSON, FAIRBAIRN, and KIRKALDY; and Formulæ for Calculating Girders, &c. Arranged and Edited by WM. HUMBER, A.-M.Inst. C.E. Demy 8vo, 400 pp., with 19 large Plates and numerous Woodcuts, cloth. 18/-

"Valuable alike to the student, tyro, and the experienced practitioner, it will always rank in future, as it has hitherto done, as the standard treatise on that particular subject."—*Engineer*.

"As a scientific work of the first class, it deserves a foremost place on the bookshelves of every civil engineer and practical mechanic."—*English Mechanic*.

SAFE RAILWAY WORKING.

A Treatise on Railway Accidents, their Cause and Prevention; with a Description of Modern Appliances and Systems. By CLEMENT E. STRETTON, C.E., Vice-President and Consulting Engineer, Amalgamated Society of Railway Servants. With Illustrations and Coloured Plates. Third Edition, Enlarged. Crown 8vo, cloth 3/6

"A book for the engineer, the directors, the managers; and, in short, all who wish for information on railway matters will find a perfect encyclopædia in 'Safe Railway Working.'"—*Railway Review*.

"We commend the remarks on railway signalling to all railway managers, especially where a uniform code and practice is advocated."—*Herepath's Railway Journal*.

"The author may be congratulated on having collected, in a very convenient form, much valuable information on the principal questions affecting the safe working of railways."—*Railway Engineer*.

EXPANSION OF STRUCTURES BY HEAT.

By JOHN KEILY, C.E., late of the Indian Public Works Department. Crown 8vo, cloth 3/6

"The aim the author has set before him, viz., to show the effects of heat upon metallic and other structures, is a laudable one, for this is a branch of physics upon which the engineer or architect can find but little reliable and comprehensive data in books."—*Builder*.

THE PROGRESS OF MODERN ENGINEERING.

Complete in Four Volumes, imperial 4to, half-morocco, price **£12 12s.**

Each volume sold separately, as follows:—

FIRST SERIES. Comprising Civil, Mechanical, Marine, Hydraulic, Railway, Bridge, and other Engineering Works, &c. By WILLIAM HUMBER, A.-M.Inst.C.E., &c. Imp. 4to, with 36 Double Plates, drawn to a large scale. Photographic Portrait of John Hawkshaw, C.E., F.R.S., &c., and copious descriptive Letterpress, Specifications, &c., half-morocco **£3 3s.**

LIST OF THE PLATES AND DIAGRAMS.

VICTORIA STATION AND ROOF, L. B. & S. C. R. (8 PLATES); SOUTHPORT PIER (2 PLATES); VICTORIA STATION AND ROOF, L. C. & D. AND G. W. R. (6 PLATES); ROOF OF CREMORNE MUSIC HALL; BRIDGE OVER G. N. RAILWAY; ROOF OF STATION, DUTCH RHENISH RAIL (2 PLATES); BRIDGE OVER THE THAMES, WEST LONDON EXTENSION RAILWAY (5 PLATES); ARMOUR PLATES: SUSPENSION BRIDGE, THAMES (4 PLATES); THE ALLEN ENGINE; SUSPENSION BRIDGE, AVON (3 PLATES); UNDERGROUND RAILWAY (3 PLATES).

"Handsomely lithographed and printed. It will find favour with many who desire to preserve in a permanent form copies of the plans and specifications prepared for the guidance of the contractors for many important engineering works."—*Engineer*.

HUMBER'S MODERN ENGINEERING.

SECOND SERIES. Imperial 4to, with 3 Double Plates, Photographic Portrait of Robert Stephenson, C.E., M.P., F.R.S., &c., and copious descriptive Letterpress, Specifications, &c., half-morocco **£3 3s.**

LIST OF THE PLATES AND DIAGRAMS.

BIKENHEAD DOCKS, LOW WATER BASIN (15 PLATES); CHARING CROSS STATION ROOF, C. C. RAILWAY (3 PLATES); DIGSWELL VIADUCT, GREAT NORTHERN RAILWAY; ROBBERY WOOD VIADUCT, GREAT NORTHERN RAILWAY; IRON PERMANENT WAY; CLYDACH VIADUCT; MERTHYR, TREDEGAR, AND ABERGAVENNY RAILWAY; EBBW VIADUCT, MERTHYR, TREDEGAR, AND ABERGAVENNY RAILWAY; COLLEGE WOOD VIADUCT, CONNELL RAILWAY; DUBLIN WINTER PALACE ROOF (3 PLATES); BRIDGE OVER THE THAMES, L. C. and D. RAILWAY (6 PLATES); ALBERT HARBOUR, GREENOCK (4 PLATES).

"Mr. Humber has done the profession good and true service, by the fine collection of examples he has here brought before the profession and the public."—*Practical Mechanic's Journal*.

HUMBER'S MODERN ENGINEERING.

THIRD SERIES. Imp. 4to, with 40 Double Plates, Photographic Portrait of J. R. M'Clean, late Pres. Inst. C.E., and copious descriptive Letterpress, Specifications, &c., half-morocco **£3 3s.**

LIST OF THE PLATES AND DIAGRAMS.

MAIN DRAINAGE, METROPOLIS.—*North Side*.—MAP SHOWING INTERCEPTION OF SEWERS; MIDDLE LEVEL SEWER (2 PLATES); OUTFALL SEWER, BRIDGE OVER RIVER LEA (3 PLATES); OUTFALL SEWER, BRIDGE OVER MARSH LANE, NORTH WOOLWICH RAILWAY, AND BOW AND BARKING RAILWAY JUNCTION; OUTFALL SEWER, BRIDGE OVER BOW AND BARKING RAILWAY (3 PLATES); OUTFALL SEWER, BRIDGE OVER EAST LONDON WATERWORKS' FEEDER (2 PLATES); OUTFALL SEWER RESERVOIR (2 PLATES); OUTFALL SEWER, TUNBLING BAY AND OUTLET; OUTFALL SEWER, PENSTOCKS. *South Side*.—OUTFALL SEWER, BERMONDSEY BRANCH (2 PLATES); OUTFALL SEWER, RESERVOIR AND OUTLET (4 PLATES); OUTFALL SEWER, FILTH HOIST; SECTIONS OF SEWERS (NORTH AND SOUTH SIDES).

THAMES EMBANKMENT.—SECTION OF RIVER WALL; STEAMBOAT PIER, WESTMINSTER (2 PLATES); LANDING STAIRS BETWEEN CHARING CROSS AND WATERLOO BRIDGES; YORK GATE (2 PLATES); OVERFLOW AND OUTLET AT SAVOY STREET SEWER (3 PLATES); STEAMBOAT PIER, WATERLOO BRIDGE (3 PLATES); JUNCTION OF SEWERS, PLANS AND SECTIONS; GULLIES, PLANS, AND SECTIONS; ROLLING STOCK; GRANITE AND IRON FORTS.

"The drawings have a constantly increasing value, and whoever desires to possess clear representations of the two great works carried out by our Metropolitan Board will obtain Mr. Humber's volume."—*Engineer*.

HUMBER'S MODERN ENGINEERING.

FOURTH SERIES. Imp. 4to, with 36 Double Plates, Photographic Portrait of John Fowler, late Pres. Inst. C.E., and copious descriptive Letterpress, Specifications, &c., half morocco **£3 3s.**

LIST OF THE PLATES AND DIAGRAMS.

ABBEY MILLS PUMPING STATION, MAIN DRAINAGE, METROPOLIS (4 PLATES); BARROW DOCKS (5 PLATES); MANQUIS VIADUCT, SANTIAGO AND VALPARAISO RAILWAY (2 PLATES); ADAM'S LOCOMOTIVE, ST. HELEN'S CANAL RAILWAY (2 PLATES); CANNON STREET STATION ROOF, CHARING CROSS RAILWAY (3 PLATES); ROAD BRIDGE OVER THE RIVER MOKA (2 PLATES); TELEGRAPHIC APPARATUS FOR MESOPOTAMIA; VIADUCT OVER THE RIVER WYE, MIDLAND RAILWAY (3 PLATES); ST. GERMAN'S VIADUCT, CORNWALL RAILWAY (2 PLATES); WROUGHT-IRON CYLINDER FOR DIVING BELL; MILLWALL DOCKS (6 PLATES); MILROY'S PATENT EXCAVATOR; METROPOLITAN DISTRICT RAILWAY (6 PLATES); HARBOURS, PORTS AND BREAKWATERS (3 PLATES).

"We gladly welcome another year's issue of this valuable publication from the able pen of Mr. Humber. The accuracy and general excellence of this work are well known, while its usefulness in giving the measurements and details of some of the latest examples of engineering, as carried out by the most eminent men in the profession, cannot be too highly prized."—*Aritizan*.

MARINE ENGINEERING, SHIPBUILDING, NAVIGATION, ETC.

THE NAVAL ARCHITECT'S AND SHIPBUILDER'S POCKET-BOOK

Of Formulæ, Rules, and Tables, and Marine Engineer's and Surveyor's Handy Book of Reference. By CLEMENT MACKROW, M.I.N.A. Seventh Edition, 700 pages, with 300 Illustrations. Fcap., leather. **12/6**

SUMMARY OF CONTENTS.

SIGNS AND SYMBOLS, DECIMAL FRACTIONS.—TRIGONOMETRY.—PRACTICAL GEOMETRY.—MEN-
SURATION.—CENTRES AND MOMENTS OF FIGURES.—MOMENTS OF INERTIA AND RADII OF GYRATION.—
ALGEBRAICAL EXPRESSIONS FOR SIMPSON'S RULES.—MECHANICAL PRINCIPLES.—CENTRE OF GRAVITY
—LAWS OF MOTION.—DISPLACEMENT, CENTRE OF BUOYANCY.—CENTRE OF GRAVITY OF SHIP'S HULL.
—STABILITY CURVES AND METACENTRES.—SEA AND SHALLOW-WATER WAVES.—ROLLING OF SHIPS.—
PROPULSION AND RESISTANCE OF VESSELS.—SPEED TRIALS.—SAILING, CENTRE OF EFFORT.—
DISTANCES DOWN RIVERS, COAST LINES.—STEERING AND RUDDERS OF VESSELS.—LAUNCHING
CALCULATIONS AND VELOCITIES.—WEIGHT OF MATERIAL AND GEAR.—GUN PARTICULARS AND
WEIGHT.—STANDARD GAUGES.—RIVETED JOINTS AND RIVETING.—STRENGTH AND TESTS OF
MATERIALS.—BINDING AND SHEARING STRESSES, ETC.—STRENGTH OF SHAFTING, PILLARS, WHEELS,
ETC.—HYDRAULIC DATA, ETC.—CONIC SECTIONS, CATENARIAN CURVES.—MECHANICAL POWERS,
WORK.—BOARD OF TRADE REGULATIONS FOR BOILERS AND ENGINES.—BOARD OF TRADE REGU-
LATIONS FOR SHIPS.—LLOYD'S RULES FOR BOILERS.—LLOYD'S WEIGHT OF CHAINS.—LLOYD'S SCANT-
LINGS FOR SHIPS.—DATA OF ENGINES AND VESSELS.—SHIPS' FITTINGS AND TESTS.—SEASONING
PRESERVING TIMBER.—MEASUREMENT OF TIMBER.—ALLOYS, PAINTS, VARNISHES.—DATA FOR
STOWAGE.—ADMIRALTY TRANSPORT REGULATIONS.—RULES FOR HORSE-POWER, SCREW PRO-
PELLERS, ETC.—PERCENTAGES FOR BUTT STRAPS, ETC.—PARTICULARS OF YACHTS.—MASTING AND
RIGGING VESSELS.—DISTANCES OF FOREIGN PORTS.—TONNAGE TABLES.—VOCABULARY OF FRENCH
AND ENGLISH TERMS.—ENGLISH WEIGHTS AND MEASURES.—FOREIGN WEIGHTS AND MEASURES.—
DECIMAL EQUIVALENTS.—FOREIGN MONEY.—DISCOUNT AND WAGE TABLES.—USEFUL NUMBERS AND
READY RECKONERS.—TABLES OF CIRCULAR MEASURES.—TABLES OF AREAS OF AND CIRCUMFERENCES
OF CIRCLES.—TABLES OF AREAS OF SEGMENTS OF CIRCLES.—TABLES OF SQUARES AND CUBES AND
ROOTS OF NUMBERS.—TABLES OF LOGARITHMS OF NUMBERS.—TABLES OF HYPERBOLIC LOGARITHMS.
—TABLES OF NATURAL SINES, TANGENTS, ETC.—TABLES OF LOGARITHMIC SINES, TANGENTS, ETC.

"In these days of advanced knowledge a work like this is of the greatest value. It contains a vast amount of information. We unhesitatingly say that it is the most valuable compilation for its specific purpose that has ever been printed. No naval architect, engineer, surveyor, seaman, wood or iron shipbuilder, can afford to be without this work."—*Nautical Magazine*.

"Should be used by all who are engaged in the construction or design of vessels. . . . Will be found to contain the most useful tables and formulæ required by shipbuilders, carefully collected from the best authorities, and put together in a popular and simple form. The book is one of exceptional merit."—*Engineer*.

"The professional shipbuilder has now, in a convenient and accessible form, reliable data for solving many of the numerous problems that present themselves in the course of his work."—*Iron*.

"There is no doubt that a pocket-book of this description must be a necessity in the shipbuilding trade. . . . The volume contains a mass of useful information clearly expressed and presented in a handy form."—*Marine Engineer*.

WANNAN'S MARINE ENGINEER'S GUIDE

To Board of Trade Examinations for Certificates of Competency. Containing all latest Questions to Date, with Simple, Clear, and Correct Solutions; 302 Elementary Questions with Illustrated Answers, and Verbal Questions and Answers; complete Set of Drawings with Statements completed. By A. C. WANNAN, C.E., Consulting Engineer, and E. W. I. WANNAN, M.I.M.E., Certificated First Class Marine Engineer. Illustrated with numerous Engravings. Second Edition, Revised and Enlarged. 500 pages. Large crown 8vo, cloth. **[Just Published. Net 10/6]**

"The book is clearly and plainly written and avoids unnecessary explanations and formulas, and we consider it a valuable book for students of marine engineering."—*Nautical Magazine*.

"This is an excellent book. The young engineer with the world before him could hardly make a sounder base. The feature of the volume is its simplicity."—*Glasgow Herald*.

"The work covers all points on which information is indispensable, and does so in a manner which affords those who go to it for guidance an opportunity of not only gaining knowledge, but of testing to what extent they have succeeded in mastering the multifarious details with which the volume abounds."—*Scotsman*.

WANNAN'S MARINE ENGINEER'S POCKET-BOOK.

Containing latest Board of Trade Rules and Data for Marine Engineers. By A. C. WANNAN, C.E. Second Edition, carefully Revised. Square 18mo, with Thumb Index, leather **5/-**

"There is a great deal of useful information in this little pocket-book. It is of the rule-of-thumb order, and is, on that account, well adapted to the uses of the sea-going engineer."—*Engineer*.

"The work, with its many diagrams, condenses the information that is contained in the larger works on the subject, in such a manner as to be very handy for reference."—*Nautical Magazine*.

SEA TERMS, PHRASES, AND WORDS

(Technical Dictionary of) used in the English and French Languages. (English-French, French-English.) For the Use of Seamen, Engineers, Pilots, Shipbuilders, Shipowners, and Ship-brokers. Compiled by W. PIRRIE, late of the African Steamship Company. Fcap. 8vo, cloth limp **5/-**

"This volume will be highly appreciated by seamen, engineers, pilots, shipbuilders and ship-owners. It will be found wonderfully accurate and complete."—*Scotsman*.

"A very useful dictionary, which has long been wanted by French and English engineers, masters, officers and others."—*Shipping World*.

ELECTRIC SHIP LIGHTING.

A Handbook on the Practical Fitting and Running of Ship's Electrical Plant, for the Use of Shipowners and Builders, Marine Electricians and Sea-going Engineers in Charge. By J. W. URQUHART, Author of "Electric Light," "Dynamo Construction," &c. Second Edition, revised and extended. With numerous Illustrations. Crown 8vo, cloth **[Just Published. 7/6]**

MARINE ENGINEER'S POCKET-BOOK.

Consisting of useful Tables and Formulæ. By FRANK PROCTOR, A.I.N.A. Third Edition. Royal 32mo, leather **4/-**

"We recommend it to our readers as going far to supply a long-felt want."—*Naval Science*.

"A most useful companion to all marine engineers."—*United Service Gazette*.

ELEMENTARY MARINE ENGINEERING.

A Manual for Young Marine Engineers and Apprentices. In the Form of Questions and Answers on Metals, Alloys, Strength of Materials, Construction and Management of Marine Engines and Boilers, Geometry, &c. With an Appendix of Useful Tables. By JOHN SHERREN BREWER, Government Marine Surveyor, Hongkong. Fourth Edition, small crown 8vo, cloth **1/6**

"Contains much valuable information for the class for whom it is intended, especially in the chapters on the management of boilers and engines."—*Nautical Magazine*.

MARINE ENGINES AND STEAM VESSELS.

A Treatise on. By ROBERT MURRAY, C.E. Eighth Edition, thoroughly Revised, with considerable Additions by the Author and by GEORGE CARLISLE, C.E., Senior Surveyor to the Board of Trade at Liverpool. Crown 8vo, cloth. **4/6**

PRACTICAL NAVIGATION.

Consisting of THE SAILOR'S SEA-BOOK, by JAMES GREENWOOD and W. H. ROSSER; together with the requisite Mathematical and Nautical Tables for the Working of the Problems, by HENRY LAW, C.E., and Professor J. R. YOUNG. Illustrated. 12mo, strongly half-bound **7/-**

THE ART AND SCIENCE OF SAILMAKING.

By SAMUEL B. SADLER, Practical Sailmaker, late in the employment of Messrs. Ratsey and Laphorne, of Cowes and Gosport. With Plates and other Illustrations. Small 4to, cloth **12/6**

"This extremely practical work gives a complete education in all the branches of the manufacture, cutting out, roping, seaming and goring. It is copiously illustrated, and will form a first-rate text-book and guide."—*Portsmouth Times*.

CHAIN CABLES AND CHAINS.

Comprising Sizes and Curves of Links, Studs, &c., Iron for Cables and Chains, Chain Cable and Chain Making, Forming and Welding Links, Strength of Cables and Chains, Certificates for Cables, Marking Cables, Prices of Chain Cables and Chains, Historical Notes, Acts of Parliament, Statutory Tests, Charges for Testing, List of Manufacturers of Cables, &c., &c. By THOMAS W. TRAILL, F.E.R.N., M.Inst.C.E., Engineer-Surveyor-in-Chief, Board of Trade, Inspector of Chain Cable and Anchor Proving Establishments, and General Superintendent, Lloyd's Committee on Proving Establishments. With numerous Tables, Illustrations, and Lithographic Drawings. Folio, cloth, bevelled boards. **£2 2s.**

"It contains a vast amount of valuable information. Nothing seems to be wanting to make it a complete and standard work of reference on the subject."—*Nautical Magazine*.

MINING, METALLURGY, AND COLLIERY WORKING.

PROSPECTING FOR GOLD.

A Handbook of Practical Information and Hints for Prospectors based on Personal Experience. By DANIEL J. RANKIN, F.R.S.G.S., M.R.A.S., Author of "The Zambesi Basin," &c.; formerly Manager of the Central African Company, and Leader of African Gold Prospecting Expeditions. With Illustrations specially Drawn and Engraved for the Work. Fcap. 8vo, leather.

[Just Published. Net 7/6]

THE METALLURGY OF GOLD.

A Practical Treatise on the Metallurgical Treatment of Gold-bearing Ores. Including the Assaying, Melting, and Refining of Gold. By M. EISSLER, Mining Engineer, A.I.M.E., Member of the Institute of Mining and Metallurgy. Fifth Edition, Enlarged and Re-arranged. With over 300 Illustrations and Numerous Folding Plates. Medium 8vo cloth.

[Just Published. Net 21/-]

"This book thoroughly deserves its title of a 'Practical Treatise.' The whole process of gold mining, from the breaking of the quartz to the assay of the bullion, is described in clear and orderly narrative and with much, but not too much, fulness of detail."—*Saturday Review*

"The work is a storehouse of information and valuable data, and we strongly recommend it to all professional men engaged in the gold-mining industry."—*Mining Journal*.

THE CYANIDE PROCESS OF GOLD EXTRACTION.

Including its Practical Application on the Witwatersrand Gold Fields in South Africa. By M. EISSLER, M.E., Author of "The Metallurgy of Gold," &c. With Diagrams and Working Drawings. Second Edition, Revised and Enlarged. 8vo, cloth.

7/6

"This book is just what was needed to acquaint mining men with the actual working of a process which is not only the most popular, but is, as a general rule, the most successful for the extraction of gold from tailings."—*Mining Journal*.

"The work will prove invaluable to all interested in gold mining."—*Chemical News*.

DIAMOND DRILLING FOR GOLD & OTHER MINERALS.

A Practical Handbook on the Use of Modern Diamond Core-Drills in Prospecting and Exploiting Mineral-bearing Properties, including Particulars of the Cost of Apparatus and Working. By G. A. DENNY, M.N.E.Inst.M.E., M.I.M. & M., Author of "The Klerksdorp Goldfields." Medium 8vo, 168 pp., with Illustrative Diagrams.

[Just Published. 12/6]

"There is certainly scope for a work on diamond drilling, and Mr. Denny deserves grateful recognition for supplying a decided want. We strongly recommend every board of directors to carefully peruse the pages treating of the applicability of diamond drilling to auriferous deposits and, under certain conditions, its advantages over shaft sinking for systematic prospecting, both from the surface and underground. The author has given us a valuable volume of eminently practical data that should be in the possession of those interested in mining."—*Mining Journal*.

"Mr. Denny's handbook is the first English work to give a detailed account of the use of modern diamond core-drills in searching for mineral deposits. The work contains much information of a practical character, including particulars of the cost of apparatus and of working."—*Nature*.

FIELD TESTING FOR GOLD AND SILVER.

A Practical Manual for Prospectors and Miners. By W. H. MERRITT, M.N.E.Inst.M.E., A.R.S.M., &c. With Photographic Plates and other Illustrations. Fcap. 8vo, leather.

[Just Published. Net 5/-]

"As an instructor of prospectors classes Mr. Merritt has the advantage of knowing exactly the information likely to be most valuable to the miner in the field. The contents cover all the details of sampling and testing gold and silver ores. A useful addition to a prospector's kit."—*Mining Journal*.

"It gives the gist of the author's experience as a teacher of prospectors, and is a book which no prospector could use habitually without finding it pan out well."—*Scotsman*.

THE PROSPECTOR'S HANDBOOK.

A Guide for the Prospector and Traveller in Search of Metal-Bearing or other Valuable Minerals. By J. W. ANDERSON, M.A. (Camb.), F.R.G.S. Eighth Edition, thoroughly Revised and much Enlarged. Small crown 8vo, 3/6 cloth; or, leather, pocket-book form, with tuck.

[Just Published. 4/6]

"Will supply a much felt want, especially among Colonists, in whose way are so often thrown many mineralogical specimens the value of which it is difficult to determine."—*Engineer*.

"How to find commercial minerals, and how to identify them when they are found, are the leading points to which attention is directed. The author has managed to pack as much practical detail into his pages as would supply material for a book three times its size."—*Mining Journal*.

THE METALLURGY OF SILVER.

A Practical Treatise on the Amalgamation, Roasting, and Lixiviation of Silver Ores. Including the Assaying, Melting, and Refining of Silver Bullion. By M. EISSLER, Author of "The Metallurgy of Gold," &c. Third Edition. Crown 8vo, cloth **10/6**

"A practical treatise, and a technical work which we are convinced will supply a long felt want amongst practical men, and at the same time be of value to students and others indirectly connected with the industries."—*Mining Journal*.

"From first to last the book is thoroughly sound and reliable."—*Colliery Guardian*.

"For chemists, practical miners, assayers, and investors alike, we do not know of any work on the subject so handy and yet so comprehensive."—*Glasgow Herald*.

THE HYDRO-METALLURGY OF COPPER ORES.

By M. EISSLER, Author of "The Metallurgy of Gold," &c. Medium 8vo, with Folding Plates. *[In the Press.]*

THE METALLURGY OF ARGENTIFEROUS LEAD.

A Practical Treatise on the Smelting of Silver-Lead Ores and the Refining of Lead Bullion. Including Reports on various Smelting Establishments and Descriptions of Modern Smelting Furnaces and Plants in Europe and America. By M. EISSLER, M.E., Author of "The Metallurgy of Gold," &c. Crown 8vo, 400 pp., with 183 Illustrations, cloth **12/6**

"The numerous metallurgical processes, which are fully and extensively treated of, embrace all the stages experienced in the passage of the lead from the various natural states to its issue from the refinery as an article of commerce."—*Practical Engineer*.

"The present volume fully maintains the reputation of the author. Those who wish to obtain a thorough insight into the present state of this industry cannot do better than read this volume, and all mining engineers cannot fail to find many useful hints and suggestions in it."—*Industries*.

METALLIFEROUS MINERALS AND MINING.

By D. C. DAVIES, F.G.S. Sixth Edition, thoroughly Revised and much Enlarged by his Son, E. HENRY DAVIES, M.E., F.G.S. 600 pages, with 173 Illustrations. Large crown 8vo, cloth. *[Just Published. Net 12/6]*

"Neither the practical miner nor the general reader, interested in mines, can have a better book for his companion and his guide."—*Mining Journal*.

"As a history of the present state of mining throughout the world this book has a real value, and it supplies an actual want."—*Athenæum*.

MACHINERY FOR METALLIFEROUS MINES.

A Practical Treatise for Mining Engineers, Metallurgists and Managers of Mines. By E. HENRY DAVIES, M.E., F.G.S. Crown 8vo, 580 pp., with upwards of 300 Illustrations, cloth **12/6**

"Mr. Davies, in this handsome volume, has done the advanced student and the manager of mines good service. Almost every kind of machinery in actual use is carefully described, and the woodcuts and plates are good."—*Athenæum*.

"From cover to cover the work exhibits all the same characteristics which excite the confidence and attract the attention of the student as he peruses the first page. The work may safely be recommended. By its publication the literature connected with the industry will be enriched, and the reputation of its author enhanced."—*Mining Journal*.

EARTHY AND OTHER MINERALS AND MINING.

By D. C. DAVIES, F.G.S., Author of "Metalliferous Minerals," &c. Third Edition, Revised and Enlarged, by his Son, E. HENRY DAVIES, M.E., F.G.S. With about 100 Illustrations. Crown 8vo, cloth **12/6**

"We do not remember to have met with any English work on mining matters that contains the same amount of information packed in equally convenient form."—*Academy*.

"We should be inclined to rank it as among the very best of the handy technical and trades manuals which have recently appeared."—*British Quarterly Review*.

BRITISH MINING.

A Treatise on the History, Discovery, Practical Development, and Future Prospects of Metalliferous Mines in the United Kingdom. By ROBERT HUNT, F.R.S., late Keeper of Mining Records. Upwards of 950 pp., with 230 Illustrations. Second Edition, Revised. Super-royal 8vo, cloth **22 2s.**

"The book is a treasure-house of statistical information on mining subjects, and we know of no other work embodying so great a mass of matter of this kind. Were this the only merit of Mr. Hunt's volume it would be sufficient to render it indispensable in the library of everyone interested in the development of the mining and metallurgical industries of this country."—*Athenæum*.

POCKET-BOOK FOR MINERS & METALLURGISTS.

Comprising Rules, Formulæ, Tables, and Notes, for Use in Field and Office Work. By F. DANVERS POWER, F.G.S., M.E. Second Edition, Corrected. Fcap. 8vo, leather. [Just Published. 9/-]

"This excellent book is an admirable example of its kind, and ought to find a large sale amongst English-speaking prospectors and mining engineers."—*Engineering*.

THE MINER'S HANDBOOK.

A Handy Book of Reference on the subjects of Mineral Deposits, Mining Operations, Ore Dressing, &c. For the Use of Students and others interested in Mining matters. Compiled by JOHN MILNE, F.R.S., Professor of Mining in the Imperial University of Japan. Revised Edition. Fcap. 8vo, leather . 7/6

"Professor Milne's handbook is sure to be received with favour by all connected with mining, and will be extremely popular among students."—*Athenæum*.

IRON ORES OF GREAT BRITAIN AND IRELAND:

Their Mode of Occurrence, Age and Origin, and the Methods of Searching for and Working them. With a Notice of some of the Iron Ores of Spain. By J. D. KENDALL, F.G.S., Mining Engineer. Crown 8vo, cloth . 16/-

"A very useful volume which cannot fail to be of value to all interested in the iron industry of the country."—*Industries*.

MINE DRAINAGE.

A Complete Practical Treatise on Direct-acting Underground Steam Pumping Machinery. By STEPHEN MICHELL. Second Edition, Re-written and Enlarged, 390 pp. With about 250 Illustrations. Royal 8vo, cloth.

[Just Published Net 25/-]

HORIZONTAL PUMPING ENGINES—ROTARY AND NON-ROTARY HORIZONTAL ENGINES—SIMPLE AND COMPOUND STEAM PUMPS—VERTICAL PUMPING ENGINES—ROTARY AND NON-ROTARY VERTICAL ENGINES—SIMPLE AND COMPOUND STEAM PUMPS—TRIPLE-EXPANSION STEAM PUMPS—PULSATING STEAM PUMPS—PUMP VALVES—SINKING PUMPS, &c., &c.

"This volume contains an immense amount of important and interesting new matter. The book should undoubtedly prove of great use to all who wish for information on the subject, inasmuch as the different patterns of steam pumps are not alone lucidly described and clearly illustrated, but in addition numerous tables are supplied, in which their sizes, capacity, price, &c., are set forth, hence facilitating immensely the rational selection of a pump to suit any purpose that the reader may desire, or, on the other hand, supplying him with useful information about any of the pumps that come within the scope of the volume."—*The Engineer*, November 3rd, 1899.

THE COLLIERY MANAGER'S HANDBOOK.

A Comprehensive Treatise on the Laying-out and Working of Collieries, Designed as a Book of Reference for Colliery Managers, and for the Use of Coal-Mining Students preparing for First-class Certificates. By CALEB PAMELY, Mining Engineer and Surveyor; Member of the North of England Institute of Mining and Mechanical Engineers; and Member of the South Wales Institute of Mining Engineers. With 700 Plans, Diagrams, and other Illustrations. Fourth Edition, Revised and Enlarged, medium 8vo, over 900 pp., strongly bound . 25/-

GEOLOGY.—SEARCH FOR COAL.—MINERAL LEASES AND OTHER HOLDINGS.—SHAFT SINKING.—FITTING UP THE SHAFT AND SURFACE ARRANGEMENTS.—STEAM BOILERS AND THEIR FITTINGS.—TIMBERING AND WALLING.—NARROW WORK AND METHODS OF WORKING.—UNDERGROUND CONVEYANCE.—DRAINAGE.—THE GASES MET WITH IN MINES; VENTILATION.—ON THE FRICTION OF AIR IN MINES.—THE PRIESTMAN OIL ENGINE; PETROLEUM AND NATURAL GAS.—SURVEYING AND PLANNING.—SAFETY LAMPS AND FIRE-DAMP DETECTORS.—SUNDRY AND INCIDENTAL OPERATIONS AND APPLIANCES.—COLLIERY EXPLOSIONS.—MISCELLANEOUS QUESTIONS AND ANSWERS.—Appendix: SUMMARY OF REPORT OF H.M. COMMISSIONERS ON ACCIDENTS IN MINES.

"Mr. Pameley's work is eminently suited to the purpose for which it is intended—being clear, interesting, exhaustive, rich in detail, and up to date, giving descriptions of the latest machines in every department. A mining engineer could scarcely go wrong who followed this work."—*Colliery Guardian*.

"Mr. Pameley has not only given us a comprehensive reference book of a very high order, suitable to the requirements of mining engineers and colliery managers, but has also provided mining students with a class-book that is as interesting as it is instructive."—*Colliery Manager*.

"This is the most complete 'all-round' work on coal-mining published in the English language. . . . No library of coal-mining books is complete without it."—*Colliery Engineer* (Scranton, Pa., U.S.A.).

COLLIERY WORKING AND MANAGEMENT.

Comprising the Duties of a Colliery Manager, the Oversight and Arrangement of Labour and Wages, and the different Systems of Working Coal Seams. By H. F. BULMAN and R. A. S. REDMAYNE. 350 pages, with 28 Plates and other Illustrations, including Underground Photographs. Medium 8vo, cloth

[Just Published. 15/-

"This is, indeed, an admirable Handbook for Colliery Managers, in fact, it is an indispensable adjunct to a Colliery Manager's education, as well as being a most useful and interesting work on the subject for all who in any way have to do with coal mining. The underground photographs are an attractive feature of the work, being very life-like and necessarily true representations of the scenes they depict."—*Colliery Guardian*.

"Mr. Bulman and Mr. Redmayne, who are both experienced Colliery Managers of great literary ability, are to be congratulated on having supplied an authoritative work dealing with a side of the subject of coal mining which has hitherto received but scant treatment. The authors elucidate their text by 119 woodcuts and 28 plates, most of the latter being admirable reproductions of photographs taken underground with the aid of the magnesium flash-light. These illustrations are excellent."—*Nature*.

COAL AND COAL MINING.

By the late Sir WARINGTON W. SMYTH, M.A., F.R.S., Chief Inspector of the Mines of the Crown and of the Duchy of Cornwall. Eighth Edition, Revised and Extended by T. FORSTER BROWN, Mining and Civil Engineer, Chief Inspector of the Mines of the Crown and of the Duchy of Cornwall. Crown 8vo, cloth.

[Just Published. 3/6

"As an outline is given of every known coal-field in this and other countries, as well as of the principal methods of working, the book will doubtless interest a very large number of readers."—*Mining Journal*.

NOTES AND FORMULÆ FOR MINING STUDENTS.

By JOHN HERMAN MERIVALE, M.A., Late Professor of Mining in the Durham College of Science, Newcastle-upon-Tyne. Fourth Edition, Revised and Enlarged, by H. F. BULMAN, A.M.Inst.C.E. Small crown 8vo, cloth. . . 2/6

"The author has done his work in a creditable manner, and has produced a book that will be of service to students, and those who are practically engaged in mining operations."—*Engineer*.

INFLAMMABLE GAS AND VAPOUR IN THE AIR

(The Detection and Measurement of). By FRANK CLOWES, D.Sc., Lond., F.I.C. With a Chapter on the DETECTION AND MEASUREMENT OF PETROLEUM VAPOUR by BOVERTON REDWOOD, F.R.S.E., Consulting Adviser to the Corporation of London under the Petroleum Acts. Crown 8vo, cloth . . . Net 5/-

"Professor Clowes has given us a volume on a subject of much industrial importance. . . . Those interested in these matters may be recommended to study this book, which is easy of comprehension and contains many good things."—*The Engineer*.

COAL & IRON INDUSTRIES OF THE UNITED KINGDOM.

Comprising a Description of the Coal Fields, and of the Principal Seams of Coal, with Returns of their Produce and its Distribution, and Analyses of Special Varieties. Also, an Account of the Occurrence of Iron Ores in Veins or Seams; Analyses of each Variety; and a History of the Rise and Progress of Pig Iron Manufacture. By RICHARD MEADE. 8vo, cloth . . . 28/-

"Of this book we may unreservedly say that it is the best of its class which we have ever met. . . . A book of reference which no one engaged in the iron or coal trades should omit from his library."—*Iron and Coal Trades Review*.

ASBESTOS AND ASBESTIC.

Their Properties, Occurrence, and Use. By ROBERT H. JONES, F.S.A., Mineralogist, Hon. Mem. Asbestos Club, Black Lake, Canada. With Ten Collotype Plates and other Illustrations. Demy 8vo, cloth.

[Just Published. 10/-

"An interesting and invaluable work."—*Colliery Guardian*.

GRANITES AND OUR GRANITE INDUSTRIES.

By GEORGE F. HARRIS, F.G.S. With Illustrations. Crown 8vo, cloth. . . 2/6

TRAVERSE TABLES.

For use in Mine Surveying. By WILLIAM LINTERN, C.E. With two Plates. Small crown 8vo, cloth.

[Just Published. Net 3/-

ELECTRICITY, ELECTRICAL ENGINEERING, ETC.

SUBMARINE TELEGRAPHS.

Their History, Construction and Working. Founded in part on WÜNSCHEN-DORFF's "Traité de Télégraphie Sous Marine," and Compiled from Authoritative and Exclusive Sources. By CHARLES BRIGHT, F.R.S.E. Super royal 8vo, nearly 800 pages, fully illustrated, including a large number of maps and folding plates. [Just Published. Net 23 3s.]

"There are few, if any, persons more fitted to write a treatise on submarine telegraphy than Mr. Charles Bright. He has done his work admirably, and has written in a way which will appeal as much to the layman as to the engineer. This admirable volume must for many years to come hold the position of the English classic on submarine telegraphy."—*Engineer*.

"This book is full of information. It makes a book of reference which should be in every engineer's library."—*Nature*.

"Mr. Bright's interestingly written and admirably illustrated book will meet with a welcome reception from cable men."—*Electrician*.

"The Author deals with his subject from all points of view—political and strategical as well as scientific—the work will be of interest not only to men of science, but to the general public. We can strongly recommend it."—*Athenæum*.

"The work contains a great store of technical information concerning the making and working of submarine telegraphs. In bringing together the most valuable results relating to the evolution of the telegraph the Author has rendered a service that will be very widely appreciated."—*Morning Post*.

DYNAMO ELECTRIC MACHINERY.

Its Construction, Design, and Operation (Direct Current Machines). By SAMUEL SHELDON, A.M., Ph.D., assisted by H. MASON, B.S. Second Edition, Revised. Large crown 8vo, cloth. With 202 Illustrations. [Just Published. Net 10/6]

THE ELECTRICAL ENGINEER'S POCKET-BOOK.

Consisting of Modern Rules, Formulæ, Tables, and Data. By H. R. KEMPE, M.Inst.E.E., A.M.Inst.C.E., Technical Officer, Postal Telegraphs, Author of "A Handbook of Electrical Testing," &c. Second Edition, Thoroughly Revised, with Additions. With numerous Illustrations. Royal 32mo, oblong, leather 5/-

"It is the best book of its kind."—*Electrical Engineer*.

"The Electrical Engineer's Pocket-Book is a good one."—*Electrician*.

"Strongly recommended to those engaged in the electrical industries."—*Electrical Review*.

ELECTRIC LIGHT FITTING.

A Handbook for Working Electrical Engineers, embodying Practical Notes on Installation Management. By J. W. URQUHART, Electrician, Author of "Electric Light," &c. With numerous Illustrations. Third Edition, Revised, with Additions. Crown 8vo, cloth. [Just Published. 5/-]

"This volume deals with the mechanics of electric lighting, and is addressed to men who are already engaged in the work, or are training for it. The work traverses a great deal of ground, and may be read as a sequel to the author's useful work on 'Electric Light.'"—*Electrician*.

"The book is well worth the perusal of the workman, for whom it is written."—*Electrical Review*.

ELECTRIC LIGHT.

Its Production and Use, Embodying Plain Directions for the Treatment of Dynamo-Electric Machines, Batteries, Accumulators, and Electric Lamps. By J. W. URQUHART, C.E. Sixth Edition, Revised, with Additions. Crown 8vo, cloth. [Just Published. 7/6]

"The whole ground of electric lighting is more or less covered and explained in a very clear and concise manner."—*Electrical Review*.

"A *vade-mecum* of the salient facts connected with the science of electric lighting."—*Electrician*.

DYNAMO CONSTRUCTION.

A Practical Handbook for the Use of Engineer Constructors and Electricians-in-Charge. Embracing Framework Building, Field Magnet and Armature Winding and Grouping, Compounding, &c. By J. W. URQUHART. Second Edition, Enlarged. With 114 Illustrations. Crown 8vo, cloth. 7/6

"Mr. Urquhart's book is the first one which deals with these matters in such a way that the engineering student can understand them. The book is very readable, and the author leads his readers up to difficult subjects by reasonably simple tests."—*Engineering Review*.

THE MANAGEMENT OF DYNAMOS.

A Handybook of Theory and Practice for the Use of Mechanics, Engineers, Students and others in Charge of Dynamos. By G. W. LUMMIS-PATERSON. Second Edition, Thoroughly Revised and Enlarged. With numerous Illustrations. Crown 8vo, cloth. [Just Published. 4/6]

"An example which deserves to be taken as a model by other authors. The subject is treated in a manner which any intelligent man who is fit to be entrusted with charge of an engine should be able to understand. It is a useful book to all who make, tend or employ electric machinery."—*Architect*.

THE STANDARD ELECTRICAL DICTIONARY.

A Popular Dictionary of Words and Terms Used in the Practice of Electrical Engineering. Containing upwards of 3,000 Definitions. By T. O'CONOR SLOANE, A.M., Ph.D. Third Edition, with Appendix. Crown 8vo, 690 pp., 390 Illustrations, cloth. [Just Published. Net 7/6]

"The work has many attractive features in it, and is, beyond doubt, a well put together and useful publication. The amount of ground covered may be gathered from the fact that in the index about 5,000 references will be found."—*Electrical Review*.

ELECTRIC SHIP-LIGHTING.

A Handbook on the Practical Fitting and Running of Ship's Electrical Plant. For the Use of Shipowners and Builders, Marine Electricians, and Sea-going Engineers in Charge. By J. W. URQUHART, C.E. Second Edition. Revised and Extended. With 88 Illustrations, crown 8vo, cloth. [Just Published. 7/6]

"The subject of ship electric lighting is one of vast importance, and Mr. Urquhart is to be highly complimented for placing such a valuable work at the service of marine electricians."—*The Steamship*.

ELECTRIC LIGHT FOR COUNTRY HOUSES.

A Practical Handbook on the Erection and Running of Small Installations, with Particulars of the Cost of Plant and Working. By J. H. KNIGHT. Third Edition, Revised. Crown 8vo, wrapper. [Just Published. 1/-]

"The book contains excellent advice and many practical hints for the help of those who wish to light their own houses."—*Building News*.

ELECTRIC LIGHTING (ELEMENTARY PRINCIPLES OF).

By ALAN A. CAMPBELL SWINTON, M.Inst.C.E., M.Inst.E.E. Fourth Edition, Revised. With Sixteen Illustrations. Crown 8vo, cloth [Just Published. 1/6]

"Anyone who desires a short and thoroughly clear exposition of the elementary principles of electric-lighting cannot do better than read this little work."—*Bradford Observer*.

DYNAMIC ELECTRICITY AND MAGNETISM.

By PHILIP ATKINSON, A.M., Ph.D., Author of "Elements of Static Electricity," &c. Crown 8vo, 417 pp., with 120 Illustrations, cloth 10/6

POWER TRANSMITTED BY ELECTRICITY.

And applied by the Electric Motor, including Electric Railway Construction. By P. ATKINSON, A.M., Ph.D. Third Edition, fully Revised, and New Matter added. With 94 Illustrations. Crown 8vo, cloth. [Just Published. Net 9/-]

HOW TO MAKE A DYNAMO.

A Practical Treatise for Amateurs. Containing numerous Illustrations and Detailed Instructions for Constructing a Small Dynamo to Produce the Electric Light. By ALFRED CROFTS. Sixth Edition, Revised and Enlarged. Crown 8vo, cloth. [Just Published. 2/-]

"The instructions given in this unpretentious little book are sufficiently clear and explicit to enable any amateur mechanic possessed of average skill and the usual tools to be found in an amateur's workshop, to build a practical dynamo machine."—*Electrician*.

THE STUDENT'S TEXT-BOOK OF ELECTRICITY.

By H. M. NOAD, F.R.S. Cheaper Edition. 650 pp., with 470 Illustrations. Crown 8vo, cloth. 9/-

ARCHITECTURE, BUILDING, ETC.

PRACTICAL BUILDING CONSTRUCTION.

A Handbook for Students Preparing for Examinations, and a Book of Reference for Persons Engaged in Building. By JOHN PARNELL ALLEN, Surveyor, Lecturer on Building Construction at the Durham College of Science, Newcastle-on-Tyne. Third Edition, Revised and Enlarged. Medium 8vo, 450 pages, with 1,000 Illustrations, cloth. [Just Published. 7/6]

"The most complete exposition of building construction we have seen. It contains all that is necessary to prepare students for the various examinations in building construction."—*Building News*.

"The author depends nearly as much on his diagrams as on his type. The pages suggest the hand of a man of experience in building operations—and the volume must be a blessing to many teachers as well as to students."—*The Architect*.

"The work is sure to prove a formidable rival to great and small competitors alike, and bids fair to take a permanent place as a favourite student's text-book. The large number of illustrations deserve particular mention for the great merit they possess for purposes of reference, in exactly corresponding to convenient scales."—*Jour. Inst. Brit. Archts.*

PRACTICAL MASONRY.

A Guide to the Art of Stone Cutting. Comprising the Construction, Setting-out, and Working of Stairs, Circular Work, Arches, Niches, Domes, Pendentives, Vaults, Tracery Windows, &c. For the Use of Students, Masons, and other Workmen. By WILLIAM R. PURCHASE, Building Inspector to the Borough of Hove. Third Edition, with Glossary of Terms. Royal 8vo, 142 pages, with 52 Lithographic Plates, comprising 400 separate Diagrams, cloth. [Just Published. 7/6]

"Mr. Purchase's 'Practical Masonry' will undoubtedly be found useful to all interested in this important subject, whether theoretically or practically. Most of the examples given are from actual work carried out, the diagrams being carefully drawn. The book is a practical treatise on the subject, the author himself having commenced as an operative mason, and afterwards acted as foreman mason on many large and important buildings prior to the attainment of his present position. It should be found of general utility to architectural students and others, as well as to those to whom it is specially addressed."—*Journal of the Royal Institute of British Architects*.

MODERN PLUMBING,

STEAM AND HOT WATER HEATING.

A New Practical Work for the Plumber, the Heating Engineer, the Architect, and the Builder. By J. J. LAWLER, Author of "American Sanitary Plumbing," &c. With 284 Illustrations and Folding Plates. 4to, cloth.

[Just Published. Net 21/-]

HEATING BY HOT WATER.

With Information and Suggestions on the best Methods of Heating Public, Private and Horticultural Buildings. By WALTER JONES. Second Edition. With 96 Illustrations, crown 8vo. Net 2/6

"We confidently recommend all interested in heating by hot water to secure a copy of this valuable little treatise."—*The Plumber and Decorator*.

CONCRETE: ITS NATURE AND USES.

A Book for Architects, Builders, Contractors, and Clerks of Works. By GEORGE L. SUTCLIFFE, A.R.I.B.A. 350 pages, with Illustrations. Crown 8vo, cloth 7/6

"The author treats a difficult subject in a lucid manner. The manual fills a long-felt gap. It is careful and exhaustive; equally useful as a student's guide and an architect's book of reference."—*Journal of Royal Institute of British Architects*.

LOCKWOOD'S BUILDER'S PRICE BOOK FOR 1902.

A Comprehensive Handbook of the Latest Prices and Data, for Builders, Architects, Engineers, and Contractors. Re-constructed, Re-written, and Greatly Enlarged. By FRANCIS T. W. MILLER. 800 closely-printed pages, crown 8vo, cloth. 4/-

"This book is a very useful one, and should find a place in every English office connected with the building and engineering professions."—*Industries*. "An excellent book of reference."—*Architect*.

"In its new and revised form this Price Book is what a work of this kind should be—comprehensive, reliable, well arranged, legible, and well bound."—*British Architect*.

DECORATIVE PART OF CIVIL ARCHITECTURE.

By Sir WILLIAM CHAMBERS, F.R.S. With Portrait, Illustrations, Notes, and an EXAMINATION OF GRECIAN ARCHITECTURE, by JOSEPH GWILT, F.S.A. Revised and Edited by W. H. LEEDS. 66 Plates, 4to, cloth **21/-**

THE MECHANICS OF ARCHITECTURE.

A Treatise on Applied Mechanics, especially Adapted to the Use of Architects. By E. W. TARN, M.A., Author of "The Science of Building," &c. Second Edition, Enlarged. Illustrated with 125 Diagrams. Crown 8vo, cloth . . . **7/6**

"The book is a very useful and helpful manual of architectural mechanics."—*Builder*.

A HANDY BOOK OF VILLA ARCHITECTURE.

Being a Series of Designs for Villa Residences in various Styles. With Outline Specifications and Estimates. By C. WICKES, Architect, Author of "The Spires and Towers of England," &c. 61 Plates, 4to, half-morocco, gilt edges **21 11s. 6d.**

"The whole of the designs bear evidence of their being the work of an artistic architect, and they will prove very valuable and suggestive."—*Building News*.

THE ARCHITECT'S GUIDE.

Being a Text-book of Useful Information for Architects, Engineers, Surveyors, Contractors, Clerks of Works, &c., &c. By F. ROGERS. Crown 8vo, cloth **3/6**

ARCHITECTURAL PERSPECTIVE.

The whole Course and Operations of the Draughtsman in Drawing a Large House in Linear Perspective. Illustrated by 43 Folding Plates. By F. O. FERGUSON. Second Edition, Enlarged. 8vo, boards **3/6**

"It is the most intelligible of the treatises on this ill-treated subject that I have met with."—E. INGRESS BELL, Esq., in the *R.I.B.A. Journal*.

PRACTICAL RULES ON DRAWING.

For the Operative Builder and Young Student in Architecture. By GEORGE PYNE. 14 Plates, 4to, boards **7/6**

MEASURING AND VALUING ARTIFICERS' WORK

(The Student's Guide to the Practice of). Containing Directions for taking Dimensions, Abstracting the same, and bringing the Quantities into Bill, with Tables of Constants for Valuation of Labour, and for the Calculation of Areas and Solidities. Originally edited by E. DOBSON, Architect. With Additions by E. W. TARN, M.A. Seventh Edition, Revised. With 8 Plates and 63 Woodcuts. Crown 8vo, cloth. [just Published. **7/6**

"This edition will be found the most complete treatise on the principles of measuring and valuing artificers' work that has yet been published."—*Building News*

TECHNICAL GUIDE, MEASURER, AND ESTIMATOR.

For Builders and Surveyors. Containing Technical Directions for Measuring Work in all the Building Trades, Complete Specifications for Houses, Roads, and Drains, and an Easy Method of Estimating the parts of a Building collectively. By A. C. BEATON. Ninth Edition. Waistcoat-pocket size, gilt edges . . . **1/6**

"No builder, architect, surveyor, or valuer should be without his 'Beaton.'"—*Building News*.

SPECIFICATIONS**FOR PRACTICAL ARCHITECTURE.**

A Guide to the Architect, Engineer, Surveyor, and Builder. With an Essay on the Structure and Science of Modern Buildings. Upon the Basis of the Work by ALFRED BARTHOLOMEW, thoroughly Revised, Corrected, and greatly added to by FREDERICK ROGERS, Architect. Third Edition, Revised. 8vo, cloth **15/-**

"The work is too well known to need any recommendation from us. It is one of the books with which every young architect must be equipped."—*Architect*.

THE HOUSE-OWNER'S ESTIMATOR.

Or, What will it Cost to Build, Alter, or Repair? A Price Book for Unprofessional People, as well as the Architectural Surveyor and Builder. By J. D. SIMON. Edited by F. T. W. MILLER, A.R.I.B.A. Fifth Edition, carefully Revised. Crown 8vo, cloth. [just Published. Net **3/6**

"In two years it will repay its cost a hundred times over."—*Field*.

SANITATION AND WATER SUPPLY.

THE BACTERIAL PURIFICATION OF SEWAGE:

Being a Practical Account of the Various Modern Biological Methods of Purifying Sewage. By SIDNEY BARWISE, M.D. (Lond.), D.P.H. (Camb.), &c. With 10 Page Plates and 2 Folding Diagrams. Royal 8vo, cloth.

[Just Published. Net 6/0

THE PURIFICATION OF SEWAGE.

Being a Brief Account of the Scientific Principles of Sewage Purification, and their Practical Application. By SIDNEY BARWISE, M.D. (Lond.), M.R.C.S., D.P.H. (Camb.), Fellow of the Sanitary Institute, Medical Officer of Health to the Derbyshire County Council. Crown 8vo, cloth.

[Just Published. 5/-

WATER AND ITS PURIFICATION.

A Handbook for the Use of Local Authorities, Sanitary Officers, and others interested in Water Supply. By S. RIDEAL, D.Sc., Lond., F.I.C. Second Edition, Revised, with Additions, including numerous Illustrations and Tables. Large crown 8vo, cloth.

[Just Published. Net 9/-

RURAL WATER SUPPLY.

A Practical Handbook on the Supply of Water and Construction of Waterworks for Small Country Districts. By ALLAN GREENWELL, A.M.I.C.E., and W. T. CURRY, A.M.I.C.E. Revised Edition. Crown 8vo, cloth

5/-

THE WATER SUPPLY OF CITIES AND TOWNS.

By WILLIAM HUMBER, A.M.Inst.C.E., and M.Inst.M.E. Imp. 4to, half-bound morocco. (See page 11)

[Net 26 6s.

THE WATER SUPPLY OF TOWNS

AND THE CONSTRUCTION OF WATER-WORKS.

By Professor W. K. BURTON, A.M.Inst.C.E. Second Edition, Revised and Extended. Royal 8vo, cloth. (See page 10)

21 5s.

WATER ENGINEERING.

A Practical Treatise on the Measurement, Storage, Conveyance, and Utilisation of Water for the Supply of Towns. By C. SLAGG, A.M.Inst.C.E.

7/6

SANITARY WORK IN SMALL TOWNS AND VILLAGES.

By CHARLES SLAGG, A.M.Inst.C.E. Crown 8vo, cloth

3/-

SANITARY ARRANGEMENT OF DWELLING HOUSES.

By A. J. WALLIS-TAYLER, A.M.Inst.C.E. Crown 8vo, cloth

2/6

MODERN PLUMBING, HOT WATER HEATING, &c.

A New Practical Work for the Plumber, the Heating Engineer, the Architect, and the Builder. By J. J. LAWLER, Author of "American Sanitary Plumbing," &c. With 284 Illustrations and Folding Plates. 4to, cloth.

[Just Published (see page 25). Net 21/-

PLUMBING.

A Text-Book to the Practice of the Art or Craft of the Plumber. By W. P. BUCHAN. Eighth Edition, Enlarged, with 500 Illustrations. Crown 8vo

3/6

VENTILATION.

A Text-Book to the Practice of the Art of Ventilating Buildings. By W. P. BUCHAN, R.P. Crown 8vo, cloth

3/6

THE HEALTH OFFICER'S POCKET-BOOK.

A Guide to Sanitary Practice and Law. For Medical Officers of Health, Sanitary Inspectors, Members of Sanitary Authorities, &c. By EDWARD F. WILLOUGHBY, M.D. (Lond.), &c. Entirely New Edition, Re-written and greatly Enlarged. Fcap. 8vo, cloth.

[Just Published. Net 10/6

CARPENTRY, TIMBER, ETC.

THE ELEMENTARY PRINCIPLES OF CARPENTRY.

A Treatise on the Pressure and Equilibrium of Timber Framing, the Resistance of Timber, and the Construction of Floors, Arches, Bridges, Roofs, Uniting Iron and Stone with Timber, &c. To which is added an Essay on the Nature and Properties of Timber, &c., with Descriptions of the kinds of Wood used in Building; also numerous Tables of the Scantlings of Timber for different purposes, the Specific Gravities of Materials, &c. By THOMAS TREDGOLD, C.E. With an Appendix of Specimens of Various Roofs of Iron and Stone, Illustrated. Seventh Edition, thoroughly Revised and considerably Enlarged by E. WYNDHAM TARN, M.A., Author of "The Science of Building," &c. With 61 Plates, Portrait of the Author, and several Woodcuts. In One large Vol., 4to, cloth.

£1 5s.

"Ought to be in every architect's and every builder's library."—*Builder*.

"A work whose monumental excellence must commend it wherever skilful carpentry is concerned. The author's principles are rather confirmed than impaired by time. The additional plates are of great intrinsic value."—*Building News*.

WOODWORKING MACHINERY.

Its Rise, Progress, and Construction. With Hints on the Management of Saw Mills and the Economical Conversion of Timber. Illustrated with Examples of Recent Designs by leading English, French, and American Engineers. By M. POWIS BALE, A.M.Inst.C.E., M.I.M.E. Second Edition, Revised, with large Additions, large crown 8vo, 440 pp., cloth.

9/-

"Mr. Bale is evidently an expert on the subject, and he has collected so much information that his book is all-sufficient for builders and others engaged in the conversion of timber."—*Architect*.

"The most comprehensive compendium of wood-working machinery we have seen. The author is a thorough master of his subject."—*Building News*.

SAW MILLS.

Their Arrangement and Management, and the Economical Conversion of Timber. (A Companion Volume to "Woodworking Machinery.") By M. POWIS BALE, A.M.Inst.C.E. Second Edition, Revised. Crown 8vo, cloth.

[Just Published. 10/6

"The administration of a large sawing establishment is discussed, and the subject examined from a financial standpoint. Hence the size, shape, order, and disposition of saw-mills and the like are gone into in detail, and the course of the timber is traced from its reception to its delivery in its converted state. We could not desire a more complete or practical treatise."—*Builder*.

THE CARPENTER'S GUIDE.

Or, Book of Lines for Carpenters; comprising all the Elementary Principles essential for acquiring a knowledge of Carpentry. Founded on the late PETER NICHOLSON's standard work. A New Edition, Revised by ARTHUR ASHPITEL, F.S.A. Together with Practical Rules on Drawing, by GEORGE PYNE. With 74 Plates, 4to, cloth.

£1 1s.

A PRACTICAL TREATISE ON HANDRAILING.

Showing New and Simple Methods for Finding the Pitch of the Plank, Drawing the Moulds, Beveling, Jointing-up, and Squaring the Wreath. By GEORGE COLLINGS. Second Edition, Revised and Enlarged, to which is added A TREATISE ON STAIR-BUILDING. With Plates and Diagrams. 12mo, cloth.

2/6

"Will be found of practical utility in the execution of this difficult branch of joinery."—*Builder*.

"Almost every difficult phase of this somewhat intricate branch of joinery is elucidated by the aid of plates and explanatory letterpress."—*Furniture Gazette*.

CIRCULAR WORK IN CARPENTRY AND JOINERY.

A Practical Treatise on Circular Work of Single and Double Curvature. By GEORGE COLLINGS. With Diagrams. Third Edition, 12mo, cloth.

2/6

"An excellent example of what a book of this kind should be. Cheap in price, clear in definition, and practical in the examples selected."—*Builder*.

THE CABINET-MAKER'S GUIDE

TO THE ENTIRE CONSTRUCTION OF CABINET WORK.

Including Veneering, Marquetry, Buhlwork, Mosaic, Inlaying, &c. By RICHARD BITMEAD. Illustrated with Plans, Sections, and Working Drawings. Crown 8vo, cloth.

[Just Published. 3/6

HANDRAILING COMPLETE IN EIGHT LESSONS.

On the Square-Cut System. By J. S. GOLDTHORP, Teacher of Geometry and Building Construction at the Halifax Mechanics' Institute. With Eight Plates and over 150 Practical Exercises. 4to, cloth **3/6**

"Likely to be of considerable value to joiners and others who take a pride in good work. The arrangement of the book is excellent. We heartily commend it to teachers and students."—*Timber Trades Journal*.

TIMBER MERCHANT'S & BUILDER'S COMPANION.

Containing New and Copious Tables of the Reduced Weight and Measurement of Deals and Battens, of all sizes, and other useful Tables for the use of Timber Merchants and Builders. By WILLIAM DOWSING. Fourth Edition, Revised and Corrected. Crown 8vo, cloth **3/-**

"We are glad to see a fourth edition of these admirable tables, which for correctness and simplicity of arrangement leave nothing to be desired."—*Timber Trades Journal*.

THE PRACTICAL TIMBER MERCHANT.

Being a Guide for the use of Building Contractors, Surveyors, Builders, &c., comprising useful Tables for all purposes connected with the Timber Trade, Marks of Wood, Essay on the Strength of Timber, Remarks on the Growth of Timber, &c. By W. RICHARDSON. Second Edition. Fcap. 8vo, cloth . . . **3/6**

"This handy manual contains much valuable information for the use of timber merchants, builders, foresters, and all others connected with the growth, sale, and manufacture of timber."—*Journal of Forestry*.

PACKING-CASE TABLES.

Showing the number of Superficial Feet in Boxes or Packing-Cases, from six inches square and upwards. By W. RICHARDSON, Timber Broker. Third Edition. Oblong 4to, cloth **3/6**

"Invaluable labour-saving tables."—*Ironmonger*.

"Will save much labour and calculation."—*Grocer*.

GUIDE TO SUPERFICIAL MEASUREMENT.

Tables calculated from 1 to 200 inches in length, by 1 to 108 inches in breadth. For the use of Architects, Surveyors, Engineers, Timber Merchants, Builders, &c. By JAMES HAWKINGS. Fourth Edition. Fcap., cloth **3/6**

"These tables will be found of great assistance to all who require to make calculations in superficial measurement."—*English Mechanic*.

PRACTICAL FORESTRY.

And its Bearing on the Improvement of Estates. By CHARLES E. CURTIS, F.S.I., Professor of Forestry, Field Engineering, and General Estate Management, at the College of Agriculture, Downton. Second Edition, Revised. Crown 8vo, cloth **3/6**

[Just Published.]

PREFATORY REMARKS.—OBJECTS OF PLANTING.—CHOICE OF A FORESTER.—CHOICE OF SOIL AND SITE.—LAYING OUT OF LAND FOR PLANTATIONS.—PREPARATION OF THE GROUND FOR PLANTING.—DRAINAGE.—PLANTING.—DISTANCES AND DISTRIBUTION OF TREES IN PLANTATIONS.—TREES AND GROUND GAME.—ATTENTION AFTER PLANTING.—THINNING OF PLANTATIONS.—PRUNING OF FOREST TREES.—REALIZATION.—METHODS OF SALE.—MEASUREMENT OF TIMBER.—MEASUREMENT AND VALUATION OF LARCH PLANTATION.—FIRE LINES.—COST OF PLANTING.

"Mr. Curtis has in the course of a series of short pithy chapters afforded much information of a useful and practical character on the planting and subsequent treatment of trees."—*Illustrated Carpenter and Builder*.

THE ELEMENTS OF FORESTRY.

Designed to afford Information concerning the Planting and Care of Forest Trees for Ornament or Profit, with suggestions upon the Creation and Care of Woodlands. By F. B. HOUGH. Large crown 8vo, cloth **10/-**

TIMBER IMPORTER'S, TIMBER MERCHANT'S, AND BUILDER'S STANDARD GUIDE.

By RICHARD E. GRANDY. Comprising:—An Analysis of Deal Standards, Home and Foreign, with Comparative Values and Tabular Arrangements for fixing Net Landed Cost on Baltic and North American Deals, including all intermediate Expenses, Freight, Insurance, &c. &c.; together with copious Information for the Retailer and Builder. Third Edition, Revised. 12mo, cloth . . . **2/-**

"Everything it pretends to be: built up gradually, it leads one from a forest to a treenall, and throws in, as a makeweight, a host of material concerning bricks, columns, cisterns, &c."—*English Mechanic*.

DECORATIVE ARTS, ETC.

SCHOOL OF PAINTING FOR THE IMITATION OF WOODS AND MARBLES.

As Taught and Practised by A. R. VAN DER BURG and P. VAN DER BURG, Directors of the Rotterdam Painting Institution. Royal folio, 18½ by 12½ in., Illustrated with 24 full-size Coloured Plates; also 12 plain Plates, comprising 154 Figures. Third Edition, cloth. [*Just Published.* 21 11s. 6d.]

LIST OF PLATES.

1. VARIOUS TOOLS REQUIRED FOR WOOD PAINTING.—2, 3. WALNUT; PRELIMINARY STAGES OF GRAINING AND FINISHED SPECIMEN.—4. TOOLS USED FOR MARBLE PAINTING AND METHOD OF MANIPULATION.—5, 6. ST. REMI MARBLE; EARLIER OPERATIONS AND FINISHED SPECIMEN.—7. METHODS OF SKETCHING DIFFERENT GRAINS, KNOTS, &c.—8, 9. ASH; PRELIMINARY STAGES AND FINISHED SPECIMEN.—10. METHODS OF SKETCHING MARBLE GRAINS.—11, 12. BRECHE MARBLE; PRELIMINARY STAGES OF WORKING AND FINISHED SPECIMEN.—13. MAPLE; METHODS OF PRODUCING THE DIFFERENT GRAINS.—14, 15. BIRD'S-EYE MAPLE; PRELIMINARY STAGES AND FINISHED SPECIMEN.—16. METHODS OF SKETCHING THE DIFFERENT SPECIES OF WHITE MARBLE.—17, 18. WHITE MARBLE; PRELIMINARY STAGES OF PROCESS AND FINISHED SPECIMEN.—19. MAHOGANY; SPECIMEN OF VARIOUS GRAINS AND METHODS OF MANIPULATION.—20, 21. MAHOGANY; EARLIER STAGES AND FINISHED SPECIMEN.—22, 23, 24. SIENNA MARBLE; VARIETIES OF GRAIN, PRELIMINARY STAGES AND FINISHED SPECIMEN.—25, 26, 27. JUNIPER WOOD; METHODS OF PRODUCING GRAIN, &c.; PRELIMINARY STAGES AND FINISHED SPECIMEN.—28, 29, 30. VERT DE MER MARBLE; VARIETIES OF GRAIN AND METHODS OF WORKING, UNFINISHED AND FINISHED SPECIMENS.—31, 32, 33. OAK; VARIETIES OF GRAIN, TOOLS EMPLOYED AND METHODS OF MANIPULATION, PRELIMINARY STAGES AND FINISHED SPECIMEN.—34, 35, 36. WAULSORT MARBLE; VARIETIES OF GRAIN, UNFINISHED AND FINISHED SPECIMENS.

"Those who desire to attain skill in the art of painting woods and marbles will find advantage in consulting this book. . . . Some of the Working Men's Clubs should give their young men the opportunity to study it."—*Builder*.

"A comprehensive guide to the art. The explanations of the processes, the manipulation and management of the colours, and the beautifully executed plates will not be the least valuable to the student who aims at making his work a faithful transcript of nature."—*Building News*.

"Students and novices are fortunate who are able to become the possessors of so noble a work."—*The Architect*.

ELEMENTARY DECORATION.

A Guide to the Simpler Forms of Everyday Art. Together with PRACTICAL HOUSE DECORATION. By JAMES W. FACEY. With numerous Illustrations. In One Vol., strongly half-bound 5/-

HOUSE-PAINTING, GRAINING, MARBLING, AND SIGN WRITING,

A Practical Manual of. By ELLIS A. DAVIDSON. Eighth Edition. With Coloured Plates and Wood Engravings. Crown 8vo, cloth 8/-

"A mass of information, of use to the amateur and of value to the practical man."—*English Mechanic*.

THE DECORATOR'S ASSISTANT.

A Modern Guide for Decorative Artists and Amateurs, Painters, Writers, Gilders, &c. Containing upwards of 600 Receipts, Rules and Instructions; with a variety of Information for General Work connected with every Class of Interior and Exterior Decorations, &c. Seventh Edition. 152 pp., crown 8vo, in wrapper. 1/-

"Full of receipts of value to decorators, painters, gilders, &c. The book contains the gist of larger treatises on colour and technical processes. It would be difficult to meet with a work so full of varied information on the painter's art."—*Building News*.

MARBLE DECORATION

And the Terminology of British and Foreign Marbles. A Handbook for Students. By GEORGE H. BLAGROVE, Author of "Shoring and its Application," &c. With 28 Illustrations. Crown 8vo, cloth 3/6

"This most useful and much wanted handbook should be in the hands of every architect and builder."—*Building World*.

"A carefully and usefully written treatise; the work is essentially practical."—*Scotsman*.

DELAMOTTE'S WORKS ON ILLUMINATION AND ALPHABETS.

ORNAMENTAL ALPHABETS, ANCIENT & MÆDÆVAL.

From the Eighth Century, with Numerals; including Gothic, Church-Text, large and small, German, Italian, Arabesque, Initials for Illumination, Monograms, Crosses, &c. &c., for the use of Architectural and Engineering Draughtsmen, Missal Painters, Masons, Decorative Painters, Lithographers, Engravers, Carvers, &c. &c. Collected and Engraved by F. DELAMOTTE, and Printed in Colours. New and Cheaper Edition. Royal 8vo, oblong, ornamental boards . . . 2/6

"For those who insert enamelled sentences round gilded chalices, who blazon shop legends over shop-doors, who letter church walls with pithy sentences from the Decalogue, this book will be useful."—*Athenæum*.

MODERN ALPHABETS, PLAIN AND ORNAMENTAL.

Including German, Old English, Saxon, Italic, Perspective, Greek, Hebrew, Court Hand, Engrossing, Tuscan, Riband, Gothic, Rustic, and Arabesque; with several Original Designs, and an analysis of the Roman and Old English Alphabets, large and small, and Numerals, for the use of Draughtsmen, Surveyors, Masons, Decorative Painters, Lithographers, Engravers, Carvers, &c. Collected and Engraved by F. DELAMOTTE, and printed in Colours. New and Cheaper Edition. Royal 8vo, oblong, ornamental boards . . . 2/6

"There is comprised in it every possible shape into which the letters of the alphabet and numerals can be formed, and the talent which has been expended in the conception of the various plain and ornamental letters is wonderful."—*Standard*.

MÆDÆVAL ALPHABETS AND INITIALS.

By F. G. DELAMOTTE. Containing 21 Plates and Illuminated Title, printed in Gold and Colours. With an Introduction by J. WILLIS BROOKS. Fourth and Cheaper Edition. Small 4to, ornamental boards . . . 4/-

"A volume in which the letters of the alphabet come forth glorified in gilding and all the colours of the prism interwoven and intertwined and intermingled."—*Sun*.

A PRIMER OF THE ART OF ILLUMINATION.

For the Use of Beginners; with a Rudimentary Treatise on the Art, Practical Directions for its Exercise, and Examples taken from Illuminated MSS., printed in Gold and Colours. By F. DELAMOTTE. New and Cheaper Edition. Small 4to, ornamental boards . . . 6/-

"The examples of ancient MSS. recommended to the student, which, with much good sense, the author chooses from collections accessible to all, are selected with judgment and knowledge, as well as taste."—*Athenæum*.

THE EMBROIDERER'S BOOK OF DESIGN.

Containing Initials, Emblems, Cyphers, Monograms, Ornamental Borders, Ecclesiastical Devices, Mædæval and Modern Alphabets, and National Emblems. Collected by F. DELAMOTTE, and printed in Colours. Oblong royal 8vo, ornamental wrapper . . . 1/6

"The book will be of great assistance to ladies and young children who are endowed with the art of plying the needle in this most ornamental and useful pretty work."—*East Anglian Times*.

WOOD-CARVING FOR AMATEURS.

With Hints on Design. By A LADY. With Ten Plates. New and Cheaper Edition. Crown 8vo, in emblematic wrapper . . . 2/-

"The handicraft of the wood-carver, so well as a book can impart it, may be learnt from 'A Lady's' publication."—*Athenæum*.

PAINTING POPULARLY EXPLAINED.

By THOMAS JOHN GULLICK, Painter, and JOHN TIMBS, F.S.A. Including Fresco, Oil, Mosaic, Water Colour, Water-Glass, Tempera, Encaustic, Miniature, Painting on Ivory, Vellum, Pottery, Enamel, Glass, &c. Fifth Edition. Crown 8vo, cloth 5/-

* * * Adopted as a Prize book at South Kensington.

"Much may be learned, even by those who fancy they do not require to be taught, from the careful perusal of this unpretending but comprehensive treatise."—*Art Journal*.

NATURAL SCIENCE, ETC.

THE VISIBLE UNIVERSE.

Chapters on the Origin and Construction of the Heavens. By J. E. GORE, F.R.A.S., Author of "Star Groups," &c. Illustrated by 6 Stellar Photographs and 12 Plates. Demy 8vo, cloth **16/-**

"A valuable and lucid summary of recent astronomical theory, rendered more valuable and attractive by a series of stellar photographs and other illustrations."—*The Times*.

"In presenting a clear and concise account of the present state of our knowledge, Mr. Gore has made a valuable addition to the literature of the subject."—*Nature*.

"Mr. Gore's 'Visible Universe' is one of the finest works on astronomical science that has recently appeared in our language. In spirit and in method it is scientific from cover to cover, but the style is so clear and attractive that it will be as acceptable and as readable to those who make no scientific pretensions as to those who devote themselves specially to matters astronomical."—*Leeds Mercury*.

STAR GROUPS.

A Student's Guide to the Constellations. By J. ELLARD GORE, F.R.A.S., M.R.I.A., &c., Author of "The Visible Universe," "The Scenery of the Heavens," &c. With 30 Maps. Small 4to, cloth **5/-**

"The volume contains thirty maps showing stars of the sixth magnitude—the usual naked-eye limit—and each is accompanied by a brief commentary, adapted to facilitate recognition and bring to notice objects of special interest. For the purpose of a preliminary survey of the 'midnight pomp' of the heavens, nothing could be better than a set of delineations averaging scarcely twenty square inches in area, and including nothing that cannot at once be identified."—*Saturday Review*.

AN ASTRONOMICAL GLOSSARY.

Or, Dictionary of Terms used in Astronomy. With Tables of Data and Lists of Remarkable and Interesting Celestial Objects. By J. ELLARD GORE, F.R.A.S., Author of "The Visible Universe," &c. Small crown 8vo, cloth **2/6**

"A very useful little work for beginners in astronomy, and not to be despised by more advanced students."—*The Times*.

"A very handy book . . . the utility of which is much increased by its valuable tables of astronomical data."—*Athenaeum*.

THE MICROSCOPE.

Its Construction and Management. Including Technique, Photo-micrography, and the Past and Future of the Microscope. By Dr. HENRI VAN HEURCK. Re-edited and Augmented from the Fourth French Edition, and Translated by WYNNE E. BAXTER, F.G.S. 400 pages, with upwards of 250 Woodcuts, imp. 8vo, cloth **18/-**

"A translation of a well-known work, at once popular and comprehensive."—*Times*.

"The translation is as felicitous as it is accurate."—*Nature*.

ASTRONOMY.

By the late Rev. ROBERT MAIN, M.A., F.R.S. Third Edition, Revised by WILLIAM THYNNE LYNN, B.A., F.R.A.S., formerly of the Royal Observatory, Greenwich. 12mo, cloth **2/-**

"A sound and simple treatise, very carefully edited, and a capital book for beginners."—*Knowledge*.

"Accurately brought down to the requirements of the present time by Mr. Lynn."—*Educational Times*.

A MANUAL OF THE MOLLUSCA.

A Treatise on Recent and Fossil Shells. By S. P. WOODWARD, A.L.S., F.G.S. With an Appendix on RECENT AND FOSSIL CONCHOLOGICAL DISCOVERIES, by RALPH TATE, A.L.S., F.G.S. With 23 Plates and upwards of 300 Woodcuts. Reprint of Fourth Edition (1880). Crown 8vo, cloth **7/6**

"A most valuable storehouse of conchological and geological information."—*Science Gossip*.

THE TWIN RECORDS OF CREATION.

Or, Geology and Genesis, their Perfect Harmony and Wonderful Concord. By G. W. V. LE VAUX. 8vo, cloth **5/-**

"A valuable contribution to the evidences of Revelation, and disposes very conclusively of the arguments of those who would set God's Works against God's Word. No real difficulty is shirked, and no sophistry is left unexposed."—*The Rock*.

HANDBOOK OF MECHANICS.

By Dr. LARDNER. Enlarged and re-written by BENJAMIN LOEWY, F.R.A.S.
378 Illustrations. Post 8vo, cloth **6/-**

"The perspicuity of the original has been retained, and chapters which had become obsolete have been replaced by others of more modern character. The explanations throughout are studiously popular, and care has been taken to show the application of the various branches of physics to the industrial arts, and to the practical business of life."—*Mining Journal*.

HANDBOOK OF HYDROSTATICS & PNEUMATICS.

By Dr. LARDNER. New Edition, Revised and Enlarged by BENJAMIN LOEWY, F.R.A.S. With 236 Illustrations. Post 8vo, cloth **5/-**

"For those who desire to attain accurate knowledge of physical science without the profound methods of mathematical investigation, this work is well adapted."—*Chemical News*.

HANDBOOK OF HEAT.

By Dr. LARDNER. Edited and re-written by BENJAMIN LOEWY, F.R.A.S., &c.
117 Illustrations. Post 8vo, cloth **6/-**

"The style is always clear and precise, and conveys instruction without leaving any cloudiness or lurking doubts behind."—*Engineering*.

HANDBOOK OF OPTICS.

By Dr. LARDNER. New Edition. Edited by T. OLVER HARDING, B.A. Lond.
With 298 Illustrations. Small 8vo, 448 pages, cloth **5/-**

"Written by one of the ablest English scientific writers, beautifully and elaborately illustrated."—*Mechanic's Magazine*.

ELECTRICITY, MAGNETISM AND ACOUSTICS.

By Dr. LARDNER. Edited by GEO. CAREY FOSTER, B.A., F.C.S. With 400
Illustrations. Small 8vo, cloth **5/-**

"The book could not have been entrusted to anyone better calculated to preserve the terse and lucid style of Lardner, while correcting his errors and bringing up his work to the present state of scientific knowledge."—*Popular Science Review*.

HANDBOOK OF ASTRONOMY.

By Dr. LARDNER. Fourth Edition. Revised and Edited by EDWIN DUNKIN, F.R.A.S., Royal Observatory, Greenwich. With 38 Plates and upwards of 100
Woodcuts. 8vo, cloth **9/6**

"Probably no other book contains the same amount of information in so compendious and well-arranged a form—certainly none at the price at which this is offered to the public."—*Athenæum*.

"We can do no other than pronounce this work a most valuable manual of astronomy, and we strongly recommend it to all who wish to acquire a general—but at the same time correct—acquaintance with this sublime science."—*Quarterly Journal of Science*.

MUSEUM OF SCIENCE AND ART.

Edited by Dr. LARDNER. With upwards of 1,200 Engravings on Wood. In Six
Double Volumes, **1/1/-** in a new and elegant cloth binding; or handsomely
bound in half-morocco **£1 11s. 6d.**

"A cheap and interesting publication, alike informing and attractive. The papers combine subjects of importance and great scientific knowledge, considerable inductive powers, and a popular style of treatment."—*Spectator*.

Separate books formed from the above.

Common Things Explained. 5s.

The Microscope. 2s. cloth.

Popular Geology. 2s. 6d. cloth.

Popular Physics. 2s. 6d. cloth.

Steam and its Uses. 2s. cloth.

Popular Astronomy. 4s. 6d. cloth.

The Bee and White Ants. 2s. cloth.

The Electric Telegraph. 1s. 6d.

NATURAL PHILOSOPHY FOR SCHOOLS.

By Dr. LARDNER. Fcap. 8vo **3/6**

"A very convenient class-book for junior students in private schools."—*British Quarterly Review*.

ANIMAL PHYSIOLOGY FOR SCHOOLS.

By Dr. LARDNER. Fcap. 8vo **3/6**

"Clearly written, well arranged, and excellently illustrated."—*Gardener's Chronicle*.

THE ELECTRIC TELEGRAPH.

By Dr. LARDNER. Revised by E. B. BRIGHT, F.R.A.S. Fcap. 8vo, cloth. **2/6**

"One of the most readable books extant on the Electric Telegraph."—*English Mechanic*.

CHEMICAL MANUFACTURES, CHEMISTRY, ETC.

THE GAS ENGINEER'S POCKET BOOK.

Comprising Tables, Notes and Memoranda relating to the Manufacture, Distribution and Use of Coal Gas and the Construction of Gas Works. By H. O'CONNOR, A.M.Inst.C.E. Second Edition, Revised. 470 pages, crown 8vo, fully illustrated, leather. [just Published. 10/6]

"The book contains a vast amount of information. The author goes consecutively through the engineering details and practical methods involved in each of the different processes or parts of a gas-works. He has certainly succeeded in making a compilation of hard matters of fact absolutely interesting to read."—*Gas World*.

"A useful work of reference for the gas engineer and all interested in lighting or heating by gas, while the analyses of the various descriptions of gas will be of value to the technical chemist. All matter in any way connected with the manufacture and use of gas is dealt with. The book has evidently been carefully compiled, and certainly constitutes a useful addition to gas literature."—*Builder*.

"The volume contains a great quantity of specialised information, compiled, we believe, from trustworthy sources, which should make it of considerable value to those for whom it is specifically produced."—*Engineer*.

LIGHTING BY ACETYLENE

Generators, Burners and Electric Furnaces. By WILLIAM E. GIBBS, M.E. With Sixty-six Illustrations. Crown 8vo, cloth. [just Published. 7/6]

ENGINEERING CHEMISTRY.

A Practical Treatise for the Use of Analytical Chemists, Engineers, Iron Masters, Iron Founders, Students and others. Comprising Methods of Analysis and Valuation of the Principal Materials used in Engineering Work, with numerous Analyses, Examples and Suggestions. By H. JOSHUA PHILLIPS, F.I.C., F.C.S. Second Edition, Revised and Enlarged. Crown 8vo, 400 pages, with Illustrations, cloth. 10/6

"In this work the author has rendered no small service to a numerous body of practical men. . . . The analytical methods may be pronounced most satisfactory, being as accurate as the despatch required of engineering chemists permits."—*Chemical News*.

"The book is full of good things. As a handbook of technical analysis, it is very welcome."—*Builder*.

"The analytical methods given are, as a whole, such as are likely to give rapid and trustworthy results in experienced hands. . . . There is much excellent descriptive matter in the work, the chapter on 'Oils and Lubrication' being specially noticeable in this respect."—*Engineer*.

NITRO-EXPLOSIVES.

A Practical Treatise concerning the Properties, Manufacture, and Analysis of Nitrated Substances, including the Fulminates, Smokeless Powders and Celluloid. By P. GERALD SANFORD, F.I.C., Consulting Chemist to the Cotton Powder Company, Limited, &c. With Illustrations. Crown 8vo, cloth. [just Published. 9/-]

"One of the very few text-books in which can be found just what is wanted. Mr. Sanford goes steadily through the whole list of explosives commonly used, he names any given explosive and tells us of what it is composed and how it is manufactured. The book is excellent throughout."—*The Engineer*.

A HANDBOOK ON MODERN EXPLOSIVES.

A Practical Treatise on the Manufacture and Use of Dynamite, Gun-Cotton, Nitro-Glycerine, and other Explosive Compounds, including Collodion-Cotton. With Chapters on Explosives in Practical Application. By M. EISSLER, M.E. Second Edition, Enlarged. Crown 8vo, cloth. [just Published. 12/6]

"A veritable mine of information on the subject of explosives employed for military, mining and blasting purposes."—*Army and Navy Gazette*.

DANGEROUS GOODS.

Their Sources and Properties, Modes of Storage and Transport. With Notes and Comments on Accidents arising therefrom. A Guide for the Use of Government and Railway Officials, Steamship Owners, &c. By H. JOSHUA PHILLIPS, F.I.C., F.C.S. Crown 8vo, 374 pages, cloth. 9/-

"Merits a wide circulation and an intelligent, appreciative study."—*Chemical News*.

A MANUAL OF THE ALKALI TRADE.

Including the Manufacture of Sulphuric Acid, Sulphate of Soda, and Bleaching Powder. By JOHN LOMAS, Alkali Manufacturer. With 232 Illustrations and Working Drawings. Second Edition, with Additions. Super-royal 8vo, cloth. **21 10s.**

"We find not merely a sound and luminous explanation of the chemical principles of the trade, but a notice of numerous matters which have a most important bearing on the successful conduct of alkali works, but which are generally overlooked by even experienced technological authors."—*Chemical Review*.

THE BLOWPIPE IN CHEMISTRY, MINERALOGY, Etc.

Containing all known Methods of Anhydrous Analysis, many Working Examples, and Instructions for Making Apparatus. By Lieut.-Colonel W. A. ROSS, R.A., F.G.S. Second Edition, Enlarged. Crown 8vo, cloth **5/-**

"The student who goes conscientiously through the course of experimentation here laid down will gain a better insight into inorganic chemistry and mineralogy than if he had 'got up' any of the best text-books of the day, and passed any number of examinations in their contents."—*Chemical News*.

THE MANUAL OF COLOURS AND DYE-WARES.

Their Properties, Applications, Valuations, Impurities, and Sophistications. For the Use of Dyers, Printers, Drysalterers, Brokers, &c. By J. W. SLATER. Second Edition, Revised and greatly Enlarged. Crown 8vo, cloth **7/6**

"There is no other work which covers precisely the same ground. To students preparing for examinations in dyeing and printing it will prove exceedingly useful."—*Chemical News*.

A HANDYBOOK FOR BREWERS.

Being a Practical Guide to the Art of Brewing and Malting. Embracing the Conclusions of Modern Research which bear upon the Practice of Brewing. By HERBERT EDWARDS WRIGHT, M.A. Second Edition, Enlarged. Crown 8vo, 530 pp., cloth **12/6**

"May be consulted with advantage by the student who is preparing himself for examination tests, while the scientific brewer will find in it a *résumé* of all the most important discoveries of modern times. The work is written throughout in a clear and concise manner, and the author takes great care to discriminate between vague theories and well-established facts."—*Brewers' Journal*.

"We have great pleasure in recommending this handybook, and have no hesitation in saying that it is one of the best—if not the best—which has yet been written on the subject of beer-brewing in this country. It should have a place on the shelves of every brewer's library."—*Brewers' Guardian*.

"Although the requirements of the student are primarily considered, an acquaintance of half-an-hour's duration cannot fail to impress the practical brewer with the sense of having found a trustworthy guide and practical counsellor in brewery matters."—*Chemical Trade Journal*.

FUELS: SOLID, LIQUID, AND GASEOUS.

Their Analysis and Valuation. For the Use of Chemists and Engineers. By H. J. PHILLIPS, F.C.S., Formerly Analytical and Consulting Chemist to the Great Eastern Railway. Third Edition, Revised and Enlarged. Crown 8vo, cloth **2/-**

"Ought to have its place in the laboratory of every metallurgical establishment, and wherever fuel is used on a large scale."—*Chemical News*.

THE ARTISTS' MANUAL OF PIGMENTS.

Showing their Composition, Conditions of Permanency, Non-Permanency, and Adulterations, &c., with Tests of Purity. By H. C. STANDAGE. Third Edition, crown 8vo, cloth **2/6**

"This work is indeed *multum in parvo*, and we can, with good conscience, recommend it to all who come in contact with pigments, whether as makers, dealers, or users."—*Chemical Review*.

A POCKET-BOOK OF MENSURATION & GAUGING.

Containing Tables, Rules, and Memoranda for Revenue Officers, Brewers, Spirit Merchants, &c. By J. B. MANT (Inland Revenue). Second Edition, Revised, 18mo, leather **4/-**

"Should be in the hands of every practical brewer."—*Brewers' Journal*.

INDUSTRIAL ARTS, TRADES AND MANUFACTURES.

TEA MACHINERY AND TEA FACTORIES.

A Descriptive Treatise on the Mechanical Appliances required in the Cultivation of the Tea Plant and the Preparation of Tea for the Market. By A. J. WALLIS-TAYLER, A.M.Inst.C.E. Medium 8vo, 468 pp. With 218 Illustrations.

[Just Published. Net 25/-]

SUMMARY OF CONTENTS.

MECHANICAL CULTIVATION OR TILLAGE OF THE SOIL.—PLUCKING OR GATHERING THE LEAF.—TEA FACTORIES.—THE DRESSING, MANUFACTURE, OR PREPARATION OF TEA BY MECHANICAL MEANS.—ARTIFICIAL WITHERING OF THE LEAF.—MACHINES FOR ROLLING OR CURLING THE LEAF.—FERMENTING PROCESS.—MACHINES FOR THE AUTOMATIC DRYING OR FIRING OF THE LEAF.—MACHINES FOR NON-AUTOMATIC DRYING OR FIRING OF THE LEAF.—DRYING OR FIRING MACHINES.—BREAKING OR CUTTING, AND SORTING MACHINES.—PACKING THE TEA.—MEANS OF TRANSPORT ON TEA PLANTATIONS.—MISCELLANEOUS MACHINERY AND APPARATUS.—FINAL TREATMENT OF THE TEA.—TABLES AND MEMORANDA.

"The subject of tea machinery is now one of the first interest to a large class of people, to whom we strongly commend the volume."—*Chamber of Commerce Journal*.

"When tea planting was first introduced into the British possessions little, if any, machinery was employed, but now its use is almost universal. This volume contains a very full account of the machinery necessary for the proper outfit of a factory, and also a description of the processes best carried out by this machinery."—*Journal Society of Arts*.

FLOUR MANUFACTURE.

A Treatise on Milling Science and Practice. By FRIEDRICH KICK, Imperial Regierungsrath, Professor of Mechanical Technology in the Imperial German Polytechnic Institute, Prague. Translated from the Second Enlarged and Revised Edition, with Supplement. By H. H. P. POWLES, Assoc. Memb. Institution of Civil Engineers. Nearly 400 pp. Illustrated with 28 Folding Plates, and 167 Woodcuts. Royal 8vo, cloth 25/-

"This invaluable work is, and will remain, the standard authority on the science of milling. The miller who has read and digested this work will have laid the foundation, so to speak, of a successful career; he will have acquired a number of general principles which he can proceed to apply. In this handsome volume we at last have the accepted text-book of modern milling in good, sound English, which has little, if any, trace of the German idiom."—*The Miller*.

"The appearance of this celebrated work in English is very opportune, and British millers will, we are sure, not be slow in availing themselves of its pages."—*Millers' Gazette*.

COTTON MANUFACTURE.

A Manual of Practical Instruction of the Processes of Opening, Carding, Combing, Drawing, Doubling and Spinning of Cotton, the Methods of Dyeing, &c. For the Use of Operatives, Overlookers, and Manufacturers. By JOHN LISTER, Technical Instructor, Pendleton. 8vo, cloth 7/6

"This invaluable volume is a distinct advance in the literature of cotton manufacture."—*Machinery*.
"It is thoroughly reliable, fulfilling nearly all the requirements desired."—*Glasgow Herald*.

MODERN CYCLES.

A Practical Handbook on their Construction and Repair. By A. J. WALLIS-TAYLER, A.M.Inst.C.E., Author of "Refrigerating Machinery," &c. With upwards of 300 Illustrations. Crown 8vo, cloth. [Just Published. 10/6]

"The large trade that is done in the component parts of bicycles has placed in the way of men mechanically inclined extraordinary facilities for building bicycles for their own use. The book will prove a valuable guide for all those who aspire to the manufacture or repair of their own machines."—*The Field*.

"A most comprehensive and up-to-date treatise."—*The Cycle*.

"A very useful book, which is quite entitled to rank as a standard work for students of cycle construction."—*Wheeling*.

MOTOR CARS OR POWER CARRIAGES FOR COMMON ROADS.

By A. J. WALLIS-TAYLER, Assoc. Memb. Inst. C.E., Author of "Modern Cycles," &c. 212 pp., with 76 Illustrations. Crown 8vo, cloth 4/6

"The book is clearly expressed throughout, and is just the sort of work that an engineer, thinking of turning his attention to motor-carriage work, would do well to read as a preliminary to starting operations."—*Engineering*.

FRENCH POLISHING AND ENAMELLING.

A Practical Work of Instruction. Including Numerous Recipes for making Polishers, Varnishes, Glaze-Lacquers, Revivers, &c. By RICHARD BITMEAD, Author of "The Cabinet-Maker's Guide." Small crown 8vo, cloth.

[Just Published. 1/6]

THE CABINET-MAKER'S GUIDE

TO THE ENTIRE CONSTRUCTION OF CABINET WORK.

Including Veneering, Marquetry, Buhlwork, Mosaic, Inlaying, &c. By RICHARD BITMEAD. Illustrated with Plans, Sections, and Working Drawings. Small Crown 8vo, cloth.

[Just Published. 2/6]

CEMENTS, PASTES, GLUES AND GUMS.

A Practical Guide to the Manufacture and Application of the various Agglutinants required in the Building, Metal-Working, Wood-Working, and Leather-Working Trades, and for Workshop and Office Use. With upwards of 900 Recipes. By H. C. STANDAGE. Third Edition. Crown 8vo, cloth . . . 2/-

"We have pleasure in speaking favourably of this volume. So far as we have had experience, which is not inconsiderable, this manual is trustworthy."—*Athenæum*.

THE ART OF SOAP-MAKING.

A Practical Handbook of the Manufacture of Hard and Soft Soaps, Toilet Soaps, &c. Including many New Processes, and a Chapter on the Recovery of Glycerine from Waste Lays. By ALEXANDER WATT. Sixth Edition, including an Appendix on Modern Candlemaking. Crown 8vo, cloth . . . 7/6

"The work will prove very useful, not merely to the technological student, but to the practical soap-boiler who wishes to understand the theory of his art."—*Chemical News*.

"A thoroughly practical treatise. We congratulate the author on the success of his endeavour to fill a void in English technical literature."—*Nature*.

PRACTICAL PAPER-MAKING.

A Manual for Paper-Makers and Owners and Managers of Paper-Mills. With Tables, Calculations, &c. By G. CLAPPERTON, Paper-Maker. With Illustrations of Fibres from Micro-Photographs. Crown 8vo, cloth . . . 5/-

"The author caters for the requirements of responsible mill hands, apprentices, &c., whilst his manual will be found of great service to students of technology, as well as to veteran paper-makers and mill-owners. The illustrations form an excellent feature."—*The World's Paper Trade Review*.

THE ART OF PAPER-MAKING.

A Practical Handbook of the Manufacture of Paper from Rags, Esparto, Straw, and other Fibrous Materials. Including the Manufacture of Pulp from Wood Fibre, with a Description of the Machinery and Appliances used. To which are added Details of Processes for Recovering Soda from Waste Liquors. By ALEXANDER WATT. With Illustrations. Crown 8vo, cloth . . . 7/6

"It may be regarded as the standard work on the subject. The book is full of valuable information. The 'Art of Paper-Making' is in every respect a model of a text-book, either for a technical class, or for the private student."—*Paper and Printing Trades Journal*.

A TREATISE ON PAPER

For Printers and Stationers. With an Outline of Paper Manufacture; Complete Tables of Sizes, and Specimens of Different Kinds of Paper. By RICHARD PARKINSON, late of the Manchester Technical School. Demy 8vo, cloth . . . 3/6

THE ART OF LEATHER MANUFACTURE.

Being a Practical Handbook, in which the Operations of Tanning, Currying, and Leather Dressing are fully Described, and the Principles of Tanning Explained, and many Recent Processes Introduced; as also Methods for the Estimation of Tannin, and a Description of the Arts of Glue Boiling, Gut Dressing, &c. By ALEXANDER WATT. Fourth Edition. Crown 8vo, cloth . . . 9/-

"A sound, comprehensive treatise on tanning and its accessories. The book is an eminently valuable production, which redounds to the credit of both author and publishers."—*Chemical Review*.

THE ART OF BOOT AND SHOE-MAKING.

A Practical Handbook, including Measurement, Last-Fitting, Cutting-Out, Closing and Making, with a Description of the most approved Machinery Employed. By JOHN B. LENO. 12mo, cloth . . . 2/-

WOOD ENGRAVING.

A Practical and Easy Introduction to the Study of the Art. By W. N. BROWN.
12mo, cloth 1/6

"The book is clear and complete, and will be useful to any one wanting to understand the first elements of the beautiful art of wood engraving."—*Graphic*.

MODERN HOROLOGY IN THEORY AND PRACTICE.

Translated from the French of CLAUDIUS SAUNIER, ex-Director of the School of Horology at Macon, by JULIEN TRIPPLIN, F.R.A.S., Besançon Watch Manufacturer, and EDWARD RIGG, M.A., Assayer in the Royal Mint. With Seventy-eight Woodcuts and Twenty-two Coloured Copper Plates. Second Edition. Super-royal 8vo, **£2 2s.**, cloth; half-calf **£2 10s.**

"There is no horological work in the English language at all to be compared to this production of M. Saunier's for clearness and completeness. It is alike good as a guide for the student and as a reference for the experienced horologist and skilled workman."—*Horological Journal*.

"The latest, the most complete, and the most reliable of those literary productions to which continental watchmakers are indebted for the mechanical superiority over their English brethren—in fact, the Book of Books, is M. Saunier's 'Treatise.'"—*Watchmaker, Jeweller, and Silversmith*.

THE WATCH ADJUSTER'S MANUAL.

A Practical Guide for the Watch and Chronometer Adjuster in Making, Springing, Timing and Adjusting for Isochronism, Positions and Temperatures. By C. E. FRITS. 370 pages, with Illustrations, 8vo, cloth 18/-

THE WATCHMAKER'S HANDBOOK.

Intended as a Workshop Companion for those engaged in Watchmaking and the Allied Mechanical Arts. Translated from the French of CLAUDIUS SAUNIER, and enlarged by JULIEN TRIPPLIN, F.R.A.S., and EDWARD RIGG, M.A., Assayer in the Royal Mint. Third Edition. Crown 8vo, cloth 9/-

"Each part is truly a treatise in itself. The arrangement is good and the language is clear and concise. It is an admirable guide for the young watchmaker."—*Engineering*.

"It is impossible to speak too highly of its excellence. It fulfils every requirement in a handbook intended for the use of a workman. Should be found in every workshop."—*Watch and Clockmaker*.

HISTORY OF WATCHES & OTHER TIMEKEEPERS.

By JAMES F. KENDAL, M.B.H.Inst. **1/6** boards; or cloth, gilt 2/6

"The best which has yet appeared on this subject in the English language."—*Industries*.

"Open the book where you may, there is interesting matter in it concerning the ingenious devices of the ancient or modern horologer."—*Saturday Review*.

ELECTRO-DEPOSITION.

A Practical Treatise on the Electrolysis of Gold, Silver, Copper, Nickel, and other Metals and Alloys. With descriptions of Voltaic Batteries, Magneto and Dynamo-Electric Machines, Thermopiles, and of the Materials and Processes used in every Department of the Art, and Several Chapters on ELECTRO-METALLURGY. By ALEXANDER WATT, Author of "Electro-Metallurgy," &c. Third Edition, Revised. Crown 8vo, cloth 9/-

"Eminently a book for the practical worker in electro-deposition. It contains practical descriptions of methods, processes and materials, as actually pursued and used in the workshop."—*Engineer*.

ELECTRO-METALLURGY.

Practically Treated. By ALEXANDER WATT. Tenth Edition, including the most recent Processes. 12mo, cloth 3/6

"From this book both amateur and artisan may learn everything necessary for the successful prosecution of electroplating."—*Iron*.

JEWELLER'S ASSISTANT IN WORKING IN GOLD.

A Practical Treatise for Masters and Workmen, Compiled from the Experience of Thirty Years' Workshop Practice. By GEORGE E. GEE, Author of the "Goldsmith's Handbook," &c. Crown 8vo, cloth 7/6

"This manual of technical education is apparently destined to be a valuable auxiliary to a handicraft which is certainly capable of great improvement."—*The Times*.

ELECTROPLATING.

A Practical Handbook on the Deposition of Copper, Silver, Nickel, Gold, Aluminium, Brass, Platinum, &c., &c. By J. W. URQUHART, C.E. Fourth Edition, Revised. Crown 8vo, cloth. [Just Published. 5/-

"An excellent practical manual."—*Engineering*.

"An excellent work, giving the newest information."—*Horological Journal*.

ELECTROTYPING.

The Reproduction and Multiplication of Printing Surfaces and Works of Art by the Electro-deposition of Metals. By J. W. URQUHART, C.E. Crown 8vo, cloth 5/-

"The book is thoroughly practical; the reader is, therefore, conducted through the leading laws of electricity, then through the metals used by electrotypers, the apparatus, and the depositing processes, up to the final preparation of the work."—*Art Journal*.

GOLDSMITH'S HANDBOOK.

By GEORGE E. GEE, Jeweller, &c. Fifth Edition. 12mo, cloth 3/-

"A good, sound educator, and will be generally accepted as an authority."—*Horological Journal*.

SILVERSMITH'S HANDBOOK.

By GEORGE E. GEE, Jeweller, &c. Third Edition, with numerous Illustrations. 12mo, cloth 3/-

"The chief merit of the work is its practical character. . . . The workers in the trade will speedily discover its merits when they sit down to study it."—*English Mechanic*.

* * * The above two works together, strongly half-bound, price 7s.

SHEET METAL WORKER'S INSTRUCTOR.

Comprising a Selection of Geometrical Problems and Practical Rules for Describing the Various Patterns Required by Zinc, Sheet-Iron, Copper and Tin-Plate Workers. By REUBEN HENRY WARN, Practical Tin-Plate Worker. New Edition, Revised and greatly Enlarged by JOSEPH G. HORNER, A.M.I.M.E. Crown 8vo, 254 pages, with 430 Illustrations, cloth. [Just Published. 7/6

BREAD & BISCUIT BAKER'S & SUGAR-BOILER'S ASSISTANT.

Including a large variety of Modern Recipes. With Remarks on the Art of Bread-making. By ROBERT WELLS. Third Edition. Cr. 8vo, cloth 2/-

"A large number of wrinkles for the ordinary cook, as well as the baker."—*Saturday Review*.

PASTRYCOOK & CONFECTIONER'S GUIDE.

For Hotels, Restaurants, and the Trade in general, adapted also for Family Use. By R. WELLS, Author of "The Bread and Biscuit Baker." Crown 8vo, cloth 2/-

"We cannot speak too highly of this really excellent work. In these days of keen competition our readers cannot do better than purchase this book."—*Baker's Times*.

ORNAMENTAL CONFECTIONERY.

A Guide for Bakers, Confectioners and Pastrycooks; including a variety of Modern Recipes, and Remarks on Decorative and Coloured Work. With 129 Original Designs. By ROBERT WELLS. Second Edition. Crown 8vo, cloth. 5/-

"A valuable work, practical, and should be in the hands of every baker and confectioner. The illustrative designs are alone worth treble the amount charged for the whole work."—*Baker's Times*.

MODERN FLOUR CONFECTIONER.

Containing a large Collection of Recipes for Cheap Cakes, Biscuits, &c. With Remarks on the Ingredients Used in their Manufacture. By ROBERT WELLS, Author of "The Bread and Biscuit Baker," &c. Crown 8vo, cloth 2/-

"The work is of a decidedly practical character, and in every recipe regard is had to economical working."—*North British Daily Mail*.

RUBBER HAND STAMPS

And the Manipulation of Rubber. A Practical Treatise on the Manufacture of Indiarubber Hand Stamps, Small Articles of Indiarubber, The Hektograph, Special Inks, Cements and Allied Subjects. By T. O'CONOR SLOANE, A.M., Ph.D. With numerous Illustrations, Square 8vo, cloth 5/-

HANDYBOOKS FOR HANDICRAFTS.

BY PAUL N. HASLUCK,

Editor of "Work" (New Series), Author of "Lathe Work," "Milling Machines," &c.

Crown 8vo, 144 pages, price 1/- each.

 These HANDYBOOKS have been written to supply information for WORKMEN, STUDENTS, and AMATEURS in the several Handicrafts, on the actual PRACTICE of the WORKSHOP, and are intended to convey in plain language TECHNICAL KNOWLEDGE of the several CRAFTS. In describing the processes employed, and the manipulation of material, workshop terms are used; workshop practice is fully explained; and the text is freely illustrated with drawings of modern tools, appliances, and processes.

METAL TURNER'S HANDYBOOK.

A Practical Manual for Workers at the Foot-Lathe. With 100 Illustrations 1/-
 "The book will be of service alike to the amateur and the artisan turner. It displays thorough knowledge of the subject."—*Scotsman*.

WOOD TURNER'S HANDYBOOK.

A Practical Manual for Workers at the Lathe. With over 100 Illustrations 1/-
 "We recommend the book to young turners and amateurs. A multitude of workmen have hitherto sought in vain for a manual of this special industry."—*Mechanical World*.

WATCH JOBBER'S HANDYBOOK.

A Practical Manual on Cleaning, Repairing, and Adjusting. With upwards of 100 Illustrations 1/-
 "We strongly advise all young persons connected with the watch trade to acquire and study this inexpensive work."—*Clerkenwell Chronicle*.

PATTERN MAKERS' HANDYBOOK.

A Practical Manual on the Construction of Patterns for Founders. With upwards of 100 Illustrations 1/-
 "A most valuable, if not indispensable, manual for the pattern maker."—*Knowledge*.

MECHANIC'S WORKSHOP HANDYBOOK.

A Practical Manual on Mechanical Manipulation, embracing Information on various Handicraft Processes. With Useful Notes and Miscellaneous Memoranda. Comprising about 200 Subjects 1/-
 "A very clever and useful book, which should be found in every workshop; and it should certainly find a place in all technical schools."—*Saturday Review*.

MODEL ENGINEER'S HANDYBOOK.

A Practical Manual on the Construction of Model Steam Engines. With upwards of 100 Illustrations 1/-
 "Mr. Hasluck has produced a very good little book."—*Builder*.

CLOCK JOBBER'S HANDYBOOK.

A Practical Manual on Cleaning, Repairing, and Adjusting. With upwards of 100 Illustrations 1/-
 "It is of inestimable service to those commencing the trade."—*Coventry Standard*.

CABINET WORKER'S HANDYBOOK.

A Practical Manual on the Tools, Materials, Appliances, and Processes employed in Cabinet Work. With upwards of 100 Illustrations 1/-
 "Mr. Hasluck's thoroughgoing little Handybook is amongst the most practical guides we have seen for beginners in cabinet-work."—*Saturday Review*.

WOODWORKER'S HANDYBOOK.

Embracing Information on the Tools, Materials, Appliances, and Processes Employed in Woodworking. With 104 Illustrations 1/-
 "Written by a man who knows not only how work ought to be done, but how to do it, and how to convey his knowledge to others."—*Engineering*.
 "Mr. Hasluck writes admirably, and gives complete instructions."—*Engineer*.
 "Mr. Hasluck combines the experience of a practical teacher with the manipulative skill and scientific knowledge of processes of the trained mechanic, and the manuals are marvels of what can be produced at a popular price."—*Schoolmaster*.
 "Helpful to workmen of all ages and degrees of experience."—*Daily Chronicle*.
 "Concise, clear, and practical."—*Saturday Review*.

COMMERCE, COUNTING-HOUSE WORK, TABLES, ETC.

LESSONS IN COMMERCE.

By Professor R. GAMBARO, of the Royal High Commercial School at Genoa. Edited and Revised by JAMES GAULT, Professor of Commerce and Commercial Law in King's College, London. Fourth Edition. Crown 8vo, cloth . . . **3/6**

"The publishers of this work have rendered considerable service to the cause of commercial education by the opportune production of this volume. . . . The work is peculiarly acceptable to English readers and an admirable addition to existing class books. In a phrase, we think the work attains its object in furnishing a brief account of those laws and customs of British trade with which the commercial man interested therein should be familiar."—*Chamber of Commerce Journal*.

"An invaluable guide in the hands of those who are preparing for a commercial career, and, in fact, the information it contains on matters of business should be impressed on every one."—*Counting House*.

THE FOREIGN COMMERCIAL CORRESPONDENT.

Being Aids to Commercial Correspondence in Five Languages—English, French, German, Italian, and Spanish. By CONRAD E. BAKER. Third Edition. Carefully revised throughout. Crown 8vo, cloth. [Just Published. **4/8**

"Whoever wishes to correspond in all the languages mentioned by Mr. Baker cannot do better than study this work, the materials of which are excellent and conveniently arranged. They consist not of entire specimen letters, but—what are far more useful—short passages, sentences, or phrases expressing the same general idea in various forms."—*Athenæum*.

"A careful examination has convinced us that it is unusually complete, well arranged and reliable. The book is a thoroughly good one."—*Schoolmaster*.

FACTORY ACCOUNTS: THEIR PRINCIPLES AND PRACTICE.

A Handbook for Accountants and Manufacturers, with Appendices on the Nomenclature of Machine Details; the Income Tax Acts; the Rating of Factories; Fire and Boiler Insurance; the Factory and Workshop Acts, &c., including also a Glossary of Terms and a large number of Specimen Rulings. By EMILE GARCKE and J. M. FELS. Fourth Edition, Revised and Enlarged. Demy 8vo, 250 pages, cloth . . . **6/-**

"A very interesting description of the requirements of Factory Accounts. . . . The principle of assimilating the Factory Accounts to the general commercial books is one which we thoroughly agree with."—*Accountants' Journal*.

"Characterised by extreme thoroughness. There are few owners of factories who would not derive great benefit from the perusal of this most admirable work."—*Local Government Chronicle*.

MODERN METROLOGY.

A Manual of the Metrical Units and Systems of the Present Century. With an Appendix containing a proposed English System. By LOWIS D'A. JACKSON, A.-M.Inst.C.E., Author of "Aid to Survey Practice," &c. Large crown 8vo, cloth . . . **12/6**

"We recommend the work to all interested in the practical reform of our weights and measures."—*Nature*.

A SERIES OF METRIC TABLES.

In which the British Standard Measures and Weights are compared with those of the Metric System at present in Use on the Continent. By C. H. DOWLING, C.E. 8vo, cloth . . . **10/6**

"Mr. Dowling's Tables are well put together as a ready reckoner for the conversion of one system into the other."—*Athenæum*.

IRON AND METAL TRADES' COMPANION.

For expeditiously ascertaining the Value of any Goods bought or sold by Weight, from 1s. per cwt. to 112s. per cwt., and from one farthing per pound to one shilling per pound. By THOMAS DOWNIE. Strongly bound in leather, 396 pp. . . **9/-**

"A most useful set of tables, nothing like them before existed."—*Building News*.

"Although specially adapted to the iron and metal trades, the tables will be found useful in every other business in which merchandise is bought and sold by weight."—*Railway News*.

NUMBER, WEIGHT, & FRACTIONAL CALCULATOR.

Containing upwards of 250,000 Separate Calculations, showing at a glance the value at 422 different rates, ranging from $\frac{1}{128}$ th of a Penny to 20s. each, or per cwt., and £20 per ton, of any number of articles consecutively, from 1 to 470. —Any number of cwt.s., qrs., and lbs., from 1 cwt to 470 cwt.s.—Any number of tons, cwt.s., qrs., and lbs., from 1 to 1,000 tons. By WILLIAM CHADWICK, Public Accountant. Third Edition, Revised and Improved. 8vo, strongly bound **18/-**

"It is as easy of reference for any answer or any number of answers as a dictionary. For making up accounts or estimates the book must prove invaluable to all who have any considerable quantity of calculations involving price and measure in any combination to do."—*Engineer*.

"The most perfect work of the kind yet prepared."—*Glasgow Herald*.

THE WEIGHT CALCULATOR.

Being a Series of Tables upon a New and Comprehensive Plan, exhibiting at one Reference the exact Value of any Weight from 1 lb. to 15 tons, at 300 Progressive Rates, from 1d. to 168s. per cwt., and containing 186,000 Direct Answers, which, with their Combinations, consisting of a single addition (mostly to be performed at sight), will afford an aggregate of 10,266,000 Answers; the whole being calculated and designed to ensure correctness and promote despatch. By HENRY HARBEN, Accountant. Fifth Edition, carefully corrected. Royal 8vo, strongly half-bound **£1 5s.**

"A practical and useful work of reference for men of business generally."—*Ironmonger*.

"Of priceless value to business men. It is a necessary book in all mercantile offices."—*Sheffield Independent*.

THE DISCOUNT GUIDE.

Comprising several Series of Tables for the Use of Merchants, Manufacturers, Ironmongers, and others, by which may be ascertained the exact Profit arising from any mode of using Discounts, either in the Purchase or Sale of Goods, and the method of either Altering a Rate of Discount, or Advancing a Price, so as to produce, by one operation, a sum that will realise any required profit after allowing one or more Discounts; to which are added Tables of Profit or Advance from $1\frac{1}{4}$ to 90 per cent., Tables of Discount from $1\frac{1}{4}$ to 98 $\frac{1}{2}$ per cent., and Tables of Commission, &c., from $\frac{1}{4}$ to 10 per cent. By HENRY HARBEN, Accountant. New Edition, Corrected. Demy 8vo, half-bound **£1 5s.**

"A book such as this can only be appreciated by business men, to whom the saving of time means saving of money. The work must prove of great value to merchants, manufacturers, and general traders."—*British Trade Journal*.

TABLES OF WAGES.

At 54, 52, 50, and 48 Hours per Week. Showing the Amounts of Wages from One-quarter-of-an-hour to Sixty-four hours in each case at Rates of Wages advancing by One Shilling from 4s. to 55s. per week. By THOS. GARBUTT, Accountant. Square crown 8vo, half-bound **6/-**

IRON-PLATE WEIGHT TABLES.

For Iron Shipbuilders, Engineers and Iron Merchants. Containing the Calculated Weights of Upwards of 150,000 different sizes of Iron Plates from 1 foot by 6 in. by $\frac{1}{4}$ in. to 10 feet by 5 feet by 1 in. Worked out on the basis of 40 lbs. to the square foot of Iron of 1 inch in thickness. By H. BURLINSON and W. H. SIMPSON. 4to, half-bound **25/-**

MATHEMATICAL TABLES (ACTUARIAL).

Comprising Commutation and Conversion Tables, Logarithms, Cologarithms, Antilogarithms and Reciprocals. By J. W. GORDON. Royal 8vo, mounted on canvas, in cloth case. [Just Published. **5/-**]

AGRICULTURE, FARMING, GARDENING, ETC.

THE COMPLETE GRAZIER AND FARMER'S AND CATTLE BREEDER'S ASSISTANT.

A Compendium of Husbandry. Originally Written by WILLIAM YOUATT. Fourteenth Edition, entirely Re-written, considerably Enlarged, and brought up to Present Requirements, by WILLIAM FREAM, LL.D., Assistant Commissioner Royal Commission on Agriculture, Author of "The Elements of Agriculture," &c. Royal 8vo, 1,100 pp., with over 450 Illustrations. Handsomely bound.

[Just Published. £1 11s. 6d.]

SUMMARY OF CONTENTS.

BOOK I. ON THE VARIETIES, BREEDING, REARING, FATTENING AND MANAGEMENT OF CATTLE.	BOOK VII. ON THE BREEDING, REARING, AND MANAGEMENT OF POULTRY.
BOOK II. ON THE ECONOMY AND MANAGEMENT OF THE DAIRY.	BOOK VIII. ON FARM OFFICES AND IMPLEMENTS OF HUSBANDRY.
BOOK III. ON THE BREEDING, REARING, AND MANAGEMENT OF HORSES.	BOOK IX. ON THE CULTURE AND MANAGEMENT OF GRASS LANDS.
BOOK IV. ON THE BREEDING, REARING, AND FATTENING OF SHEEP.	BOOK X. ON THE CULTIVATION AND APPLICATION OF GRASSES, PULSE AND ROOTS.
BOOK V. ON THE BREEDING, REARING, AND FATTENING OF SWINE.	BOOK XI. ON MANURES AND THEIR APPLICATION TO GRASS LAND AND CROPS.
BOOK VI. ON THE DISEASES OF LIVE STOCK.	BOOK XII. MONTHLY CALENDARS OF FARMWORK.

* * * OPINIONS OF THE PRESS.

"Dr. Fream is to be congratulated on the successful attempt he has made to give us a work which will at once become the standard classic of the farm practice of the country. We believe that it will be found that it has no compeer among the many works at present in existence. . . . The illustrations are admirable, while the frontispiece, which represents the well-known bull, New Year's Gift, bred by the Queen, is a work of art."—*The Times*.

"The book must be recognised as occupying the proud position of the most exhaustive work of reference in the English language on the subject with which it deals."—*Athenæum*.

"The most comprehensive guide to modern farm practice that exists in the English language to-day. . . . The book is one that ought to be on every farm and in the library of every land owner."—*Mark Lane Express*.

"In point of exhaustiveness and accuracy the work will certainly hold a pre-eminent and unique position among books dealing with scientific agricultural practice. It is, in fact, an agricultural library of itself."—*North British Agriculturist*.

"A compendium of authoritative and well-ordered knowledge on every conceivable branch of the work of the live stock farmer; probably without an equal in this or any other country."—*Yorkshire Post*.

FARM LIVE STOCK OF GREAT BRITAIN.

By ROBERT WALLACE, F.L.S., F.R.S.E., &c., Professor of Agricultural and Rural Economy in the University of Edinburgh. Third Edition, thoroughly Revised and considerably Enlarged. With over 120 Phototypes of Prize Stock. Demy 8vo, 384 pp., with 79 Plates and Maps. Cloth 12/6

"A really complete work on the history, breeds, and management of the farm stock of Great Britain, and one which is likely to find its way to the shelves of every country gentleman's library."—*The Times*.

"The latest edition of 'Farm Live Stock of Great Britain' is a production to be proud of, and its issue not the least of the services which its author has rendered to agricultural science."—*Scottish Farmer*.

"The book is very attractive, . . . and we can scarcely imagine the existence of a farmer who would not like to have a copy of this beautiful and useful work."—*Mark Lane Express*.

NOTE-BOOK OF AGRICULTURAL FACTS AND FIGURES FOR FARMERS AND FARM STUDENTS.

By PRIMROSE MCCONNELL, B.Sc., Fellow of the Highland and Agricultural Society, Author of "Elements of Farming." Sixth Edition, Rewritten, Revised, and greatly Enlarged. F'cap. 8vo, 480 pages, leather, gilt edges.

[Just Published. 6/-]

SUMMARY OF CONTENTS.

SURVEYING AND LEVELLING.—WEIGHTS AND MEASURES.—MACHINERY AND BUILDINGS.—LABOUR.—OPERATIONS.—DRAINING.—EMBANKING.—GEOLOGICAL MEMORANDA.—SOILS.—MANURES.—CROPPING.—CROPS.—ROTATIONS.—WEEDS.—FEEDING.—DAIRYING.—LIVE STOCK.—HORSES.—CATTLE.—SHEEP.—PIGS.—POULTRY.—FORESTRY.—HORTICULTURE.—MISCELLANEOUS.

"No farmer, and certainly no agricultural student, ought to be without this *multum in parvo* manual of all subjects connected with the farm."—*North British Agriculturist*.

"This little pocket-book contains a large amount of useful information upon all kinds of agricultural subjects. Something of the kind has long been wanted."—*Mark Lane Express*.

"The amount of information it contains is most surprising; the arrangement of the matter is so methodical—although so compressed—as to be intelligible to every one who takes a glance through its pages. They teem with information."—*Farm and Home*.

BRITISH DAIRYING.

A Handy Volume on the Work of the Dairy-Farm. For the Use of Technical Instruction Classes, Students in Agricultural Colleges and the Working Dairy-Farmer. By Prof. J. P. SHELDON. With Illusts. Second Edition, Revised. Crown 8vo, cloth. [Just Published. 2/6

"Confidently recommended as a useful text-book on dairy farming."—*Agricultural Gazette*.

"Probably the best half-crown manual on dairy work that has yet been produced."—*North British Agriculturist*.

"It is the soundest little work we have yet seen on the subject."—*The Times*.

MILK, CHEESE, AND BUTTER.

A Practical Handbook on their Properties and the Processes of their Production. Including a Chapter on Cream and the Methods of its Separation from Milk. By JOHN OLIVER, late Principal of the Western Dairy Institute, Berkeley. With Coloured Plates and 200 Illustrations. Crown 8vo, cloth. 7/6

"An exhaustive and masterly production. It may be cordially recommended to all students and practitioners of dairy science."—*N.B. Agriculturist*.

"We recommend this very comprehensive and carefully-written book to dairy-farmers and students of dairying. It is a distinct acquisition to the library of the agriculturist."—*Agricultural Gazette*.

SYSTEMATIC SMALL FARMING.

Or, The Lessons of my Farm. Being an introduction to Modern Farm Practice for Small Farmers. By R. SCOTT BURN, Author of "Outlines of Modern Farming," &c. Crown 8vo, cloth. 6/-

"This is the completest book of its class we have seen, and one which every amateur farmer will read with pleasure, and accept as a guide."—*Field*.

OUTLINES OF MODERN FARMING.

By R. SCOTT BURN. Soils, Manures, and Crops—Farming and Farming Economy—Cattle, Sheep, and Horses—Management of Dairy, Pigs, and Poultry—Utilization of Town-Sewage, Irrigation, &c. Sixth Edition. In one vol., 1,250 pp., half-bound, profusely Illustrated. 12/-

FARM ENGINEERING, THE COMPLETE TEXT-BOOK OF.

Comprising Draining and Embanking; Irrigation and Water Supply; Farm Roads, Fences, and Gates; Farm Buildings; Barn Implements and Machines; Field Implements and Machines; Agricultural Surveying, &c. By Professor JOHN SCOTT. In one vol., 1,150 pp., half-bound, with over 600 Illustrations, 12/-

"Written with great care, as well as with knowledge and ability. The author has done his work well; we have found him a very trustworthy guide wherever we have tested his statements. The volume will be of great value to agricultural students."—*Mark Lane Express*.

THE FIELDS OF GREAT BRITAIN.

A Text-Book of Agriculture. Adapted to the Syllabus of the Science and Art Department. For Elementary and Advanced Students. By HUGH CLEMENTS (Board of Trade). Second Edition, Revised, with Additions. 18mo, cloth. 2/6

"It is a long time since we have seen a book which has pleased us more, or which contains such a vast and useful fund of knowledge."—*Educational Times*.

TABLES AND MEMORANDA FOR FARMERS, GRAZIERS, AGRICULTURAL STUDENTS, SURVEYORS, LAND AGENTS, AUCTIONEERS, &c.

With a New System of Farm Book-keeping. By SIDNEY FRANCIS. Fifth Edition. 272 pp., waistcoat-pocket size, limp leather. [Just Published. 1/6

"Weighing less than 1 oz., and occupying no more space than a match box, it contains a mass of facts and calculations which has never before, in such handy form, been obtainable. Every operation on the farm is dealt with. The work may be taken as thoroughly accurate, the whole of the tables having been revised by Dr. Fream. We cordially recommend it."—*Bell's Weekly Messenger*.

THE ROTHAMSTED EXPERIMENTS AND THEIR PRACTICAL LESSONS FOR FARMERS.

Part I. Stock. Part II. Crops. By C. J. R. TIPPER. Crown 8vo, cloth.

[Just Published. 3/6

"We have no doubt that the book will be welcomed by a large class of farmers and others interested in agriculture."—*Standard*.

FERTILISERS AND FEEDING STUFFS.

Their Properties and Uses. A Handbook for the Practical Farmer. By BERNARD DYER, D.Sc. (Lond.). With the Text of the Fertilisers and Feeding Stuffs Act of 1893, &c. Third Edition, Revised. Crown 8vo, cloth.

[Just Published. 1/-]
"This little book is precisely what it professes to be—'A Handbook for the Practical Farmer.' Dr. Dyer has done farmers good service in placing at their disposal so much useful information in so intelligible a form."—*The Times*.

BEEES FOR PLEASURE AND PROFIT:

Guide to the Manipulation of Bees, the Production of Honey, and the General Management of the Apiary. By G. GORDON SAMSON. With numerous Illustrations. Crown 8vo, wrapper 1/-

BOOK-KEEPING FOR FARMERS AND ESTATE OWNERS.

A Practical Treatise, presenting, in Three Plans, a System adapted for all Classes of Farms. By JOHNSON M. WOODMAN, Chartered Accountant. Fourth Edition. Crown 8vo, cloth.

[Just Published. 2/6]

"The volume is a capital study of a most important subject."—*Agricultural Gazette*.

WOODMAN'S YEARLY FARM ACCOUNT BOOK.

Giving Weekly Labour Account and Diary, and showing the Income and Expenditure under each Department of Crops, Live Stock, Dairy, &c., &c. With Valuation, Profit and Loss Account, and Balance Sheet at the end of the Year. By JOHNSON M. WOODMAN, Chartered Accountant. Second Edition. Folio, half-bound.

[Net 7/6]

"Contains every requisite for keeping farm accounts readily and accurately."—*Agriculture*.

THE FORCING-GARDEN.

Or, How to Grow Early Fruits, Flowers, and Vegetables. With Plans and Estimates for Building Glasshouses, Pits and Frames. With Illustrations. By SAMUEL WOOD. Crown 8vo, cloth 3/6

"A good book, containing a great deal of valuable teaching."—*Gardener's Magazine*.

A PLAIN GUIDE TO GOOD GARDENING.

Or, How to Grow Vegetables, Fruits, and Flowers. By S. WOOD. Fourth Edition, with considerable Additions, &c., and numerous Illustrations. Crown 8vo, cloth 3/6

"A very good book, and one to be highly recommended as a practical guide. The practical directions are excellent."—*Athenæum*.

MULTUM-IN-PARVO GARDENING.

Or, How to make One Acre of Land produce £620 a year, by the Cultivation of Fruits and Vegetables; also, How to Grow Flowers in Three Glass Houses, so as to realise £176 per annum clear Profit. By SAMUEL WOOD, Author of "Good Gardening," &c. Sixth Edition. Crown 8vo, sewed 1/-

THE LADIES' MULTUM-IN-PARVO FLOWER GARDEN.

And Amateur's Complete Guide. By S. WOOD. Crown 8vo, cloth 3/6

POTATOES: HOW TO GROW AND SHOW THEM.

A Practical Guide to the Cultivation and General Treatment of the Potato. By J. PINK. Crown 8vo 2/-

MARKET AND KITCHEN GARDENING.

By C. W. SHAW, late Editor of "Gardening Illustrated." Crown 8vo, cloth.

3/6

AUCTIONEERING, VALUING, LAND SURVEYING, ESTATE AGENCY, ETC.

INWOOD'S TABLES FOR PURCHASING ESTATES AND FOR THE VALUATION OF PROPERTIES.

Including Advowsons, Assurance Policies, Copyholds, Deferred Annuities, Freeholds, Ground Rents, Immediate Annuities, Leaseholds, Life Interests Mortgages, Perpetuities, Renewals of Leases, Reversions, Sinking Funds, &c., &c. 26th Edition, Revised and Extended by WILLIAM SCHOOLING, F.R.A.S., with Logarithms of Natural Numbers and THOMAN'S Logarithmic Interest and Annuity Tables. 360 pp., demy 8vo, cloth. [Just Published. Net 8/-]

"Those interested in the purchase and sale of estates, and in the adjustment of compensation cases, as well as in transactions in annuities, life insurances, &c., will find the present edition of eminent service."—*Engineering*.

"This valuable book has been considerably enlarged and improved by the labours of Mr. Schooling, and is now very complete indeed."—*Economist*.

"Altogether this edition will prove of extreme value to many classes of professional men in saving them many long and tedious calculations."—*Investors' Review*.

THE APPRAISER, AUCTIONEER, BROKER, HOUSE AND ESTATE AGENT AND VALUER'S POCKET ASSISTANT,

For the Valuation for Purchase, Sale, or Renewal of Leases, Annuities and Reversions, and of property generally; with Prices for Inventories, &c. By JOHN WHEELER, Valuer, &c. Sixth Edition, Re-written and greatly Extended by C. NORRIS. Royal 32mo, cloth 5/-

"A neat and concise book of reference, containing an admirable and clearly-arranged list of prices for inventories, and a very practical guide to determine the value of furniture, &c."—*Standard*.

"Contains a large quantity of varied and useful information as to the valuation for purchase, sale, or renewal of leases, annuities and reversions, and of property generally, with prices for inventories, and a guide to determine the value of interior fittings and other effects."—*Builder*.

AUCTIONEERS: THEIR DUTIES AND LIABILITIES.

A Manual of Instruction and Counsel for the Young Auctioneer. By ROBERT SQUIBBS, Auctioneer. Second Edition, Revised. Demy 8vo, cloth 12/6

"The work is one of general excellent character, and gives much information in a compendious and satisfactory form."—*Builder*.

"May be recommended as giving a great deal of information on the law relating to auctioneers, in a very readable form."—*Law Journal*.

THE AGRICULTURAL VALUER'S ASSISTANT.

A Practical Handbook on the Valuation of Landed Estates; including Example of a Detailed Report on Management and Realisation; Forms of Valuations of Tenant Right; Lists of Local Agricultural Customs; Scales of Compensation under the Agricultural Holdings Act, and a Brief Treatise on Compensation under the Lands Clauses Acts, &c. By TOM BRIGHT, Agricultural Valuer, Author of "The Agricultural Surveyor and Estate Agent's Handbook." Fourth Edition, Revised, with Appendix containing a Digest of the Agricultural Holdings Acts, 1883-1900. Crown 8vo, cloth. [Just Published. Net 6/-]

"Full of tables and examples in connection with the valuation of tenant-right, estates, labour, contents and weights of timber, and farm produce of all kinds."—*Agricultural Gazette*.

"An eminently practical handbook, full of practical tables and data of undoubted interest and value to surveyors and auctioneers in preparing valuations of all kinds."—*Farmer*.

POLE PLANTATIONS AND UNDERWOODS.

A Practical Handbook on Estimating the Cost of Forming, Renovating, Improving, and Grubbing Plantations and Underwoods, their Valuation for Purposes of Transfer, Rental, Sale or Assessment. By TOM BRIGHT. Crown 8vo, cloth 3/6

"To valuers, foresters and agents it will be a welcome aid."—*North British Agriculturist*.

"Well calculated to assist the valuer in the discharge of his duties, and of undoubted interest and use both to surveyors and auctioneers in preparing valuations of all kinds."—*Kent Herald*.

AGRICULTURAL SURVEYOR AND ESTATE AGENT'S HANDBOOK.

Of Practical Rules, Formulæ, Tables, and Data. A Comprehensive Manual for the Use of Surveyors, Agents, Landowners, and others interested in the Equipment, the Management, or the Valuation of Landed Estates. By TOM BRIGHT, Agricultural Surveyor and Valuer, Author of "The Agricultural Valuer's Assistant," &c. With Illustrations. Fcap. 8vo, Leather.

[Just Published. Net 7/6

"An exceedingly useful book, the contents of which are admirably chosen. The classes for whom the work is intended will find it convenient to have this comprehensive handbook accessible for reference."—*Live Stock Journal*.

"It is a singularly compact and well informed compendium of the facts and figures likely to be required in estate work, and is certain to prove of much service to those to whom it is addressed."—*Scotsman*.

THE LAND VALUER'S BEST ASSISTANT.

Being Tables on a very much improved Plan, for Calculating the Value of Estates With Tables for reducing Scotch, Irish, and Provincial Customary Acres to Statute Measure, &c. By R. HUDSON, C.E. New Edition. Royal 32mo, leather, elastic band 4/-

"Of incalculable value to the country gentleman and professional man."—*Farmers' Journal*.

THE LAND IMPROVER'S POCKET-BOOK.

Comprising Formulæ, Tables, and Memoranda required in any Computation relating to the Permanent Improvement of Landed Property. By JOHN EWART, Surveyor. Second Edition, Revised, Royal 32mo, oblong, leather 4/-

"A compendious and handy little volume."—*Spectator*.

THE LAND VALUER'S COMPLETE POCKET-BOOK.

Being the above Two Works bound together. Leather 7/6

HANDBOOK OF HOUSE PROPERTY.

A Popular and Practical Guide to the Purchase, Tenancy, and Compulsory Sale of Houses and Land, including Dilapidations and Fixtures: with Examples of all kinds of Valuations, Information on Building and on the right use of Decorative Art. By E. L. TARBUCK, Architect and Surveyor. Sixth Edition. 12mo, cloth. [Just Published. 5/-

"The advice is thoroughly practical."—*Law Journal*.

"For all who have dealings with house property this is an indispensable guide."—*Decoration*.

"Carefully brought up to date, and much improved by the addition of a division on Fine Art. A well-written and thoughtful work."—*Land Agents' Record*.

LAW AND MISCELLANEOUS.

MODERN JOURNALISM.

A Handbook of Instruction and Counsel for the Young Journalist. By JOHN B. MACKIE, Fellow of the Institute of Journalists. Crown 8vo, cloth 2/-

"This invaluable guide to journalism is a work which all aspirants to a journalistic career will read with advantage."—*Journalist*.

HANDBOOK FOR SOLICITORS AND ENGINEERS

Engaged in Promoting Private Acts of Parliament and Provisional Orders, for the authorization of Railways, Tramways, Gas and Water Works, &c. By L. L. MACASSEY, of the Middle Temple, Barrister-at-Law, M.I.C.E. 8vo, cloth. 21 5s.

PATENTS FOR INVENTIONS, HOW TO PROCURE THEM.

Compiled for the Use of Inventors, Patentees and others. By G. G. M. HARDINGHAM, Assoc. Mem. Inst. C.E., &c. Demy 8vo, cloth 1/6

CONCILIATION AND ARBITRATION, IN LABOUR DISPUTES.

A Historical Sketch and Brief Statement of the Present Position of the Question at Home and Abroad. By J. S. JEANS. Crown 8vo, 200 pp., cloth 2/6

EVERY MAN'S OWN LAWYER.

A Handy-Book of the Principles of Law and Equity. With a Concise Dictionary of Legal Terms. By A BARRISTER. Thirty-ninth Edition, carefully Revised, and including New Acts of Parliament of 1901. Comprising the *Youthful Offenders Act*, 1901; the *Larceny Act*, 1901; the *Intoxicating Liquors Act*, 1901; the *Factory and Workshop Act*, 1901, and other enactments of the year. *Judicial Decisions during the year have also been duly noted.* Crown 8vo, 800 pp., strongly bound in cloth. [Just Published. 6/8]

* * This Standard Work of Reference forms a COMPLETE EPITOME OF THE LAWS OF ENGLAND, comprising (amongst other matter) :

THE RIGHTS AND WRONGS OF INDIVIDUALS—LANDLORD AND TENANT—VENDORS AND PURCHASERS—LEASES AND MORTGAGES—PRINCIPAL AND AGENT—PARTNERSHIP AND COMPANIES—MASTERS, SERVANTS AND WORKMEN—CONTRACTS AND AGREEMENTS—BORROWERS, LENDERS AND SURETIES—SALE AND PURCHASE OF GOODS—CHEQUES, BILLS AND NOTES—BILLS OF SALE—BANKRUPTCY—RAILWAY AND SHIPPING LAW—LIFE, FIRE, AND MARINE INSURANCE—ACCIDENT AND FIDELITY INSURANCE—CRIMINAL LAW—PARLIAMENTARY ELECTIONS—COUNTY COUNCILS—DISTRICT COUNCILS—PARISH COUNCILS—MUNICIPAL CORPORATIONS—LIBEL AND SLANDER—PUBLIC HEALTH AND NUISANCES—COPYRIGHT, PATENTS, TRADE MARKS—HUSBAND AND WIFE—DIVORCE—INFANCY—CUSTODY OF CHILDREN—TRUSTEES AND EXECUTORS—CLERGY, CHURCHWARDENS, ETC.—GAME LAWS AND SPORTING—INNKEEPERS—HORSES AND DOGS—TAXES AND DEATH DUTIES—FORMS OF AGREEMENTS, WILLS, CODICILS, NOTICES, ETC.

 The object of this work is to enable those who consult it to help themselves to the law; and thereby to dispense, as far as possible, with professional assistance and advice. There are many wrongs and grievances which persons submit to from time to time through not knowing how or where to apply for redress; and many persons have as great a dread of a lawyer's office as of a lion's den. With this book at hand it is believed that many a SIX-AND-EIGHTPENCE may be saved; many a wrong redressed; many a right reclaimed; many a law suit avoided; and many an evil abated. The work has established itself as the standard legal adviser of all classes, and has also made a reputation for itself as a useful book of reference for lawyers residing at a distance from law libraries, who are glad to have at hand a work embodying recent decisions and enactments.

* * OPINIONS OF THE PRESS.

"It is a complete code of English Law written in plain language, which all can understand. . . . Should be in the hands of every business man, and all who wish to abolish lawyers' bills."—*Weekly Times*.

"A useful and concise epitome of the law, compiled with considerable care."—*Law Magazine*.

"A complete digest of the most useful facts which constitute English law."—*Globe*.

"This excellent handbook. . . . Admirably done, admirably arranged, and admirably cheap."—*Leeds Mercury*.

"A concise, cheap, and complete epitome of the English law. So plainly written that he who runs may read, and he who reads may understand."—*Figaro*.

"A dictionary of legal facts well put together. The book is a very useful one."—*Spectator*.

THE PAWNBROKERS', FACTORS', AND MERCHANTS' GUIDE TO THE LAW OF LOANS AND PLEDGES.

With the Statutes and a Digest of Cases. By H. C. FOLKARD, Barrister-at-Law. Cloth 3/6

LABOUR CONTRACTS.

A Popular Handbook on the Law of Contracts for Works and Services. By DAVID GIBBONS. Fourth Edition, with Appendix of Statutes by T. F. UTTLEY, Solicitor. Fcap. 8vo, cloth 3/6

SUMMARY OF THE FACTORY AND WORKSHOP ACTS

(1878-1891). For the Use of Manufacturers and Managers. By EMILE GARCKE and J. M. FELS. (Reprinted from "FACTORY ACCOUNTS.") Crown 8vo, sewed. 6d.

WEALE'S SERIES OF SCIENTIFIC & TECHNICAL WORKS.

"It is not too much to say that no books have ever proved more popular with or more useful to young engineers and others than the excellent treatises comprised in WEALE'S SERIES."—**Engineer.**

A New Classified List.

	PAGE		PAGE
Civil Engineering and Surveying	50	Industrial and Useful Arts	57
Mining and Metallurgy . . .	51	Agriculture, Gardening, Etc.	58
Mechanical Engineering . . .	52	Mathematics, Arithmetic, Etc.	60
Navigation, Shipbuilding, Etc.	53	Books of Reference and Miscellaneous Volumes . . .	62
Architecture and Building	54		



CROSBY LOCKWOOD AND SON,
7, STATIONERS' HALL COURT, LONDON, E.C.

1901.

CIVIL ENGINEERING & SURVEYING.

Civil Engineering.

By HENRY LAW, M. Inst. C.E. Including a Treatise on HYDRAULIC ENGINEERING by G. R. BURNELL, M.I.C.E. Seventh Edition, revised, WITH LARGE ADDITIONS ON RECENT PRACTICE by D. KINNEAR CLARK, M. Inst. C.E. 6/6, cloth boards 7/6
 "An admirable volume, which we warmly recommend to young engineers."—*Builder*.

Pioneer Engineering.

A Treatise on the Engineering Operations connected with the Settlement of Waste Lands in New Countries. By E. DOBSON, M. Inst. C.E. Second Edition. 4/6
 "Mr. Dobson is familiar with the difficulties which have to be overcome in this class of work, and much of his advice will be valuable to young engineers proceeding to our colonies."—*Engineering*.

Iron and Steel Bridges and Viaducts.

A Practical Treatise upon their Construction. For the use of Engineers, Draughtsmen, and Students. By FRANCIS CAMPIN, C.E. 3/6

Iron Bridges of Moderate Span:

Their Construction and Erection. By H. W. PENDRED. With 40 illustrations 2/0
 "Students and engineers should obtain this book for constant and practical use."—*Colliery Guardian*.

Constructional Iron and Steel Work,

As applied to Public, Private, and Domestic Buildings. By FRANCIS CAMPIN, C.E. 3/6
 "This practical book may be counted a most valuable work."—*British Architect*.

Tubular and other Iron Girder Bridges,

Describing the Britannia and Conway Tubular Bridges. With a Sketch of Iron Bridges, &c. By G. DRYSDALE DEMPSEY, C.E. Fourth Edition. 2/0

Materials and Construction.

A Theoretical and Practical Treatise on the Strains, Designing, and Erection of Works of Construction. By FRANCIS CAMPIN, C.E. Second Edition. 3/0
 "No better exposition of the practical application of the principles of construction has yet been published to our knowledge in such a cheap comprehensive form."—*Building News*.

Sanitary Work in Small Towns and Villages.

By CHARLES SLAGG, Assoc. M. Inst. C.E. Second Edition, Enlarged. 3/0
 "This is a very useful book. There is a great deal of work required to be done in the smaller towns and villages, and this little volume will help those who are willing to do it."—*Builder*.

Construction of Roads and Streets.

By H. LAW, C.E., and D. K. CLARK, C.E. Sixth Edition, revised, with Additional Chapters by A. J. WALLIS-TAYLER, A.M. Inst. C.E. [Just published. 6/0
 "A book which every borough surveyor and engineer must possess, and which will be of considerable service to architects, builders, and property owners generally."—*Building News*.

Construction of Gas Works,

And the Manufacture and Distribution of Coal Gas. By S. HUGHES, C.E. Re-written by WILLIAM RICHARDS, C.E. Eighth Edition, with important Additions. 5/6
 "Will be of infinite service alike to manufacturers, distributors, and consumers."—*Foreman Engineer*.

Water Works, for the Supply of Cities and Towns.

With a Description of the Principal Geological Formations of England as influencing Supplies of Water. By SAMUEL HUGHES. 4/0
 "Everyone who is debating how his village, town, or city shall be plentifully supplied with pure water should read this book."—*Newcastle Courant*.

Power of Water.

As applied to drive Flour Mills, and to give motion to Turbines and other Hydrostatic Engines. By JOSEPH GLYNN, F.R.S., &c. New Edition. Illustrated. 2/0

Wells and Well-Sinking.

By J. G. SWINDELL, A.R.I.B.A., and G. R. BURNELL, C.E. Revised Edition 2/0
 "Solid practical information, written in a concise and lucid style. The work can be recommended as a text-book for all surveyors, architects, &c."—*Iron and Coal Trades Review*.

Drainage of Lands, Towns, and Buildings.

By G. D. DEMPSEY, C.E. Revised, with large Additions on Recent Practice in Drainage Engineering, by D. KINNEAR CLARK, M.I.C.E. Third Edition. 4/6

Blasting and Quarrying of Stone,

For Building and other Purposes. With Remarks on the Blowing up of Bridges.
By Gen. Sir J. BURGOYNE, K.C.B. 1/6

Foundations and Concrete Works.

With Practical Remarks on Footings, Planking, Sand, Concrete, Béton, Pile-driving,
Caissons, and Cofferdams. By E. DOBSON, M.R.I.B.A. Seventh Edition . . . 1/6

Pneumatics,

Including Acoustics and the Phenomena of Wind Currents, for the use of Beginners.
By CHARLES TOMLINSON, F.R.S. Fourth Edition, enlarged. Illustrated . . . 1/6

Land and Engineering Surveying.

For Students and Practical Use. By T. BAKER, C.E. Eighteenth Edition, revised
and extended by F. E. DIXON, A.M. Inst. C.E. Illustrated with Plates and Diagrams.
[Just published. 2/0

Mensuration and Measuring,

With the Mensuration and Levelling of Land for the purposes of Modern Engineering.
By T. BAKER, C.E. New Edition by E. NUGENT, C.E. 1/6

MINING AND METALLURGY.**Mineralogy,**

Rudiments of. By A. RAMSAY, F.G.S. Third Edition. Woodcuts and Plates 3/6

"The author throughout has displayed an intimate knowledge of his subject, and great facility in imparting that knowledge to others. The book is of great utility."—*Mining Journal*.

Coal and Coal Mining,

By the late Sir WARINGTON W. SMYTH, M.A., F.R.S., Eighth Edition, Revised and
Extended by T. FORSTER BROWN, Chief Inspector of the Mines of the Crown and of
the Duchy of Cornwall [Just Published. 3/6

"Every portion of the volume appears to have been prepared with much care, and as an outline is given of every known coal-field in this and other countries, as well as of the two principal methods of working, the book will doubtless interest a very large number of readers."—*Mining Journal*.

Metallurgy of Iron.

Containing History of Iron Manufacture, Methods of Assay, and Analyses of Iron Ores,
Processes of Manufacture of Iron and Steel, &c. By H. BAUERMAN, F.G.S., A.R.S.M.
With numerous Illustrations. Sixth Edition, revised and enlarged 5/0

"Carefully written, it has the merit of brevity and conciseness, as to less important points; while all material matters are very fully and thoroughly entered into."—*Standard*.

Mineral Surveyor & Valuer's Complete Guide.

Comprising a Treatise on Improved Mining Surveying and the Valuation of Mining
Properties, with New Traverse Tables. By W. LINTERN, C.E., Third Edition, with an
Appendix on Magnetic and Angular Surveying, with Records of the Peculiarities of
Needle Disturbances. With Four Plates of Diagrams, Plans, &c. 3/6

"Contains much valuable information, and is thoroughly trustworthy."—*Iron & Coal Trades Review*.

Slate and Slate Quarrying,

Scientific, Practical, and Commercial. By D. C. DAVIES, F.G.S., Mining Engineer, &c.
With numerous Illustrations and Folding Plates. Third Edition 3/0

"One of the best and best-balanced treatises on a special subject that we have met with."—*Engineer*.

A First Book of Mining and Quarrying,

With the Sciences connected therewith, for Primary Schools and Self-Instruction. By
J. H. COLLINS, F.G.S. Second Edition, with Additions 1/6

"For those concerned in schools in the mining districts, this work is the very thing that should be in the hands of their schoolmasters."—*Iron*.

Subterraneous Surveying.

By THOMAS FENWICK. Also the Method of Conducting Subterraneous Surveys
without the use of the Magnetic Needle, &c. By T. BAKER, C.E. 2/6

Mining Tools,

Manual of. By W. MORGANS, Lecturer on Mining at the Bristol School of Mines 2/6

Mining Tools, Atlas

Of Engravings to the above, containing 235 Illustrations drawn to Scale. 4to. . . 4/6

"Students, Overmen, Captains, Managers, and Viewers may gain practical knowledge and useful hints by the study of Mr. Morgans' Manual."—*Colliery Guardian*.

Physical Geology,

Partly based on Major-General PORTLOCK'S "Rudiments of Geology." By RALPH TATE, A.L.S., &c. Woodcuts 2/0

Historical Geology,

Partly based on Major-General PORTLOCK'S "Rudiments." By RALPH TATE . . . 2/6

Geology,

PHYSICAL and HISTORICAL. Consisting of "Physical Geology," which sets forth the Leading Principles of the Science; and "Historical Geology," which treats of the Mineral and Organic Conditions of the Earth at each successive epoch. By RALPH TATE, F.G.S. With 250 Illustrations 4/0

"The fulness of the matter has elevated the book into a manual. Its information is exhaustive and well-arranged, so that any subject may be opened upon at once."—*School Board Chronicle*.

MECHANICAL ENGINEERING.**Workman's Manual of Engineering Drawing.**

By JOHN MAXTON, Instructor in Engineering Drawing, Royal Naval College, Greenwich. Seventh Edition. 300 Plates and Diagrams 3/6

"A copy of it should be kept for reference in every drawing office."—*Engineering*.

Fuels: Solid, Liquid, and Gaseous.

Their Analysis and Valuation. For the use of Chemists and Engineers. By H. J. PHILLIPS, F.C.S., formerly Analytical and Consulting Chemist to the Great Eastern Railway. Second Edition, revised 2/0

"Ought to have its place in the laboratory of every metallurgical establishment, and wherever fuel is used on a large scale."—*Chemical News*.

Fuel, Its Combustion and Economy.

Consisting of an Abridgment of "A Treatise on the Combustion of Coal and the Prevention of Smoke." By C. W. WILLIAMS, A.I.C.E. With extensive Additions by D. KINNEAR CLARK, M. Inst. C.E. Third Edition, corrected 3/6

"Students should buy the book and read it, as one of the most complete and satisfactory treatises on the combustion and economy of fuel to be had."—*Engineer*.

Boilermaker's Assistant

In Drawing, Templating, and Calculating Boiler Work, &c. By J. COURTNEY, Practical Boilermaker. Edited by D. K. CLARK, C.E. Third Edition, revised . . . 2/0

"With very great care we have gone through the 'Boilermaker's Assistant,' and have to say that it has our unqualified approval. Scarcely a point has been omitted."—*Foreman Engineer*.

Boilermaker's Ready Reckoner,

With Examples of Practical Geometry and Templating for the Use of Platers, Smiths, and Riveters. By JOHN COURTNEY. Edited by D. K. CLARK, M.I.C.E. . . . 4/0

* * *The last two Works in One Vol., half-bound, entitled "THE BOILERMAKER'S READY RECKONER AND ASSISTANT."* By J. COURTNEY and D. K. CLARK. Price 7/0

"A most useful work. No workman or apprentice should be without it."—*Iron Trade Circular*.

Steam Boilers.

Their Construction and Management. By R. ARMSTRONG, C.E. Illustrated . . . 1/6

"A mass of information suitable for beginners."—*Design and Work*.

Steam and Machinery Management.

A Guide to the Arrangement and Economical Management of Machinery, with Hints on Construction and Selection. By M. POWIS BALE, M. Inst. M.E. 2/6

"Gives the results of wide experience."—*Lloyd's Newspaper*.

Steam and the Steam Engine,

Stationary and Portable. Being an Extension of the Treatise on the Steam Engine of Mr. J. SEWELL. By D. K. CLARK, C.E. Third Edition 3/6

"Every essential part of the subject is treated of competently, and in a popular style."—*Iron*.

The Steam Engine,

A Treatise on the Mathematical Theory of, with Rules and Examples for Practical Men. By T. BAKER, C.E. 1/6

"Teems with scientific information with reference to the steam-engine."—*Design and Work*.

The Steam Engine.

For the use of Beginners. By Dr. LARDNER. Illustrated 1/6

Locomotive Engines.

A Rudimentary Treatise on. By G. D. DEMPSEY, C.E. With large Additions treating of the Modern Locomotive, by D. K. CLARK, M. Inst. C.E. With Illustrations . . . 3/0

"A model of what an elementary technical book should be."—*Academy*.

Locomotive Engine-Driving.

A Practical Manual for Engineers in Charge of Locomotive Engines. By MICHAEL REYNOLDS, M.S.E. Tenth Edition. 3/6 limp; cloth boards 4/6

"We can confidently recommend the book, not only to the practical driver, but to everyone who takes an interest in the performance of locomotive engines."—*The Engineer*.

Stationary Engine Driving.

A Practical Manual for Engineers in Charge of Stationary Engines. By MICHAEL REYNOLDS, M.S.E. Sixth Edition. 3/6 limp; cloth boards 4/6

"The author is thoroughly acquainted with his subjects, and has produced a manual which is an exceedingly useful one for the class for whom it is specially intended."—*Engineering*.

Smithy and Forge.

Including the Farrier's Art and Coach Smithing. By W. J. E. CRANE. 2/6

"The first modern English book on the subject. Great pains have been bestowed by the author upon the book; shoeing-smiths will find it both useful and interesting."—*Builder*.

Modern Workshop Practice,

As applied to Marine, Land, and Locomotive Engines, Floating Docks, Dredging Machines, Bridges, Ship-Building, &c. By J. G. WINTON. 4th Edn., Illustrated 3/6

"Whether for the apprentice determined to master his profession, or for the artisan bent upon raising himself to a higher position, this clearly-written and practical treatise will be a great help."—*Scotsman*.

Mechanical Engineering.

Comprising Metallurgy, Moulding, Casting, Forging, Tools, Workshop Machinery, Mechanical Manipulation, Manufacture of the Steam Engine, &c. By FRANCIS CAMPIN, C.E. Third Edition, Re-written and Enlarged [just published. 2/6

"A sound and serviceable text-book, quite up to date."—*Building News*.

Details of Machinery.

Comprising Instructions for the Execution of various Works in Iron in the Fitting-shop, Foundry, and Boiler-Yard. By FRANCIS CAMPIN, C.E. 3/0

"A sound and practical handbook for all engaged in the engineering trades."—*Building World*.

Elementary Engineering:

A Manual for Young Marine Engineers and Apprentices. In the Form of Questions and Answers on Metals, Alloys, Strength of Materials, &c. By J. S. BREWER. Second Edition 1/6

"A useful introduction to the more elaborate text-books."—*Scotsman*.

Power in Motion:

Horse-power Motion, Toothed-Wheel Gearing, Long and Short Driving Bands, Angular Forces, &c. By JAMES ARMOUR, C.E. With 73 Diagrams. Third Edition 2/0

"The value of the knowledge imparted cannot well be over-estimated."—*Newcastle Weekly Chron.*

Iron and Heat.

Exhibiting the Principles concerned in the Construction of Iron Beams, Pillars and Girders. By J. ARMOUR, C.E. 2/6

"A very useful and thoroughly practical little volume."—*Mining Journal*.

Practical Mechanism,

And Machine Tools. By T. BAKER, C.E. With Remarks on Tools and Machinery by J. NASMYTH, C.E. 2/6

Mechanics.

Being a concise Exposition of the General Principles of Mechanical Science, and their Applications. By CHARLES TOMLINSON, F.R.S. 1/6

Cranes,

The Construction of, and other Machinery for Raising Heavy Bodies for the Erection of Buildings, &c. By JOSEPH GLYNN, F.R.S. 1/6

NAVIGATION, SHIPBUILDING, ETC.**Sailor's Sea Book:**

A Rudimentary Treatise on Navigation. By JAMES GREENWOOD, B.A. With numerous Woodcuts and Coloured Plates. New and Enlarged Edition. By W. H. ROSSER 2/6

"Is perhaps the best and simplest epitome of navigation ever compiled."—*Field*.

Practical Navigation.

Consisting of the SAILOR'S SEA BOOK, by JAMES GREENWOOD and W. H. ROSSER; together with Mathematical and Nautical Tables for the Working of the Problems, by HENRY LAW, C.E., and Prof. J. R. YOUNG. Half-bound in leather 7/0

"A vast amount of information is contained in this volume, and we fancy in a very short time that it will be seen in the library of almost every ship or yacht afloat."—*Hunt's Yachting Magazine*.

Navigation and Nautical Astronomy,

In Theory and Practice. By Prof. J. R. YOUNG. New Edition. Illustrated 2/6

"A very complete, thorough, and useful manual for the young navigator."—*Observatory*.

Mathematical Tables,

For Trigonometrical, Astronomical, and Nautical Calculations; to which is prefixed a Treatise on Logarithms, by H. LAW, C.E. Together with a Series of Tables for Navigation and Nautical Astronomy. By Professor J. R. YOUNG. New Edition 4/0

Masting, Mast-Making, and Rigging of Ships.

Also Tables of Spars, Rigging, Blocks; Chain, Wire, and Hemp Ropes, &c., relative to every class of vessels. By ROBERT KIPPING, N.A. 2/0

Sails and Sail-Making.

With Draughting, and the Centre of Effort of the Sails. Weights and Sizes of Ropes; Masting, Rigging, and Sails of Steam Vessels, &c. By R. KIPPING, N.A. 2/6

Marine Engines and Steam Vessels.

By R. MURRAY, C.E. Eighth Edition, thoroughly Revised, with Additions by the Author and by GEORGE CARLISLE, C.E. 4/6

"An indispensable manual for the student of marine engineering."—*Liverpool Mercury*.

Naval Architecture.

An Exposition of the Elementary Principles. By JAMES PEAKE . . . 3/6

Ships for Ocean and River Service,

Principles of the Construction of. By H. A. SOMMERFELDT . . . 1/6

An Atlas of Engravings

To Illustrate the above. Twelve large folding Plates. Royal 4to, cloth . . . 7/6

Ships and Boats.

By W. BLAND. Seventh Edition, revised, with numerous Illustrations and Models 1/6

ARCHITECTURE AND BUILDING.**Constructional Iron and Steel Work,**

As applied to Public, Private, and Domestic Buildings. By FRANCIS CAMPIN, C.E. 3/6

"Anyone who wants a book on ironwork as employed for stanchions, columns, and beams, will find the present volume to be suitable."—*British Architect*.

Building Estates:

A Treatise on the Development, Sale, Purchase, and Management of Building Land.

By F. MAITLAND. Second Edition, revised . . . 2/0

"This book should undoubtedly be added to the library of every professional man dealing with building land."—*Land Agent's Record*.

Science of Building:

An Elementary Treatise on the Principles of Construction. By E. WYNNDHAM TARN, M.A. Lond. Third Edition, revised and enlarged . . . 3/6

Art of Building,

Rudiments of. General Principles of Construction, Strength, and Use of Materials. Working Drawings, Specifications, &c. By EDWARD DOBSON, M.R.I.B.A. &c. 2/0

"A good book for practical knowledge, and about the best to be obtained."—*Building News*.

Book on Building,

Civil and Ecclesiastical. By Sir EDMUND BECKETT, Bart., LL.D., Q.C., F.R.A.S., Author of "Clocks and Watches and Bells," &c. Second Edition, enlarged. 4/6

"A book which is always amusing and nearly always instructive."—*Times*.

Dwelling-Houses,

Erection of, Illustrated by a Perspective View, Plans, Elevations, and Sections of a Pair of Villas, with the Specification, Quantities, and Estimates. By S. H. BROOKS 2/6

Cottage Building.

By C. BRUCE ALLEN. Eleventh Edition, with Chapter on Economic Cottages for Allotments, by E. E. ALLEN, C.E. . . . 2/0

Acoustics of Public Buildings:

The Laws of Sound as applied to the Arrangement of Buildings. By Professor T. ROGER SMITH, F.R.I.B.A. New Edition, revised. With numerous Illustrations. [Just published. 1/6

Practical Bricklaying.

General Principles of Bricklaying; Arch Drawing, Cutting and Setting; Pointing; Paving, Tiling, &c. By ADAM HAMMOND. With 68 Woodcuts . . . 1/6

"The young bricklayer will find it infinitely valuable to him."—*Glasgow Herald*.

Art of Practical Brick-Cutting and Setting.

By ADAM HAMMOND. With 90 Engravings . . . 1/6

Brickwork:

Embodying the General and Higher Principles of Bricklaying, Cutting and Setting; with the Application of Geometry to Roof Tiling, &c. By F. WALKER . . . 1/6
 "Contains all that a young tradesman or student needs to learn from books."—*Building News*.

Bricks and Tiles,

Rudimentary Treatise on the Manufacture of. Containing an Outline of the Principles of Brickmaking. By E. DOBSON, M.R.I.B.A. Additions by C. TOMLINSON, F.R.S. Illustrated . . . 3/0

"The best handbook on the subject. We can safely recommend it as a good investment."—*Builder*.

Practical Brick and Tile Book.

Comprising: BRICK AND TILE MAKING, by E. DOBSON, M.Inst.C.E.; Practical BRICK-LAYING, by A. HAMMOND; BRICK-CUTTING and SETTING, by A. HAMMOND. 550 pp. with 270 Illustrations, strongly half-bound . . . 6/0

Carpentry and Joinery—

THE ELEMENTARY PRINCIPLES OF CARPENTRY. Chiefly composed from the Standard Work of THOMAS TREDGOLD, C.E. With Additions, and a TREATISE ON JOINERY by E. W. TARN, M.A. Sixth Edition, revised and extended . . . 3/6

Carpentry and Joinery.

Atlas of 35 Plates to accompany and illustrate the foregoing book. With Descriptive Letterpress. 4to. . . 6/0

"These two volumes form a complete treasury of carpentry and joinery, and should be in the hands of every carpenter and joiner in the Empire."—*Iron*.

Practical Treatise on Handrailing:

Showing New and Simple Methods. By GEO. COLLINGS. Second Edition, Revised, including a TREATISE ON STAIRBUILDING. With Plates . . . 2/6

"Will be found of practical utility in the execution of this difficult branch of joinery."—*Builder*.

Circular Work in Carpentry and Joinery.

A Practical Treatise on Circular Work of Single and Double Curvature. By GEORGE COLLINGS. Second Edition . . . 2/6

"Cheap in price, clear in definition, and practical in the examples selected."—*Builder*.

Roof Carpentry:

Practical Lessons in the Framing of Wood Roofs. For the use of Working Carpenters. By GEO. COLLINGS, Author of "Handrailing and Stairbuilding," &c. . . 2/0

Construction of Roofs, of Wood and Iron:

Deduced chiefly from the Works of Robison, Tredgold, and Humber. By E. WYNDHAM TARN, M.A., Architect. Second Edition, revised . . . 1/6

"Mr. Tarn is so thoroughly master of his subject, that although the treatise was founded on the works of others he has given it a distinct value of his own. It will be found valuable by all students."—*Builder*.

The Joints Made and Used by Builders.

By WYVILL J. CHRISTY, Architect. With 160 Woodcuts . . . 3/0

"The work is deserving of high commendation."—*Builder*.

Shoring,

And its Application: A Handbook for the use of Students. By G. H. BLAGROVE . . . 1/6

"We recommend this valuable treatise to all students."—*Building News*.

Timber Importer's, Timber Merchant's, and Builder's Standard Guide.

By R. E. GRANDY. . . 2/0

"Everything it pretends to be: built up gradually, it leads one from a forest to a treenail, and throws in, as a makeweight, a host of material concerning bricks, columns, cisterns, &c."—*English Mechanic*.

Plumbing:

A Text-Book to the Practice of the Art or Craft of the Plumber. With Chapters upon House Drainage and Ventilation. By WM. PATON BUCHAN, R.P., Sanitary Engineer. Eighth Edition, Re-written and Enlarged, with 500 Illustrations. . . 3/6

"A text-book which may be safely put into the hands of every young plumber, and which will also be found useful by architects and medical professors."—*Builder*.

Ventilation:

A Text-Book to the Practice of the Art of Ventilating Buildings. By W. P. BUCHAN, R.P., Author of "Plumbing," &c. With 170 Illustrations . . . 3/6

The Practical Plasterer:

A Compendium of Plain and Ornamental Plaster Work. By WILFRED KEMP . . . 2/0

House Painting, Graining, Marbling, and Sign Writing:

With a Course of Elementary Drawing, and a Collection of Useful Receipts. By ELLIS A. DAVIDSON. Eighth Edition. Coloured Plates . . . 5/0

"The above, in cloth boards, strongly bound, 8/0.

"A mass of information of use to the amateur and of value to the practical man."—*English Mechanic*.

Grammar of Colouring.

Applied to Decorative Painting and the Arts. By GEORGE FIELD. New Edition, revised and enlarged by ELLIS A. DAVIDSON. With Coloured Plates . . . 3/0
 "The book is a most useful *résumé* of the properties of pigments."—*Builder*.

Elementary Decoration :

As Applied to Dwelling-Houses, &c. By JAMES W. FACEY. Illustrated . . . 2/0
 "The principles which ought to guide the decoration of dwelling-houses are clearly set forth, and elucidated by examples; while full instructions are given to the learner."—*Scotsman*.

Practical House Decoration.

A Guide to the Art of Ornamental Painting, the Arrangement of Colours in Apartments, and the Principles of Decorative Design. By JAMES W. FACEY . . . 2/6
 * * The last two Works in One handsome Vol., half-bound, entitled "HOUSE DECORATION, ELEMENTARY AND PRACTICAL," price 5/0.

Portland Cement for Users.

By HENRY FAIJA, A.M. Inst. C.E. Third Edition, corrected . . . 2/0
 "Supplies in a small compass all that is necessary to be known by users of cement."—*Building News*.

Limes, Cements, Mortars, Concretes, Mastics, Plastering, &c.

By G. R. BUCKNELL, C.E. Thirteenth Edition . . . 1/6

Masonry and Stonecutting,

The Principles of Masonic Projection, and their Application to Construction. By E. DOBSON, M.R.I.B.A. . . . 2/6

Arches, Piers, Buttresses, &c.

Experimental Essays on the Principles of Construction in. By WILLIAM BLAND 1/6

Quantities and Measurements,

In Bricklayers', Masons', Plasterers', Plumbers', Painters', Paperhangers', Gilders', Smiths', Carpenters' and Joiners' Work. By A. C. BEATON, Surveyor . . . 1/6
 "This book is indispensable to builders and their quantity clerks."—*English Mechanic*.

Complete Measurer;

Setting forth the Measurement of Boards, Glass, Timber, and Stone. By R. HORTON. Fifth Edition . . . 4/0
 * * The above, strongly bound in leather, price 5/0.

Light :

An Introduction to the Science of Optics. Designed for the Use of Students of Architecture, Engineering, and other Applied Sciences. By E. W. TARN, M.A. . . 1/6

Hints to Young Architects.

By GEORGE WIGHTWICK, Architect, Author of "The Palace of Architecture," &c., &c. Fifth Edition, revised and enlarged by G. HUSKISSON GUILLAUME, Architect . . 3/6
 "A copy ought to be considered as necessary a purchase as a box of instruments."—*Architect*.

Architecture—Orders.

The Orders and their Æsthetic Principles. By W. H. LEEDS. Illustrated . . 1/6

Architecture—Styles.

The History and Description of the Styles of Architecture of Various Countries, from the Earliest to the Present Period. By T. TALBOT BURY, F.R.I.B.A., &c. Illustrated . . . 2/0
 ORDERS AND STYLES OF ARCHITECTURE," in One Vol., 3/6.

Architecture—Design.

The Principles of Design in Architecture, as deducible from Nature and exemplified in the Works of the Greek and Gothic Architects. By EDW. L. GARBETT, Architect 2/6
 "We know no work that we would sooner recommend to an attentive reader desirous to obtain clear views of the nature of architectural art. The book is a valuable one."—*Builder*.
 * * The three preceding Works in One handsome Vol., half-bound, entitled "MODERN ARCHITECTURE," price 6/0.

Architectural Modelling in Paper,

The Art of. By T. A. RICHARDSON. With Illustrations, engraved by O. JEWITT 1/6
 "A valuable aid to the practice of architectural modelling."—*Builder's Weekly Reporter*.

Perspective for Beginners.

For Students and Amateurs in Architecture, Painting, &c. By G. PYNE . . . 2/0

Glass Staining, and the Art of Painting on Glass.

From the German of Dr. GESSERT and EMANUEL OTTO FROMBERG. With an Appendix on THE ART OF ENAMELLING . . . 2/0

Vitruvius—The Architecture of Marcus Vitruvius Pollio.

In Ten Books. Translated from the Latin by JOSEPH GWILT, F.S.A., F.R.A.S.
With 23 Plates 5/0

N.B.—This is the only Edition of VITRUVIUS procurable at a moderate price.

Grecian Architecture,

An Inquiry into the Principles of Beauty in ; with an Historical View of the Rise and Progress of the Art in Greece. By the EARL OF ABERDEEN 1/0

. *The two preceding Works in One handsome Vol., half-bound, entitled "ANCIENT ARCHITECTURE," price 6/0.*

INDUSTRIAL AND USEFUL ARTS.

Cements, Pastes, Glues, and Gums.

A Guide to the Manufacture and Application of Agglutinants for Workshop, Laboratory, or Office Use. With 900 Recipes and Formulæ. By H. C. STANDAGE 2/0

"As a revelation of what are considered trade secrets, this book will arouse an amount of curiosity among the large number of industries it touches."—*Daily Chronicle*.

Clocks and Watches, and Bells,

A Rudimentary Treatise. By SIR EDMUND BECKETT. Seventh Edition. 4/6

. *The above, handsomely bound, Cloth Boards, 5/6.*

"The best work on the subject probably extant. The treatise on bells is undoubtedly the best in the language."—*Engineering*. "The only modern treatise on clock-making."—*Horological Journal*.

Electro-Metallurgy,

Practically Treated. By ALEXANDER WATT. Tenth Edition, enlarged and revised. With Additional Illustrations, and including the most Recent Processes 3/6

"From this book both amateur and artisan may learn everything necessary."—*Iron*.

Goldsmith's Handbook,

Containing full Instructions in the Art of Alloying, Melting, Reducing, Colouring, Collecting, and Refining. The processes of Manipulation, Recovery of Waste, Chemical and Physical Properties of Gold ; Solders, Enamels, and other useful Rules and Recipes, &c. By GEORGE E. GEE. Third Edition, considerably enlarged 3/0

"A good, sound, technical educator."—*Horological Journal*.

Silversmith's Handbook,

On the same plan as the above. By GEORGE E. GEE. Second Edition, Revised 3/0

"A valuable sequel to the author's 'Practical Goldworker.'"—*Silversmith's Trade Journal*.

. *The two preceding Works, in One handsome Vol., half-bound, entitled "THE GOLDSMITH'S AND SILVERSMITH'S COMPLETE HANDBOOK," 7/0.*

Hall-Marking of Jewellery.

Comprising an account of all the different Assay Towns of the United Kingdom ; with the Stamps at present employed ; also the Laws relating to the Standards and Hall-Marks at the various Assay Offices. By GEORGE E. GEE. 3/0

"Deals thoroughly with its subject from a manufacturer's and dealer's point of view."—*Jeweller*.

French Polishing and Enamelling.

A Practical Book of Instruction, including numerous Recipes for making Polishes, Varnishes, Glaze-Lacquers, Revivers, etc. By RICHARD BITMEAD.

[Just published. 1/6]

Practical Organ Building.

By W. E. DICKSON, M.A., Precentor of Ely Cathedral. Second Edition, Revised 2/6

"The amateur builder will find in this book all that is necessary to enable him personally to construct a perfect organ with his own hands."—*Academy*.

Coach-Building :

A Practical Treatise, Historical and Descriptive. By JAMES W. BURGESS 2/6

"This handbook will supply a long-felt want, not only to manufacturers themselves, but more particularly apprentices, and others connected with the trade of coach-building."—*European Mail*.

The Cabinet-Maker's Guide

To the Entire Construction of Cabinet-Work, including Veneering, Marqueterie, Buhl-Work, Mosaic, Inlaying, Working and Polishing Ivory, Trade Recipes, &c. By RICHARD BITMEAD. With Plans, Sections, and Working Drawings.

[Just published. 2/6]

Brass Founder's Manual :

Instructions for Modelling, Pattern Making, Moulding, Turning, &c. By W. GRAHAM 2/0

Sheet Metal-Worker's Guide.

A Practical Handbook for Tinsmiths, Coppersmiths, Zincworkers, &c., with 46 Diagrams and Working Patterns. By W. J. E. CRANE. Second Edition, revised 1/6

"The author has acquitted himself with considerable tact in choosing his examples, and with no less ability in treating them."—*Plumber*.

Sewing Machinery.

Construction, History, Adjusting, &c. By J. W. URQUHART, C.E. 2/0

Gas Fitting:A Practical Handbook. By JOHN BLACK. Revised Edition. With 130 Illustrations 2/6
"It is written in a simple practical style, and we heartily recommend it."—*Plumber and Decorator*.**Construction of Door Locks.**

From the Papers of A. C. HOBBS. Edited by CHARLES TOMLINSON, F.R.S. With a Note upon IRON SAFES by ROBERT MALLETT. Illustrated. 2/6

The Model Locomotive Engineer, Fireman, and Engine-Boy.

By MICHAEL REYNOLDS 3/6

Art of Letter Painting made Easy.

By JAMES GREIG BADENOCH. With 12 full-page Engravings of Examples. 1/6

"Any intelligent lad who fails to turn out decent work after studying this system, has mistaken his vocation."—*English Mechanic*.**Art of Boot and Shoemaking,**

Including Measurement, Last-fitting, Cutting-out, Closing and Making; with a Description of the most Approved Machinery employed. By J. B. LENO 2/0

"By far the best work ever written on the subject."—*Scottish Leather Trader*.**Mechanical Dentistry:**

A Practical Treatise on the Construction of the Various Kinds of Artificial Dentures, comprising also Useful Formulæ, Tables and Receipts. By C. HUNTER 3/0

Wood Engraving:

A Practical and Easy Introduction to the Study of the Art. By W. N. BROWN 1/6

Laundry Management.A Handbook for Use in Private and Public Laundries. Including Accounts of Modern Machinery and Appliances. By the EDITOR of *The Laundry Journal* 2/0"This book should certainly occupy an honoured place on the shelves of all housekeepers who wish to keep themselves au courant of the newest appliances and methods."—*The Queen*.**AGRICULTURE, GARDENING, ETC.****Draining and Embanking.**

A Practical Treatise. By JOHN SCOTT, late Professor of Agriculture and Rural Economy at the Royal Agricultural College, Cirencester. With 68 Illustrations. 1/6

"A valuable handbook to the engineer as well as to the surveyor."—*Land*.**Irrigation and Water Supply:**

A Practical Treatise on Water Meadows, Sewage Irrigation, Warping, &c.; on the Construction of Wells, Ponds, and Reservoirs, &c. By Professor J. SCOTT 1/6

"A valuable and indispensable book for the estate manager and owner."—*Forestry*.**Farm Roads, Fences, and Gates:**

A Practical Treatise on the Roads, Tramways, and Waterways of the Farm; the Principles of Enclosures; and on Fences, Gates, and Stiles. By Prof. JOHN SCOTT 1/6

"A useful practical work, which should be in the hands of every farmer."—*Farmer*.**Farm Buildings:**

A Practical Treatise on the Buildings necessary for various kinds of Farms, their Arrangement and Construction, with Plans and Estimates. By Professor J. SCOTT 2/0

"No one who is called upon to design farm buildings can afford to be without this work."—*Builder*.**Barn Implements and Machines:**

Treating of the Application of Power to the Operations of Agriculture; and of the various Machines used in the Threshing-barn, in the Stockyard, Dairy, &c. By Professor JOHN SCOTT. With 123 Illustrations 2/0

Field Implements and Machines:

With Principles and Details of Construction and Points of Excellence, their Management, &c. By Professor JOHN SCOTT. With 138 Illustrations 2/0

Agricultural Surveying:

A Treatise on Land Surveying, Levelling, and Setting-out; with Directions for Valuing and Reporting on Farms and Estates. By Professor J. SCOTT 1/6

Farm Engineering.

By Professor JOHN SCOTT. Comprising the above Seven Volumes in One, 1,150 pages, and over 600 Illustrations. Half-bound 12/0

"A copy of this work should be treasured up in every library where the owner thereof is in any way connected with land."—*Farm and Home*.

Outlines of Farm Management.

Treating of the General Work of the Farm; Stock; Contract Work; Labour, &c. By R. SCOTT BURN, Author of "Outlines of Modern Farming," &c. 2/6
 "The book is eminently practical, and may be studied with advantage by beginners in agriculture, while it contains hints which will be useful to old and successful farmers."—*Scotsman*.

Outlines of Landed Estates Management.

Treating of the Varieties of Lands, Methods of Farming, the Setting-out of Farms, &c.; Roads, Fences, Gates, Irrigation, Drainage, &c. By R. S. BURN 2/6
 "A complete and comprehensive outline of the duties appertaining to the management of landed estates."—*Journal of Forestry*.

Soils, Manures, and Crops.

(Vol. I. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN. Woodcuts . 2/0

Farming and Farming Economy,

Historical and Practical. (Vol. II. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN 3/0
 "Eminently calculated to enlighten the agricultural community on the varied subjects of which it treats; hence it should find a place in every farmer's library."—*City Press*.

Stock: Cattle, Sheep, and Horses.

(Vol. III. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN. Woodcuts 2/6
 "The author's grasp of his subject is thorough, and his grouping of facts effective. . . . We commend this excellent treatise."—*Weekly Dispatch*.

Dairy, Pigs, and Poultry.

(Vol. IV. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN. Woodcuts 2/0
 "We can testify to the clearness and intelligibility of the matter, which has been compiled from the best authorities."—*London Review*.

Utilization of Sewage, Irrigation, &c.

(Vol. V. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN. Woodcuts 2/6
 "A work containing valuable information, which will recommend itself to all interested in modern farming."—*Field*.

Outlines of Modern Farming.

By R. SCOTT BURN, Author of "Landed Estates Management," &c. Consisting of the above Five Volumes in One, 1,250 pp., profusely illustrated, half-bound . . . 12/0
 "The aim of the author has been to make his work at once comprehensive and trustworthy, and in this aim he has succeeded to a degree which entitles him to much credit."—*Morning Advertiser*.

Book-keeping for Farmers and Estate Owners.

A Practical Treatise, presenting, in Three Plans, a System adapted for all classes of Farms. By J. M. WOODMAN, Chartered Accountant. Third Edition, revised . 2/6
 "Will be found of great assistance by those who intend to commence a system of book-keeping, the author's examples being clear and explicit, and his explanations full and accurate."—*Live Stock Journal*.

Ready Reckoner for Admeasurement of Land.

By A. ARMAN. Third Edition, revised and extended by C. NORRIS, Surveyor . 2/0
 "A very useful book to all who have land to measure."—*Mark Lane Express*.
 "Should be in the hands of all persons having any connection with land."—*Irish Farm*.

Ready Reckoner for Millers, Corn Merchants,

And Farmers. Second Edition, revised, with a Price List of Modern Flour Mill Machinery. By W. S. HUTTON, C.E. 2/0
 "Will prove an indispensable *vade mecum*. Nothing has been spared to make the book complete and perfectly adapted to its special purpose."—*Miller*.

The Hay and Straw Measurer:

New Tables for the use of Auctioneers, Valuers, Farmers, Hay and Straw Dealers, &c., forming a complete Calculator and Ready Reckoner. By JOHN STEELE . . . 2/0
 "A most useful handbook. It should be in every professional office where agricultural valuations are conducted."—*Land Agent's Record*.

Meat Production:

A Manual for Producers, Distributors, and Consumers of Butchers' Meat. By JOHN EWART 2/6
 "A compact and handy volume on the meat question."—*Meat and Provision Trades Review*.

Sheep:

The History, Structure, Economy, and Diseases of. By W. C. SPOONER. Fifth Edition, with Engravings, including Specimens of New and Improved Breeds . . . 3/6
 "The book is decidedly the best of the kind in our language."—*Scotsman*.

Market and Kitchen Gardening.

By C. W. SHAW, late Editor of "Gardening Illustrated" . . . 3/6
 "The most valuable compendium of kitchen and market-garden work published."—*Farmer*.

Kitchen Gardening made Easy.

Showing the best means of Cultivating every known Vegetable and Herb, &c., with directions for management all the year round. By GEO. M. F. GLENNY. Illustrated 1/6
 "This book will be found trustworthy and useful."—*North British Agriculturist*.

Cottage Gardening;

Or, Flowers, Fruits, and Vegetables for Small Gardens. By E. HOBDAY . . . 1/6
 "Definite instructions as to the cultivation of small gardens."—*Scotsman*.

Garden Receipts.

Edited by CHARLES W. QUIN. Third Edition . . . 1/6
 "A singularly complete collection of the principal receipts needed by gardeners."—*Farmer*.

Fruit Trees,

The Scientific and Profitable Culture of. From the French of M. DU BREUIL. Fourth Edition, carefully Revised by GEORGE GLENNY. With 187 Woodcuts . . . 3/6
 "The book teaches how to prune and train fruit trees to perfection."—*Field*.

Tree Planter and Plant Propagator:

With numerous Illustrations of Grafting, Layering, Budding, Implements, Houses, Pits, &c. By S. WOOD, Author of "Good Gardening," &c. 2/0
 "Sound in its teaching and very comprehensive in its aim. It is a good book."—*Gardeners' Magazine*.

Tree Pruner:

Being a Practical Manual on the Pruning of Fruit Trees, including also their Training and Renovation, also treating of the Pruning of Shrubs, Climbers, and Flowering Plants. With numerous Illustrations. By SAMUEL WOOD, Author of "Good Gardening," &c. 1/6
 "A useful book, written by one who has had great experience."—*Mark Lane Express*.

. The above Two Vols. in One, handsomely half-bound, entitled "THE TREE PLANTER, PROPAGATOR AND PRUNER." By SAMUEL WOOD. Price 3/6.

Art of Grafting and Budding.

By CHARLES BALLET. With Illustrations . . . 2/6
 "The one standard work on this subject."—*Scotsman*.

MATHEMATICS, ARITHMETIC, ETC.**Descriptive Geometry,**

An Elementary Treatise on; with a Theory of Shadows and of Perspective, extracted from the French of G. MONGE. To which is added a Description of the Principles and Practice of Isometrical Projection. By J. F. HEATHER, M.A. With 14 Plates. 2/0

Practical Plane Geometry:

Giving the Simplest Modes of Constructing Figures contained in one Plane and Geometrical Construction of the Ground. By J. F. HEATHER, M.A. . . . 2/0
 "The author is well-known as an experienced professor, and the volume contains as complete a collection of problems as is likely to be required in ordinary practice."—*Architect*.

Analytical Geometry and Conic Sections.

By JAMES HANN. New Edition, Enlarged by Professor J. R. YOUNG . . . 2/0
 "The author's style is exceedingly clear and simple, and the book is well adapted for the beginner and those who may be obliged to have recourse to self-tuition."—*Engineer*.

Euclid,

THE ELEMENTS OF; with many Additional Propositions and Explanatory Notes; to which is prefixed an Introductory Essay on Logic. By HENRY LAW, C.E. . . . 2/6

. Sold also separately, viz. :—

EUCLID. The First Three Books. By HENRY LAW, C.E. . . . 1/6
 EUCLID. Books 4, 5, 6, 11, 12. By HENRY LAW, C.E. . . . 1/6

Plane Trigonometry,

The Elements of. By JAMES HANN, M.A. Sixth Edition . . . 1/6

Spherical Trigonometry,

The Elements of. By JAMES HANN. Revised by CHARLES H. DOWLING, C.E. 1/0
 ** Or with "The Elements of Plane Trigonometry," in One Vol., 2/6.

Differential Calculus,

Elements of the. By W. S. B. WOOLHOUSE, F.R.A.S., &c. 1/6

Integral Calculus.

By HOMERSHAM COX, B.A. 1/6

Algebra,

The Elements of. By JAMES HADDON, M.A., formerly Mathematical Master of King's College School. With Appendix, containing Miscellaneous Investigations, and a collection of Problems 2/0

Key and Companion to the Above.

An extensive repository of Solved Examples and Problems in Illustration of the various Expedients necessary in Algebraical Operations. By J. R. YOUNG . . . 1/6

Commercial Book-keeping.

With Commercial Phrases and Forms in English, French, Italian, and German. By JAMES HADDON, M.A., formerly Mathematical Master, King's College School . . . 1/6

Arithmetic,

A Rudimentary Treatise on : with full Explanations of its Theoretical Principles, and numerous Examples for Practice. For the use of Schools and for Self-Instruction. By J. R. YOUNG, late Professor of Mathematics in Belfast College. Eleventh Edition 1/6

Key to the Above.

By J. R. YOUNG 1/6

Equational Arithmetic,

Applied to Questions of Interest, Annuities, Life Assurance, and General Commerce : with various Tables by which all calculations may be greatly facilitated. By W. HIPSLEY 1/6

Arithmetic,

Rudimentary, for the Use of Schools and Self-Instruction. By JAMES HADDON, M.A. Revised by ABRAHAM ARMAN 1/6

Key to the Above.

By A. ARMAN 1/6

Mathematical Instruments,

A Treatise on ; Their Construction, Adjustment, Testing, and Use concisely explained. By J. F. HEATHER, M.A., of the Royal Military Academy, Woolwich. Fourteenth Edition, Revised with Additions, by A. T. WALMSLEY, M.I.C.E., Fellow of the Surveyors' Institution. Original Edition in One Vol., Illustrated . . . 2/0

** In ordering be careful to say "Original Edition," to distinguish it from the Enlarged Edition in Three Vols. (see below).

Drawing and Measuring Instruments.

Including—I. Instruments employed in Geometrical and Mechanical Drawing, and in the Construction, Copying, and Measurement of Maps and Plans. II. Instruments used for the purposes of Accurate Measurement, and for Arithmetical Computations. By J. F. HEATHER, M.A. 1/6

Optical Instruments.

Including (more especially) Telescopes, Microscopes, and Apparatus for producing copies of Maps and Plans by Photography. By J. F. HEATHER, M.A. Illustrated 1/6

Surveying and Astronomical Instruments.

Including—I. Instruments used for Determining the Geometrical Features of a portion of Ground. II. Instruments employed in Astronomical Observations. By J. F. HEATHER, M.A. Illustrated 1/6

** The above Three Volumes form an enlargement of the Author's original work, "Mathematical Instruments," price 2/0.

Mathematical Instruments:

Their Construction, Adjustment, Testing and Use. Comprising Drawing, Measuring, Optical, Surveying, and Astronomical Instruments. By J. F. HEATHER, M.A. Enlarged Edition, for the most part re-written. Three Parts as above . . . 4/6

"An exhaustive treatise, belonging to the well-known Weale's Series. Mr. Heather's experience well qualifies him for the task he has so ably fulfilled."—*Engineering and Building Times*.

Slide Rule, and How to Use It.

Containing full, easy, and simple Instructions to perform all Business Calculations with unexampled rapidity and accuracy. By CHARLES HOARE, C.E. With a Slide Rule, in tuck of cover. Fifth Edition 2/6

Mathematical Tables,

For Trigonometrical, Astronomical, and Nautical Calculations; to which is prefixed a Treatise on Logarithms. By H. LAW, C.E. Together with a Series of Tables for Navigation and Nautical Astronomy. By Professor J. R. YOUNG. New Edition 4/0

Logarithms.

With Mathematical Tables for Trigonometrical, Astronomical, and Nautical Calculations. By HENRY LAW, C.E. Revised Edition. (Forming part of the above work) 3/0

Theory of Compound Interest and Annuities:

With Tables of Logarithms for the more Difficult Computations of Interest, Discount, Annuities, &c., in all their Applications and Uses for Mercantile and State Purposes. By FEDOR THOMAN, of the Société Crédit, Mobilier, Paris. Fourth Edition 4/0

"A very powerful work, and the author has a very remarkable command of his subject."—Professor A. DE MORGAN. "We recommend it to the notice of actuaries and accountants."—*Athenæum*.

Treatise on Mathematics,

As applied to the Constructive Arts. By FRANCIS CAMPIN, C.E., &c. and Edn. 3/0

"Should be in the hands of every one connected with building construction."—*Builders' Reporter*.

Astronomy.

By the late Rev. ROBERT MAIN, M.A., F.R.S. Third Edition, revised and corrected. By WILLIAM THYNNE LYNN, B.A., F.R.A.S. 2/0

"A sound and simple treatise, very carefully edited, and a capital book for beginners."—*Knowledge*.

Statics and Dynamics,

The Principles and Practice of; embracing also a clear development of Hydrostatics, Hydrodynamics, and Central Forces. By T. BAKER, C.E. Fourth Edition 1/6

BOOKS OF REFERENCE AND MISCELLANEOUS VOLUMES.

Manual of the Mollusca:

A Treatise on Recent and Fossil Shells. By Dr. S. P. WOODWARD, A.L.S. With Appendix by RALPH TATE, A.L.S., F.G.S. With numerous Plates and 300 Woodcuts 7/6

"A storehouse of conchological and geological information."—*Hardwicke's Science Gossip*.

Dictionary of Painters,

And Handbook for Picture Amateurs; being a Guide for Visitors to Public and Private Picture Galleries, and for Art Students, including Glossary of Terms, &c. By PHILIPPE DARYL, B.A. 2/6

"Considering its small compass, really admirable. We cordially recommend the book."—*Builder*.

Painting Popularly Explained.

By THOMAS JOHN GULLICK, Painter, and JOHN TIMBS, F.S.A. Including Fresco, Oil, Mosaic, Water Colour, Water-Glass, Tempera, Encaustic, Miniature, Painting on Ivory, Vellum, Pottery, Enamel, Glass, &c. Fifth Edition. 5/0

* * * Adopted as a Prize Book at South Kensington.

"Much may be learned, even by those who fancy they do not require to be taught, from the careful perusal of this unpretending but comprehensive treatise."—*Art Journal*.

Dictionary of Terms used in Architecture,

Building, Engineering, Mining, Metallurgy, Archæology, the Fine Arts, &c. By JOHN WEALE. Sixth Edition. Edited by ROBT. HUNT, F.R.S., Keeper of Mining Records, Editor of "Ure's Dictionary." Numerous Illustrations. 5/0

* * * The above, strongly bound in cloth boards, price 6/0.

"The best small technological dictionary in the language."—*Architect*.

Music,

A Rudimentary and Practical Treatise on. By CHARLES CHILD SPENCER 2/6

"Mr. Spencer has marshalled his information with much skill, and yet with a simplicity that must recommend his works to all who wish to thoroughly understand music."—*Weekly Times*.

Pianoforte,

The Art of Playing the. With Exercises and Lessons. By C. C. SPENCER 1/6

"A sound and excellent work, written with spirit, and calculated to inspire the pupil with a desire to aim at high accomplishment in the art."—*School Board Chronicle*.

House Manager:

Being a Guide to Housekeeping, Practical Cookery, Pickling and Preserving, Household Work, Dairy Management, the Table and Dessert, Cellarage of Wines, Home-brewing and Wine-making, the Boudoir and Dressing-room, Travelling, Stable Economy, Gardening Operations, &c. By AN OLD HOUSEKEEPER . . . 3/6

"We find here directions to be discovered in no other book, tending to save expense to the pocket, as well as labour to the head."—*John Bull*.

Manual of Domestic Medicine.

By R. GOODING, B.A., M.D. Intended as a Family Guide in all Cases of Accident and Emergency. Third Edition, carefully revised . . . 2/0

"The author has performed a useful service by placing at the disposal of those situated at a distance from medical aid, a reliable and sensible work in which professional knowledge and accuracy have been well seconded by the ability to express himself in ordinary untechnical language."—*Public Health*.

Management of Health.

A Manual of Home and Personal Hygiene. By the Rev. JAMES BAIRD, B.A. . . 1/0

"It is wonderfully reliable, it is written with excellent taste, and there is instruction crowded into every page."—*English Mechanic*.

House Book,

Comprising—I. THE HOUSE MANAGER. By AN OLD HOUSEKEEPER. II. DOMESTIC MEDICINE. By RALPH GOODING, M.D. III. MANAGEMENT OF HEALTH. By JAMES BAIRD. In One Vol., strongly half-bound . . . 6/0

Natural Philosophy,

For the Use of Beginners. By CHARLES TOMLINSON, F.R.S. . . . 1/6

Electric Lighting:

The Elementary Principles of. By ALAN A. CAMPBELL SWINTON, M.Inst.C.E., M.Inst.E.E. With 16 Illustrations. Fourth Edition, Revised [*Just published*]. 1/6

Electric Telegraph:

Its History and Progress; with Descriptions of some of the Apparatus. By R. SABINE, C.E., F.S.A., &c. . . . 3/0

"Essentially a practical and instructive work."—*Daily Telegraph*.

Handbook of Field Fortification.

By Major W. W. KNOLLYS, F.R.G.S. With 163 Woodcuts. . . . 3/0

"A well-timed and able contribution to our military literature. . . . The author supplies, in clear business style, all the information likely to be practically useful."—*Chambers of Commerce Chronicle*.

Logic,

Pure and Applied. By S. H. EMMENS. Third Edition. . . . 1/6

"This admirable work should be a text-book not only for schools, students, and philosophers, for all *litterateurs* and men of science, but for those concerned in the practical affairs of life, &c."—*The News*.

Locke's Essays on the Human Understanding.

Selections, with Notes by S. H. EMMENS 1/6

Compendious Calculator

(*Intuitive Calculations*); or Easy and Concise Methods of performing the various Arithmetical Operations required in Commercial and Business Transactions; together with Useful Tables, &c. By DANIEL O'GORMAN. Twenty-seventh Edition, carefully revised by C. NORRIS . . . 2/6. Strongly half-bound 3/6

"It would be difficult to exaggerate the usefulness of this book to every one engaged in commerce or manufacturing industry. It is crammed full with rules and formulæ for shortening and employing calculations in money, weights and measures, &c., of every sort and description."—*Knowledge*.

Measures, Weights, and Moneys of all Nations,

And an Analysis of the Christian, Hebrew, and Mahometan Calendars. By W. S. B. WOOLHOUSE, F.R.A.S., F.S.S. Seventh Edition . . . 2/6

"A work necessary for every mercantile office."—*Building Trades Journal*.

Grammar of the English Tongue,

Spoken and Written. With an Introduction to the Study of Comparative Philology. By HYDE CLARKE, D.C.L. Fifth Edition . . . 1/6

Dictionary of the English Language,

As Spoken and Written. Containing about 100,000 Words. By HYDE CLARKE, D.C.L. . . . 3/6

.* Complete with the GRAMMAR, 5/6.

Composition and Punctuation,

Familiarly Explained for those who have neglected the Study of Grammar. By JUSTIN BRENNAN. Eighteenth Edition . . . 1/6

French Grammar.

With Complete and Concise Rules on the Genders of French Nouns. By
G. L. STRAUSS, Ph.D. 1/6

English-French Dictionary.

By ALFRED ELWES 2/0

French Dictionary.

In Two Parts : I. French-English. II. English-French. Complete in One Vol. 3/0
. Or with the GRAMMAR, 4/6.

French and English Phrase Book.

Containing Introductory Lessons, with Translations, Vocabularies of Words, Collection
of Phrases, and Easy Familiar Dialogues 1/6

German Grammar.

Adapted for English Students, from Heyse's Theoretical and Practical Grammar, by
Dr. G. L. STRAUSS 1/6

German Triglote Dictionary.

By N. E. S. A. HAMILTON. Part I. German-French-English. Part II. English-
German-French. Part III. French-German-English 3/0

German Triglote Dictionary

(As above). Together with German Grammar in One Vol. 5/0

Italian Grammar,

Arranged in Twenty Lessons, with Exercises. By ALFRED ELWES 1/6

Italian Triglote Dictionary,

Wherein the Genders of all the Italian and French Nouns are carefully noted down.
By ALFRED ELWES. Vol. I. Italian-English-French 2/6

Italian Triglote Dictionary.

By ALFRED ELWES. Vol. II. English-French-Italian 2/6

Italian Triglote Dictionary.

By ALFRED ELWES. Vol. III. French-Italian-English 2/6

Italian Triglote Dictionary

(As above). In One Vol. 7/6

Spanish Grammar.

In a Simple and Practical Form. With Exercises. By ALFRED ELWES 1/6

Spanish-English and English-Spanish Dictionary.

Including a large number of Technical Terms used in Mining, Engineering, &c., with
the proper Accents and the Gender of every Noun. By ALFRED ELWES 4/0
. Or with the GRAMMAR, 6/0.

Portuguese Grammar,

In a Simple and Practical Form. With Exercises. By ALFRED ELWES 1/6

**Portuguese-English and English-Portuguese Dic-
tionary.**

Including a large number of Technical Terms used in Mining, Engineering, &c., with
the proper Accents and the Gender of every Noun. By ALFRED ELWES. Third
Edition, revised 5/0
. Or with the GRAMMAR, 7/0.

Animal Physics,

Handbook of. By DIONYSIUS LARDNER, D.C.L. With 520 Illustrations. In One Vol.
(732 pages), cloth boards 7/6
. Sold also in Two Parts, as follows:—

ANIMAL PHYSICS. By Dr. LARDNER. Part I., Chapters I.—VII. 4/0

ANIMAL PHYSICS. By Dr. LARDNER. Part II. Chapters VIII.—XVIII. 3/0




McRAE & CO.,

Refrigerating Engineers.

COLD STORES
and
CHILL ROOMS
of every
description
equipped
throughout.

TELEGRAMS: "FREEZE, LONDON."

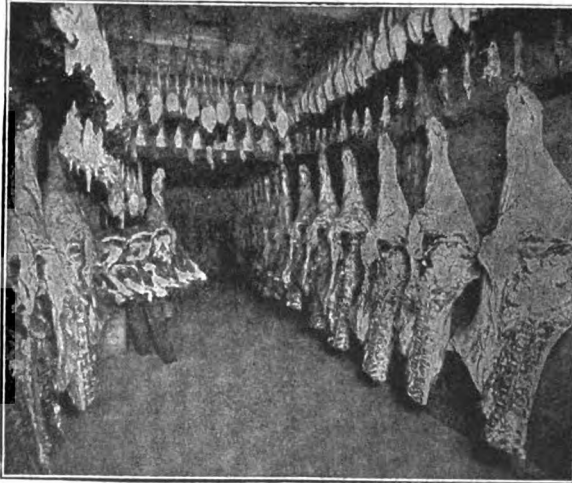

TELEPHONE: NO. 5634 AVENUE.

CHOCOLATE
COOLING
PLANT
ICE-MAKING
and
LIQUID-COOLING
PLANT
on Carbonic
System.

McRAE & CO.,
7, FENCHURCH AVENUE, LONDON, E.C.

IX

THIS BOOK IS DUE ON THE LAST DATE
STAMPED BELOW

FEB 7 1916

SEP 13 1917

SEP 13 1917

TI

TELEGRAMS: "FREEZE, LONDON."
"FREEZE, EASTLEIGH."

DEC 8 1928

MAR 13 1927

MAR 13 1927

ty.

TELEPHONE NO. 5634 AVENUE.
NO. 2 EASTLEIGH.

NT.

NO.

30m-1, '15


Preparatus for Cooling and Preserving

The Express Rotary Cooler Syndicate, Ltd.,

7, FENCHURCH AVENUE, LONDON, E.C.

Works: Forest Road, Dalston, and Eastleigh Ironworks,
Eastleigh, Southampton.

THE "ARCTIC" PATENT DRY COLD AIR REFRIGERATING MACHINE.

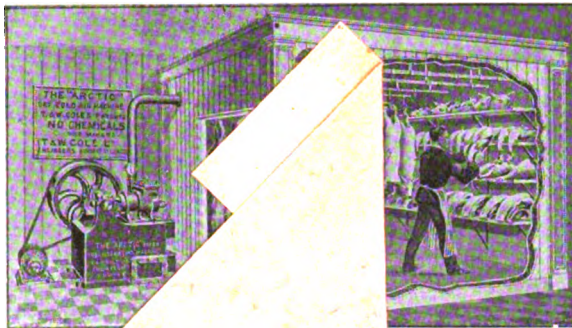

Copyright

Patented in all countries.

THIS ILLUSTRATION
MACHINE

Total

102681

PLANT, viz.: A No. 1 "ARCTIC"
AND COOLING A GOLD CHAMBER
6 ins.

ation, as shewn, under £200.

ONE WILL CHILL

MEAT IN 5 HOURS,

LOWERING THE TEMPERATURE OF THE MEAT 30° Fahr.

Cost of Running 2½d. per hour.

CAN BE DRIVEN BY ANY FORM OF POWER.

NO CHEMICALS USED. AIR ONLY.

COLD ROOM AND CONTENTS QUITE DRY.

SMALL POWER REQUIRED.

Whole of Cold Room available for Storage, as there are no tanks,
pipes, or other obstructions.

QUOTATIONS FOR ALL SIZES ON APPLICATION.

Write for PARTICULARS & CIRCULAR, or CALL AND
SEE MACHINE AT WORK AT THE PATENTEES &
SOLE MAKERS:**T. & W. COLE, LTD.,**

PARK ROAD IRONWORKS,

St. Ann's Road, BURDETT ROAD,

LONDON, E., England.

